
3M Infection Prevention Respiratory Protection



The 3M Qualitative Fit Test Apparatus offers a simple way to meet the Occupational Safety and Health Administration's (OSHA) qualitative fit testing requirements. It can be used to assess the face-to-respirator seal of any particulate respirator or gas/vapor respirator with a particulate prefilter.

Fit testing must be performed before a respirator is first issued to a healthcare worker and is required annually thereafter. (Note: a separate user seal check must be performed each time the respirator is worn.)

Fit testing is accomplished by spraying a test agent into the hood environment with the respirator in place. If the wearer does not detect the taste of the test agent, an acceptable fit has been demonstrated.

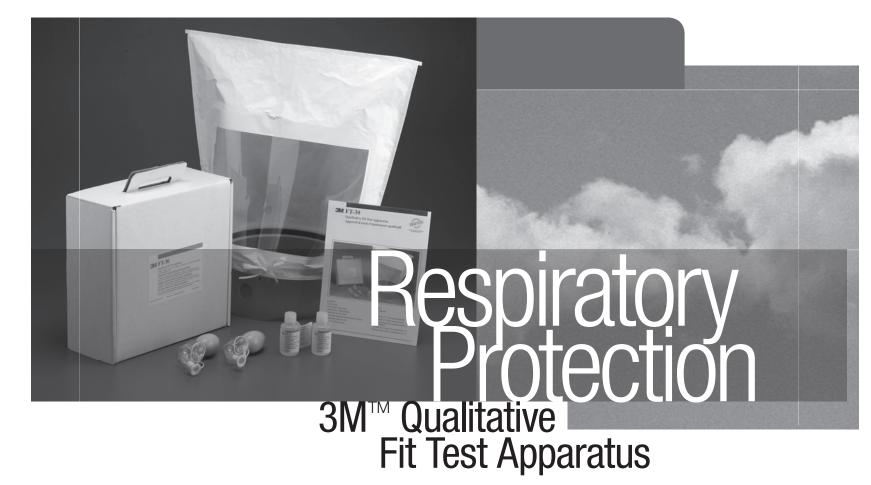

3M™ Qualitative Fit Test Apparatus

Some benefits of 3M's Fit Test Apparatus:

- Fast, easy method for performing qualitative fit testing
- Two test agent options are available to determine employee's taste threshold to test solution − 3MTM Qualitative Fit Test Apparatus FT-10, Sweet and 3MTM Qualitative Fit Test Apparatus FT-30, Bitter
- Can be used with any particulate respirator, or any gas/vapor respirator with particulate prefilter
- · Convenient, reliable and economical to use
- Provides consistent test atmosphere for test exercises
- Educational materials available from 3M to help you meet OSHA respirator program requirements

Ordering Information

	Cat. No.	Description	Size	Each/Box	Box/Case
	FT-10	3M™ Qualitative Fit Test Apparatus (sweet) Contains: FT-11, FT-12, FT-14, FT-15 (1 each); FT-13 (2 each)		1	1
I.	FT-30	3M™ Qualitative Fit Test Apparatus (bitter) Contains: FT-31, FT-32, FT-14, FT-15 (1 each); FT-13 (2 each)		1	1
ii	FT-11	Sensitivity Solution (sweet)	55 mL	1	6
ð	FT-12	Fit Test Solution (sweet)	55 mL	1	6
	FT-31	Sensitivity Solution (bitter)	55 mL	1	6
	FT-32	Fit Test Solution (bitter)	55 mL	1	6
44	FT-13	Nebulizer		1	3
	FT-14	Test Hood (2/pack)		2	5
	FT-15	Collar		1	1