

Brite-Nite™ 2 Million LED Spotlight Lantern™




User's Manual

Brite-Nite™ 2 Million LED Spotlight Lantern™ by Wagan Tech®

Thank you for purchasing the Brite-Nite™ 2 Million LED Spotlight Lantern™ by Wagan Tech®. This spotlight has two output levels, a 12 LED area lantern, and a 6 LED red flashing hazard light.

With normal care and proper treatment, it will provide years of reliable service. Please read all operating instructions carefully before use.

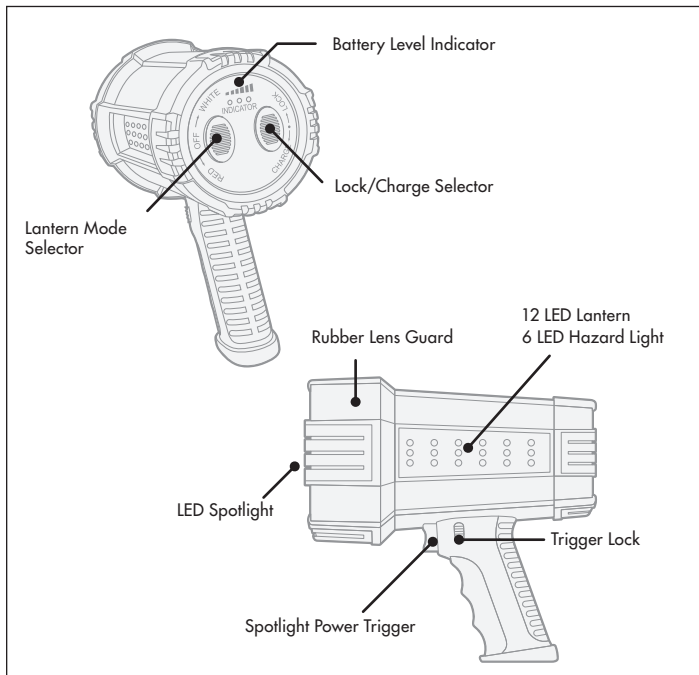

SPECIFICATIONS

Lumens	Spotlight— 600 lm (high) 100 lm (low) Lantern— 40 lm
Run Time	Spotlight— 1 hr (high) 6 hrs (low) Lantern— 15 hrs
Battery	3.7V, 1800mAh (lithium)
Spotlight	CREE® LED
Lantern	12 white LEDs 6 red LEDs
Beam Distance	820 ft (250m)
Charging Input	5V DC, micro USB
Charge Time	4-6 hrs

SAFETY GUIDELINES

- Caution! The lens will become hot after prolonged use.
- Do not cover lens while in use.
- Do not use near flammable liquids, gasses or in high temperatures: the battery may explode.
- Do not use in water or wet conditions. Store in a clean, dry environment.
- Keep out of reach of children.
- Never stare directly into the light: doing so can cause eye damage.
- Strong impacts may cause damage to the unit: please handle with care.

HOW TO USE

1. Press Spotlight Power Trigger to toggle between "HIGH" and "LOW". Lock trigger in position with Trigger Lock.
2. For Lantern: Move the switch on rear of unit to the "WHITE" position.
3. For Hazard Light: Move the switch on rear of unit to the "RED" position.



RECHARGING THE BATTERY

1. Slide the switch at the back to the "CHARGE" position, revealing the charging port.
2. Attach micro-USB cord to charging port. Charge with any USB power source, AC wall adapter, or supplied DC adapter.
3. Check the Battery Level Indicator LEDs at the back of the light to see the charge level while charging.
4. Do not turn on spotlight while charging.
5. The battery will be fully charged about an hour after the green Battery Level Indicator light is lit. It takes roughly 4–6 hours to charge with the DC adapter (estimated time: please see the Battery Level Indicator for actual charge level).

MAINTENANCE

- Keep the spotlight clean and dry.
- The lifespan of the internal battery depends on how well it is treated. It is advisable to recharge the spotlight after use, in order to extend battery life.
- If not used for an extended period of time, check battery level after 3 months. Recharge as necessary.
- Do not throw used batteries into the garbage can: Check with your local recycling center for proper disposal.