


Electrical Markets
3M™ Cable Ties and Bases



Broad Solutions for Effective Fastening

3M

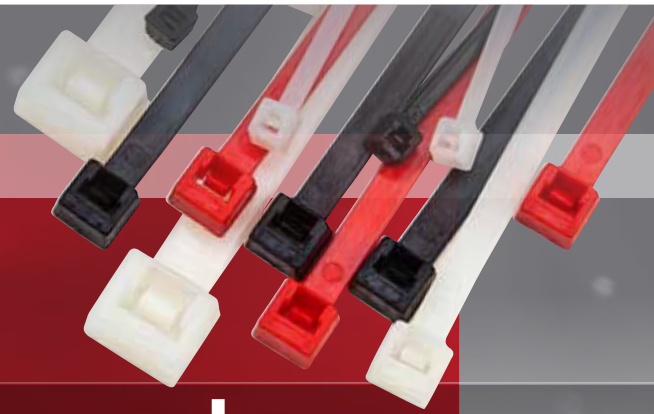

A Broad Line of Cable Ties from 3M

Available in 8 industry-standard lengths to accommodate your needs:

- 4", 6", 8", 11", 15", 24", 36" and 48"

Available in 3 colors:

- Black (indoor/outdoor, UV-weather resistant)
- Natural (off white for indoor)
- Red (indoor)

Available in 5 tensile strength categories for light- to heavy-duty jobs

- Miniature: 18 pounds
- Intermediate: 30-40 lbs.
- Standard: 50 lbs.
- Light Heavy-Duty: 120 lbs.
- Heavy-Duty: 175 lbs.

Packaged in convenient quantities:

- Small bags of 50 or 100 ties
- Bulk bags of 500 or 1,000 ties

Mounting bases available in a variety of sizes and configurations

Available in plenum-rated materials

- Some cable ties from 3M meet National Electrical Code (NEC) Section 300.22 C/D standard (See product charts for specifications.)

Made to 3M quality standards

| | Standard Cable Ties | |
|--|---------------------|---------------------------------------|
| | Natural Nylon 6.6 | UV Weather-Resistant Black, Nylon 6.6 |
| UL 94 Flammability Rating | V-2 | V-2 |
| Colors | Natural Red | Black |
| Screw Mountable Options | X | X |
| UV Resistant (For Outdoor Use) | | X |
| UL Listed - ANSI/UL 62275^a | X | X |
| UL Listed 181B-C^b | 36" and 48" Only | 36" and 48" Only |
| Plenum Rated^c | X | X |
| Eu RoHS Compliant (2011/65/Eu) | X | X |
| Tensile: | | |
| Miniature (18 pounds) | X | X |
| Intermediate (30-40 lbs.) | X | X |
| Standard (50 lbs.) | X | X |
| Light Heavy Duty (120 lbs.) | X | X |
| Heavy Duty (175 lbs.) | X | X |

^a UL Listed 62275 for Positioning Devices. Excludes 48" Cable Ties which are UL Recognized.

^b UL Listed 181B-C mechanical fasteners for use with non-metallic air ducts and air connectors.

^c Suitable for use in Air Handling spaces (plenum) in accordance with the Section 300.22 (C) and (D) of the NEC.



Guide to product names for 3M™ Cable Ties

CT D C T X - P

Example:

CT8BK50-M

CT8BK50S-C

| CT | D | C | T | X | - | P |
|--|---|--|---|--|---|---|
| CT = Nylon Cable Ties CTB = Mounting Bases | D = Dimensions (inches) Ties = Length Bases = Length X Width | C = Color BK = Black NT = Natural RD = Red BG = Beige | T = Tensile (pounds) 18 = Miniature 40 = Intermediate 50 = Standard 120 = Light Heavy Duty 175 = Heavy Duty | X = Special Features _ = Standard Tie (Blank) S = Screw Mount A = Adhesive Mount | | P = Package Size (Roman Numeral) M = 1,000 D = 500 C = 100 L = 50 |

Note: Cable Tie Base Part Numbers do not include Tensile.

3M™ Standard Cable Ties

3M™ Cable Ties are made with high-quality 6/6 nylon and designed to secure wire bundles and harness components quickly, without slipping.

- Self-locking head
- Available in several strengths, lengths, and screw mount options
- Plenum rated (Suitable for use in air handling spaces in accordance with the Section 3000.22(C) and (D) of the National Electrical Code.
- Colors available in natural and red for indoor use and UV weather-resistant black for indoor and outdoor use.
- Curved tip allows for faster threading and installation
- Agency Approval: UL 62775 Type 2/21 (Unless noted otherwise as UL Recognized)
- RoHS 2011/65/EU: Yes

3M™ Standard Cable Ties - Natural Nylon 6.6

| Part Number | UPC | Length in (mm) | Width in (mm) | Thickness in (mm) | Max. Bundle Diameter in (mm) | Tensile lbf (N) | Min. Operating Temp °C (°F) | Max Operating Temp °C (°F) | Min. Installation Temp °C (°F) | Bag Qty. | Carton Qty. |
|---|----------------|----------------|---------------|-------------------|------------------------------|-----------------|-----------------------------|----------------------------|--------------------------------|----------|-------------|
| Miniature Cable Ties (18 lb., 80 N) - Plenum rated | | | | | | | | | | | |
| CT4NT18-C | 051128-59275-5 | 4.1 (104) | 0.10 (3,0) | 0.04 (1,0) | 0.75 (19) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 100 | 1000 |
| CT4NT18-M | 051128-59276-2 | 4.1 (104) | 0.10 (3,0) | 0.04 (1,0) | 0.75 (19) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 1000 | 10000 |
| CT6NT18-C | 051128-59278-6 | 6.1 (155) | 0.10 (3,0) | 0.05 (1,3) | 1.25 (32) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 100 | 1000 |
| CT6NT18-M | 051128-59279-3 | 6.1 (155) | 0.10 (3,0) | 0.05 (1,3) | 1.25 (32) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 1000 | 10000 |
| CT8NT18-C | 051128-59282-3 | 8.1 (206) | 0.10 (3,0) | 0.05 (1,3) | 2.00 (51) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 100 | 1000 |
| CT8NT18-M | 051128-59283-0 | 8.1 (206) | 0.10 (3,0) | 0.05 (1,3) | 2.00 (51) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 1000 | 10000 |

3M™ Standard Cable Ties - Natural Nylon 6.6

| Part Number | UPC | Length in (mm) | Width in (mm) | Thickness in (mm) | Max. Bundle Diameter in (mm) | Tensile lbf (N) | Min. Operating Temp °C (°F) | Max Operating Temp °C (°F) | Min. Installation Temp °C (°F) | Bag Qty. | Carton Qty. |
|--|----------------|-------------------|------------------|----------------------|------------------------------------|--------------------|-----------------------------------|----------------------------------|--------------------------------------|-------------|----------------|
| Intermediate Cable Ties (30-40 lb., 135-180 N) - Plenum Rated | | | | | | | | | | | |
| CT6NT30-C | 051128-59286-1 | 5.8 (147) | 0.14 (3,6) | 0.05 (1,3) | 1.25 (32) | 30 (135) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT6NT30-M | 051128-59287-8 | 5.8 (147) | 0.14 (3,6) | 0.05 (1,3) | 1.25 (32) | 30(135) | -40 (-40) | 85 (185) | -20 (-4) | 1000 | 10000 |
| CT8NT40-C | 051128-59290-8 | 8.9 (226) | 0.14 (3,6) | 0.05 (1,3) | 2.00 (51) | 40 (180) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT8NT40-M | 051128-59291-5 | 8.9 (226) | 0.14 (3,6) | 0.05 (1,3) | 2.00 (51) | 40 (180) | -40 (-40) | 85 (185) | -20 (-4) | 1000 | 10000 |
| Standard Cable Ties (50 lb., 220 N) - Plenum Rated | | | | | | | | | | | |
| CT8NT50-C | 051128-59297-7 | 7.6 (193) | 0.18 (4,6) | 0.05 (1,3) | 1.87 (48) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT8NT50-M | 051128-59299-1 | 7.6 (193) | 0.18 (4,6) | 0.05 (1,3) | 1.87 (48) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 1000 | 10000 |
| CT8RD50-C | 051128-59559-6 | 7.6 (193) | 0.18 (4,6) | 0.05 (1,3) | 1.87 (48) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT11NT50-C | 051128-59302-8 | 11.1 (282) | 0.18 (4,6) | 0.05 (1,3) | 3.00 (76) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT11NT50-D | 051128-59303-5 | 11.1 (282) | 0.18 (4,6) | 0.05 (1,3) | 3.00 (76) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 500 | 5000 |
| CT11RD50-C | 051128-59560-2 | 11.1 (282) | 0.18 (4,6) | 0.05 (1,3) | 3.00 (76) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT15NT50-C | 051128-59307-3 | 14.6 (371) | 0.18 (4,6) | 0.05 (1,3) | 4.00 (102) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 500 |
| CT15NT50-D | 051128-59309-7 | 14.6 (371) | 0.18 (4,6) | 0.05 (1,3) | 4.00 (102) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 500 | 2500 |
| Light Heavy Duty Ties (120 lb., 530 N) - Plenum Rated | | | | | | | | | | | |
| CT8NT120-L | 051128-59311-0 | 9 (229) | 0.30 (7,6) | 0.07 (1,8) | 2.00 (51) | 120 (530) | -40 (-40) | 85 (185) | -20 (-4) | 50 | 500 |
| CT15NT120-C | 051128-59315-8 | 15 (381) | 0.30 (7,6) | 0.07 (1,8) | 4.00 (102) | 120 (530) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 500 |
| CT15NT120-D | 051128-59317-2 | 15 (381) | 0.30 (7,6) | 0.07 (1,8) | 4.00 (102) | 120 (530) | -40 (-40) | 85 (185) | -20 (-4) | 500 | 2500 |
| Heavy Duty Ties (175 lb., 800 N) | | | | | | | | | | | |
| CT24NT175-L ¹ | 051128-59319-6 | 24 (610) | 0.34 (8,6) | 0.09 (2,3) | 7.2 (183) | 175 (800) | 0 (32) | 85 (185) | 0 (32) | 50 | 500 |
| CT36NT175-L ^{1,2} | 051128-59321-9 | 36 (914) | 0.34 (8,6) | 0.09 (2,3) | 11.00 (279) | 175 (800) | 0 (32) | 85 (185) | 0 (32) | 50 | 500 |
| CT48NT175-L ² | 051128-59323-3 | 47.9 (1217) | 0.36 (9,1) | 0.07 (1,8) | 14.70 (373) | 175 (800) | - | 85 (185) | - | 50 | 500 |
| Screw Mountable¹ - Plenum Rated | | | | | | | | | | | |
| CT8NT50S-C | 051128-59296-0 | 8.6 (218) | 0.18 (4,6) | 0.06 (1,5) | 2.00 (51) | 50 (220) | -40 (-40) | 85 (185) | - | 100 | 1000 |
| CT8NT50S-M | 051128-59298-4 | 8.6 (218) | 0.18 (4,6) | 0.06 (1,5) | 2.00 (51) | 50 (220) | -40 (-40) | 85 (185) | - | 1000 | 10000 |
| CT15NT50S-L | 051128-59306-6 | 15.1 (384) | 0.18 (4,6) | 0.06 (1,5) | 4.00 (102) | 50 (220) | -40 (-40) | 85 (185) | - | 50 | 500 |
| CT15NT50S-D | 051128-59308-0 | 15.1 (384) | 0.18 (4,6) | 0.06 (1,5) | 4.00 (102) | 50 (220) | -40 (-40) | 85 (185) | - | 500 | 2500 |
| CT15NT120S-D ³ | 051128-59316-5 | 15.7 (399) | 0.30 (7,6) | 0.07 (1,8) | 4.00 (102) | 120 (530) | -40 (-40) | 85 (185) | - | 500 | 2500 |
| CT15NT120S-L | 051128-59314-1 | 15.7 (399) | 0.30 (7,6) | 0.07 (1,8) | 4.00 (102) | 120 (530) | -40 (-40) | 85 (185) | - | 50 | 500 |

¹ Suitable for use in air handling spaces (plenum)

² UL Recognized

³ UL Listing is pending at this time

3M™ Standard Cable Ties - Weather-Resistant Black Nylon 6.6

| Part Number | UPC | Length in (mm) | Width in (mm) | Thickness in (mm) | Max. Bundle Diameter in (mm) | Tensile lbf (N) | Min. Operating Temp °C (°F) | Max Operating Temp °C (°F) | Min. Installation Temp °C (°F) | Bag Qty. | Carton Qty. |
|--|----------------|-------------------|------------------|----------------------|------------------------------------|--------------------|-----------------------------------|----------------------------------|--------------------------------------|-------------|----------------|
| Miniature Cable Ties (18 lb., 80 N) - Plenum Rated | | | | | | | | | | | |
| CT4BK18-C | 051128-59273-1 | 4.1 (104) | 0.10 (3,0) | 0.04 (1,0) | 0.75 (19) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 100 | 1000 |
| CT4BK18-M | 051128-59274-8 | 4.1 (104) | 0.10 (3,0) | 0.04 (1,0) | 0.75 (19) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 1000 | 10000 |
| CT6BK18-C | 051128-59277-9 | 6.1 (155) | 0.10 (3,0) | 0.05 (1,3) | 1.25 (32) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 100 | 1000 |
| CT8BK18-C | 051128-59280-9 | 8.1 (206) | 0.10 (3,0) | 0.05 (1,3) | 2.00 (51) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 100 | 1000 |
| CT8BK18-M | 051128-59281-6 | 8.1 (206) | 0.10 (3,0) | 0.05 (1,3) | 2.00 (51) | 18 (80) | -40 (-40) | 85 (185) | 0 (32) | 1000 | 10000 |
| Intermediate Cable Ties (30-40 lb., 135-180 N) - Plenum Rated | | | | | | | | | | | |
| CT6BK30-C | 051128-59284-7 | 5.8 (147) | 0.14 (3,6) | 0.05 (1,3) | 1.25 (32) | 30 (135) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT6BK30-M | 051128-59285-4 | 5.8 (147) | 0.14 (3,6) | 0.05 (1,3) | 1.25 (32) | 30 (135) | -40 (-40) | 85 (185) | -20 (-4) | 1000 | 10000 |
| CT8BK40-C | 051128-59288-5 | 8.9 (226) | 0.14 (3,6) | 0.05 (1,3) | 2.00 (51) | 40 (180) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT8BK40-M | 051128-59289-2 | 8.9 (226) | 0.14 (3,6) | 0.05 (1,3) | 2.00 (51) | 40 (180) | -40 (-40) | 85 (185) | -20 (-4) | 1000 | 10000 |
| Standard Cable Ties (50 lb., 220 N) - Plenum Rated | | | | | | | | | | | |
| CT8BK50-C | 051128-59293-9 | 7.6 (193) | 0.18 (4,6) | 0.05 (1,3) | 1.87 (48) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT8BK50-M | 051128-59294-6 | 7.6 (193) | 0.18 (4,6) | 0.05 (1,3) | 1.87 (48) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 1000 | 10000 |
| CT11BK50-C | 051128-59300-4 | 11.1 (282) | 0.18 (4,6) | 0.05 (1,3) | 3.00 (76) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 1000 |
| CT11BK50-D | 051128-59301-1 | 11.1 (282) | 0.18 (4,6) | 0.05 (1,3) | 3.00 (76) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 500 | 5000 |
| CT15BK50-C | 051128-59304-2 | 14.6 (371) | 0.18 (4,6) | 0.05 (1,3) | 4.00 (102) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 500 |
| CT15BK50-D | 051128-59305-9 | 14.6 (371) | 0.18 (4,6) | 0.05 (1,3) | 4.00 (102) | 50 (220) | -40 (-40) | 85 (185) | -20 (-4) | 500 | 2500 |
| Light Heavy Duty Ties (120 lb., 550 N) - Plenum Rated | | | | | | | | | | | |
| CT8BK120-L | 051128-59310-3 | 9 (229) | 0.30 (7,6) | 0.07 (1,8) | 2.00 (51) | 120 (530) | -40 (-40) | 85 (185) | -20 (-4) | 50 | 500 |
| CT15BK120-C | 051128-59312-7 | 15 (381) | 0.30 (7,6) | 0.07 (1,8) | 4.00 (102) | 120 (530) | -40 (-40) | 85 (185) | -20 (-4) | 100 | 500 |
| CT15BK120-D | 051128-59313-4 | 15 (381) | 0.30 (7,6) | 0.07 (1,8) | 4.00 (102) | 120 (530) | -40 (-40) | 85 (185) | -20 (-4) | 500 | 2500 |
| Heavy Duty Ties (175 lb., 800 N) | | | | | | | | | | | |
| CT24BK175-L ¹ | 051128-59318-9 | 24 (610) | 0.34 (8,6) | 0.09 (2,3) | 7.20 (183) | 175 (800) | 0 (32) | 85 (185) | 0 (32) | 50 | 500 |
| CT36BK175-L ^{1,2} | 051128-59320-2 | 36 (914) | 0.34 (8,6) | 0.09 (2,3) | 11.00 (279) | 175 (800) | 0 (32) | 85 (185) | 0 (32) | 50 | 500 |
| CT48BK175-L ² | 051128-59322-6 | 47.9 (1217) | 0.36 (9,1) | 0.07 (1,8) | 14.70 (373) | 175 (800) | - | 85 (185) | - | 50 | 500 |
| Screw Mountable - Plenum Rated | | | | | | | | | | | |
| CT8BK50S-C | 051128-59292-2 | 8.6 (218) | 0.18 (4,6) | 0.06 (1,5) | 2.00 (51) | 50 (220) | -40 (-40) | 85 (185) | - | 100 | 1000 |
| CT8BK50S-M | 051128-59295-3 | 8.6 (218) | 0.18 (4,6) | 0.06 (1,5) | 2.00 (51) | 50 (220) | -40 (-40) | 85 (185) | - | 1000 | 10000 |

¹ Suitable for use in air handling spaces (plenum)

² UL Recognized

3M™ Standard Cable Ties - Assortment Pack

- Contains 15 each of natural nylon 6.6. ties: CT4NT18-, CT6NT30-, CT8NT50-, and CT11NT50-
- Contains 10 each of black, weather-resistant nylon 6.6 ties: CT4BK18-, CT6BK30-, CT8BK50-, and CT11BK50-

| Part Number | UPC | Length in (mm) | Width in (mm) | Thickness in (mm) | Max. Bundle Diameter in (mm) | Tensile lbf (N) | Min. Operating Temp °C (°F) | Max Operating Temp °C (°F) | Min. Installation Temp °C (°F) | Bag Qty. | Carton Qty. |
|-------------|----------------|----------------|---------------|-------------------|------------------------------|-----------------|-----------------------------|----------------------------|--------------------------------|----------|-------------|
| CT06220 | 051128-59324-0 | varies | varies | varies | varies | varies | -40 (-40) | 85 (185) | varies | 100 | 1000 |

3M™ Mounting Bases

| Part Number | Dimensions L x W x H in (mm) | Slot Width in (mm) | Slot Height in (mm) | Color | Mount Type | Bag Qty. | Material |
|---------------|------------------------------------|--------------------|---------------------|--------------------|------------------------------------|----------|----------|
| CTB75X75NTA-C | .74 x .74 x .22 (19 x 19 x 5,6) | 0.21 (5,3) | .06 (1.5) | Natural | Foam Backed Adhesive | 100 | Nylon |
| CTB75X75BKA-C | .74 x .74 x .22 (19 x 19 x 5,6) | 0.21 (5,3) | .06 (1.5) | UV Resistant Black | Foam-Backed Adhesive | 100 | Nylon |
| CTB1X1NTA-C | .99 x .99 x .22 (25 x 25 x 5,6) | 0.21 (5,3) | .06 (1.5) | Natural | Foam-Backed Adhesive | 100 | Nylon |
| CTB1X1BKA-C | .99 x .99 x .23 (25 x 25 x 5,6) | 0.21 (5,3) | .06 (1.5) | UV Resistant Black | Foam-Backed Adhesive | 100 | Nylon |
| CTB2X1BGA-C | 2.0 x 1.0 x .35 (51 x 25 x 8,9) | 0.21 (5,3) | .18 (4,5) | Beige | Foam-Backed Adhesive | 100 | ABS |
| CTB1X1BGA-C | 1.0 x 1.2 x .15 (25 x 25 x 3,8) | 0.21 (5,3) | .06 (1,5) | Beige | Foam-Backed Adhesive (Screw Mount) | 100 | ABS |
| CTB60X41NTS-C | .60 x .41 x .28 (15 x 10 x 7,0) | 0.21 (5,3) | .06 (1,5) | Natural | Screw Mount | 100 | Nylon |
| CTB87X62NTS-C | .87 x .62 x .38 (22 x 16 x 10) | 0.35 (8,9) | .10 (2,5) | Natural | Screw Mount | 100 | Nylon |

3M Science.
Applied to Life.™

Electrical Solutions you can rely on.

Electrical Products Catalog

Cable Ties and Accessories

3M™ Cable Ties are designed to secure wire bundles and harness components quickly, without slipping. Featuring a self-locking head and a locking mechanism, they are designed to handle temperatures up to 185°F (85°C). Available in several strengths and lengths, including screw mount. Most are plenum rated and USA made.



Cable Ties Part Number Naming Convention

The product name has been changed to better identify the characteristics of each tie.

CT D C T X - P

Example:

Catalog Number: CT4BK18-C

CT

D

C

T

X

-

P

CT = Cable Ties
CTB = Mounting
Bases

D = Dimensions (inches)
Ties = Length
Bases = Length X Width

C = Color
BK = Black
NT = Natural
RD = Red
BG = Beige

T* = Tensile (pounds)
18 = Miniature
40 = Intermediate
50 = Standard
120 = Light Heavy Duty
175 = Heavy Duty

X = Special Features
_ = Standard Tie (Blank)
S = Screw Mount
A = Adhesive Mount

P = Package Size
(Roman Numeral)
M = 1,000
D = 500
C = 100
L = 50


**Cable Tie Base Part Numbers do not include Tensile.*

3M™ Standard Cable Ties


3M™ Miniature Ties (18 lb., 80 N) - Plenum Rated

3M™ Miniature Cable Ties are small lightweight cable ties for use in holding applications up to 18 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 18 lb (80 N)
Min. Operating Temp. -40°F (-40°C)
Max. Operating Temp. 185°F (85°C)
Min. Installation Temp. 32°F (0°C)
RoHS 2011/65/EU Yes

Agency Approvals 

Country of Origin 

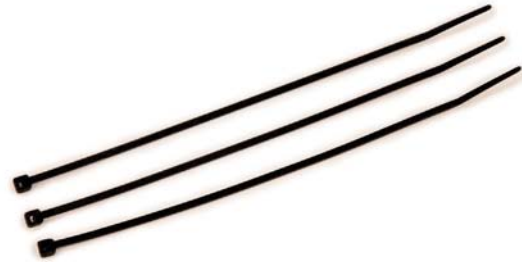

| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Max. Bundle Dia. | Tensile lbf (N) | Items per Bag (Case) |
|-----------|--------------|---------|---------------|-------------------|-------------------|-------------------|--------------------|-----------------|----------------------|
| CT4BK18-C | 051128-59273 | Black | Yes | 4.10" (104 mm) | 0.10" (3,0 mm) | 0.04" (1,0 mm) | 0.75" (19,1 mm) | 18 (80) | 100 (1000) |
| CT4BK18-M | 051128-59274 | Black | Yes | 4.10" (104 mm) | 0.10" (3,0 mm) | 0.04" (1,0 mm) | 0.75" (19,1 mm) | 18 (80) | 1000 (10,000) |
| CT4NT18-C | 051128-59275 | Natural | No | 4.10" (104 mm) | 0.10" (3,0 mm) | 0.04" (1,0 mm) | 0.75" (19,1 mm) | 18 (80) | 100 (1000) |
| CT4NT18-M | 051128-59276 | Natural | No | 4.10" (104 mm) | 0.10" (3,0 mm) | 0.04" (1,0 mm) | 0.75" (19,1 mm) | 18 (80) | 1000 (10,000) |
| CT6BK18-C | 051128-59277 | Black | Yes | 6.10" (155 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm) | 18 (80) | 100 (1000) |
| CT6NT18-C | 051128-59278 | Natural | No | 6.10" (155 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm) | 18 (80) | 100 (1000) |
| CT6NT18-M | 051128-59279 | Natural | No | 6.10" (155 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm) | 18 (80) | 1000 (10,000) |
| CT8BK18-C | 051128-59280 | Black | Yes | 8.10" (206 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 18 (80) | 100 (1000) |
| CT8BK18-M | 051128-59281 | Black | Yes | 8.10" (206 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 18 (80) | 1000 (10,000) |
| CT8NT18-C | 051128-59282 | Natural | No | 8.10" (206 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 18 (80) | 100 (1000) |
| CT8NT18-M | 051128-59283 | Natural | No | 8.10" (206 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 18 (80) | 1000 (10,000) |

3M™ Standard Cable Ties

3M™ Intermediate Ties (30-40 lb., 135-180 N) - Plenum Rated


3M™ Intermediate Cable Ties are a great solution for holding applications up to 40 lb. They provide an economical alternative to standard cable ties when higher tensile strength is not required. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

| | |
|--------------------------------|----------------------|
| Tensile Strength | 30-40 lb (135-180 N) |
| Min. Operating Temp. | -40°F (-40°C) |
| Max. Operating Temp. | 185°F (85°C) |
| Min. Installation Temp. | -4°F (-20°C) |
| RoHS 2011/65/EU | Yes |

Agency Approvals



Country of Origin

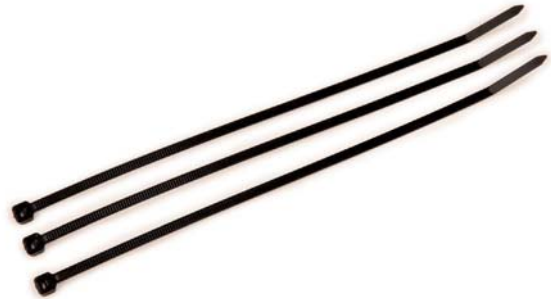

| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Max. Bundle Dia. | Tensile lbf (N) | Items per Bag (Case) |
|-----------|--------------|---------|---------------|----------------|----------------|----------------|------------------|-----------------|----------------------|
| CT6BK40-C | 051128-59284 | Black | Yes | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm) | 30 (135) | 100 (1000) |
| CT6BK40-M | 051128-59285 | Black | Yes | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm) | 30 (135) | 1000 (10,000) |
| CT6NT40-C | 051128-59286 | Natural | No | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm) | 30 (135) | 100 (1000) |
| CT6NT40-M | 051128-59287 | Natural | No | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 1.25" (31,8 mm) | 30 (135) | 1000 (10,000) |
| CT8BK40-C | 051128-59288 | Black | Yes | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 30 (135) | 100 (1000) |
| CT8BK40-M | 051128-59289 | Black | Yes | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 30 (135) | 1000 (10,000) |
| CT8NT40-C | 051128-59290 | Natural | No | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 30 (135) | 100 (1000) |
| CT8NT40-M | 051128-59291 | Natural | No | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 30 (135) | 1000 (10,000) |

3M™ Standard Cable Ties

3M™ Standard Ties (50 lb., 220 N) - Plenum Rated

3M™ Standard Cable Ties are the most common sized ties and provide a standard level of performance for general-use holding applications up to 50 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 50 lb (220 N)
Min. Operating Temp. -40°F (-40°C)
Max. Operating Temp. 185°F (85°C)
Min. Installation Temp. -4°F (-20°C)
RoHS 2011/65/EU Yes

Agency Approvals



Country of Origin



| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Max. Bundle Dia. | Tensile lbf. (N) | Items per Bag (Case) |
|------------|--------------|---------|---------------|--------------------|-------------------|-------------------|---------------------|------------------|----------------------|
| CT8BK50-C | 051128-59293 | Black | Yes | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 1.87" (47,5 mm) | 50 (220) | 100 (1000) |
| CT8BK50-M | 051128-59294 | Black | Yes | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 1.87" (47,5 mm) | 50 (220) | 1000 (10,000) |
| CT8NT50-C | 051128-59297 | Natural | No | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 1.87" (47,5 mm) | 50 (220) | 100 (1000) |
| CT8NT50-M | 051128-59299 | Natural | No | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 1.87" (47,5 mm) | 50 (220) | 1000 (10,000) |
| CT8RD50-C | 051128-59559 | Red | No | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 2.00" (50,8 mm) | 50 (220) | 100 (1000) |
| CT11BK50-C | 051128-59300 | Black | Yes | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm) | 50 (220) | 100 (1000) |
| CT11BK50-D | 051128-59301 | Black | Yes | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm) | 50 (220) | 500 (5000) |
| CT11NT50-C | 051128-59302 | Natural | No | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm) | 50 (220) | 100 (1000) |
| CT11NT50-D | 051128-59303 | Natural | No | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm) | 50 (220) | 500 (5000) |
| CT11RD50-C | 051128-59560 | Red | No | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 3.00" (76,2 mm) | 50 (220) | 100 (1000) |
| CT15BK50-C | 051128-59304 | Black | Yes | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 4.00" (101,6 mm) | 50 (220) | 100 (500) |
| CT15BK50-D | 051128-59305 | Black | Yes | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 4.00" (101,6 mm) | 50 (220) | 500 (2500) |
| CT15NT50-C | 051128-59307 | Natural | No | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 4.00" (101,6 mm) | 50 (220) | 100 (500) |
| CT15NT50-D | 051128-59309 | Natural | No | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 4.00" (101,6 mm) | 50 (220) | 500 (2500) |

3M™ Standard Cable Ties

3M™ Light Heavy Duty Ties (120 lb., 530 N) - Plenum Rated

3M™ Light Heavy Duty Cable Ties are commonly used in more demanding commercial and industrial jobs when extra strength is required to hold up to 120 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

| | |
|--------------------------------|----------------|
| Tensile Strength | 120 lb (530 N) |
| Min. Operating Temp. | -40°F (-40°C) |
| Max. Operating Temp. | 185°F (85°C) |
| Min. Installation Temp. | -4°F (-20°C) |
| RoHS 2011/65/EU | Yes |

Agency Approvals



Country of Origin




| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Max. Bundle Dia. | Tensile lbf (N) | Items per Bag (Case) |
|-------------|--------------|---------|---------------|--------------------|-------------------|-------------------|---------------------|-----------------|----------------------|
| CT8BK120-L | 051128-59310 | Black | Yes | 9.00" (229 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 2.00" (50,8 mm) | 120 (530) | 50 (500) |
| CT8NT120-L | 051128-59311 | Natural | No | 9.00" (229 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 2.00" (50,8 mm) | 120 (530) | 50 (500) |
| CT15BK120-C | 051128-59312 | Black | Yes | 15.00" (381 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 4.00" (101,6 mm) | 120 (530) | 100 (500) |
| CT15BK120-D | 051128-59313 | Black | Yes | 15.00" (381 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 4.00" (101,6 mm) | 120 (530) | 500 (2500) |
| CT15NT120-C | 051128-59315 | Natural | No | 15.00" (381 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 4.00" (101,6 mm) | 120 (530) | 100 (500) |
| CT15NT120-D | 051128-59317 | Natural | No | 15.00" (381 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 4.00" (101,6 mm) | 120 (530) | 500 (2500) |

3M™ Standard Cable Ties







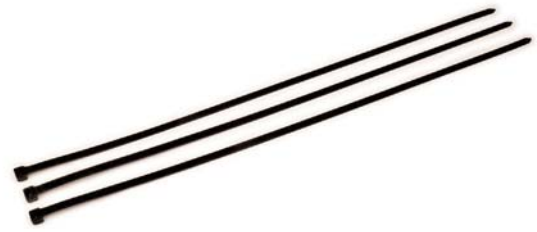

3M™ Heavy Duty Ties (175 lb., 800 N) - Plenum Rated

3M™ Heavy Duty Cable Ties provide an added level of strength plus a larger bundle diameter for heavy duty jobs up to 175 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

The 24" and 36" ties are also suitable for use with UL non-metallic air ducts and air connectors. (Plenum)



| | |
|--------------------------------|----------------|
| Tensile Strength | 175 lb (800 N) |
| Min. Operating Temp. | 32°F (0°C) |
| Max. Operating Temp. | 185°F (85°C) |
| Min. Installation Temp. | 32°F (0°C) |
| RoHS 2011/65/EU | Yes |

| | CT24BK175-L | CT24NT175-L | CT36BK175-L |
|----------------------|---|---|---|
| UPC | 051128-59318 | 051128-59319 | 051128-59320 |
| Color | Black | Natural | Black |
| UV Resistance | Yes | No | Yes |
| Length | 24.00" (610 mm) | 24.00" (610 mm) | 36.00" (914 mm) |
| Width | 0.34" (8,6 mm) | 0.34" (8,6 mm) | 0.34" (8,6 mm) |
| Thickness | 0.09" (2,3 mm) | 0.09" (2,3 mm) | 0.09" (2,3 mm) |
| Max. Bundle Dia. | 7.20" (183 mm) | 7.20" (183 mm) | 11.00" (279 mm) |
| Tensile lbf (N) | 175 (800) | 175 (800) | 175 (800) |
| Items per Bag (Case) | 50 (500) | 50 (500) | 50 (500) |
| Agency Approval |  |  |  |
| Country of Origin |  |  |  |
| | CT36NT175-L | CT48BK175-L | CT48NT175-L |
| UPC | 051128-59321 | 051128-59322 | 051128-59323 |
| Color | Natural | Black | Natural |
| UV Resistance | No | Yes | No |
| Length | 36.00" (914 mm) | 47.90" (1217 mm) | 47.90" (1217 mm) |
| Width | 0.34" (8,6 mm) | 0.36" (9,1 mm) | 0.36" (9,1 mm) |
| Thickness | 0.09" (2,3 mm) | 0.07" (1,8 mm) | 0.07" (1,8 mm) |
| Max. Bundle Dia. | 11.00" (279 mm) | 14.60" (372 mm) | 14.60" (372 mm) |
| Tensile lbf (N) | 175 (800) | 175 (800) | 175 (800) |
| Items per Bag (Case) | 50 (500) | 50 (500) | 50 (500) |
| Agency Approval |  | UL Pending - Not Plenum Rated | UL Pending - Not Plenum Rated |
| Country of Origin |  | - | - |



3M™ Standard Cable Ties

3M™ Screw Mountable - Plenum Rated

3M™ Screw Mount Cable Ties allow precise and controlled positioning of standard and heavy duty cables up to 120 lb. The easy-to-use ties can be quickly mounted to walls and structures with screws, bolts or rivets for added security. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

3M™ Screw Mount Cable Ties are suitable for use in air handling spaces (plenum).

NOTE: UL Listing is pending at this time for **CT15NT120S-D**.

| | |
|-------------------------|---|
| Stud Size | 10 |
| Min. Operating Temp. | -40°F (-40°C) |
| Max. Operating Temp. | 185°F (85°C) |
| Min. Installation Temp. | - |
| RoHS 2011/65/EU | Yes |
| Agency Approvals |  |
| Country of Origin |  |





| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Max. Bundle Dia. | Tensile lbf (N) | Items per Bag (Case) |
|--------------|--------------|---------|---------------|--------------------|-------------------|-------------------|---------------------|-----------------|----------------------|
| CT8BK50S-C | 051128-59292 | Black | Yes | 8.60" (218 mm) | 0.18" (4,6 mm) | 0.06" (1,5 mm) | 2.00" (50,8 mm) | 50 (220) | 100 (1000) |
| CT8BK50S-M | 051128-59295 | Black | Yes | 8.60" (218 mm) | 0.18" (4,6 mm) | 0.06" (1,5 mm) | 2.00" (50,8 mm) | 50 (220) | 1000 (10,000) |
| CT8NT50S-C | 051128-59296 | Natural | No | 8.60" (218 mm) | 0.18" (4,6 mm) | 0.06" (1,5 mm) | 2.00" (50,8 mm) | 50 (220) | 100 (1000) |
| CT8NT50S-M | 051128-59298 | Natural | No | 8.60" (218 mm) | 0.18" (4,6 mm) | 0.06" (1,5 mm) | 2.00" (50,8 mm) | 50 (220) | 1000 (10,000) |
| CT15NT50S-L | 051128-59306 | Natural | No | 15.10" (384 mm) | 0.18" (4,6 mm) | 0.06" (1,5 mm) | 4.00" (102,6 mm) | 50 (220) | 50 (500) |
| CT15NT50S-D | 051128-59308 | Natural | No | 15.10" (384 mm) | 0.18" (4,6 mm) | 0.06" (1,5 mm) | 4.00" (102,0 mm) | 50 (220) | 500 (2500) |
| CT15NT120S-L | 051128-59314 | Natural | No | 15.70" (399 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 4.00" (102,0 mm) | 120 (530) | 50 (500) |
| CT15NT120S-D | 051128-59316 | Natural | No | 15.70" (399 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 4.00" (102,0 mm) | 120 (530) | 500 (2500) |

3M™ Standard Cable Ties

3M™ Standard Cable Ties - Assortment Pack

3M™ Cable Tie Assortment Pack contains 100 of our most commonly used ties. Includes three sizes, four lengths and both colors.

| | |
|-------------------------|---|
| Min. Operating Temp. | -40°F (-40°C) |
| Max. Operating Temp. | 185°F (85°C) |
| Min. Installation Temp. | Varies |
| RoHS 2011/65/EU | Yes |
| Agency Approvals |  |
| Country of Origin |  |




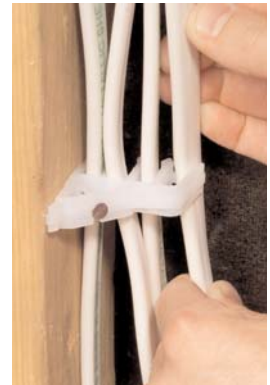
| Order No. | UPC | Product Name | Description | Items per Pack | Items per Case |
|-----------|--------------|-------------------------------------|--|----------------|----------------|
| CT06220 | 051128-59324 | 3M™ Cable Tie Assortment Pack 06220 | Contains 15 each of natural nylon 6.6. ties: CT4NT18-, CT6NT30-, CT8NT50-, and CT11NT50- Contains 10 each of black, weather-resistant nylon 6.6 ties: CT4BK18-, CT6BK30-, CT8BK50-, and CT11BK50- | 100 | 1000 |



3M™ Cable Bases and Stackers

3M™ Cable Stackers

3M™ Cable Stackers organize cable runs and aid in identification, putting an end to tangled wires and the potential heating that could occur when cables are held together tightly under a single fastener. Easy installation simplifies compliance with the spacing requirements of the National Electrical Code, article 300-4-(d) and the Canadian Electric Code Part I, Section 12-516. Made from reclaimed plastic.

| | |
|-------------------|---|
| Cable Tie Type | Stacker |
| Color | White |
| RoHS 2011/65/EU | Yes |
| Country of Origin |  |




| | SI-1 | SIFS-1 |
|----------------|---|--|
| |  |  |
| UPC | 054007-49554 | 054007-49918 |
| Product Name | 3M™ Cable Stacker SI-1 | 3M™ Furring Strip Cable Stacker SIFS-1 |
| Description | The 3M™ Cable Stacker SI-1 centers multiple cables on a 2 X 4 framing member. | The 3M™ Furring Strip Cable Stacker SIFS-1 routes, fastens, and supports CATV, telephone, security and instrumentation cables. |
| Items per Bag | 25 | 25 |
| Items per Case | 250 | 250 |

3M™ Cable Bases and Stackers

3M™ Cable Tie Mounting Bases

3M™ Cable Tie Bases make mounting wire and cable a quick, easy and secure process. 2-way and 4-way configurations as well as adhesive-backed and screw mount options offer flexible mounting alternatives to meet a variety of applications.

RoHS 2011/65/EU Yes

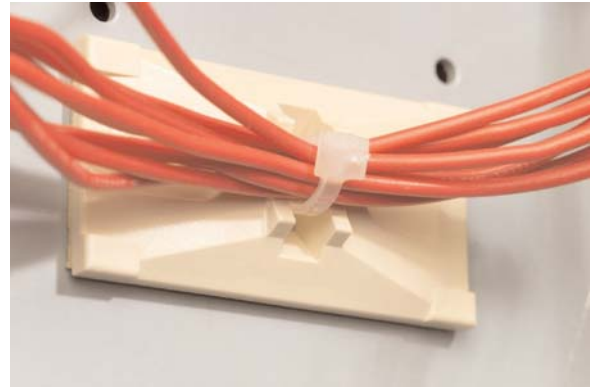

| | CTB2X1BGA-C | CTB1X1BGA-C | CTB75X75NTA-C | CTB75X75BKA-C |
|-------------------|----------------------|------------------------------------|----------------------|----------------------|
| | | | | |
| UPC | 054007-06290 | 054007-06292 | 054007-06294 | 054007-06295 |
| Material | ABS | ABS | Nylon | Nylon |
| Mount Type | Foam Backed Adhesive | Foam Backed Adhesive (Screw Mount) | Foam Backed Adhesive | Foam Backed Adhesive |
| Color | Beige | Beige | Natural | Black (UV Resistant) |
| Length | 2.0" (51 mm) | 1.0" (25 mm) | 0.74" (19 mm) | 0.74" (19 mm) |
| Width | 1.0" (25 mm) | 1.2" (25 mm) | 0.74" (19 mm) | 0.74" (19 mm) |
| Height | 0.35" (8,9 mm) | 0.15" (3,8 mm) | 0.22" (5,6 mm) | 0.22" (5,6 mm) |
| Slot Width | 0.21" (5,3 mm) | 0.21" (5,3 mm) | 0.21" (5,3 mm) | 0.21" (5,3 mm) |
| Slot Height | 0.18" (4,5 mm) | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.06" (1,5 mm) |
| Items per Bag | 100 | 100 | 100 | 100 |
| Items per Case | 500 | 500 | 500 | 500 |
| Country of Origin | | | | |
| | CTB1X1NTA-C | CTB1X1BKA-C | CTB60X41NTS-C | CTB87X62NTS-C |
| | | | | |
| UPC | 054007-06296 | 054007-06297 | 054007-95667 | 054007-95668 |
| Material | Nylon | Nylon | Nylon | Nylon |
| Mount Type | Foam Backed Adhesive | Foam Backed Adhesive | Screw Mount | Screw Mount |
| Color | Natural | Black (UV Resistant) | Natural | Natural |
| Length | 0.99" (25 mm) | 0.99" (25 mm) | 0.60" (15 mm) | 0.87" (22 mm) |
| Width | 0.99" (25 mm) | 0.99" (25 mm) | 0.41" (10 mm) | 0.62" (16 mm) |
| Height | 0.22" (5,6 mm) | 0.22" (5,6 mm) | 0.28" (7,0 mm) | 0.38" (10 mm) |
| Slot Width | 0.21" (5,3 mm) | 0.21" (5,3 mm) | 0.21" (5,3 mm) | 0.35" (8,9 mm) |
| Slot Height | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.10" (2,5 mm) |
| Items per Bag | 100 | 100 | 100 | 100 |
| Items per Case | 500 | 500 | 500 | 500 |
| Country of Origin | | | - | - |

3M™ Hook and Loop Reclosable Fasteners

3M™ Hook and Loop Reclosable Fasteners

3M™ Hook and Loop Reclosable Fasteners permit thousands of easy openings and secure closings. Stiff hooks on one side mesh with pliable loops on the other side to provide secure closure.

RoHS 2011/65/EU Yes



| Order No. | UPC | Product Name | Description | Rolls per Case |
|---------------------------|--------------|---|--|----------------|
| SJ-3526N-Hook-Black-1-1/2 | 021200-86383 | 3M™ Fastener Hook SJ3526 | Hook (Black) 1 1/2"x50 yd | 2 |
| SJ3526N-White-2"x50yd | 021200-86247 | 3M™ Fastener Hook SJ3526 | Hook (White) 2"x50yd | 2 |
| SJ3527N-1"x50yd-White | 021200-86253 | 3M™ Fastener Loop SJ3527 | Loop (White) 1"x50 yd Bulk | 3 |
| SJ3527N-2"x50yd-Black | 021200-86255 | 3M™ Fastener Loop SJ3527 | Loop (Black) 2"x50 yd Bulk | 2 |
| SJ3527N-2"x50yd-White | 021200-86256 | 3M™ Fastener Loop SJ3527 | Loop (White) 2"x50 yd Bulk | 2 |
| SJ3526N-Beige-1"x50yd | 021200-86242 | 3M™ Fastener Hook SJ3526 | Hook (Beige) 1"x50yd | 3 |
| SJ3526N-Beige-2"x50yd | 021200-86246 | 3M™ Fastener Hook SJ3526 | Hook (Beige) 2"x50yd | 2 |
| SJ3526N-Beige-5/8"x50yd | 021200-86239 | 3M™ Fastener Hook SJ3526 | Hook (Beige) 5/8"x50yd | 4 |
| SJ3401-1"x50yd-Black | 021200-62538 | 3M™ Fastener Loop SJ3401 | Loop (Black) 1"x50 yd | 12 |
| SJ3401-1"x50yd-White | 021200-62539 | 3M™ Fastener Loop SJ3401 | Loop (White) 1"x50 yd | 12 |
| SJ3401-2"x50yd | 021200-62544 | 3M™ Fastener Loop SJ3401 | Loop (Black) 2"x50 yd | 6 |
| SJ3402-1"x50yd-Black | 021200-62553 | 3M™ Fastener Hook SJ3402 | Hook (Black) 1"x50 yd | 12 |
| SJ3402-1"x50yd-White | 021200-62554 | 3M™ Fastener Hook SJ3402 | Hook (White) 1"x50 yd | 12 |
| SJ3402-2"x50yd | 021200-62559 | 3M™ Fastener Hook SJ3402 | Hook (Black) 2"x50 yd | 6 |
| SJ3402-3/4"x50yd-Black | 021200-62550 | 3M™ Fastener Hook SJ3402 | Hook (Black) 3/4"x50 yd | 16 |
| SJ-3522 | 021200-86236 | 3M™ Fastener Plasticizer Resistant Hook SJ3522 | Hook (Black) 1"x50 yd | 3 |
| SJ-3523 | 021200-86238 | 3M™ Fastener Plasticizer Resistant Loop SJ3523 | Loop (Black) 1"x50 yd | 3 |
| SJ3526N-2"x50yd | 021200-86245 | 3M™ Fastener Hook SJ3526 | Hook (Black) 2"x50 yd | 2 |
| SJ3526N-Black-5/8"x50yd | 021200-86240 | 3M™ Fastener Hook SJ3526 | Hook (Black) 5/8"x50yd | 4 |
| SJ-3526N-Hook-Black-1" | 021200-86243 | 3M™ Fastener Hook SJ3526 | Hook (Black) 1"x50 yd | 3 |
| SJ-3526N-Hook-White-5/8" | 021200-86241 | 3M™ Fastener Hook SJ3526 | Hook (White) 5/8"x50 yd | 4 |
| SJ3527N-Beige-1"x50yd | 021200-86251 | 3M™ Fastener Loop SJ3527 | Loop (Beige) 1"x50yd | 3 |
| SJ3527N-Beige-2"x50yd | 021200-86254 | 3M™ Fastener Loop SJ3527 | Loop (Beige) 2"x50yd | 2 |
| SJ3527N-Beige-5/8"x50yd | 021200-86248 | 3M™ Fastener Loop SJ3527 | Loop (Beige) 5/8"x50yd | 4 |
| SJ3527N-Black-1.5"x50yd | 021200-86167 | 3M™ Fastener Loop SJ3527 | Loop (Black) 1.5"x50yd | 2 |
| SJ-3527N-Loop-Black-1" | 021200-86252 | 3M™ Fastener Loop SJ3527 | Loop (Black) 1"x50 yd | 3 |
| SJ3527N-White-5/8"x50yd | 021200-86250 | 3M™ Fastener Loop SJ3527 | Loop (White) 5/8"x50yd | 4 |
| SJ-3532N-Hook-Black-1" | 021200-86259 | 3M™ Fastener Hook SJ3532 | Hook (Black) 1"x50 yd | 3 |
| SJ-3533N-Loop-Black-1" | 021200-86266 | 3M™ Fastener Loop SJ3533 | Loop (Black) 1"x50 yd | 3 |
| SJ-3571-1"x50yd-Black | 021200-86285 | 3M™ Fastener Loop SJ3571 | Loop (Black) 1"x50 yd | 3 |
| SJ3571-1"x50yd-White | 021200-87277 | 3M™ Fastener Loop SJ3571 | Loop (White) 1"x50 yd | 3 |
| SJ3571-5/8"x50yd-Black | 021200-86289 | 3M™ Fastener Loop SJ3571 | Loop (Black) 5/8"x50 yd | 4 |
| SJ3571-White-2"x50yd | 021200-86467 | 3M™ Fastener Loop SJ3571 | Loop (White) 2"x50yd | 2 |
| SJ-3572-1"x50yd-Black | 021200-86286 | 3M™ Fastener Hook SJ3572 | Hook (Black) 1"x50 yd | 3 |
| SJ3572-2"x50yd-Black | 021200-86377 | 3M™ Fastener Hook SJ3572 | Hook (Black) 2"x50 yd | 2 |
| SJ3572-5/8"x50yd-Black | 021200-86290 | 3M™ Fastener Hook SJ3572 | Hook (Black) 5/8"x50 yd | 4 |
| MP3401/MP3402-Black | 051131-06465 | 3M™ Scotchmate™ Reclosable Fastener MP3401 | Reclosable Fastener (Black) 1"x5 yd | 5 |
| MP-3526/27N-Black | 051131-06481 | 3M™ Scotchmate™ Reclosable Fastener MP3526/MP3527 | Hook & Loop Fastener (Black) 1"x5 yd Mini Pack, Roll | 5 |

3M™ Hook and Loop Reclosable Fasteners

3M™ Hook and Loop Reclosable Fasteners (continued)

| Order No. | UPC | Product Name | Description | Rolls per Case |
|-------------------|--------------|---|--|----------------|
| MP-3526/27N-White | 051131-06488 | 3M™ Scotchmate™ Reclosable Fastener MP3526/MP3527 | Hook & Loop Fastener (White) 1"x5 yd Mini Pack, Roll | 5 |

3M™ Dual Lock™ Reclosable Fasteners

3M™ Dual Lock™ Reclosable Fasteners

Strong. Hidden. Removable. 3M™ Dual Lock™ Reclosable Fasteners are a fastening solution that can replace screws, bolts and rivets. The fasteners contain hundreds of mushroom-shaped stems that audibly “SNAP” together to form a secure attachment with strong adhesive backings that adhere to your substrate.

RoHS 2011/65/EU Yes




| Order No. | UPC | Product Name | Description | Rolls per Case |
|-----------------------|--------------|--|---|----------------|
| MP-3541/42-Black | 051131-06483 | 3M™ Dual Lock™ Reclosable Fastener MP3541/MP3542 400/170 | Reclosable Fastener (Black) 400 stems per square inch, 1"x5 yd | 5 |
| MP-3551/52-Black | 051131-06484 | 3M™ Dual Lock™ Reclosable Fastener MP3551/MP3552 400/170 | Reclosable Fastener (Black) 400 stems per square inch., 1"x5 yd | 5 |
| MP-3560-Clear | 051131-06463 | 3M™ Dual Lock™ Reclosable Fastener MP3560 250 | Reclosable Fastener (Clear) 250 stems per square inch, 1"x5 yd | 5 |
| SJ-3463 | 021200-24993 | 3M™ Dual Lock™ Reclosable Fastener SJ3463 400 | Reclosable Fastener (Black) rigid backed circle with hole, 400 stems per square inch, 13/16" diameter with 0.16 in hole. | 1000 |
| SJ3540-1"x50yd-Black | 021200-65812 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3540 | Reclosable Fastener (Black) 250 stems per square inch, 1"x50 yd | 2 |
| SJ-3541-1"x50yd-Black | 021200-86277 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3541 | Reclosable Fastener (Black) 400 stems per square inch, 1"x50 yd | 2 |
| SJ-3542-1"x50yd-Black | 021200-86309 | 3M™ Dual Lock™ Reclosable Fastener SJ3542 170 | Reclosable Fastener (Black) 170 stems per square inch, 1"x50 yd | 2 |
| SJ-3560-1"x50yd-Clear | 021200-86282 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3560 | Reclosable Fastener (Clear) 250 stems per square inch, 1"x50 yd | 2 |
| SJ-3748 | 021200-63628 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3748 Black | Pop-in, Christmas tree style reclosable fastener with a 16.2 mm stud, 400 stems per square inch, 1 inch x 1 inch. | 5000 |
| SJ-3755 | 021200-24129 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3755 Black | Black, polypropylene reclosable fastener with rigid backing, rigid backed circle with one hole, 250 stems per square inch, 1 1/8 inch (28.5 mm) outside diameter. | 1000 |
| SJ-3762 | 021200-24131 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3762 Black | Black, polypropylene reclosable fastener with rigid backing, rigid backed circle with one hole, 400 stems per square inch, 1 1/8 inch (28.5 mm) outside diameter. | 1000 |
| SJ-3767 | 021200-24128 | 3M™ Dual Lock™ Reclosable Fastener SJ3767 Black | Black, polyolefin plastic reclosable square fastener with two counter-sunk holes, 400 stem per square inch, 1 1/2 inch (38 mm). | 1000 |

3M™ Dual Lock™ Reclosable Fasteners

3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570

Low to medium temperature performance. Bonds well to metals (aluminum, stainless steel), glass, many plastics (polypropylene, polyethylene, polycarbonate, ABS), powder coated paints and medium to low surface energy materials. Designed for indoor use. Products include SJ4570 and SJ4575.

RoHS 2011/65/EU Yes

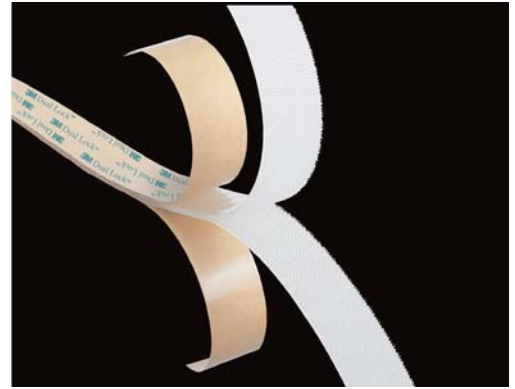

| Order No. | UPC | Product Name | Description | Rolls per Case |
|------------------------|--------------|---|---|----------------|
| SJ4570-1"x50yd-Clear | 021200-44883 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 1 in x 50 yd 0.105 in (2,7 mm). | 2 |
| SJ4570-2"x50yd-Clear | 021200-46070 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 2 in x 50 yd 0.105 in (2,7 mm). | 1 |
| SJ4570-3/4"x50yd-Clear | 021200-46239 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 3/4 in x 50 yd 0.105 in (2,7 mm). | 2 |
| SJ4570-4"x50yd-Clear | 021200-46071 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 4 in x 50 yd 0.105 in (2,7 mm). | 1 |
| SJ4570-5/8"x50yd-Clear | 021200-45075 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 5/8 in x 50 yd 0.105 in (2,7 mm). | 3 |

3M™ Cable Ties

Data Sheet

| | |
|--------------------|---|
| Description | 3M™ Cable Ties are molded from 6/6 nylon and are available in a variety of sizes and styles, including weather resistant black for outdoor use. |
|--------------------|---|

| | |
|---|---|
| Agency Approvals & Self Certifications | Products which are UL Listed as noted in the Typical Data section meet UL Standard 62275 for Cable Management Systems, TYPE 21 or TYPE 21S, and are suitable for use in Air Handling Spaces (plenums) in accordance with Section 300.22 of the National Electric Code. |
|---|---|

Products which are identified as UL Listed and manufactured with a black, UV resistant material are Listed as suitable for use outdoors.

The Heavy Duty(175 lb.) cable ties are UL Listed 181B-C mechanical fasteners for use with flexible air ducts.

UL. File # E116841

| | |
|---------------------|---|
| Applications | 3M™ Cable Ties are used to secure wire bundles and harness components quickly. The flexible design allows the user to slip ties easily under and around cables and harnesses. These ties can be used with most standard tensioning/cutoff tools for fast production line fastening. |
|---------------------|---|

| | |
|-----------------------|--|
| Specifications | Open Specifications All ties must be UL. Listed, TYPE 21 or TYPE 21S, and tested to UL. Standard 62275 for Cable Management Systems. |
|-----------------------|--|

Closed Specifications
Product must be 3M cable ties, UL. Listed, TYPE 21 or TYPE 21S, and tested to UL. Standard 62275 for Cable Management Systems.

Cable Tie Mounting Bases

3M™ Cable Tie Bases are molded from 6/6 nylon or ABS and available in natural, weather resistant black or ivory material. They are also available in different sizes and mounting abilities. The self-adhesive style is for simple lightweight mounting of wire bundles while the saddle design screw mount is designed for maximum weight and stability.

3M™ Cable Ties



Miniature Cable Ties (18lb, 80N) UL Listed TYPE 21

| Part Number | Length in (mm) | Width in (mm) | Min/Max Bundle Dia. in (mm) | Tensile lb (N) | Thickness in (mm) | Operating Temp. | Min Install Temp | Bag Quantity | Description |
|-------------|----------------|---------------|-----------------------------|----------------|-------------------|-----------------|------------------|--------------|--------------------|
| CT4BK18-C | 4.1 (104) | .10 (3,0) | .062 (1,6) / .75 (19,1) | 18 (80) | .04 (1,0) | -40°C - 85°C | 0°C | 100 | UV Resistant Black |
| CT4BK18-M | 4.1 (104) | .10 (3,0) | .062 (1,6) / .75 (19,1) | 18 (80) | .04 (1,0) | -40°C - 85°C | 0°C | 1000 | UV Resistant Black |
| CT4NT18-C | 4.1 (104) | .10 (3,0) | .062 (1,6) / .75 (19,1) | 18 (80) | .04 (1,0) | -40°C - 85°C | 0°C | 100 | Standard |
| CT4NT18-M | 4.1 (104) | .10 (3,0) | .062 (1,6) / .75 (19,1) | 18 (80) | .04 (1,0) | -40°C - 85°C | 0°C | 1000 | Standard |
| CT6BK18-C | 6.1 (155) | .10 (3,0) | .062 (1,6) / 1.25 (31,8) | 18 (80) | .05 (1,3) | -40°C - 85°C | 0°C | 100 | UV Resistant Black |
| CT6NT18-C | 6.1 (155) | .10 (3,0) | .062 (1,6) / 1.25 (31,8) | 18 (80) | .05 (1,3) | -40°C - 85°C | 0°C | 100 | Standard |
| CT6NT18-M | 6.1 (155) | .10 (3,0) | .062 (1,6) / 1.25 (31,8) | 18 (80) | .05 (1,3) | -40°C - 85°C | 0°C | 1000 | Standard |
| CT8BK18-C | 8.1 (206) | .10 (3,0) | .062 (1,6) / 2.00 (50,8) | 18 (80) | .05 (1,3) | -40°C - 85°C | 0°C | 100 | UV Resistant Black |
| CT8BK18-M | 8.1 (206) | .10 (3,0) | .062 (1,6) / 2.00 (50,8) | 18 (80) | .05 (1,3) | -40°C - 85°C | 0°C | 1000 | UV Resistant Black |
| CT8NT18-C | 8.1 (206) | .10 (3,0) | .062 (1,6) / 2.00 (50,8) | 18 (80) | .05 (1,3) | -40°C - 85°C | 0°C | 100 | Standard |
| CT8NT18-M | 8.1 (206) | .10 (3,0) | .062 (1,6) / 2.00 (50,8) | 18 (80) | .05 (1,3) | -40°C - 85°C | 0°C | 1000 | Standard |



Intermediate Cable Ties (40lb, 180N) UL Listed TYPE 21

| Part Number | Length in (mm) | Width in (mm) | Min/Max Bundle Dia. in (mm) | Tensile lb (N) | Thickness in (mm) | Temp. Rating | Min Install Temp | Bag Quantity | Description |
|-------------|----------------|---------------|-----------------------------|----------------|-------------------|--------------|------------------|--------------|--------------------|
| CT6BK40-C | 5.8 (147) | .14 (3,6) | .062 (1,6) / 1.25 (31,8) | 40 (180) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | UV Resistant Black |
| CT6BK40-M | 5.8 (147) | .14 (3,6) | .062 (1,6) / 1.25 (31,8) | 40 (180) | .05 (1,3) | -40°C - 85°C | -20°C | 1000 | UV Resistant Black |
| CT6NT40-C | 5.8 (147) | .14 (3,6) | .062 (1,6) / 1.25 (31,8) | 40 (180) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | Standard |
| CT6NT40-M | 5.8 (147) | .14 (3,6) | .062 (1,6) / 1.25 (31,8) | 40 (180) | .05 (1,3) | -40°C - 85°C | -20°C | 1000 | Standard |
| CT8BK40-C | 8.9 (226) | .14 (3,6) | .062 (1,6) / 2.00 (50,8) | 40 (180) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | UV Resistant Black |
| CT8BK40-M | 8.9 (226) | .14 (3,6) | .062 (1,6) / 2.00 (50,8) | 40 (180) | .05 (1,3) | -40°C - 85°C | -20°C | 1000 | UV Resistant Black |
| CT8NT40-C | 8.9 (226) | .14 (3,6) | .062 (1,6) / 2.00 (50,8) | 40 (180) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | Standard |
| CT8NT40-M | 8.9 (226) | .14 (3,6) | .062 (1,6) / 2.00 (50,8) | 40 (180) | .05 (1,3) | -40°C - 85°C | -20°C | 1000 | Standard |

3M™ Cable Ties



Standard Cable Ties (50lb, 220N) UL Listed TYPE 21S

| Part Number | Length in (mm) | Width in (mm) | Min/Max Bundle Dia. in (mm) | Tensile lb (N) | Thickness in (mm) | Temp. Rating | Min Install Temp | Bag Quantity | Description |
|-------------|----------------|---------------|-----------------------------|----------------|-------------------|--------------|------------------|--------------|--------------------|
| CT8BK50-C | 7.6 (193) | .18 (4,6) | .062 (1,6) / 1.87 (47,5) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | UV Resistant Black |
| CT8BK50-M | 7.6 (193) | .18 (4,6) | .062 (1,6) / 1.87 (47,5) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 1000 | UV Resistant Black |
| CT8NT50-C | 7.6 (193) | .18 (4,6) | .062 (1,6) / 1.87 (47,5) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | Standard |
| CT8NT50-M | 7.6 (193) | .18 (4,6) | .062 (1,6) / 1.87 (47,5) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 1000 | Standard |
| CT8RD50-C | 7.6 (193) | .18 (4,6) | .062 (1,6) / 1.87 (47,5) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | Standard Red |
| CT11BK50-C | 11.1 (282) | .18 (4,6) | .062 (1,6) / 3.00 (76,2) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | UV Resistant Black |
| CT11BK50-D | 11.1 (282) | .18 (4,6) | .062 (1,6) / 3.00 (76,2) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 500 | UV Resistant Black |
| CT11NT50-C | 11.1 (282) | .18 (4,6) | .062 (1,6) / 3.00 (76,2) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | Standard |
| CT11NT50-D | 11.1 (282) | .18 (4,6) | .062 (1,6) / 3.00 (76,2) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 500 | Standard |
| CT11RD50-C | 11.1 (282) | .18 (4,6) | .062 (1,6) / 3.00 (76,2) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | Standard Red |
| CT15BK50-C | 14.6 (371) | .18 (4,6) | .062 (1,6) / 4.00 (101,6) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | UV Resistant Black |
| CT15BK50-D | 14.6 (371) | .18 (4,6) | .062 (1,6) / 4.00 (101,6) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 500 | UV Resistant Black |
| CT15NT50-C | 14.6 (371) | .18 (4,6) | .062 (1,6) / 4.00 (101,6) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 100 | Standard |
| CT15NT50-D | 14.6 (371) | .18 (4,6) | .062 (1,6) / 4.00 (101,6) | 50 (220) | .05 (1,3) | -40°C - 85°C | -20°C | 500 | Standard |



Light Heavy Duty Cable Ties (120lb, 530N) UL Listed TYPE 21S

| Part Number | Length in (mm) | Width in (mm) | Min/Max Bundle Dia. in (mm) | Tensile lb (N) | Thickness in (mm) | Temp. Rating | Min Install Temp | Bag Quantity | Description |
|-------------|----------------|---------------|-----------------------------|----------------|-------------------|--------------|------------------|--------------|--------------------|
| CT8BK120-L | 9.0 (229) | .30 (7,6) | .06 (1,6) / 2.00 (50,8) | 120 (530) | .07 (1,8) | -40°C - 85°C | -20°C | 50 | UV Resistant Black |
| CT8NT120-L | 9.0 (229) | .30 (7,6) | .06 (1,6) / 2.00 (50,8) | 120 (530) | .07 (1,8) | -40°C - 85°C | -20°C | 50 | Standard |
| CT15BK120-C | 15.0 (381) | .30 (7,6) | .19 (4,8) / 4.00 (101,6) | 120 (530) | .07 (1,8) | -40°C - 85°C | -20°C | 100 | UV Resistant Black |
| CT15BK120-D | 15.0 (381) | .30 (7,6) | .19 (4,8) / 4.00 (101,6) | 120 (530) | .07 (1,8) | -40°C - 85°C | -20°C | 500 | UV Resistant Black |
| CT15NT120-C | 15.0 (381) | .30 (7,6) | .19 (4,8) / 4.00 (101,6) | 120 (530) | .07 (1,8) | -40°C - 85°C | -20°C | 100 | Standard |
| CT15NT120-D | 15.0 (381) | .30 (7,6) | .19 (4,8) / 4.00 (101,6) | 120 (530) | .07 (1,8) | -40°C - 85°C | -20°C | 500 | Standard |

3M™ Cable Ties



Heavy Duty Cable Ties (175lb, 800N) UL Listed TYPE 21

| Part Number | Length in (mm) | Width in (mm) | Min/Max Bundle Dia. in (mm) | Tensile lb (N) | Thickness in (mm) | Temp. Rating | Min Install Temp | Bag Quantity | Description |
|-------------|----------------|---------------|-----------------------------|----------------|-------------------|--------------|------------------|--------------|--------------------|
| CT24BK175-L | 24.0 (610) | .34 (8,6) | .19 (4,8) / 7.2 (183) | 175 (800) | .09 (2,3) | -40°C - 85°C | 0°C | 50 | UV Resistant Black |
| CT24NT175-L | 24.0 (610) | .34 (8,6) | .19 (4,8) / 7.2 (183) | 175 (800) | .09 (2,3) | -40°C - 85°C | 0°C | 50 | Standard |
| CT36BK175-L | 36.0 (914) | .34 (8,6) | .19 (4,8) / 11.0 (279) | 175 (800) | .09 (2,3) | -40°C - 85°C | 0°C | 50 | UV Resistant Black |
| CT36NT175-L | 36.0 (914) | .34 (8,6) | .19 (4,8) / 11.0 (279) | 175 (800) | .09 (2,3) | -40°C - 85°C | 0°C | 50 | Standard |
| CT48BK175-L | 47.9 (1217) | .36 (9,1) | .28 (7) / 14.3 (365) | 175 (800) | .07 (1,8) | -40°C - 85°C | 0°C | 50 | UV Resistant Black |
| CT48NT175-L | 47.9 (1217) | .36 (9,1) | .28 (7) / 14.3 (365) | 175 (800) | .07 (1,8) | -40°C - 85°C | 0°C | 50 | Standard |



Screw Mount Ties UL Listed TYPE 21

| Part Number | Length in (mm) | Width in (mm) | Min / Max Bundle Dia. in (mm) | Loop Tensile lb (N) | Thickness in (mm) | Temp. Rating | Mech. Tensile Lb (N) | Bag Quantity | Description |
|--------------|----------------|---------------|-------------------------------|---------------------|-------------------|--------------|----------------------|--------------|------------------------------|
| CT8BK50S-C | 8.6 (218) | .18 (4,6) | .062 (1,6) / 2.00 (50,8) | 50 (220) | .06 (1,5) | -40°C - 85°C | 50 (220) | 100 | UV Resistant Black # 10 stud |
| CT8BK50S-M | 8.6 (218) | .18 (4,6) | .062 (1,6) / 2.00 (50,8) | 50 (220) | .06 (1,5) | -40°C - 85°C | 50 (220) | 1000 | UV Resistant Black # 10 stud |
| CT8NT50S-C | 8.6 (218) | .18 (4,6) | .062 (1,6) / 2.00 (50,8) | 50 (220) | .06 (1,5) | -40°C - 85°C | 50 (220) | 100 | Mounting # 10 stud |
| CT8NT50S-M | 8.6 (218) | .18 (4,6) | .062 (1,6) / 2.00 (50,8) | 50 (220) | .06 (1,5) | -40°C - 85°C | 50 (220) | 1000 | Mounting # 10 stud |
| CT15BK50S-L | 15.1 (384) | .18 (4,6) | .062 (1,6) / 4.00 (102,0) | 50 (220) | .06 (1,5) | -40°C - 85°C | 50 (220) | 50 | UV Resistant Black # 10 stud |
| CT15BK50S-D | 15.1 (384) | .18 (4,6) | .062 (1,6) / 4.00 (102,0) | 50 (220) | .06 (1,5) | -40°C - 85°C | 50 (220) | 500 | UV Resistant Black # 10 stud |
| CT15NT50S-L | 15.1 (384) | .18 (4,6) | .062 (1,6) / 4.00 (102,0) | 50 (220) | .06 (1,5) | -40°C - 85°C | 50 (220) | 50 | Mounting #10 stud |
| CT15NT50S-D | 15.1 (384) | .18 (4,6) | .062 (1,6) / 4.00 (102,0) | 50 (220) | .06 (1,5) | -40°C - 85°C | 50 (220) | 500 | Mounting #10 stud |
| CT15NT120S-L | 15.7 (399) | .30 (7,6) | .19 (4,8) / 4.00 (102,0) | 120 (530) | .07 (1,8) | -40°C - 85°C | 18 (80) | 50 | Mounting #10 stud |
| CT15NT120S-D | 15.7 (399) | .30 (7,6) | .19 (4,8) / 4.00 (102,0) | 120 (530) | .07 (1,8) | -40°C - 85°C | 18 (80) | 500 | Mounting #10 stud |

3M™ Cable Ties

Mounting Bases

| Part Number | Dimensions LxWxH in (mm) | Slot Width in (mm) | Slot Height in (mm) | Color | Mount Type | Bag Quantity | Material |
|---------------|---------------------------------|-----------------------|---------------------------|--------------------|-------------------------|-----------------|----------|
| CTB75X75NTA-C | .74x.74x.22 (19x19x5,6) | .21 (5,3) | .06 (1,5) | Natural | Foam Backed Adhesive | 100 | Nylon |
| CTB75X75BKA-C | .74x.74x.22 (19x19x5,6) | .21 (5,3) | .06 (1,5) | UV Resistant black | Foam Backed Adhesive | 100 | Nylon |
| CTB1X1NTA-C | .99x.99x.22 (25x25x5,8) | .21 (5,3) | .06 (1,5) | Natural | Foam Backed Adhesive | 100 | Nylon |
| CTB1X1BKA-C | .99x.99x.23 (25x25x5,8) | .21 (5,3) | .06 (1,5) | UV Resistant black | Foam Backed Adhesive | 100 | Nylon |
| CTB2X1BGA-C | 2.0x1.0x.35 (51x25x8,9) | .21 (5,3) | .18 (4,5) | Beige | Foam Backed Adhesive | 100 | ABS |
| CTB1X1BGA-C | 1.0x1.2x.15 (25x25x3,8) | .21 (5,3) | .06 (1,5) | Beige | Foam Backed Adhesive | 100 | ABS |
| CTB60X40NTS-C | .60x.41x.28 (15x10x7,0) | .21 (5,3) | .06 (1,5) | Natural | Screw Mount | 100 | Nylon |
| CTB87X62NTS-C | .87x.62x.38 (22x16x10) | .35 (8,9) | .10 (2,5) | Natural | Screw Mount | 100 | Nylon |

Availability

Please contact your local distributor; available from 3M.com/electrical [Where to Buy] or call 1.800.245.3573.

Shelf Life & Storage

3M™ Cable Ties have a 5-year shelf life from date of manufacture when stored in a humidity controlled storage (10°C/50°F to 27°C/80°F and <75% relative humidity).
