



Part No. ALL23116
ALL23117

Spring Steel Punches

Spring steel punches place a 1/4" diameter hole 1/2" from the end of Allstar's 1" x .062" thick spring steel material. Built-in stop positions material for accurate hole placement. ALL23116, placed on a hard surface, can be struck lightly with a 3 to 4lb hammer. ALL23117 may be placed in a vise, or handheld and impact driven, using a 3/4" socket to punch spring steel mounted to race car.

Part No.	Description
ALL23116.....	Hammer Type Punch
ALL23117.....	Impact Type Punch

Replacement Parts:

ALL99013.....	Mandrel For ALL23116
ALL99014.....	Mandrel For ALL23117
ALL99173.....	Mandrel Bolt For ALL23117
ALL99174.....	Top Plate For ALL23117




ALL99013

ALL99014

ALL99173

ALL99174

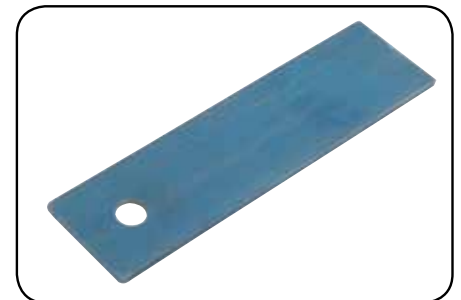

Related Parts:

ALL23110.....	Spring Steel Coil 40' Long x 1" Wide x .062" Thick
ALL23115.....	17/64" Spring Steel Drill Bit

REV080415