



**Model # 1834**


**1/2" NANO  
FLEX-HEAD ANGLE  
IMPACT WRENCH  
- 400FT/LB**



- **PATENTED DESIGN FEATURES INNOVATIVE DUAL AIR INTAKE MOTOR AND TWIN HAMMER MECHANISM FOR INCREASED POWER, AND 180° FLEX-HEAD WITH 360° SWIVEL HANDLE FOR MAXIMUM ACCESS**
- **AN INDUSTRY FIRST TRUE FLEX-HEAD IMPACT WRENCH AND WITH OUR SHORTEST LENGTH YET AT 3.34"**

Model	Square Drive	Free Speed	Working Torque	MAX. Torque	Overall Length
1834	1/2"	8000 R.P.M	280ft. lbs	400ft. lbs	3.34"(85mm)
Vibration Level	Air Inlet	Air Pressure	Clutch Type	Av. Air Consumption	
4.9m/sec <sup>2</sup>	1/4"(6.35mm)	90 psi	Twin Hammer	4 CFM	
Recommended Minimum Hose Bore Diameter			Recommended Maximum Hose Length		
3/8"(10mm)			30 ft(10m)		

**PERFECT FOR BRAKE CALIPER BOLTS OR  
WHEREVER YOU CAN HOOK THE ULTRA-SLIM  
IMPACT HEAD**



**HAND TOOLS**

SHOP EQUIPMENT UNDERCAR KIT HYDRAULICS AIR TOOLS





# Astro

## 1834

### 1/2" NANO FLEX-HEAD ANGLE IMPACT WRENCH - 400FT/LB

- ✓ An industry first true flex-head impact wrench and with our shortest length yet at 3.34"
- ✓ Patented design features innovative dual air intake motor and twin hammer mechanism for increased power, and 180° flex-head with 360° swivel handle for maximum access
- ✓ Perfect for brake caliper bolts or wherever you can hook the ultra-slim impact head

#### TOP VIEW

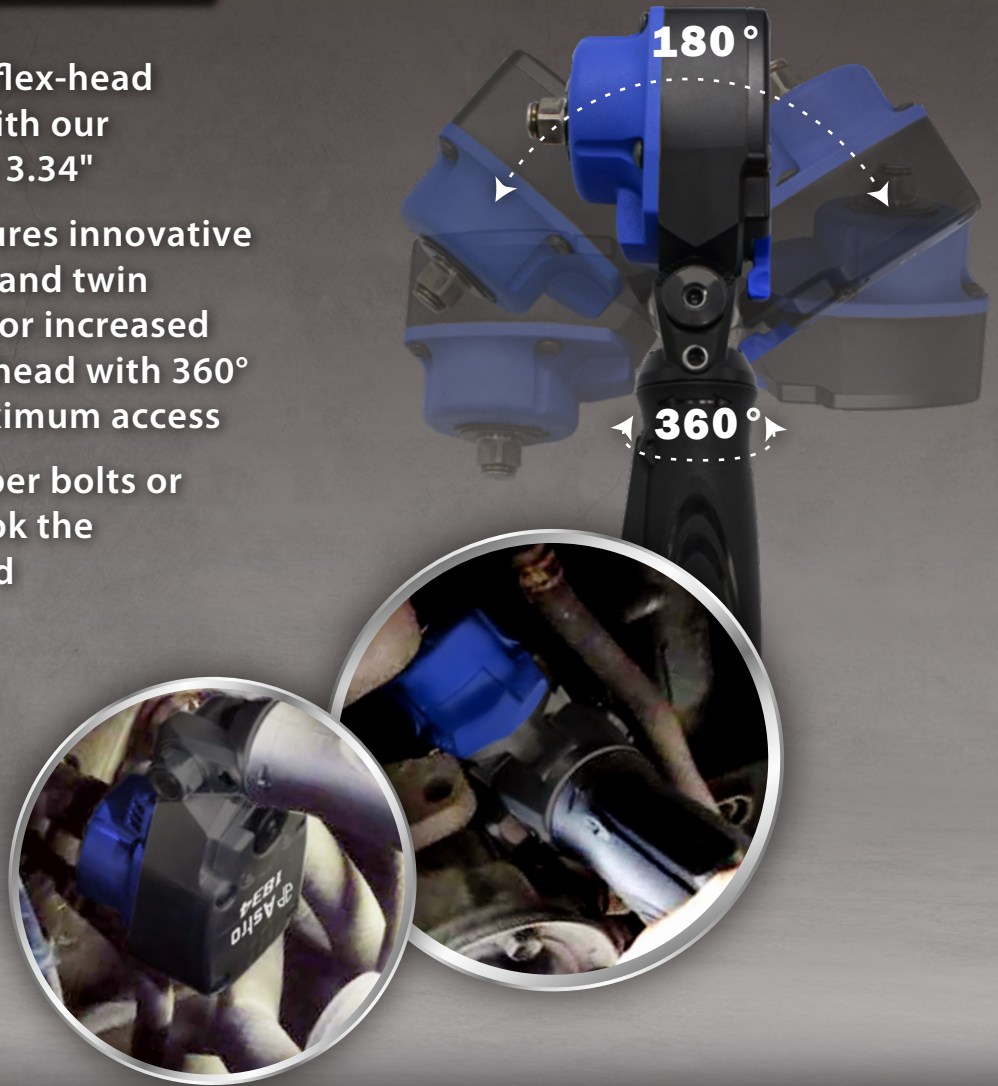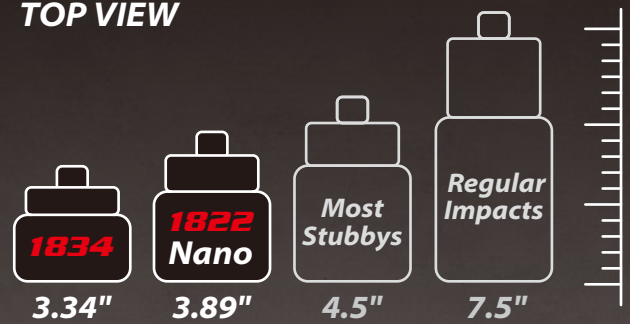

#### SPECIFICATION

Square Drive	1/2"
Free Speed	8000 R.P.M
Working Torque	280ft.lbs
MAX. Torque	400ft.lbs
Overall Length	3.34"(85mm)
Vibration Level	4.9m/sec <sup>2</sup>
Air Inlet	1/4"(6.35mm)

Air Pressure	90 psi
Clutch Type	Twin Hammer
Av. Air Consumption	4 CFM
Recommended Minimum Hose Bore Diameter	3/8"(10mm)
Recommended Maximum Hose Length	30 ft(10m)

Learn more about supplies and consumables on our website.