


Model No. **40SL**

410 RECHARGEABLE **LUMEN** COB LED SLIM LIGHT

- Designed for harsh conditions and dirty environments
- USB rechargeable (Includes wall adapter and micro USB cable)

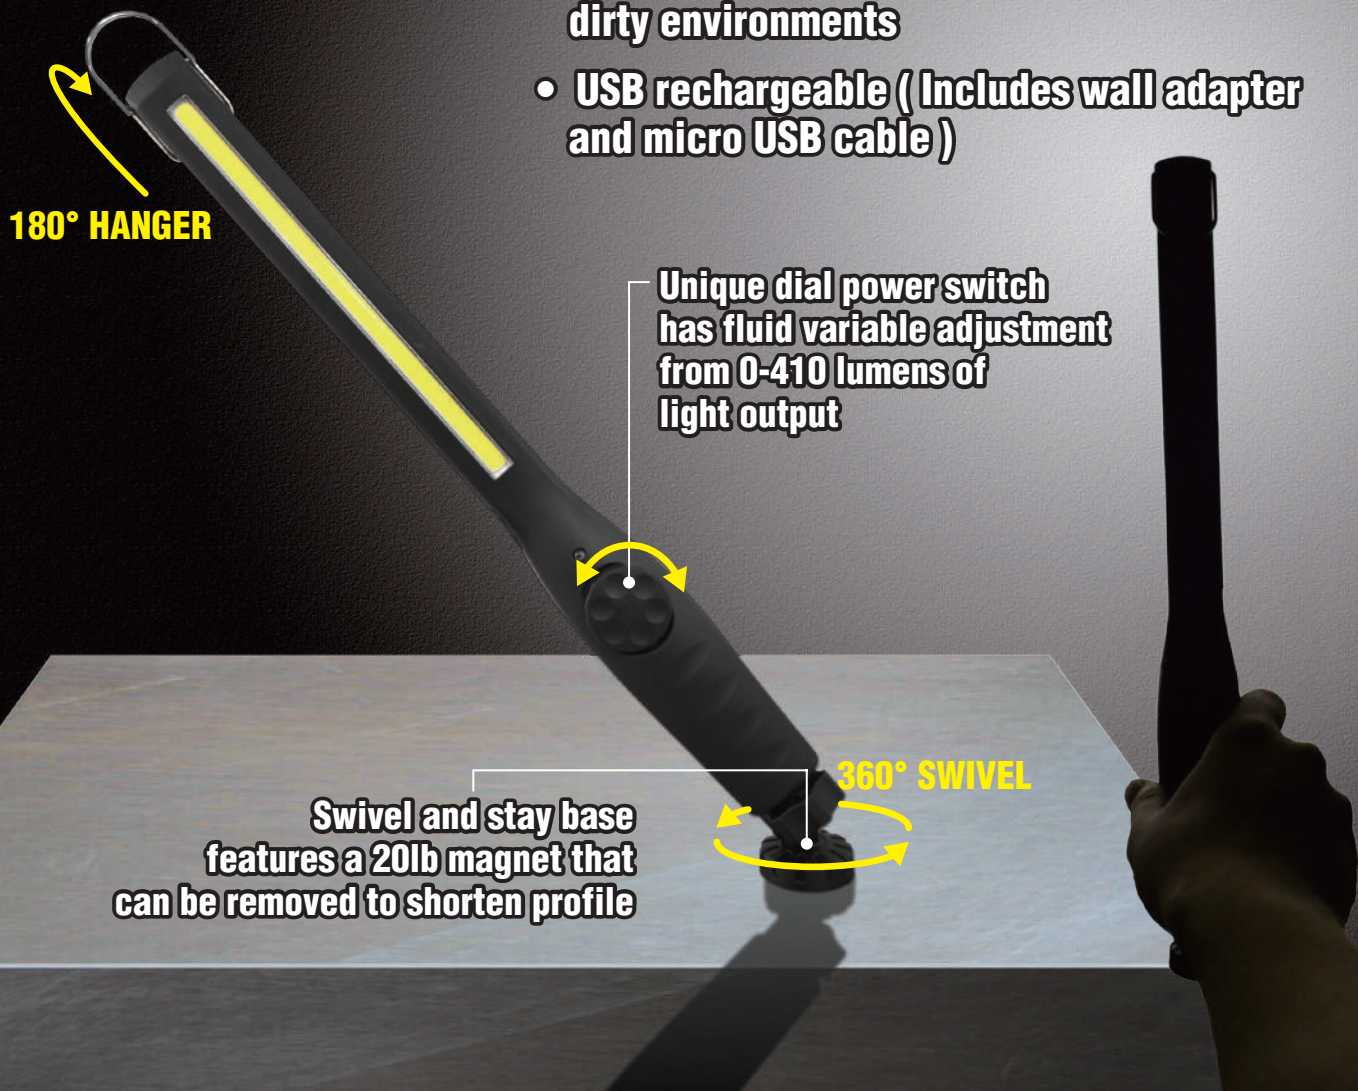

SPECIFICATIONS

<i>LED Max Power</i>	15W LED COB light	<i>Charger Time</i>	3.5 - 4.0 hours
<i>Li-ion rechargeable battery</i>	3.7V 2200mAh	<i>Length</i>	13.9-14.8"
		<i>Weight</i>	0.44 lbs
<i>Active Time</i>	10 hrs work time at 50% power, 2.5 hrs at full power		



Model # 40SL

**410 LUMEN
RECHARGEABLE
COB LED
SLIM LIGHT**

40 CHIP COB LED ARRAY WITH LIGHT DENSITY MANY TIMES HIGHER THAN SMD LED'S WHILE CONSUMING LESS POWER


10 HOUR WORK TIME AT 50% POWER, 2.5HRS AT FULL POWER

- Samsung Lithium Ion 2200mAh battery, charge time 4hrs
- Overcharge protection and auto idle mode
- Externally and internally designed for harsh conditions and dirty environments
- Steel collapsible hanger
- USB rechargeable (includes wall adapter and Micro USB cable)

UNIQUE DIAL POWER SWITCH HAS FLUID VARIABLE ADJUSTMENT FROM 0-410 LUMENS OF LIGHT OUTPUT

HEAVY-DUTY SWIVEL-LOCK BASE FEATURES A REMOVABLE 20LB MAGNET

Model	Led Max Power	Li-ion rechargeable battery
40SL	15W LED COB light	3.7V 2200mAh
Chager input	Power output:	Light Thickness
AC100-240V 50/60Hz	5.0V 1000mAh	0.425"
Charger Time	Active time	
3.5 - 4.0 hours	2.5hrs (100% power) up to 10hrs (50% power)	
Storage Temperature	Operation temperature	Dimensions
-20°C to 70°C	-5°C to 50°C	14.8" (L) x 1.58" (W) x 1.35" (H)



SHOP EQUIPMENT





Model: **40SL**

Product Type:
**410 LUMEN RECHARGEABLE
COB LED SLIM LIGHT**



WARNING



Study, understand and follow all instructions provided with this product. Read these instructions carefully before installing, operating, servicing or repairing this tool. Keep these instructions in a safe accessible place.

INTENDED USE OF THE TOOL

The 40SL Slim Light is designed as a hand-held portable electric-powered light source which provides direct light to work area. Do not use this light outside of the designed intent. Never modify the light for any other purpose or use.



WARNING



Caution: To help prevent personal injury avoid looking directly at light.

- Use of this product can expose you to chemicals including ethylene glycol, gasoline vapors and engine exhaust, which are known to the State of California to cause cancer, birth defects, or reproductive harm. For Always wear ANSI approved safety equipment, safety glasses and clothing when using this product. Study, understand, and follow all instructions provided with this product. Failure to read and follow all warnings and operating instructions may result in damages and serious injury or death.
- Always wear ANSI approved goggles when using this product. (Users and Bystanders).
- Never use this tool for any application other than for which it was designed.
- Only use accessories designed for this tool.
- Never alter or modify this tool in any way.
- Improper operation and/or maintenance of the tool, modification of the tool, or use of the tool with accessories not designed for it could result in serious injury or death.
- Always select the correct accessories of the correct size and design for the job that you are attempting to perform.
- Always work in a clean, safe, well-lit, organized and adequately equipped area.
- Do not begin repairs without assurance that vehicle is in secure position, and will not move during repair.



**Astro Pneumatic
Tool Company**

PRODUCT INFORMATION:

- Heavy-Duty swivel-lock base features a removable 20lb magnet
- Unique dial power switch has fluid variable adjustment from 0-410 lumens of light output
- Designed to withstand the harsh conditions and chemicals of an auto repair shop

SPECIFICATIONS:

LED max power: 15W LED COB light
 Li-ion rechargeable battery: 3.7V 2200mAh
 Chager input: AC100-240V 50/60Hz
 Power output: 5.0V 1000mAh
 Charger time: 3.5 - 4.0 hours
 Active time: 2.5hrs (100% power) up to 10hrs (50% power)
 Storage temperature: -20°C to 70°C
 Operation temperature: -5°C to 50°C
 Light Thickness: 0.425"
 Dimensions: 14.8" (L) x 1.58" (W) x 1.35" (H)

410 LUMEN RECHARGEABLE COB LED SLIM LIGHT



MADE IN TAIWAN

DO NOT DISCARD – GIVE TO USER



Model:

40SL

Product Type:

410 LUMEN RECHARGEABLE COB LED SLIM LIGHT




WARNING



TO REDUCE THE RISK OF SERIOUS INJURY DURING USE, FOLLOW THESE INSTRUCTIONS FOR PROPER ASSEMBLY.

- Do not completely cover or submerge the unit in water or oil. While designed to handle grime, sustained moisture and oil inside the light will damage connections.
- Do not operate the charger or charger adapters if it has been subjected to shock or damage; failure to do so may cause fire and may result in personal injury and property damage.
- Do not use when it is wet, it can cause electric shock.
- This is not a toy. Do not allow children to play with this item.
- Do not stare into the beam when the light-bar is turn on, it can cause damage to the eyes.
- It is not recommended to operate the light-bar exceed the temperature specification.
- Never plug in nor remove the charger adaptor plug with wet hands, as doing so may cause electric shock.
- Avoid using the charger adaptor in humid or dusty locations, in locations exposed to the direct sunlight, near the heaters, or in locations generating sooty smoke or steam as doing otherwise may result in fire or electric shock.
- Do not use this charger adapter for the unit which does not designate its use in combination, doing so may cause a fire.
- Remove the charger adaptor plug from the wall AC outlet when moving the connected equipment, as doing otherwise may cause damage to the power cord, resulting in a fire.
- Unplug the charger adaptor plug from the AC outlet for safety purposes when cleaning or leaving the unit unused for 10 days or more. Doing otherwise may cause a fire or electric shock.

PRODUCT LAYOUT:

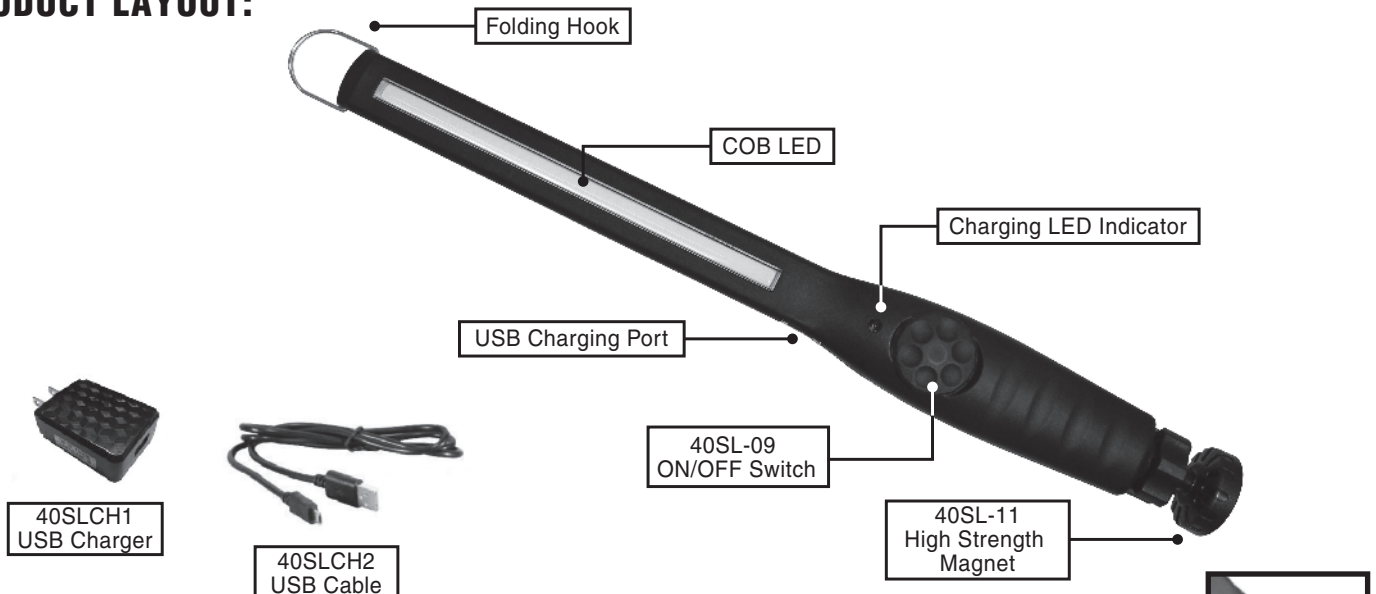

SPECIFICATIONS:

LED max power: 15W LED COB light
 Li-ion rechargeable battery: 3.7V 2200mAh
 Chager input: AC100-240V 50/60Hz
 Power output: 5.0V 1000mAh
 Charger time: 3.5 - 4.0 hours

Active time: 2.5hrs (100% power) up to 10hrs (50% power)
 Storage temperature: -20°C to 70°C
 Operation temperature: -5°C to 50°C
 Light Thickness: 0.425"
 Dimensions: 14.8" (L) x 1.58" (W) x 1.35" (H)



360° SWIVEL