



ATD-5830

3/16" AIR RIVETER INSTRUCTION MANUAL

Safety Precautions

- Do not use the tool outside of the designed intent.
- Never modify the tool for any purpose.
- Normal use of this product is likely to expose the user to dust and /or microscopic particles containing chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. Always wear appropriate safety equipment and clothing when using this product. Study, understand and follow all instructions provided with this product.
- Always wear ANSI approved goggles when using this product.
- Always select the correct accessories of the correct size and design for the job that you are attempting to perform.
- Always work in a clean, safe, well-lit, organized and adequately equipped area.
- Do not begin repairs without assurance that vehicle is in secure position and will not move during repair.

Important:

Read these instructions carefully before installing, operating, servicing or repairing this tool. Keep these instructions in a safe accessible place.

Unpacking:

When unpacking this unit, check the parts diagram and part number listing to make sure all parts are included. If any parts are missing or damaged please call your distributor.

Product Information:

- Powerful durable, high speed production tool
- Quick release air valve permits cylinder to return quickly for high speed assembly operations: Prevents overloading for long life.
- Performs well at any angle
- Gets into hard-to-reach areas
- Provides quick, quiet and comfortable operation preventing user fatigue
- Includes 3/16"(4.8mm), 5/32"(4mm), 1/8"(3.2mm) & 3/32"(2.4mm) nosepieces

Specifications:

Rivet Capacity: 3/16"

Overall Length: 10-5/8"(270mm)

Net Weight: 3lbs(1.41kg)

Stroke: 1/2"(14mm)

Motor: 1/2hp

Air Inlet Thread NPT: 1/4"


Air Hose I.D. Size: 3/8"(10mm)

Avg. Air Consumption: 4cfm

Air Pressure: 90-120psi


Maintenance/Adding Oil for Hydraulic Riveter

1. Turn off air supply
2. Use spanner wrench to dismantle the riveter head (fig. 1).
3. Use spanner wrench to open bottom cover of the riveter (fig. 2).
4. Remove piston from cylinder (fig. 3).
5. Clean inside of the cylinder and lubricate cover seal (fig. 4).
6. Lubricate the intake with oil until full (fig. 5).
7. Clean piston stem and add grease on the inner wall of the cylinder and the ring.
8. Reassemble (fig.6).

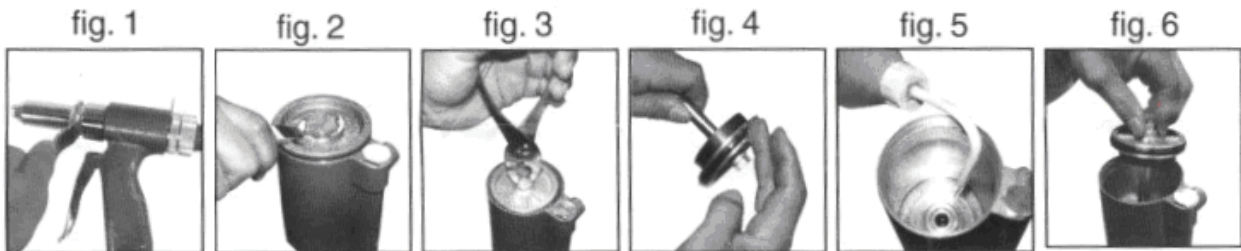


Cleaning/Maintenance for the Head of Riveter

1. Turn off air supply. Assure all pressure is released prior to disassembly.
2. Use spanner wrench to dismantle the riveter head (fig.1).
3. Use spanner wrench to disassemble (fig. 2).
4. Clean all inner/assembly parts of the riveter head with a brush.
5. Reassemble the inner/assembly parts.
6. Oil the parts and reassemble riveter head completely.

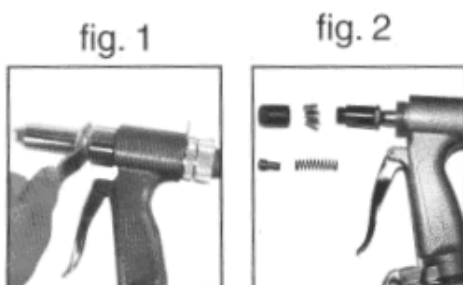



ATD-5830

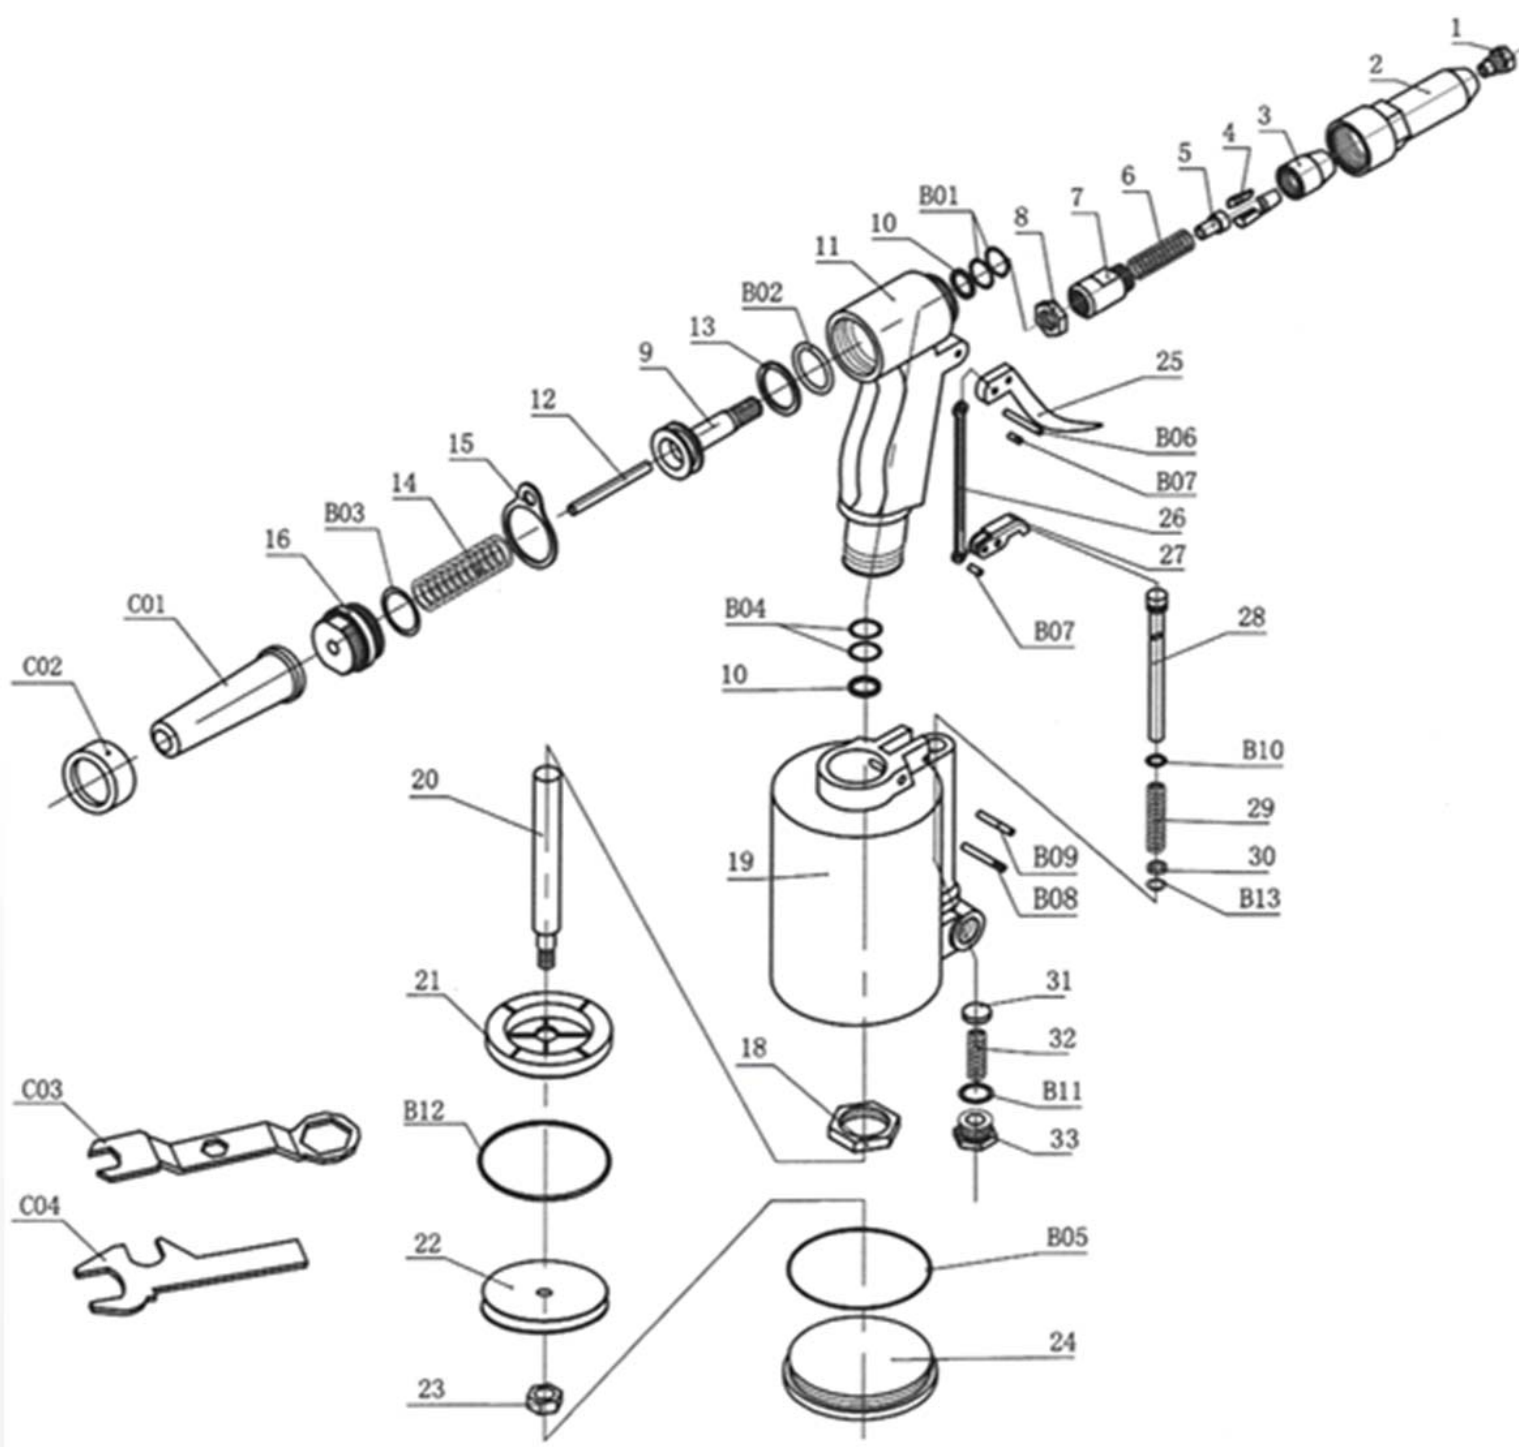



ITEM#	ORDERING PART#	PART DESCRIPTION
1	PRT5830-01	NOSEPIECE
2	PRT5830-02	OUTER CYLINDER
3	PRT5830-03	JAW CARRIER
4	PRT5830-04	JAW
5	PRT5830-05	JAW PUSHER
6	PRT5831-06	JAW PUSH SPRING
7	PRT5830-07	JAW CYLINDER
8	PRT5830-08	CASE LOCK NUT
9	PRT5830-09	PRINCIPAL AXIS
10	PRT5830-10	PLASTIC RING
11	PRT5830-11	HANDLE
12	PRT5830-12	LEAD AXIS
13	PRT5830-13	PLASTIC RING
14	PRT5830-14	RESTORE SPRING
15	PRT5830-15	POTHOOK
16	PRT5830-16	AIRPROOF LID
18	PRT5830-18	LOCK NUT
19	PRT5830-19	AIR CYLINDER
20	PRT5830-20	POLE PISTON
21	PRT5830-21	CUSHION
22	PRT5830-22	PISTON
23	PRT5830-23	NUT
24	PRT5830-24	AIR CYLINDER LID
25	PRT5830-25	TRIGGER

ITEM#	ORDERING PART#	PART DESCRIPTION
26	PRT5830-26	LINK
27	PRT5830-27	PRESS PLANK
28	PRT5830-28	AIR VALVE
29	PRT5830-29	VALVE SPRING
30	PRT5830-30	COPPER WASHER
31	PRT5830-31	AIRPROOF PLASTIC
32	PRT5830-32	AIRPROOF SPRING
33	PRT5830-33	AIRPROOF NUT
B01	PRT5830-B01	O-RING
B02	PRT5830-B02	O-RING
B03	PRT5830-B03	O-RING
B04	PRT5830-B04	O-RING
B05	PRT5830-B05	O-RING
B06	PRT5830-B06	SPRING PIN
B07	PRT5830-B07	SPRING PIN
B08	PRT5830-B08	SPRING PIN
B09	PRT5830-B09	SPRING PIN
B10	PRT5830-B10	O-RING
B11	PRT5830-B11	O-RING
B12	PRT5830-B12	O-RING
B13	PRT5830-B13	O-RING
C01	PRT5830-C01	BOTTLE
C02	PRT5830-C02	NUT