


# 1949U5

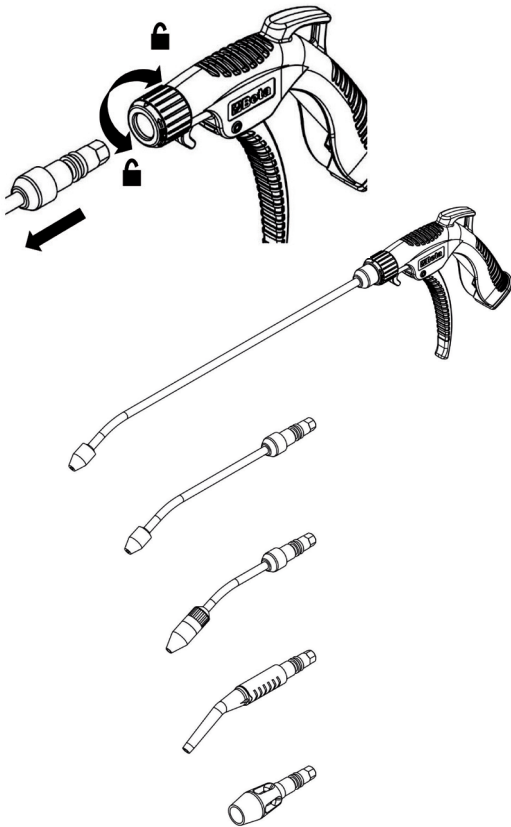

scratchproof and shock resistant, brass threaded insert 1/4" GAS female.

### Technical specifications

		1949U5
Sound level:	- 1949U5/A	83 dB
	- 1949U5/B	82 dB
	- 1949U5/C	84 dB
	- 1949U5/D	84 dB
	- 1949U5/E	89 dB
	- 1949U5/F	84 dB
	- 1949U5/G	88 dB
Maximum air pressure:		15 Bar
Air Consumption, 6 Bar:		280 l/min
Working temperature:		-10÷85 °C

### Warning

- Never point the gun towards human or animal bodies.
- Do not use with different gas or liquids but only with compressed air.
- This product must be used for this intended design and purpose.

**BLOW GUN**

1949U5



## Progressive blow gun with 5 nozzles

### Features:

- Hard-wearing, shockproof composite material body
- 3 steel nozzles, 100/160/320 mm, scratchproof, protective rubber tips
- 1 "Turbo" nozzle made of fibreglass-reinforced nylon with safety tip
- 1 revolving nozzle, 100 mm, made of fibreglass-reinforced nylon
- With quick fixing system

Threaded brass insert	1/4" GAS
Working pressure	10 bar
Maximum working pressure	15 bar
Mean air consumption	280 l/min
Working temperature	-10°C + 80°C
Weight	93 g



	art.	 g
019490030	1949U5	93