


668N

Click-type torque bars, for right-hand and left-hand tightening, torque accuracy: $\pm 3\%$

UNI EN ISO 6789

- scale increased by 60% for improved visibility and setting accuracy
- torque adjusting speed increased by 40%
- handle and lens materials resistant to all chemical substances used in automotive sector, industry and aviation
- red colour of o-ring indicates that wrench is unlocked and torque can be adjusted
- when not in use, set torque to lowest value of torque wrench range
- recalibration reminder shows time to recalibrate wrench (4 steps: 3, 6, 9 and 12 months)

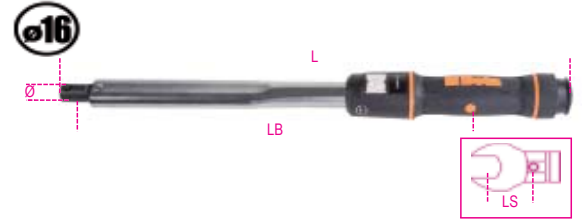

	art.	art.
	006680002	668N/2
	006680005	668N/5
	006680010	668N/10
	006680020	668N/20
	006680030	668N/30