

SILEX+

LENS
 + PLATINUM® ASAF COATING
 + PANORAMIC FIELD OF VISION



TEMPLES
 + BI-MATERIAL FLEX160° PC/TPR TEMPLES
 + ADJUSTABLE 15MM STRAP (OPTION)

FRAME
 + UPPER PROTECTION
 + NON-SLIP NOSE BRIDGE
 + SINGLE-LENS FRAME

VERSIONS



CLEAR
 #PSSSILP064B



SMOKE
 #PSSSILP443B



CSP
 #PSSSILPC13B



STRAP
 #RUSHKITS



30 g

+ MICROFIBER POUCH INCLUDED

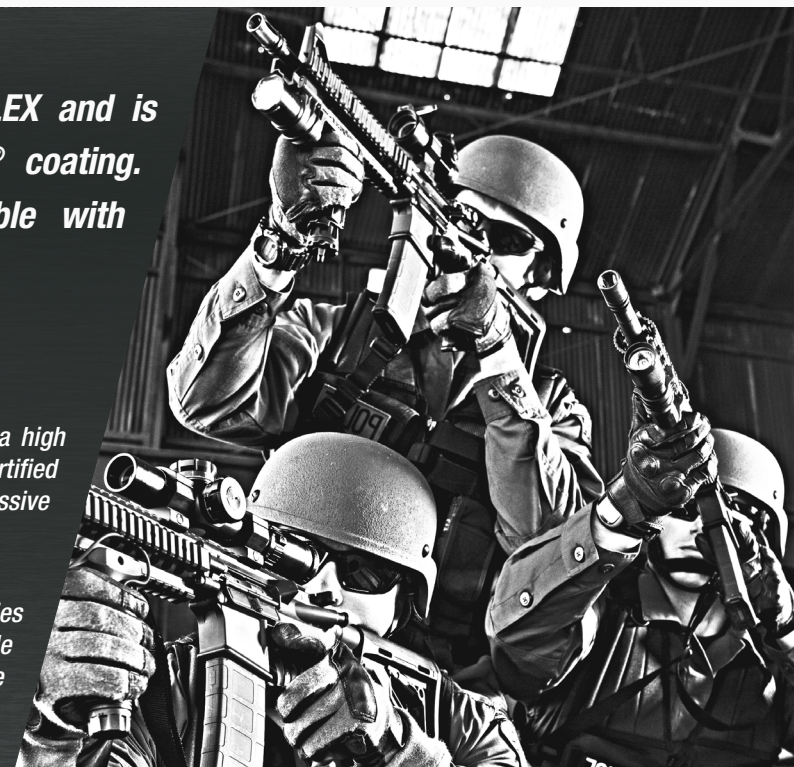
DESCRIPTION













SILEX+ offers all the advantages of SILEX and is equipped with our exclusive PLATINUM® coating. Protection, Comfort... SILEX+ is available with various lens tints.

TECHNOLOGIES

PLATINUM® (P) ASAF Coating
 Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

CSP
 This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.



MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
SILEX+	■ Mate Black	 Clear	PSSSILP064B	2C-1.2  1 FT KN C€	 EN166 FT C€	803.5 km/s - 223,2 m/s	ANSI Z87.1	ASAF 
	■ Mate Black	 Smoke	PSSSILP443B	5-3.1  1 FT KN C€	 EN166 FT C€	813.2 km/s - 225,9 m/s	ANSI Z87.1	ASAF 
	■ Mate Black	 CSP	PSSSILPC13B	5-1.4  1 FT KN C€	 EN166 FT C€	811.8 km/s - 225,5 m/s	ANSI Z87.1	ASAF 
	Strap Kit	-	RUSHKITS	-	-	-	-	-

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

C€ European standard  Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

C€ European standard  Manufacturer name

	PSSSILP064B	PSSSILP443B	PSSSILPC13B	RUSHKITS
EAN13 Unit pack	3 660 740 013 073	3 660 740 013 080	3 660 740 013 097	3 660 740 007 546
EAN13 Inner pack (number of unit per inner pack)	-	-	-	3 660 740 107 543 (10 units)
EAN13 Carton (number of unit per master pack)	3 660 740 213 077 (125 units)	3 660 740 213 084 (125 units)	3 660 740 213 091 (125 units)	3 660 740 207 540 (200 units)

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

SILEX+	
Lens	PC - 2.2 mm - Curve 9
Temples	PC + TPR
Strap	Nylon - 15mm
Spare lens	No
Country of Origin	Taiwan

