

SILEX+

LENS
 + PLATINUM® ASAF COATING
 + PANORAMIC FIELD OF VISION



TEMPLES
 + BI-MATERIAL FLEX160° PC/TPR TEMPLES
 + ADJUSTABLE 15MM STRAP (OPTION)

FRAME
 + UPPER PROTECTION
 + NON-SLIP NOSE BRIDGE
 + SINGLE-LENS FRAME



CLEAR
 #PSSSILP064B



SMOKE
 #PSSSILP443B



CSP
 #PSSSILPC13B



STRAP
 #RUSHKITS



30 g

+ MICROFIBER POUCH INCLUDED


SILEX+ offers all the advantages of SILEX and is equipped with our exclusive PLATINUM® coating. Protection, Comfort... SILEX+ is available with various lens tints.













PLATINUM® (P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

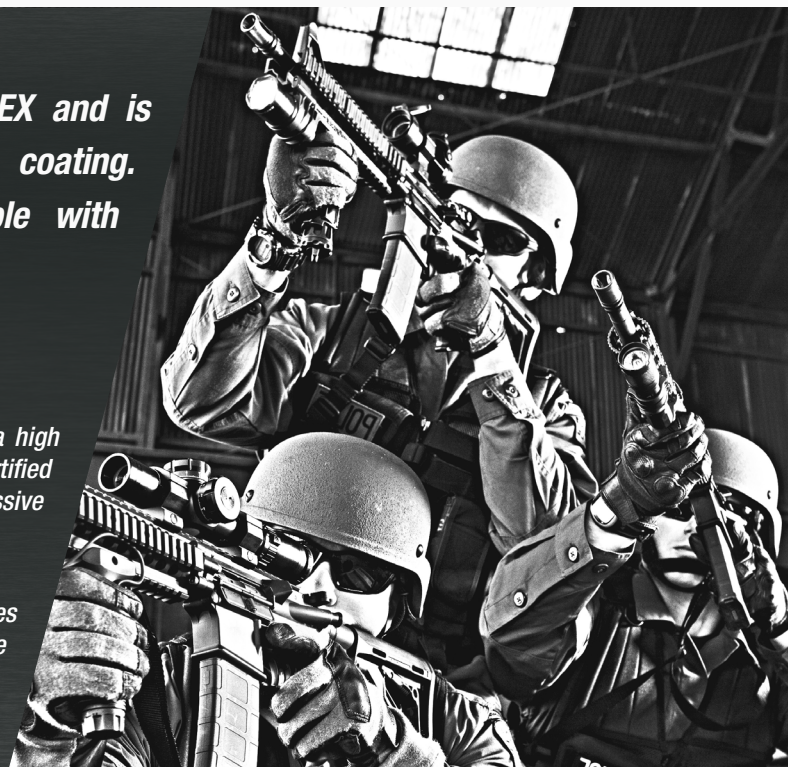CSP

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.



| MODEL | FRAME | VERSIONS | REFERENCES | LENS MARKINGS | FRAME MARKINGS | V50 BALISTIC RESISTANCE STANAG 2920 | ANSI/MIL | COATING |
|---------------|--------------|---|-------------|---|---|-------------------------------------|------------|--|
| SILEX+ | ■ Mate Black |  Clear | PSSSILP064B | 2C-1.2  1 FT KN C€ |  EN166 FT C€ | 803.5 km/s - 223,2 m/s | ANSI Z87.1 | ASAF  |
| | ■ Mate Black |  Smoke | PSSSILP443B | 5-3.1  1 FT KN C€ |  EN166 FT C€ | 813.2 km/s - 225,9 m/s | ANSI Z87.1 | ASAF  |
| | ■ Mate Black |  CSP | PSSSILPC13B | 5-1.4  1 FT KN C€ |  EN166 FT C€ | 811.8 km/s - 225,5 m/s | ANSI Z87.1 | ASAF  |
| | Strap Kit | - | RUSHKITS | - | - | - | - | - |

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

C€ European standard  Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

C€ European standard  Manufacturer name

| | PSSSILP064B | PSSSILP443B | PSSSILPC13B | RUSHKITS |
|--|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| EAN13 Unit pack | 3 660 740 013 073 | 3 660 740 013 080 | 3 660 740 013 097 | 3 660 740 007 546 |
| EAN13 Inner pack (number of unit per inner pack) | - | - | - | 3 660 740 107 543 (10 units) |
| EAN13 Carton (number of unit per master pack) | 3 660 740 213 077 (125 units) | 3 660 740 213 084 (125 units) | 3 660 740 213 091 (125 units) | 3 660 740 207 540 (200 units) |

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

| SILEX+ | |
|--------------------------|-----------------------|
| Lens | PC - 2.2 mm - Curve 9 |
| Temples | PC + TPR |
| Strap | Nylon - 15mm |
| Spare lens | No |
| Country of Origin | Taiwan |

