


DURACELL®

MN908 Size: Lantern (4LR25X)


Alkaline-Manganese Dioxide Battery

Zn/MnO₂

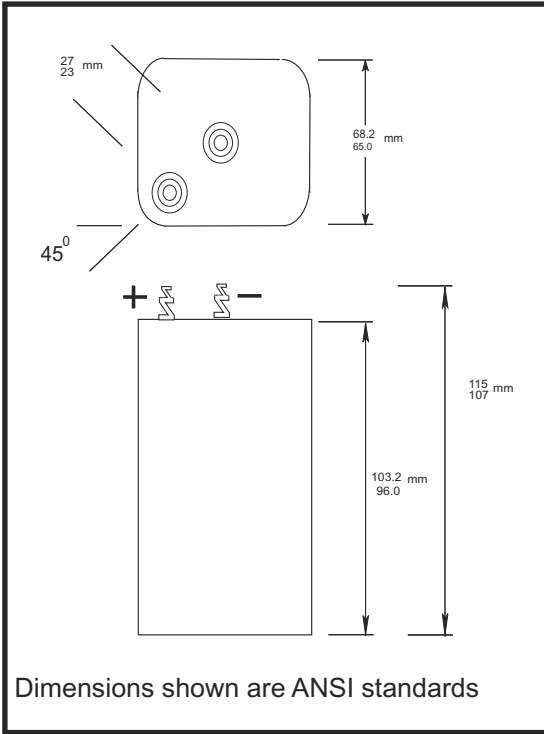


Nominal Voltage:	6 V
Nominal Internal Impedance:	600 m-ohm @ 1kHz
Average Weight:	624 gm (22 oz.)
Volume:	446 cm ³ (22.2 in. ³)
Terminals:	Springs
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
ANSI:	908
IEC:	4LR25X

Typical Discharge Characteristics at 21°C (70°F)

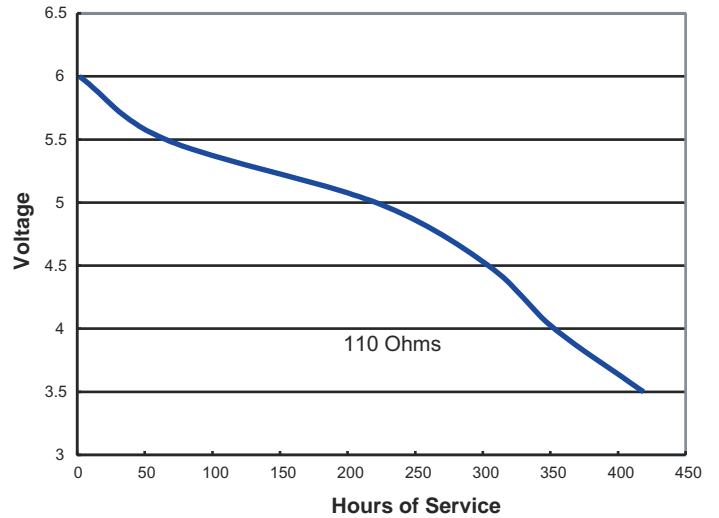

Typical Discharge Characteristics at 21°C (70°F)

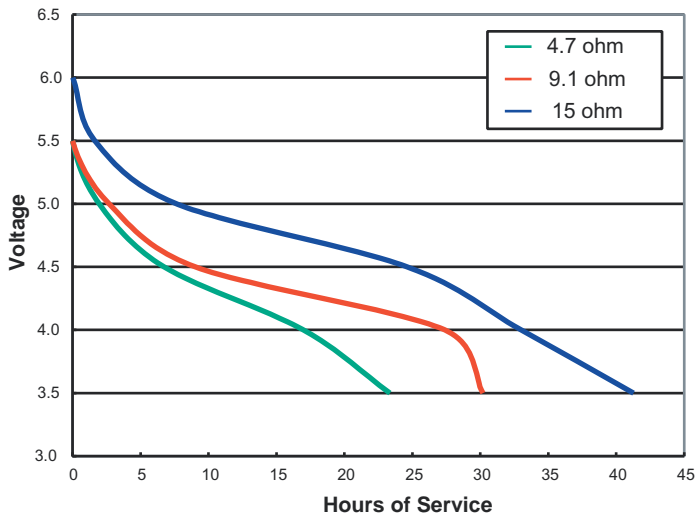

DURACELL®
BATTERIES

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.