



Dimensions shown are IEC standards

Nominal voltage	1.5 V
Impedance	156 m-ohm @ 1 kHz
Typical weight	11 g (0.4 oz)
Typical volume	3.5 cm <sup>3</sup> (0.2 in <sup>3</sup> )
Terminals	Flat
Storage temperature range	5°C to 30°C (41°F to 86°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	ANSI: 24A IEC: LR06


Coppertop AAA - Constant Current

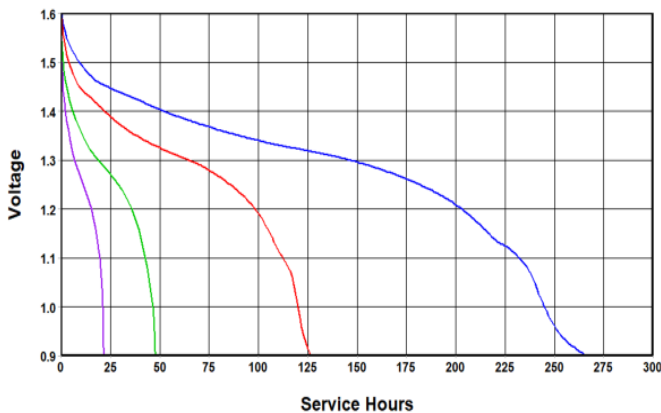


Coppertop AAA - Constant Current

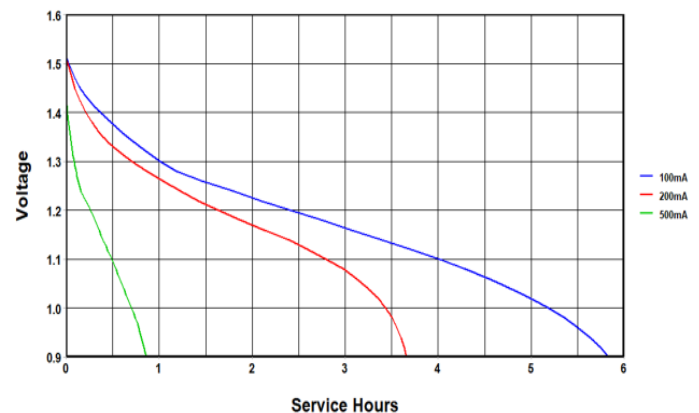

Coppertop AAA - Constant Power

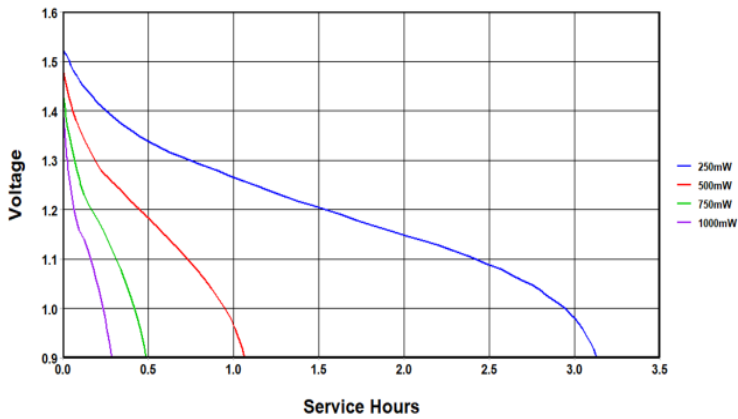

Coppertop AAA - Constant Resistance

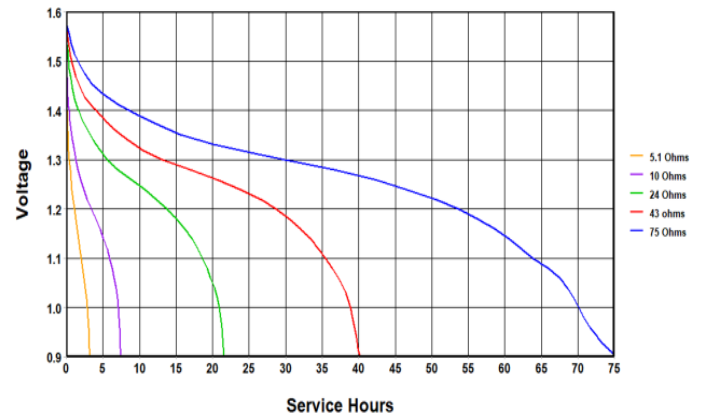

Typical Duracell AAA Coppertop Cell Impedance

