

TCRESCENT
H.K. PORTER

Product Catalog

Trusted by the Trades.



Rebar Tools189

TABLE OF CONTENTS

| Fastening 5 | Saws | 190 |
|---------------------------------|--------------------------------------|-----|
| Adjustable Wrenches6 | Replacement Blades | 194 |
| Specialty Adjustable Wrenches12 | | |
| Pipe Wrenches17 | Measuring | 197 |
| Screwdrivers & Nutdrivers21 | Blade Styles | 198 |
| Hex Keys30 | Power Tapes | 205 |
| | Pocket Tapes | 212 |
| Mechanic Hand Tool Sets 33 | Measuring Wheels | 214 |
| Multi-Drive34 | Long Tapes | 215 |
| 1/4" Drive47 | Squares & Rules | 222 |
| 3/8" Drive57 | Chalk & Reel | 229 |
| 1/2" Drive74 | Oil Gauging | 233 |
| 3/4" Drive82 | Accessories | 234 |
| Impact86 | | |
| Wrenches91 | Shaping | 241 |
| Torque Wrenches102 | American Pattern Files | 242 |
| | American Pattern Rasps | 259 |
| Power Tool Accessories 103 | Swiss Pattern Files | 262 |
| e-SHOK-Guard®104 | Specialty Files | 271 |
| u-GUARD [®] 105 | Accessories | 272 |
| Insert Bits109 | | |
| Nutsetters115 | Striking and Struck | 275 |
| Bit Holders116 | Hammer <mark>s</mark> | 276 |
| | Demolition Tools | 277 |
| Pliers 117 | | |
| Z2118 | Trade Tools | 281 |
| Tongue & Groove130 | | |
| Solid Joint132 | Storage | 287 |
| Slip Joint136 | Bags | 288 |
| Compound Action137 | Chests | 291 |
| Locking141 | Piano Bo <mark>xe</mark> s | 297 |
| Specialty Adjustable145 | Field Of <mark>fice</mark> s | 299 |
| | Cabine <mark>ts</mark> | 301 |
| Cutting 147 | Safety | 304 |
| Aviation Snips148 | Vehi <mark>cle</mark> Drawer Storage | 309 |
| Tradesman Shears157 | Tru <mark>ck</mark> Boxes | |
| Industrial Shears160 | T <mark>rans</mark> fer Tanks | |
| Tinner Snips169 | Accessories & Parts | 324 |
| Knives172 | | |
| Cutters177 | Index | 326 |



WHY Crescent?

Crescent hand tools have been an essential part of professional toolboxes for over a century. Why? Because at Crescent, we make products for people who depend on their tools to make a living. People who need tools that will stand up to the tough conditions found on every jobsite. People who recognize tools that deliver meaningful performance. Like a tape measure with an industry-leading 14 feet of standout. Or made in USA snips with ten times the cut life of anything else on the market. That's quality to get the job done right and superior performance to save time. Crescent offers thousands of tools, each one made to consistently deliver dependable, high quality results.









1907

Karl Peterson founds the **Crescent Tool Company** and introduces his revolutionary Crescent® Adjustable Wrench the following year. The unique tool is an instant success and, along with the Ford Model T, soon dominates the market.

1927

Newspapers around the world carry a report that a young aviator named Charles Lindbergh has made the first solo transatlantic flight with a scant cargo of "gasoline, sandwiches, a bottle of water, and a Crescent® wrench and pliers."

1930

At the request of the U.S. Army Air Corps, Crescent® develops Crestoloy steel alloy to make its adjustable wrenches lighter and stronger. By 1938, Crescent® is manufacturing thousands of Crestoloy tools for the Air Corps. When the country enters World War II, the plant operates around-the-clock with all output going to the war effort.

1964

Crescent® vans begin visiting distributors and showing new products.

traveling the country, This is a tradition that continues to this day.



1965

The media reports that Crescent® tools are aboard the first manned Gemini space flight.

1997

The Crescent® adjustable wrench receives its first major redesign in over 50 years, with a wider, more comfortable handle and increased jaw opening capacity over the entire line.

2018

To easier identify the Crescent®-quality tools, the line expands to include five iconic brands: Wiss® shears and snips, Lufkin® measuring products, Nicholson® files and saws, HK Porter® heavy-duty cutting tools and JOBOX® on-site and truck storage. Together, Crescent® Tools is formed and provides professional tradesman thousands of jobsite solutions all under one unified brand.

2019

Crescent Wiss® introduces its Next **Generation Aviation** Snips. The new snips last 60% longer and require 20% less force to cut on average compared to the same snips from just five years earlier.

Crescent APEX® industrial bits are added to the Crescent® family of tools

| 5 4

Innovation in the past and for the future.

From our beginnings with the original Crescent adjustable wrench and continuing through today, we are always looking for ways to make our tools better and create new ways to help tradespeople be more productive...



2020

Z2: Giving new power to pliers.

Crescent Z2 pliers take gripping and cutting to new levels of performance. Z2 Auto Bite™ pliers feature one-handed automatic adjustment, making them perfect for gripping in tight spaces, while the Six Zone head of Z2 Long Nose pliers gives them the ability to cut, grip, and turn better than any long nose we've ever made. Each plier in the Z2 line has features that make it the new best performer in its class.



Shockforce: Making a tape measure for the trades.

Pro tool users are tough to please. So when we said new Shockforce tapes were the toughest tapes to ever hit a jobsite, we met some skepticism. But after using the tapes with the ability to survive a 100-foot drop, skeptics turned into supporters. Shockforce and Shockforce Nite Eye, with its high visibility green-on-matte black blade, have become new standards in tape measures for trade professionals.



Chalk Reels: Rethinking a simple concept.

Chalk reel design had remained the same for years before
Crescent listened to users and developed new solutions to nagging
problems. Our new 100-Foot Professional Chalk Reel now offers
three innovative features that put it ahead of any other reel on the
market: A one-way valve makes refilling quick and clean, a locking
hub makes snaps neat and fast, and a nesting end hook prevents
tool bag tangles.

Innovative solutions for better products. That's Crescent.



3 Pc. Adjustable Wrench Set

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Large capacity 15/16", 24mm (6"), 1-1/8", 29mm (8") and 1-5/16", 34mm (10") jaws fit a wide range of fastener sizes
- Wider handle improves comfort and reduces fatigue
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Chrome plated finish wipes clean easily and resists rust and corrosion
- Polished head and satin finished handle



| Cat. No. | Included Storage | Product Weight |
|----------|-----------------------|----------------|
| AC3PC | None | 2.200 lb |
| Cat. No. | Description | |
| AC26VS | 6" Adjustable Wrench | |
| AC28VS | 8" Adjustable Wrench | |
| AC210VS | 10" Adjustable Wrench | |
| | | |

2 Pc. Adjustable Wrench Set

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Large capacity 1-1/8", 29mm (8") and 1-1/2", 39mm (12") jaws fit a wide range of fastener sizes
- Wider handle improves comfort and reduces fatique
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Chrome plated finish wipes clean easily and resists rust and corrosion
- Polished head and satin finished handle



Adjustable Wrenches

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Wider handle improves comfort and reduces fatigue
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment Chrome plated finish wipes clean easily and resists rust and corrosion
- Polished head and satin finished handle



| Cat. No. | Overall Length | Capacity Diameter Max | Packaging | Product Weight |
|----------|----------------|-----------------------|-----------|----------------|
| AC24VS | 4 in | 0.500 in | Carded | 0.16 lb |
| AC24BK | 4 in | 0.500 in | Bagged | 0.13 lb |
| AC26VS | 6 in | 0.937 in | Carded | 0.38 lb |
| AC26BK | 6 in | 0.937 in | Bagged | 0.34 lb |
| AC28VS | 8 in | 1.125 in | Carded | 0.62 lb |
| AC28BK | 8 in | 1.125 in | Bagged | 0.60 lb |
| AC210VS | 10 in | 1.312 in | Carded | 1.06 lb |
| AC210BK | 10 in | 1.312 in | Boxed | 1.20 lb |
| AC212VS | 12 in | 1.500 in | Carded | 1.81 lb |
| AC212BK | 12 in | 1.500 in | Boxed | 1.92 lb |

Tapered Handle Adjustable Wrenches

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment Tapered handle for better two-handed grip and less weight
- Chrome plated finish wipes clean easily and resists rust and corrosion
- Polished head and satin finished handle



| Cat. No. | Overall Length | Capacity Diameter Max | Packaging | Product Weight |
|----------|----------------|-----------------------|-----------|----------------|
| AC215VS | 15 in | 1.687 in | Carded | 3.00 lb |
| AC215BK | 15 in | 1.687 in | Boxed | 3.00 lb |
| AC218VS | 18 in | 2.062 in | Carded | 4.92 lb |
| AC218BK | 18 in | 2.062 in | Boxed | 4.92 lb |
| AC224VS | 24 in | 2.437 in | Carded | 8.71 lb |
| AC224BK | 24 in | 2.437 in | Boxed | 8.71 lb |

CRESCENT®

3 Pc. Cushion Grip Adjustable Wrench Set

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Large capacity 15/16", 24mm (6"), 1-1/8", 29mm (8") and 1-5/16", 34mm (10") jaws fit a wide range of fastener sizes
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Chrome plated finish wipes clean easily and resists rust and corrosion
- Proportioned dimensions optimize strength and minimize weight
- Cushioned ergonomic handle increases comfort and reduces fatigue



| Cat. No. | Included Storage | Product Weight |
|-----------|--------------------------|----------------|
| AC26810CV | Pouch | 2.45 lb |
| Cat. No. | Description | |
| AC26CVS | 6" Adjustable Cushion Gr | rip Wrench |
| AC28CVS | 8" Adjustable Cushion Gr | rip Wrench |
| AC210CVS | 10" Adjustable Cushion (| Grip Wrench |

2 Pc. Cushion Grip Adjustable Wrench Set

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Large capacity 15/16", 24mm (6") and 1-5/16", 34mm (10") jaws fit a wide range of fastener sizes
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Chrome plated finish wipes clean easily and resists rust and corrosion
- Proportioned dimensions optimize strength and minimize weight
- Cushioned ergonomic handle increases comfort and reduces fatigue



| Cat. No. | Included Storage | Product Weight | | |
|-----------|-----------------------------------|----------------|--|--|
| AC2610CVS | None 1.850 lb | SAE | | |
| Cat. No. | Description | | | |
| AC26CVS | 6" Adjustable Cushion Grip Wrench | | | |
| AC210CVS | 10" Adjustable Cushion Gri | p Wrench | | |
| | , | | | |

Cushion Grip Adjustable Wrenches

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Chrome plated finish wipes clean easily and resists rust and corrosion
 Proportioned dimensions optimize strength and minimize weight
- Cushioned ergonomic handle increases comfort and reduces fatigue





| Cat. No. | Overall Length | Capacity Diameter Max | Packaging | Product Weight |
|----------|----------------|-----------------------|-----------|----------------|
| AC24CVS | 4 in | 0.500 in | Carded | 0.15 lb |
| AC26CVS | 6 in | 0.937 in | Carded | 0.38 lb |
| AC28CVS | 8 in | 1.125 in | Carded | 0.62 lb |
| AC28CBK | 8 in | 1.125 in | Bagged | 0.60 lb |
| AC210CVS | 10 in | 1.312 in | Carded | 1.06 lb |
| AC210CBK | 10 in | 1.312 in | Boxed | 1.20 lb |
| AC212CVS | 12 in | 1.500 in | Carded | 1.81 lb |
| AC212CBK | 12 in | 1.500 in | Boxed | 1.92 lb |
| | | | | |

Black Oxide Adjustable Wrenches

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Ergonomic handle increases comfort and reduces fatigue
- Proportioned dimensions for greatest strength and minimum weight
- Black oxide finish resists corrosion



| | | | | _ |
|----------|----------------|-----------------------|-----------|----------------|
| Cat. No. | Overall Length | Capacity Diameter Max | Packaging | Product Weight |
| AT24VS | 4 in | 0.500 in | Carded | 0.15 lb |
| AT24BK | 4 in | 0.500 in | Bagged | 0.13 lb |
| AT26VS | 6 in | 0.937 in | Carded | 0.38 lb |
| AT26BK | 6 in | 0.937 in | Bagged | 0.34 lb |
| AT28VS | 8 in | 1.125 in | Carded | 0.62 lb |
| AT28BK | 8 in | 1.125 in | Bagged | 0.60 lb |
| AT210VS | 10 in | 1.312 in | Carded | 1.06 lb |
| AT210BK | 10 in | 1.312 in | Boxed | 1.06 lb |
| AT212VS | 12 in | 1.500 in | Carded | 1.81 lb |
| AT212BK | 12 in | 1.500 in | Boxed | 1.92 lb |

Black Oxide Tapered Handle Adjustable Wrenches

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Tapered handle for better two-handed grip and less weight
- Proportioned dimensions for greatest strength and minimum weight
- Black oxide finish resists corrosion





| Cat. No. | Overall Length | Capacity Diameter Max | Packaging | Product Weight |
|----------|----------------|-----------------------|-----------|----------------|
| AT215BK | 15 in | 1.688 in | Boxed | 3.20 lb |
| AT218BK | 18 in | 2.063 in | Boxed | 5.29 lb |

2 Pc. Black Oxide Cushion Grip Adjustable **Wrench Set**

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Large capacity 15/16", 24mm [6"] and 1-5/16", 34mm [10"] jaws fit a wide range of fastener sizes
- Heat-treated forged alloy steel for toughness and durability

Cat. No. | Included Storage | Product Weight

- Tension spring stabilizes jaw and allows easy knurl adjustment
- Black oxide finish resists rust or corrosion and wipes clean easily
- Proportioned dimensions optimize strength and minimize weight
- Cushioned ergonomic handle increases comfort and reduces fatigue



| outi itoi | moradou otorago | r roudot mongint | |
|-----------|---------------------------|-----------------------|--|
| AT2610CV | None | 2.00 lb | |
| Cat. No. | Description | | |
| AT26CVS | 6" Adjustable Black Oxide | e Cushion Grip Wrench | |

10" Adjustable Black Oxide Cushion Grip Wrench



Black Oxide Cushion Grip Adjustable Wrenches

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Black oxide finish resists rust or corrosion and wipes clean easily Proportioned dimensions optimize strength and minimize weight
- Cushioned ergonomic handle increases comfort and reduces fatique





| Cat. No. | Overall Length | Capacity Diameter Max | Packaging | Product Weight |
|----------|----------------|-----------------------|-----------|----------------|
| AT26CVS | 6 in | 0.937 in | Carded | 0.34 lb |
| AT28CVS | 8 in | 1.125 in | Carded | 0.62 lb |
| AT210CVS | 10 in | 1.312 in | Carded | 1.06 lb |
| AT212CVS | 12 in | 1.500 in | Carded | 1.81 lb |

Black Oxide Construction Wrenches

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Hex jaw design reduces slippage by gripping fasteners tightly
- Heat-treated forged alloy steel for toughness and durability
- Tension spring stabilizes jaw and allows easy knurl adjustment
- Round, tapered tang for easy alignment of bolt holes
- Black oxide finish resists rust or corrosion and wipes clean easily
- Proportioned dimensions optimize strength and minimize weight





| Cat. No. | Overall Length | Capacity Diameter Max | Packaging | Product Weight |
|-----------|----------------|-----------------------|-----------|----------------|
| AT210SPUD | 10 in | 1.125 in | Carded | 0.950 lb |
| AT215SPUD | 16 in | 1.500 in | Carded | 2.350 lb |



Crescent Wide Jaw Adjustable Wrenches

These wrenches really punch above their weight when it comes to strength and jaw capacity. They open wide to work on fasteners that would need the next larger size standard adjustable. For example, a 10-inch Crescent Wide Jaw has the same strength and jaw capacity as a 12-inch standard adjustable, so they save space and weight in your toolbox. Lighten your load with these new tools from Crescent ... the original name in adjustable wrenches.



2 Pc. Wide Jaw Adjustable Wrench Set

- Each wrench meets the ASME performance requirements for the next size up (Example: 6" wrench meets the requirements for an 8" wrench)
- Micro-serrations on the jaws provide a tighter grip on the fastener thus helping to generate 4x more torque than traditional adjustable wrenches
- Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Black phosphate and lacquer finish help to resist rust and prevent corrosion for better durability

| | | | | A CONTRACT OF | Terrancial Control | |
|------------|-------------------------------|--------------------------------|--|---------------|--------------------|--------|
| Cat. No. | Included Storage | Product Weight | | | O | |
| ATWJ2610VS | None | 1.72 lb | | | | SAE mm |
| Cat. No. | Description | | | | | |
| ATWJ26VS | 6" Wide Jaw Adjustable Wrench | | | | | |
| ATWJ210VS | 10" Wide Jaw Adjustable V | 10" Wide Jaw Adjustable Wrench | | | | |
| | | | | | | |

Wide Jaw Adjustable Wrenches

- Each wrench meets the ASME performance requirements for the next size up (Example: 6" wrench meets the requirements for an 8" wrench)
- Micro-serrations on the jaws provide a tighter grip on the fastener thus helping to generate 4x more torque than traditional adjustable wrenches
- Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely to bind up
- Black phosphate and lacquer finish help to resist rust and prevent corrosion for better durability



| Cat. No. | Overall Length | Capacity Diameter Max | Product Weight |
|-----------|----------------|-----------------------|----------------|
| ATWJ26VS | 6 in | 1.125 in | 0.49 lb |
| ATWJ28VS | 8 in | 1.312 in | 0.79 lb |
| ATWJ210VS | 10 in | 1.500 in | 1.26 lb |
| ATWJ212VS | 12 in | 1.750 in | 1.96 lb |

12 | 13

Locking Adjustable Wrench

- The original adjustable wrench, made by the world-famous Crescent® brand
- Laser etched scale in both SAE and metric sizes allows easy fastener size
- The versatility of an adjustable wrench and the gripping power of a locking plier
- Anti-slip adjustable jaw opens to 1" to fit a wide variety of fasteners
- Delivers twice the gripping power on rounded fasteners
- Locking handle tightly grips fasteners, reduces slippage on rounded fasteners
- Jaw design features gripping teeth and 14 locking positions for enhanced gripping power
- Quick release lever allows for easy disengagement
- Dual material handle for maximum comfort and control
- Chrome plated finish wipes clean easily and resists rust and corrosion



| Cat. No. | Overall Length | Capacity Diameter Max | Product Weight |
|----------|----------------|-----------------------|----------------|
| ACL10VS | 10 in | 1.312 in | 1.480 lb |

Ratcheting Adjustable Flex Lock Wrench

- The original adjustable wrench, made by the world-famous Crescent® brand ■ Laser etched scale in both SAE and metric sizes allows easy fastener size identification
- Larger knurl provides a tighter jaw fit, is easier to adjust and is less likely
- Heat-treated forged alloy steel for toughness and durability
- Large capacity 1-1/8", 29mm hex jaw design reduces slippage
- Ratcheting jaw keeps jaws secured on fasteners, making jobs faster and easier
- Ratcheting on/off selector allows use as a traditional adjustable wrench
- 180° indexing handle locks in 12 different positions
- Chrome plated finish wipes clean easily and resists rust and corrosion
- Polished head and satin finished handle





| Cat. No. | Overall Length | Capacity Diameter Max | Product Weight |
|----------|----------------|-----------------------|----------------|
| ACFR8VS | 8 in | 1.187 in | 0.830 lb |
| | | | |

2 Pc. Rapidslide™ Adjustable Wrench Set

- Slide button mechanism in handle for quick, fast adjustment
- Debris shield protects slide mechanism and maintains a smooth operation
- Laser etched scale in both SAE and metric sizes allows easy fastener size
- Large capacity 15/16, 24mm (8") and 1-3/16, 30mm (10") jaws fit a wide range of fastener sizes
- Heat-treated forged alloy steel for toughness and durability
- Chrome plated finish wipes clean easily and resists rust and corrosion
- Polished head and satin finished handle



| SAE mm |
|--------|
| |
| |
| |

| val. No. | iliciuucu Storaye | Fibuuct Weight | |
|----------|------------------------|----------------|---|
| AC610RS | None | 1.15 lb | S |
| Cat. No. | Description | | |
| - | 6" RapidSlide™ Adjusta | able Wrench | |
| - | 10" RapidSlide™ Adjus | table Wrench | |
| | | | |

Automobile Adjustable Wrenches

- Smooth jaws won't mar easily-damaged fastener surfaces such as
- Wider law capacity than traditional pipe wrenches
- Slim profile head design allows better access to tight areas
- Heat-treated forged alloy steel for toughness and durability
- Steel handle naturally absorbs shock
- Strong I-beam handle construction
- Chrome plated finish wipes clean easily and resists rust and corrosion



| Cat. No. | Overall Length | Capacity Diameter Max | Product Weight |
|----------|----------------|-----------------------|----------------|
| С79Н | 9 in | 2.750 in | 1.01 lb |
| C711H | 11 in | 3.000 in | 1.50 lb |
| C715 | 15 in | 3.625 in | 3.20 lb |
| C718 | 18 in | 4.375 in | 4.60 lb |

$(\prod \mathsf{CRESCENT}^\circ)$

Chain Wrenches

- Double-action grip force allows use in either direction for tightening or loosening
- Excels in low-access areas where ordinary pipe wrenches will not fit
- Concave-cut teeth grip tightly and can be easily sharpened if needed
- Excellent for pipe fittings
- Steel handle naturally absorbs shock
- Strong I-beam handle construction
- Chrome plated finish wipes clean easily and resists rust and corrosion



| Cat. No. | Chain Length | Overall Length | Pipe Size Max | Rpic. Part | Product Weight |
|----------|--------------|----------------|---------------|------------|----------------|
| CW12H | 16.27 in | 12.25 in | 4 in | CW12C | 1.85 lb |
| CW15 | 19.64 in | 14.81 in | 5 in | CW15C | 2.75 lb |
| CW24 | 24.14 in | 24.00 in | 6 in | CW24C | 3.60 lb |

11 Pc. X6[™] Pass-Thru[™] Adjustable Wrench Set

- Versatile fastening tool that offers the user multiple fastening options from a single tool design
- Traditional 8" adjustable wrench with laser etched SAE/metric scales and a wide
- Remove and reverse the jaw for pipe work. Serrations on the inside edge form a deep tooth pattern that holds pipe tightly and reduces slipping
- Pass-Thru™ reversible ratcheting system functions over long threaded rods where normal ratchets and sockets won't fit
- Every Pass-Thru™ socket does the job of a standard and a deep socket combined
- Universal design fits 6 fastener types Hex, Square, 12pt, E-Torx, Partially Rounded Hex, and Spline
- Forged alloy steel for exceptional toughness and durability
- Black phosphate finish resists corrosion
- Includes tray for storage and organization



| Cat. No. | Included Storage | Product Weight | | |
|----------|--------------------------|---------------------------|----------|---|
| CPTAW8 | Tray | 1.984 | | SAE IIII 🔘 |
| Cat. No. | Description | | Cat. No. | Description |
| - | 8" Pass-Thru™ Adjustable | Wrench | - | 3/8" Drive Pass-Thru™ Spline Socket 19/32" (15mm) |
| - | 3/8" Drive Pass-Thru™ Sp | line Socket 3/8" (10mm) | - | 3/8" Drive Pass-Thru™ Spline Socket 5/8" (16mm) |
| - | 3/8" Drive Pass-Thru™ Sp | line Socket 7/16" (11mm) | - | 3/8" Drive Pass-Thru™ Spline Socket 11/16" (17mm) |
| - | 3/8" Drive Pass-Thru™ Sp | line Socket 15/32" (12mm) | - | 3/8" Drive Pass-Thru™ Spline Socket 23/32" (18mm) |
| - | 3/8" Drive Pass-Thru™ Sp | line Socket 1/2" (13mm) | - | 3/8" Drive Pass-Thru™ Spline Socket 3/4" (19mm) |
| - | 3/8" Drive Pass-Thru™ Sp | line Socket 9/16" (14mm) | | |
| | | | | |
| | | | | |
| | | | | |

More Power At Every Turn

These new Crescent Pipe Wrenches have been redesigned from the ground up to be lighter, quicker to adjust, and more comfortable to use. But even more, they've been designed to deliver the most powerful pipe grip ever with our new straight wrenches offering larger bite surfaces and exclusive K9™ 30-degree angle access jaws that give you massive turning power, even in the tightest, most restricted situations.

Straight Pipe Wrenches come in both cast aluminum and cast iron. Aluminum models are up to 40% lighter than typical cast iron wrenches with thicker cross-sections in high-stress areas for exceptional strength. Our cast iron wrenches have also been optimized for strength, weighing up to 10% less than competitive products.

Our Self-Adjusting Pipe Wrenches offer compact size, light weight, and a jaw design that locks open for easier placement onto pipes in tight spots.



Best Access

K9™ Jaw Technology allows teeth to bite in an arc of 30 degrees - much greater than typical pipe wrench operation limits - for greater access in tight spaces

K9 JAWS

Patent Pending 30°ANGLE-ACCESS LARGEST **BITE SURFACE**

cut in low stress areas of aluminum wrenches, making them up to 40% lighter than cast iron wrenches. Our cast iron wrenches have also been design optimized to be up to 10% lighter than competitive wrenches.



*Aluminum models

$(\mathsf{T}\mathsf{CRESCENT}^\circ$

Aluminum K9[™] Pipe Wrenches

- K9™ jaw technology allows teeth to bite in an arc of 30 degrees for greater access in tight spaces
- 25% larger bite surface provides maximum grip helping to increase tooth
- Adjustment ring thread pitch angled for 2x faster opening and closing of wrench jaw
- 40% less weight helps reduce user fatigue
- Handle shape optimized for maximum power and user comfort
- Exceeds federal torque load specification by over 140% for maximum strength and durability





| Cat. No. | Overall Length | Capacity Diameter Max | Pipe Size Max | Rplc. Part | Rplc. Part | Product Weight |
|----------|----------------|-----------------------|---------------|------------|------------|----------------|
| CAPW14 | 11.75 in | 2.375 in | 2.0 in | C14H00K | C14HEEL | 2.143 lb |
| CAPW18 | 14.75 in | 2.875 in | 2.5 in | C18H00K | C18HEEL | 3.370 lb |

Aluminum SLIM JAW™ Pipe Wrench

- SLIM JAW[™] delivers best-in-class 2x access when working in tight spaces
- Adjustment ring thread pitch angled for 2x faster opening and closing of wrench jaw
- Excellent for turning pipes in limited access areas
- 40% less weight helps reduce user fatigue
- Handle shape optimized for maximum power and user comfort
- Exceeds federal torque load specification by over 140% for maximum strength and durability





| Cat. No. | Overall Length | Capacity Diameter Max | Pipe Size Max | Rplc. Part | Rplc. Part | Product Weight |
|----------|----------------|-----------------------|---------------|------------|------------|----------------|
| CAPW10S | 9 in | 1.9 in | 1.5 in | C10H00K | C10HEEL | 0.980 lb |

Aluminum Pipe Wrench

- Adjustment ring thread pitch angled for 2x faster opening and closing of
- 40% less weight helps reduce user fatigue
- Handle shape optimized for maximum power and user comfort
- High strength forged jaws
- Exceeds federal torque load specification by over 140% for maximum strength and durability





| Cat. No. | Overall Length | Capacity Diameter Max | Pipe Size Max | Rpic. Part | Rplc. Part | Product Weight |
|----------|----------------|-----------------------|---------------|------------|------------|----------------|
| CAPW24 | 20.5 in | 3.5 in | 3 in | C24H00K | C24HEEL | 4.988 lb |

Aluminum K9[™] Jaw Long Handle Pipe Wrench

- K9™ jaw technology allows teeth to bite in an arc of 30 degrees for greater access in tight spaces
- 25% larger bite surface provides maximum grip helping to increase tooth
- Adjustment ring thread pitch angled for 2x faster opening and closing of wrench jaw
- 40% less weight helps reduce user fatigue
- Handle shape optimized for maximum power and user comfort
- Exceeds federal torque load specification by over 140% for maximum strength and durability





| Cat. No. | Overall Length | Capacity Diameter Max | Pipe Size Max | Rplc. Part | Rplc. Part | Product Weight |
|----------|----------------|-----------------------|---------------|------------|------------|----------------|
| CAPW14L | 17.5 in | 2.375 in | 2 in | C14H00K | C14HEEL | 2.632 lb |

Cast Iron K9[™] Pipe Wrenches

- K9™ jaw technology allows teeth to bite in an arc of 30 degrees for greater access in tight spaces
- 25% larger bite surface provides maximum grip helping to increase tooth durability and life
- Adjustment ring thread pitch angled for 2x faster opening and closing of wrench iaw
- Optimized cast iron design is up to 10% lighter than competitive wrenches
- Handle shape optimized for maximum power and user comfort
- Exceeds federal torque load specification by over 160% for maximum strength and durability



| Product Weight |
|----------------|
| 2 510 lb |

SAE mm

| Cat. No. | Overall Length | Capacity Diameter Max | Pipe Size Max | Rplc. Part | Rplc. Part | Product Weight |
|----------|----------------|-----------------------|---------------|------------|------------|----------------|
| CIPW14 | 11.75 in | 2.375 in | 2.0 in | C14H00K | C14HEEL | 2.510 lb |
| CIPW18 | 14.75 in | 2.875 in | 2.5 in | C18H00K | C18HEEL | 5.690 lb |

Cast Iron SLIM JAW™ Pipe Wrench

- SLIM JAW™ delivers best-in-class 2x access when working in tight spaces
- Adjustment ring thread pitch angled for 2x faster opening and closing of wrench iaw
- Excellent for turning pipes in limited access areas
- Optimized cast iron design is up to 10% lighter than competitive wrenches
- Handle shape optimized for maximum power and user comfort
- Exceeds federal torque load specification by over 140% for maximum strength and durability





| Cat. No. | Overall Length | Capacity Diameter Max | Pipe Size Max | Rplc. Part | Rplc. Part | Product Weight |
|----------|----------------|-----------------------|---------------|------------|------------|----------------|
| CIPW10S | 9 in | 1.9 in | 1.5 in | C10H00K | C10HEEL | 1.740 lb |

Self-Adjusting Dual Material Pipe Wrench

- Self-adjusting head design instantly grips or releases, providing fast ratcheting action
- Double the gripping power of traditional tongue-and-groove pliers
- Extended lower jaw increases access and allows for quick pipe grip in confined spaces
- Locking jaw allows users to lock the jaw in the open position to quickly enter and exit pipe turning applications
- Unique angled tooth configuration grips tighter
- 20% wider jaw for improved gripping power
- Slim profile head design allows better access to tight areas
- Ideal for most surfaces, including black iron, galvanized, PVC and copper pipe, as well as nuts, bolts, and couplings
- Dual material grip provides added comfort and durability
- Black oxide finish wipes clean easily and resists rust or corrosion



| Cat. No. | Overall Length | Capacity Diameter Max | Pipe Size Min | Pipe Size Max | Product Weight |
|----------|----------------|-----------------------|---------------|---------------|----------------|
| CPW12 | 12.09 in | 1.5 in | 0.675 in | 1.5 in | 1.29 lb |

Self-Adjusting Steel Pipe Wrenches

- Self-adjusting head design instantly grips or releases, providing fast ratcheting action
- Double the gripping power of traditional tongue-and-groove pliers
- Extended lower jaw increases access and allows for quick pipe grip in confined spaces
- Locking jaw allows users to lock the jaw in the open position to quickly enter and exit pipe turning applications
- Unique angled tooth configuration grips tighter
- 20% wider jaw for improved gripping power
- Slim profile head design allows better access to tight areas
- I Ideal for most surfaces, including black iron, galvanized, PVC and copper pipe, as well as nuts, bolts, and couplings





| Cat. No. | Overall Length | Capacity Diameter Max | Pipe Size Min | Pipe Size Max | Product Weight |
|----------|----------------|-----------------------|---------------|---------------|----------------|
| CPW12S | 11.94 in | 1.5 in | 0.675 in | 1.5 in | 1.300 lb |
| CPW16S | 16.17 in | 2.5 in | 1.250 in | 2.5 in | 3.100 lb |

20 Pc. Acetate Screwdriver Set

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Phillips® and Torx® screwdrivers feature round blades; slotted screwdrivers feature square blades
- Color-coded handles help to quickly identify driver type
- Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool





| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|--|
| CP0212 | #0 x 2-1/2" Phillips® Acetate Screwdriver | CS3164 | 3/16" x 4" Slotted Acetate Screwdriver |
| CP1112 | #1 x 1-1/2" Phillips® Acetate Stubby Screwdriver | CS3166 | 3/16" x 6" Slotted Acetate Screwdriver |
| CP13 | #1 x 3" Phillips® Acetate Screwdriver | CS3169 | 3/16" x 9" Slotted Acetate Screwdriver |
| CP2112 | #2 x 1-1/2" Phillips® Acetate Stubby Screwdriver | - | 1/4" x 6" Slotted Acetate Screwdriver |
| CP24N | #2 x 4" Phillips® Acetate Screwdriver | CT103 | T10 x 3" Torx® Acetate Screwdriver |
| CP26 | #2 x 6" Phillips® Acetate Screwdriver | CT153 | T15 x 3" Torx® Acetate Screwdriver |
| CP28 | #2 x 8" Phillips® Acetate Screwdriver | CT203 | T20 x 3" Torx® Acetate Screwdriver |
| CS182 | 1/8" x 2" Slotted Acetate Screwdriver | CT254 | T25 x 4" Torx® Acetate Screwdriver |
| CS184 | 1/8" x 4" Slotted Acetate Screwdriver | CT304 | T30 x 4" Torx® Acetate Screwdriver |
| CS316112 | 3/16" x 1-1/2" Slotted Acetate Stubby Screwdriver | - | 4-in-1 Pocket Screwdriver |

20 | 21

6 Pc. Acetate Screwdriver Set

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Phillips® screwdrivers feature round blades; slotted screwdrivers feature square blades
- Color-coded handles help to quickly identify driver type
- Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool



| Cat. No. | Included Storage | Product Weight | | |
|-----------|---------------------------|---------------------------------------|----------|--|
| CPS6PCSET | None | 1.212 lb | | |
| Cat. No. | Description | | Cat. No. | Description |
| CP13 | #1 x 3" Phillips® Acetate | #1 x 3" Phillips® Acetate Screwdriver | | 1/8" x 4" Slotted Acetate Screwdriver |
| CP24N | #2 x 4" Phillips® Acetate | Screwdriver | CS3166 | 3/16" x 6" Slotted Acetate Screwdriver |
| CP26 | #2 x 6" Phillips® Acetate | e Screwdriver | CS144 | 1/4" x 4" Slotted Acetate Screwdriver |

4 Pc. Phillips® Acetate Screwdriver Set

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Phillips® screwdrivers feature round blades

Included Storage

- Color-coded handles help to quickly identify driver type
- Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool

Product Weight



| CP4PCSET | None | 0.605 lb | | | • |
|----------|---------------------|------------------------|----------|--|---|
| Cat. No. | Description | | Cat. No. | Description | |
| CP0212 | #0 x 2-1/2" Phillip | s® Acetate Screwdriver | CP24N | #2 x 4" Phillips® Acetate Screwdriver | |
| CP13 | #1 x 3" Phillips® A | cetate Screwdriver | CP1112 | #1 x 1-1/2" Phillips® Acetate Stubby Screwdriver | |

4 Pc. Slotted Acetate Screwdriver Set

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Slotted screwdrivers feature square blades

Included Storage

- Color-coded handles help to quickly identify driver type
- Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool

Product Weight



| CS4PCS | None | 0.605 lb | | | |
|----------|---------------------------------------|-----------------------|----------|--|--|
| Cat. No. | Description | | Cat. No. | Description | |
| CS184 | 1/8" x 4" Slotted Acetate Screwdriver | | CS3164 | 3/16" x 4" Slotted Acetate Screwdriver | |
| CS316112 | 3/16" x 1-1/2" Slotted Acetat | te Stubby Screwdriver | CS144 | 1/4" x 4" Slotted Acetate Screwdriver | |

4 Pc. Torx® Acetate Screwdriver Set

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Torx® screwdrivers feature round blades
- Color-coded handles help to quickly identify driver type

Included Storage

Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool

Product Weight



| CT4PCSET | None | 0.745 lb | | | 0 |
|----------|--------------------|------------------|----------|------------------------------------|---|
| Cat. No. | Description | | Cat. No. | Description | |
| CT153 | T15 x 3" Torx® Ace | tate Screwdriver | CT254 | T25 x 4" Torx® Acetate Screwdriver | |
| CT203 | T20 x 3" Torx® Ace | tate Screwdriver | CT304 | T30 x 4" Torx® Acetate Screwdriver | |

|22|

SCREWDRIVERS

CRESCENT°

Multi-Bit Acetate Screwdriver

- 6-in-1 multi-bit screwdriver set
- Multi-bit feature allows for varying applications with a single handle driver
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Chrome plated shafts and blades for increased corrosion resistance

| Cat. No. | Included Storage | Product Weight | | |
|----------|------------------|----------------|----------|------------------|
| CS61N | None | 0.450 lb | | |
| Cat. No. | Description | | Cat. No. | Description |
| - | #1 Phillips® Bit | | - | 9/32" Slotted B |
| - | #2 Phillips® Bit | | - | 1/4" Nutdriver E |

Phillips[®] Acetate Screwdrivers

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Phillips® screwdrivers feature round blades

3/16" Slotted Bit

- Color-coded handles help to quickly identify driver type
- Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool



5/16" Nutdriver Bit

| | | | | | | V |
|----------|----------|--------------|----------------|----------------|-----------------------------|----------------|
| Cat. No. | Tip Size | Blade Length | Blade Diameter | Overall Length | Handle Size (Dia. X Length) | Product Weight |
| CP0212 | #0 | 2.5 in | 0.117 in | 5.00 in | 0.70 in x 2.5 in | 0.057 lb |
| CP1112 | #1 | 1.5 in | 0.197 in | 3.81 in | 1.26 in x 2.3 in | 0.110 lb |
| CP13 | #1 | 3.0 in | 0.197 in | 6.00 in | 0.91 in x 3.0 in | 0.100 lb |
| CP2112 | #2 | 1.5 in | 0.235 in | 3.81 in | 1.26 in x 2.3 in | 0.120 lb |
| CP24N | #2 | 4.0 in | 0.235 in | 7.81 in | 1.15 in x 3.8 in | 0.190 lb |
| CP26 | #2 | 6.0 in | 0.235 in | 9.81 in | 1.15 in x 3.8 in | 0.220 lb |
| CP28 | #2 | 8.0 in | 0.235 in | 11.81 in | 1.15 in x 3.8 in | 0.250 lb |
| CP36 | #3 | 6.0 in | 0.312 in | 10.50 in | 1.25 in x 3.5 in | 0.530 lb |
| CP48 | #4 | 8.0 in | 0.370 in | 13.25 in | 1.31 in x 5.3 in | 0.535 lb |

Slotted Acetate Screwdrivers

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Slotted screwdrivers feature square blades
- Color-coded handles help to quickly identify driver type
- Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool



| Cat. No. | Tip Size | Tip Thickness | Blade Length | Blade Diameter | Overall Length | Handle Size (Dia. X Length) | Product Weight |
|----------|----------|---------------|--------------|----------------|----------------|--------------------------------|----------------|
| CS182 | 1/8 in | 0.020 in | 2.0 in | 0.117 in | 4.63 in | 0.68 in x 2.6 in | 0.040 lb |
| CS184 | 1/8 in | 0.020 in | 4.0 in | 0.117 in | 6.63 in | 0.68 in x 2.6 in | 0.050 lb |
| CS316112 | 3/16 in | 0.027 in | 1.5 in | 0.196 in | 3.19 in | 1.26 in x 2.3 in | 0.110 lb |
| CS3164 | 3/16 in | 0.027 in | 4.0 in | 0.196 in | 7.81 in | 1.15 in x 3.8 in | 0.165 lb |
| CS3166 | 3/16 in | 0.027 in | 6.0 in | 0.196 in | 9.81 in | 1.15 in x 3.8 in | 0.200 lb |
| CS3169 | 3/16 in | 0.027 in | 9.0 in | 0.196 in | 12.81 in | 1.15 in x 3.8 in | 0.230 lb |
| CS14112 | 1/4 in | 0.041 in | 1.5 in | 0.236 in | 3.81 in | 1.26 in x 2.3 in | 0.120 lb |
| CS144 | 1/4 in | 0.041 in | 4.0 in | 0.236 in | 4.00 in | 1.23 in x 4.5 in | 0.270 lb |
| CS148 | 1/4 in | 0.041 in | 8.0 in | 0.236 in | 12.50 in | 1.23 in x 4.5 in | 0.330 lb |
| CS5166 | 5/16 in | 0.046 in | 6.0 in | 0.312 in | 10.50 in | 1.23 in x 4.5 in | 0.420 lb |
| CS5168 | 5/16 in | 0.046 in | 8.0 in | 0.312 in | 12.50 in | 1.23 in x 4.5 in | 0.360 lb |
| CS388 | 3/8 in | 0.059 in | 8.0 in | 0.372 in | 13.25 in | 1.34 in x 5.3 in | 0.765 lb |

Cabinet Acetate Screwdrivers

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Cabinet tip screwdrivers feature round blades
- Color-coded handles help to quickly identify driver type
- Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool

| | 8 | © CHERCE | W. O | |
|--|---|----------|------|--|
| | | | | |
| | | | | |

| Cat. No. | Tip Size | Tip Thickness | Blade Length | Blade Diameter | Overall Length | Handle Size (Dia. X Length) | Product Weight |
|----------|----------|---------------|--------------|----------------|----------------|--------------------------------|----------------|
| CS316R4 | 3/16 in | 0.027 in | 4 in | 0.196 in | 7.812 in | 1.15 in x 3.8 in | 0.165 lb |
| CS316R8 | 3/16 in | 0.027 in | 8 in | 0.196 in | 11.812 in | 1.15 in x 3.8 in | 0.360 lb |

24 | 25

Torx® Acetate Screwdrivers

- Chrome plated shafts and blades for increased corrosion resistance
- Blade tips are designed to ensure tighter tolerance and fit while adding convenience when starting fasteners
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Torx[®] screwdrivers feature round blades
- Color-coded handles help to quickly identify driver type
- Stamped markings on the handle denote the size of driver to help you quickly identify the needed tool



| Cat. No. | Tip Size | Blade Length | Blade Diameter | Overall Length | Handle Size (Dia. X Length) | Product Weight |
|----------|----------|--------------|----------------|----------------|-----------------------------|----------------|
| CT63 | T6 | 3.00 in | 0.196 in | 6.11 in | 0.913 in x 3.10 in | 0.095 lb |
| CT103 | T10 | 3.00 in | 0.196 in | 6.11 in | 0.913 in x 3.10 in | 0.095 lb |
| CT153 | T15 | 3.00 in | 0.196 in | 6.11 in | 0.913 in x 3.10 in | 0.100 lb |
| CT203 | T20 | 3.00 in | 0.196 in | 6.11 in | 0.913 in x 3.10 in | 0.100 lb |
| CT254 | T25 | 3.75 in | 0.196 in | 7.75 in | 1.140 in x 3.75 in | 0.195 lb |
| CT274 | T27 | 4.00 in | 0.236 in | 7.75 in | 1.140 in x 3.75 in | 0.195 lb |
| CT304 | T30 | 4.00 in | 0.236 in | 7.75 in | 1.140 in x 3.75 in | 0.195 lb |

Magnetic Bit Holding Acetate Screwdriver

- Chrome plated shaft for increased corrosion resistance
- Ergonomic tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handle stands up to all conditions
- Magnetic bit holder reduces dropped and lost fasteners



| Cat. No. | Blade Length | Blade Diameter | Overall Length | Handle Size(Dia. X Length) | Product Weight |
|----------|--------------|----------------|----------------|----------------------------|----------------|
| CRW25N | 2.8 in | 0.38 in | 6.5 in | 1.05 in x 3.72 in | 0.270 lb |

8 Pc. Diamond Tip Co-Molded **Screwdriver Set**

- Black phosphate shafts and blades for increased corrosion resistance
- Diamond coated tips for improved torque and grip when fastening

Color-coded handles help to quickly identify driver type

- Co-molded acetate handle for comfort and durability while fastening

| Meets ASME specifications for dr | rivers |
|----------------------------------|--------|
|----------------------------------|--------|

Cat. No.

Cat. No.



4 Pc Diamond Tip Co-Molded **Screwdriver Set**

- Black phosphate shafts and blades for increased corrosion resistance
- Diamond coated tips for improved torque and grip when fastening
- Co-molded acetate handle for comfort and durability while fastening
- Color-coded handles help to quickly identify driver type
- Meets ASME specifications for drivers

| Cat. No. | Included Storage | Product Weight | |
|-----------|------------------|----------------|--|
| CGS4PCSET | None | 1.146 lb | |
| | | | |



| UGS4PUSE1 | None | 1.146 lb | | | |
|-----------|---|----------------------------|----------|---|------|
| Cat. No. | Description | | Cat. No. | Description | |
| - | #1 x 3" Phillips® Co-Molded Diamond Tip Screwdriver | | - | 3/16" x 4" Slotted Co-Molded Diamond Tip Screwdri | iver |
| - | #2 x 4" Phillips® Co-Molde | ed Diamond Tip Screwdriver | - | 1/4" x 4" Slotted Co-Molded Diamond Tip Screwdriv | er |

6 Pc. Diamond Tip Dual Material Precision **Screwdriver Set**

- Black phosphate shafts and blades for increased corrosion resistance
- Diamond coated tips for improved torque and grip when fastening
- Dual material handles designed for intricate, detailed work
- Plastic case for convenience and storage

| Meets A | Meets ASME specifications for mini drivers | | | | | |
|----------|--|----------------|--|--|--|--|
| Cat. No. | Included Storage | Product Weight | | | | |
| CSDP6SET | Plastic Case | 0.440 lb | | | | |
| Cat. No. | Description | | | | | |

#00 Phillips® Dual Material Diamond Tip Screwdriver

#0 Phillips® Dual Material Diamond Tip Screwdriver 1/16" Slotted Dual Material Diamond Tip Screwdriver



| Description |
|---|
| 5/64" Slotted Dual Material Diamond Tip Screwdriver |
| 3/32" Slotted Dual Material Diamond Tip Screwdriver |
| 1/8" Slotted Dual Material Diamond Tip Screwdriver |

5 Pc. SAE Solid Shaft Acetate Handle **Nutdriver Set**

- Chrome plated shafts for increased corrosion resistance
- Tips are designed to ensure tighter tolerance and fit
- Ergonomic, tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Color-coded handles help to quickly identify driver size
- Clear markings on handle denote the size of driver to help you quickly identify the needed tool
- Meets or exceeds ASME B107.110-20123



| CND5SAEN | None | 1.340 lb | | | SAE |
|----------|----------------------|------------------------------|----------|---|-----|
| Cat. No. | Description | | Cat. No. | Description | |
| CND316 | 3/16" Solid Shaft T | ri-Lobe Acetate Nutdriver 3" | CND38 | 3/8" Solid Shaft Tri-Lobe Acetate Nutdriver 3" | |
| CND14 | 1/4" Solid Shaft Tri | -Lobe Acetate Nutdriver 3" | CND716 | 7/16" Solid Shaft Tri-Lobe Acetate Nutdriver 3" | |
| CND516 | 5/16" Solid Shaft T | ri-Lobe Acetate Nutdriver 3" | | | |
| | | | | | |

5 Pc. Metric Solid Shaft Acetate Handle **Nutdriver Set**

- Chrome plated shafts for increased corrosion resistance
- Tips are designed to ensure tighter tolerance and fit
- Ergonomic, tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions

Product Weight

- Color-coded handles help to quickly identify driver size
- Clear markings on handle denote the size of driver to help you quickly identify the needed tool
- Meets or exceeds ASME B107.110-20123

Included Storage



| CND5MM | None | 1.340 lb | | | |
|----------|---------------------|---|----------|--|--|
| Cat. No. | Description | | Cat. No. | Description | |
| CND6M | 6mm Solid Shaft Tri | 6mm Solid Shaft Tri-Lobe Acetate Nutdriver 3" | | 9mm Solid Shaft Tri-Lobe Acetate Nutdriver 3" | |
| CND7M | 7mm Solid Shaft Tri | 7mm Solid Shaft Tri-Lobe Acetate Nutdriver 3" | | 10mm Solid Shaft Tri-Lobe Acetate Nutdriver 3" | |
| CND8M | 8mm Solid Shaft Tri | -Lobe Acetate Nutdriver 3" | | | |

SAE Solid Shaft Acetate Handle Nutdrivers

- Chrome plated shafts for increased corrosion resistance
- Tips are designed to ensure tighter tolerance and fit
- Ergonomic, tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Color-coded handles help to quickly identify driver size
- Clear markings on handle denote the size of driver to help you quickly identify the needed tool
- Meets or exceeds ASME B107.110-20123



| | | | | | Handle Size | |
|----------|----------|--------------|-----------------------|----------------|-----------------|----------------|
| Cat. No. | Size | Shaft Length | Bolt Clearance | Overall Length | (Dia. X Length) | Product Weight |
| CND316 | 3/16 in | 3 in | 0.119 in | 6.75 in | 1 in x 3.75 in | 0.175 lb |
| CND14 | 1/4 in | 3 in | 0.127 in | 6.75 in | 1 in x 3.75 in | 0.205 lb |
| CND516 | 5/16 in | 3 in | 0.166 in | 6.75 in | 1 in x 3.75 in | 0.205 lb |
| CND1132 | 11/32 in | 3 in | 0.214 in | 6.75 in | 1 in x 3.75 in | 0.250 lb |
| CND38 | 3/8 in | 3 in | 0.231 in | 6.75 in | 1 in x 3.75 in | 0.260 lb |
| CND716 | 7/16 in | 3 in | 0.312 in | 6.75 in | 1 in x 3.75 in | 0.315 lb |
| CND12 | 1/2 in | 3 in | 0.378 in | 6.75 in | 1 in x 3.75 in | 0.315 lb |

0.330 lb

CRESCENT

NUTDRIVERS

Metric Solid Shaft Acetate Handle Nutdrivers

- Chrome plated shafts for increased corrosion resistance
- Tips are designed to ensure tighter tolerance and fit
- Ergonomic, tri-lobe extruded acetate handles provide increased comfort and maximized torque for driving and loosening fasteners
- Easy-to-clean, chemical-resistant acetate handles stand up to all conditions
- Color-coded handles help to quickly identify driver size
- Clear markings on handle denote the size of driver to help you quickly identify the needed tool
- Meets or exceeds ASME B107.110-20123



| | | | | | Handle Size | |
|----------|-------|--------------|----------------|----------------|-----------------|----------------|
| Cat. No. | Size | Shaft Length | Bolt Clearance | Overall Length | (Dia. X Length) | Product Weight |
| CND5M | 5 mm | 3 in | 0.141 in | 6.75 in | 1 in x 3.75 in | 0.175 lb |
| CND6M | 6 mm | 3 in | 0.167 in | 6.75 in | 1 in x 3.75 in | 0.205 lb |
| CND7M | 7 mm | 3 in | 0.204 in | 6.75 in | 1 in x 3.75 in | 0.250 lb |
| CND8M | 8 mm | 3 in | 0.206 in | 6.75 in | 1 in x 3.75 in | 0.260 lb |
| CND9M | 9 mm | 3 in | 0.216 in | 6.75 in | 1 in x 3.75 in | 0.255 lb |
| CND10M | 10 mm | 3 in | 0.253 in | 6.75 in | 1 in x 3.75 in | 0.315 lb |
| CND11M | 11 mm | 3 in | 0.322 in | 6.75 in | 1 in x 3.75 in | 0.316 lb |

3 Pc. SAE/Metric Hex and Torx® Key Fold-up Set

- Versatile range of common sizes
- Measurement type clearly printed for easy recognition
- Size markings for each key
- High strength alloy steel
- Dual-material comfort grip
- Meets or exceeds ASME B18.3.2M metric hex keys
- Meets or exceeds ASME B18.3 SAE hex keys
- Meets or exceeds Camcar TXF-702 Torx® keys



| SAE | |
|-----|---|
| | 0 |

| Cat. No. | Keys | Key Sizes | Length | Handle Length | Key Length | Product Weight |
|----------|------|--|--------|---------------|------------|----------------|
| СНКЗРС | 25 | SAE: 5/64 in,3/32 in,7/64 in,1/8 in,9/64 in,5/32 in,3/16 in,7/32 in,1/4 in Metric: 1.5mm,2mm,2.5mm,3mm,4mm,5mm,6mm,8mm Torx®: T9,T10,T15,T20,T25,T27,T30,T40 | 4.5 in | 3.75 in | 3 in | 1.040 lb |

9-Key SAE Hex Fold-up Set

- Versatile range of common sizes
- Measurement type clearly printed for easy recognition
- Size markings for each key
- High strength alloy steel
- Dual-material comfort grip

Cat. No.

CHKFSAE9

Meets or exceeds ASME B18.3-2003



| | | | SAE | |
|-----|---------------|------------|----------------|--|
| yth | Handle Length | Key Length | Product Weight | |
| | | | | |

8-Key Metric Hex Key Fold-up Set

Key Sizes

5/64 in 3/32 in 7/64 in 1/8 in 9/64 in 5/32 in 3/16 in

7/32 in 1/4 in

- Versatile range of common sizes
- Measurement type clearly printed for easy recognition
- Size markings for each key
- High strength alloy steel
- Dual-material comfort grip
- Meets or exceeds ASME B18.3.2M



| Cat. No. | Keys | Key Sizes | Length | Handle Length | Key Length | Product Weight |
|----------|------|--|--------|---------------|------------|----------------|
| CHKFM8 | 8 | 1.5mm, 2mm, 2.5mm, 3mm, 4mm, 5mm, 6mm, 8mm | 4.5 in | 3.75 in | 3 in | 0.360 lb |

4.5 in

3.75 in

8-Key Torx® Key Fold-up Set

- Versatile range of common sizes
- Measurement type clearly printed for easy recognition
- Size markings for each key
- High strength alloy steel
- Dual-material comfort grip
- Meets or exceeds Camcar TXF-702



| Cat. No. | Keys | Key Sizes | Length | Handle Length | Key Length | Product Weight |
|----------|------|--------------------------------|--------|---------------|------------|----------------|
| CHKFT8 | 8 | T9 T10 T15 T20 T25 T27 T30 T40 | 4.5 in | 3 75 in | 3 in | 0.350 lb |

30 | 31

CRESCENT°

13-Key SAE Long Arm Hex Key Set

- Long length for increased access
- Short end for higher torque
- High strength alloy steel for strength and durability
- Black oxide finish resists corrosion
- Meets or exceeds ASME B18.3
- Key caddy organizes and stores hex keys




| Cat. No. | Keys | Key Sizes | Length | Product Weight |
|------------|------|---|--------|----------------|
| CHKLASAE13 | 13 | .05,1/16 in, 5/64 in, 3/32 in, 7/64 in, 1/8 in, 9/64 in, 5/32 in, 3/16 in, 7/32 in, 1/4 in, 5/16 in, 3/8 in | 7.5 in | 0.990 lb |

13-Key SAE Ball End Long Arm Hex Key Set

- Ball end hex keys permit an angle of entry of up to 25° for easier access
- Long length for increased access
- Short end for higher torque
- High strength alloy steel for strength and durability
- Black oxide finish resists corrosion
- Meets or exceeds ASME B18.3
- Key caddy organizes and stores hex keys



| | | | | _ |
|-------------|------|--|--------|----------------|
| Cat. No. | Keys | Key Sizes | Length | Product Weight |
| CHKLABALL13 | 13 | .05, 1/16 in, 5/64 in, 3/32 in, 7/64 in, 1/8 in, 9/64 in, 5/32 in, 3/16 in, 7/32 in, 1/4 in, 5/16 in, 3/8 in | 7.5 in | 0.970 lb |

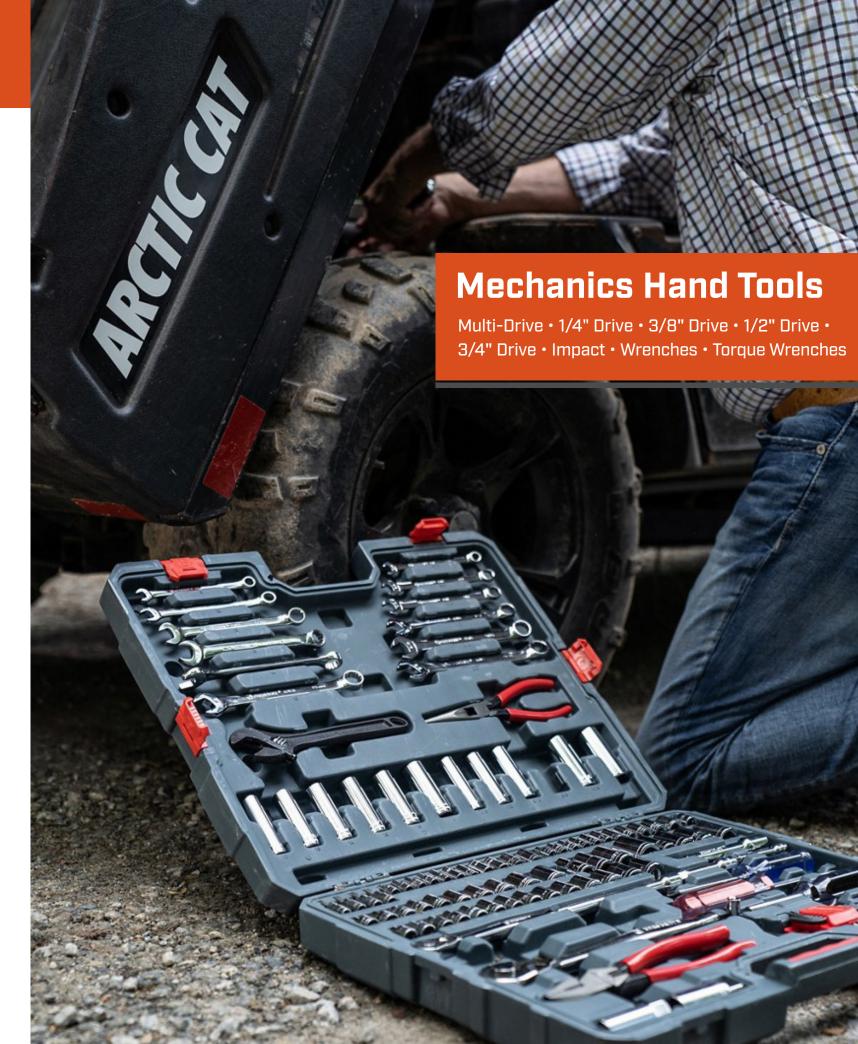

180 Pc. 1/4" and 3/8" Drive 6 Point SAE/Metric Professional Tool Set

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical and consumer applications
- Incredible access from long wrenches with narrow heads, adjustable wrenches and pliers, and a long-beam ratchets with small teardrop heads
- Long nose & diagonal pliers with professional, ergonomic dipped grips wipe clean easily
- Co-molded bit driver & screwdriver handles with ergonomic grip for improved performance
- Shallow and deep SAE/metric 6 point full polish chrome sockets with stamped size markings for easy socket identification
- 6" adjustable wrench with hex jaw design reduces slippage by gripping fasteners tightly
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications



| Cat. No. | Included Storage | Product Weight | | | SAE) (I |
|----------|------------------------------------|----------------|----------|---|---------|
| CTK180 | Blow Mold Case | 19.620 lb | | | 6 |
| Cat. No. | Description | | Cat. No. | Description | |
| - | 1/4" Drive 72 Tooth Quick Release | e Ratchet | - | 1/4" Drive 6 Point Deep SAE Socket 5/32" | |
| - | 3/8" Drive 72 Tooth Quick Release | Ratchet | - | 1/4" Drive 6 Point Deep SAE Socket 3/16" | |
| - | 1/4" Drive Extension 3" | | - | 1/4" Drive 6 Point Deep SAE Socket 7/32" | |
| - | 3/8" Drive Extension 3" | | - | 1/4" Drive 6 Point Deep SAE Socket 1/4" | |
| - | 3/8" Drive Extension 6" | | - | 1/4" Drive 6 Point Deep SAE Socket 9/32" | |
| - | 1/4" Drive 1/4" M x 3/8" F Adapte | r | - | 1/4" Drive 6 Point Deep SAE Socket 5/16" | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 5/32" | - | 1/4" Drive 6 Point Deep SAE Socket 11/32" | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 3/16" | - | 1/4" Drive 6 Point Deep SAE Socket 3/8" | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 7/32" | - | 1/4" Drive 6 Point Deep Metric Socket 4mm | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 1/4" | - | 1/4" Drive 6 Point Deep Metric Socket 5mm | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 9/32" | - | 1/4" Drive 6 Point Deep Metric Socket 5.5mm | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 5/16" | - | 1/4" Drive 6 Point Deep Metric Socket 6mm | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 11/32" | - | 1/4" Drive 6 Point Deep Metric Socket 7mm | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 3/8" | - | 1/4" Drive 6 Point Deep Metric Socket 8mm | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 7/16" | - | 1/4" Drive 6 Point Deep Metric Socket 9mm | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 1/2" | - | 1/4" Drive 6 Point Deep Metric Socket 10mm | |
| - | 1/4" Drive 6 Point Standard SAE S | Socket 9/16" | - | 3/8" Drive 6 Point Standard SAE Socket 3/16" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 4mm | - | 3/8" Drive 6 Point Standard SAE Socket 7/32" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 5mm | - | 3/8" Drive 6 Point Standard SAE Socket 1/4" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 5.5mm | - | 3/8" Drive 6 Point Standard SAE Socket 9/32" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 6mm | - | 3/8" Drive 6 Point Standard SAE Socket 5/16" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 7mm | - | 3/8" Drive 6 Point Standard SAE Socket 11/32" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 8mm | - | 3/8" Drive 6 Point Standard SAE Socket 3/8" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 9mm | - | 3/8" Drive 6 Point Standard SAE Socket 7/16" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 10mm | - | 3/8" Drive 6 Point Standard SAE Socket 1/2" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 11mm | - | 3/8" Drive 6 Point Standard SAE Socket 9/16" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 12mm | - | 3/8" Drive 6 Point Standard SAE Socket 5/8" | |
| - | 1/4" Drive 6 Point Standard Metric | Socket 13mm | - | 3/8" Drive 6 Point Standard SAE Socket 11/16" | |

| Cat. No. | Description | Cat. No. | Description |
|----------|--|----------|---|
| - | 3/8" Drive 6 Point Standard SAE Socket 3/4" | - | 15mm 12 Point Long Pattern Combination Wrench |
| - | 3/8" Drive 6 Point Standard SAE Socket 7/8" | - | 1/29" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 15/16" | - | 1/20" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 1" | - | 1/16" Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 12mm | - | 5/64" Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 13mm | - | 3/32" Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 14mm | - | 7/64" Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 15mm | - | 1/8" Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 16mm | - | 9/64" Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 17mm | - | 5/32" Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 18mm | - | 3/16" Hex Key |
| _ | 3/8" Drive 6 Point Standard Metric Socket 19mm | - | 7/32" Hex Key |
| _ | 3/8" Drive 6 Point Standard Metric Socket 20mm | - | 1/4" Hex Key |
| _ | 3/8" Drive 6 Point Standard Metric Socket 21mm | - | .9mm Hex Key |
| _ | 3/8" Drive 6 Point Standard Metric Socket 22mm | - | 1.3mm Hex Key |
| _ | 3/8" Drive 6 Point Standard Metric Socket 23mm | | 1.5mm Hex Key |
| _ | 3/8" Drive 6 Point Standard Metric Socket 24mm | | 2mm Hex Key |
| _ | 3/8" Drive 6 Point Deep SAE Socket 3/8" | _ | 2.5mm Hex Key |
| _ | 3/8" Drive 6 Point Deep SAE Socket 7/16" | | 3mm Hex Key |
| _ | 3/8" Drive 6 Point Deep SAE Socket 1/2" | - | 3.5mm Hex Key |
| _ | 3/8" Drive 6 Point Deep SAE Socket 5/8" | | 4mm Hex Key |
| _ | 3/8" Drive 6 Point Deep SAE Socket 9/16" | _ | 4.5mm Hex Key |
| _ | 3/8" Drive 6 Point Deep SAE Socket 11/16" | - | 5mm Hex Key |
| _ | 3/8" Drive 6 Point Deep SAE Socket 3/4" | - | 5.5mm Hex Key |
| _ | 3/8" Drive 6 Point Deep Metric Socket 12mm | _ | 6mm Hex Key |
| _ | 3/8" Drive 6 Point Deep Metric Socket 13mm | - | 6" Diagonal Pliers |
| - | 3/8" Drive 6 Point Deep Metric Socket 14mm | - | 6" Long Nose Pliers |
| _ | 3/8" Drive 6 Point Deep Metric Socket 15mm | _ | 6" Adjustable Wrench |
| _ | 3/8" Drive 6 Point Deep Metric Socket 16mm | _ | #1 x 3" Phillips® Dual Material Screwdriver |
| _ | 3/8" Drive 6 Point Deep Metric Socket 17mm | _ | #2 x 4" Phillips® Dual Material Screwdriver |
| _ | 3/8" Drive 6 Point Deep Metric Socket 18mm | _ | 1/4" x 4" Slotted Dual Material Screwdriver |
| _ | 3/8" Drive 6 Point Deep Metric Socket 19mm | _ | 3/16" x 3" Slotted Dual Material Screwdriver |
| _ | 3/8" Drive 6 Point Spark Plug Socket 5/8" | - | Dual Material Magnetic Bit Driver |
| _ | 5/16" 12 Point Long Pattern Combination Wrench | _ | 1/4" Drive Bit Adapter |
| - | 3/8" 12 Point Long Pattern Combination Wrench | _ | #0 Phillips® Bit |
| _ | 7/16" 12 Point Long Pattern Combination Wrench | - | #0 Fillings Bit #1 Phillips® Bit |
| _ | 1/2" 12 Point Long Pattern Combination Wrench | - | #2 Phillips® Bit |
| _ | 9/16" 12 Point Long Pattern Combination Wrench | - | #3 Phillips® Bit |
| - | 5/8" 12 Point Long Pattern Combination Wrench | - | 3/32" Slotted Bit |
| _ | 8mm 12 Point Long Pattern Combination Wrench | - | 1/8" Slotted Bit |
| _ | 10mm 12 Point Long Pattern Combination Wrench | - | 5/32" Slotted Bit |
| _ | 12mm 12 Point Long Pattern Combination Wrench | - | 3/16" Slotted Bit |
| - | 13mm 12 Point Long Pattern Combination Wrench | - | 7/32" Slotted Bit |
| _ | - | | |
| - | 14mm 12 Point Long Pattern Combination Wrench | - | 1/4" Slotted Bit |

Continued on next page

180 Pc. 1/4" and 3/8" Drive 6 Point SAE/Metric Professional Tool Set

Continued from previous page

| Cat. No. | Description | Cat. No. | Description |
|----------|------------------|----------|----------------------------|
| - | 3mm Slotted Bit | - | 7mm Hex Bit |
| - | 4mm Slotted Bit | - | S0 Square Bit |
| - | 5mm Slotted Bit | - | S1 Square Bit |
| - | 6mm Slotted Bit | - | S2 Square Bit |
| - | 7mm Slotted Bit | - | S3 Square Bit |
| - | #0 Pozidriv® Bit | - | T5 Torx® Bit |
| - | #1 Pozidriv® Bit | - | T7 Torx® Bit |
| - | #2 Pozidriv® Bit | - | T8 Torx® Bit |
| - | #3 Pozidriv® Bit | - | T10 Torx® Bit |
| - | 1/8" Hex Bit | - | T15 Torx® Bit |
| - | 5/32" Hex Bit | - | T25 Torx® Bit |
| - | 3/16" Hex Bit | - | T27 Torx® Bit |
| - | 7/32" Hex Bit | - | T30 Torx® Bit |
| - | 5/16" Hex Bit | - | T40 Torx® Bit |
| - | 3mm Hex Bit | - | T8 Tamper-proof Torx® Bit |
| - | 4mm Hex Bit | - | T10 Tamper-proof Torx® Bit |
| - | 5mm Hex Bit | - | T15 Tamper-proof Torx® Bit |
| - | 6mm Hex Bit | - | T20 Tamper-proof Torx® Bit |

150 Pc. 1/4" and 3/8" Drive 6 Point SAE/Metric Professional Tool Set

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical and consumer applications
- Incredible access from combination wrenches with narrow heads, adjustable wrenches and pliers, and low profile head quick release ratchets
- Long nose 8 diagonal pliers with professional, ergonomic dipped grips wipe clean easily
- Co-molded bit driver & screwdriver handles with ergonomic grip for improved performance
- Shallow and deep SAE/metric 6 point full polish chrome sockets with stamped size markings for easy socket identification
- 6" adjustable wrench with hex jaw design reduces slippage by gripping fasteners tightly
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications

| Cat. No. | Included Storage | Product Weight | | | SAE m |
|----------|-------------------------|---------------------|----------|---|-------|
| CTK150 | Blow Mold Case | 16.755 lb | | | 6 |
| Cat. No. | Description | | Cat. No. | Description | |
| - | 1/4" Drive 72 Tooth Qui | ick Release Ratchet | - | 3/8" Drive 72 Tooth Quick Release Ratchet | |



| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|--|
| - | 1/4" Drive Extension 3" | - | 3/8" Drive 6 Point Standard Metric Socket 15mm |
| - | 3/8" Drive Extension 3" | - | 3/8" Drive 6 Point Standard Metric Socket 16mm |
| - | 3/8" Drive Extension 6" | - | 3/8" Drive 6 Point Standard Metric Socket 17mm |
| - | 1/4" Drive 6 Point Standard SAE Socket 5/32" | - | 3/8" Drive 6 Point Standard Metric Socket 18mm |
| - | 1/4" Drive 6 Point Standard SAE Socket 3/16" | - | 3/8" Drive 6 Point Standard Metric Socket 19mm |
| - | 1/4" Drive 6 Point Standard SAE Socket 7/32" | - | 3/8" Drive 6 Point Standard Metric Socket 20mm |
| - | 1/4" Drive 6 Point Standard SAE Socket 1/4" | - | 3/8" Drive 6 Point Standard Metric Socket 21mm |
| - | 1/4" Drive 6 Point Standard SAE Socket 9/32" | - | 3/8" Drive 6 Point Standard Metric Socket 22mm |
| _ | 1/4" Drive 6 Point Standard SAE Socket 5/16" | _ | 3/8" Drive 6 Point Standard Metric Socket 23mm |
| _ | 1/4" Drive 6 Point Standard SAE Socket 11/32" | - | 3/8" Drive 6 Point Standard Metric Socket 24mm |
| _ | 1/4" Drive 6 Point Standard SAE Socket 3/8" | - | 3/8" Drive 6 Point Spark Plug Socket 5/8" |
| _ | 1/4" Drive 6 Point Standard SAE Socket 7/16" | - | 5/16" 12 Point Long Pattern Combination Wrench |
| _ | 1/4" Drive 6 Point Standard SAE Socket 1/2" | - | 3/8" 12 Point Long Pattern Combination Wrench |
| _ | 1/4" Drive 6 Point Standard SAE Socket 9/16" | - | 7/16" 12 Point Long Pattern Combination Wrench |
| _ | 1/4" Drive 6 Point Standard Metric Socket 4mm | | 1/2" 12 Point Long Pattern Combination Wrench |
| _ | 1/4" Drive 6 Point Standard Metric Socket 5mm | _ | 9/16" 12 Point Long Pattern Combination Wrench |
| _ | 1/4" Drive 6 Point Standard Metric Socket 5.5mm | _ | |
| - | | - | 5/8" 12 Point Long Pattern Combination Wrench |
| - | 1/4" Drive 6 Point Standard Metric Socket 6mm | - | 8mm 12 Point Long Pattern Combination Wrench |
| - | 1/4" Drive 6 Point Standard Metric Socket 7mm | - | 10mm 12 Point Long Pattern Combination Wrench |
| - | 1/4" Drive 6 Point Standard Metric Socket 8mm | - | 12mm 12 Point Long Pattern Combination Wrench |
| - | 1/4" Drive 6 Point Standard Metric Socket 9mm | - | 13mm 12 Point Long Pattern Combination Wrench |
| - | 1/4" Drive 6 Point Standard Metric Socket 10mm | - | 14mm 12 Point Long Pattern Combination Wrench |
| • | 1/4" Drive 6 Point Standard Metric Socket 11mm | - | 15mm 12 Point Long Pattern Combination Wrench |
| - | 1/4" Drive 6 Point Standard Metric Socket 12mm | - | 1/29" Hex Key |
| - | 1/4" Drive 6 Point Standard Metric Socket 13mm | - | 1/20" Hex Key |
| | 3/8" Drive 6 Point Standard SAE Socket 3/16" | - | 1/16" Hex Key |
| • | 3/8" Drive 6 Point Standard SAE Socket 7/32" | - | 5/64" Hex Key |
| • | 3/8" Drive 6 Point Standard SAE Socket 1/4" | - | 3/32" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 9/32" | - | 7/64" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 5/16" | - | 1/8" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 11/32" | - | 9/64" Hex Key |
| • | 3/8" Drive 6 Point Standard SAE Socket 3/8" | - | 5/32" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 7/16" | - | 3/16" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 1/2" | - | 7/32" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 9/16" | - | 1/4" Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 5/8" | - | .9mm Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 11/16" | - | 1.3mm Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 3/4" | - | 1.5mm Hex Key |
| | 3/8" Drive 6 Point Standard SAE Socket 7/8" | - | 2mm Hex Key |
| | 3/8" Drive 6 Point Standard SAE Socket 15/16" | - | 2.5mm Hex Key |
| - | 3/8" Drive 6 Point Standard SAE Socket 1" | - | 3mm Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 12mm | _ | 3.5mm Hex Key |
| - | 3/8" Drive 6 Point Standard Metric Socket 13mm | - | 4mm Hex Key |
| | 3/8" Drive 6 Point Standard Metric Socket 14mm | _ | 4.5mm Hex Key |

Continued on next page

150 Pc. 1/4" and 3/8" Drive 6 Point SAE/Metric Professional Tool Set

Continued from previous page

| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|---------------------|
| - | 5mm Hex Key | - | 7/32" Hex Bit |
| - | 5.5mm Hex Key | - | 3mm Hex Bit |
| - | 6mm Hex Key | - | 4mm Hex Bit |
| - | 6" Diagonal Pliers | - | 5mm Hex Bit |
| - | 6" Long Nose Pliers | - | 6mm Hex Bit |
| - | 6" Adjustable Wrench | - | 7mm Hex Bit |
| - | #2 x 4" Phillips® Dual Material Screwdriver | - | S1 Square Bit |
| - | 1/4" x 4" Slotted Dual Material Screwdriver | - | S2 Square Bit |
| - | Dual Material Magnetic Bit Driver | - | S3 Square Bit |
| - | 1/4" Drive Bit Adapter | - | T5 Torx® Bit |
| - | #1 Phillips® Bit | - | T7 Torx® Bit |
| - | #2 Phillips® Bit | - | T8 Torx® Bit |
| - | #3 Phillips® Bit | - | T10 Torx® Bit |
| - | 3/32" Slotted Bit | - | T15 Torx® Bit |
| - | 1/8" Slotted Bit | - | T25 Torx® Bit |
| - | 5/32" Slotted Bit | - | T27 Torx® Bit |
| - | 3/16" Slotted Bit | - | T30 Torx® Bit |
| - | 7/32" Slotted Bit | - | T40 Torx® Bit |
| - | 1/4" Slotted Bit | - | 5/32" Nutdriver Bit |
| - | 3mm Slotted Bit | - | 3/16" Nutdriver Bit |
| - | 4mm Slotted Bit | - | 7/32" Nutdriver Bit |
| - | 5mm Slotted Bit | - | 1/4" Nutdriver Bit |
| - | 6mm Slotted Bit | - | 9/32" Nutdriver Bit |
| - | 7mm Slotted Bit | - | 5/16" Nutdriver Bit |
| - | #0 Pozidriv® Bit | - | 4mm Nutdriver Bit |
| - | #1 Pozidriv [®] Bit | - | 5mm Nutdriver Bit |
| - | #2 Pozidriv® Bit | - | 6mm Nutdriver Bit |
| - | #3 Pozidriv® Bit | - | 7mm Nutdriver Bit |
| - | 5/32" Hex Bit | - | 8mm Nutdriver Bit |
| - | 3/16" Hex Bit | - | 10mm Nutdriver Bit |
| | | | |
| | | | |

142 Pc. 1/4", 3/8", and 1/2" Drive 6 and 12 Point SAE/Metric Mechanics Tool Set

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical and consumer applications
- Heavy-duty 1/4", 3/8" and 1/2" drive 60-tooth ratchets feature a compact teardrop shaped head for getting into limited access spaces and long, balanced handles for better leverage and control
- Long pattern combination wrenches for improved access and torque
- Acetate magnetic bit driver for improved impact, UV, and solvent resistance
 - Innovative new hex key caddy makes accessing the size you need quick and easy
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications





| Cat. No. | Included Storage | Product Weight | | | SAE mm |
|----------|----------------------------|----------------------------------|----------|---|-----------|
| CTK142 | Blow Mold Case | 17.335 lb | | | 6 12 |
| Cat. No. | Description | | Cat. No. | Description | |
| CRWON | 1/4" Drive 60 Tooth Quick | Release Teardrop Ratchet 6" | CDDS4N | 1/4" Drive 6 Point Deep SAE Socket 9/32" | |
| CRW6N | 3/8" Drive 60 Tooth Quick | Release Teardrop Ratchet 9" | CDDS5N | 1/4" Drive 6 Point Deep SAE Socket 5/16" | |
| CRW12N | 1/2" Drive 60 Tooth Quick | Release Teardrop Ratchet 10-1/2" | CDDS6N | 1/4" Drive 6 Point Deep SAE Socket 11/32" | |
| - | 1/4" Drive Extension 3" | | CDDS7N | 1/4" Drive 6 Point Deep SAE Socket 3/8" | |
| CDTA8N | 3/8" Drive Extension 3" | | CDDS8N | 1/4" Drive 6 Point Deep SAE Socket 7/16" | |
| CDTA12N | 1/2" Drive Extension 5" | | CDDS13N | 1/4" Drive 6 Point Deep Metric Socket 6mm | |
| CDSON | 1/4" Drive 6 Point Standa | rd SAE Socket 5/32" | CDDS14N | 1/4" Drive 6 Point Deep Metric Socket 7mm | |
| CDS1N | 1/4" Drive 6 Point Standa | rd SAE Socket 3/16" | CDDS15N | 1/4" Drive 6 Point Deep Metric Socket 8mm | |
| CDS2N | 1/4" Drive 6 Point Standa | rd SAE Socket 7/32" | CDDS16N | 1/4" Drive 6 Point Deep Metric Socket 9mm | |
| CDS3N | 1/4" Drive 6 Point Standa | rd SAE Socket 1/4" | CDDS17N | 1/4" Drive 6 Point Deep Metric Socket 10mm | |
| CDS4N | 1/4" Drive 6 Point Standa | rd SAE Socket 9/32" | CDDS19N | 1/4" Drive 6 Point Deep Metric Socket 12mm | |
| CDS5N | 1/4" Drive 6 Point Standa | rd SAE Socket 5/16" | - | 3/8" Drive 12 Point Standard SAE Socket 3/16" | |
| CDS6N | 1/4" Drive 6 Point Standa | rd SAE Socket 11/32" | CDS23N | 3/8" Drive 12 Point Standard SAE Socket 1/4" | |
| CDS7N | 1/4" Drive 6 Point Standa | rd SAE Socket 3/8" | CDS24N | 3/8" Drive 12 Point Standard SAE Socket 5/16" | |
| CDS8N | 1/4" Drive 6 Point Standa | rd SAE Socket 7/16" | CDS25N | 3/8" Drive 12 Point Standard SAE Socket 3/8" | |
| CDS9N | 1/4" Drive 6 Point Standa | rd SAE Socket 1/2" | CDS26N | 3/8" Drive 12 Point Standard SAE Socket 7/16" | |
| - | 1/4" Drive 6 Point Standa | rd SAE Socket 9/16" | CDS27N | 3/8" Drive 12 Point Standard SAE Socket 1/2" | |
| CDS11N | 1/4" Drive 6 Point Standa | rd Metric Socket 4mm | CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" | |
| CDS12N | 1/4" Drive 6 Point Standa | rd Metric Socket 5mm | CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" | |
| - | 1/4" Drive 6 Point Standa | rd Metric Socket 5.5mm | CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" | |
| CDS13N | 1/4" Drive 6 Point Standar | rd Metric Socket 6mm | CDS32N | 3/8" Drive 12 Point Standard SAE Socket 13/16" | |
| CDS14N | 1/4" Drive 6 Point Standa | rd Metric Socket 7mm | - | 3/8" Drive 12 Point Standard Metric Socket 6mm | |
| CDS15N | 1/4" Drive 6 Point Standar | rd Metric Socket 8mm | CDS37N | 3/8" Drive 12 Point Standard Metric Socket 7mm | |
| CDS16N | 1/4" Drive 6 Point Standa | rd Metric Socket 9mm | CDS38N | 3/8" Drive 12 Point Standard Metric Socket 8mm | |
| CDS17N | 1/4" Drive 6 Point Standa | rd Metric Socket 10mm | CDS39N | 3/8" Drive 12 Point Standard Metric Socket 9mm | |
| CDS18N | 1/4" Drive 6 Point Standa | rd Metric Socket 11mm | CDS40N | 3/8" Drive 12 Point Standard Metric Socket 10mm | 1 |
| CDS19N | 1/4" Drive 6 Point Standar | rd Metric Socket 12mm | CDS41N | 3/8" Drive 12 Point Standard Metric Socket 11mm | l |
| CDS20N | 1/4" Drive 6 Point Standa | rd Metric Socket 13mm | CDS42N | 3/8" Drive 12 Point Standard Metric Socket 12mm | 1 |
| - | 1/4" Drive 6 Point Standar | rd Metric Socket 14mm | CDS43N | 3/8" Drive 12 Point Standard Metric Socket 13mm | l |
| CDDS3N | 1/4" Drive 6 Point Deep S. | AE Socket 1/4" | | ■ Continued on | novt nago |

Continued on next page

142 Pc. 1/4", 3/8", and 1/2" Drive 6 and 12 Point SAE/Metric Mechanics

Tool Set

Continued from previous page

| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|--|
| CDS44N | 3/8" Drive 12 Point Standard Metric Socket 14mm | CDS53N | 1/2" Drive 12 Point Standard SAE Socket 7/16" |
| CDS45N | 3/8" Drive 12 Point Standard Metric Socket 15mm | CDS54N | 1/2" Drive 12 Point Standard SAE Socket 1/2" |
| CDS46N | 3/8" Drive 12 Point Standard Metric Socket 16mm | CDS55N | 1/2" Drive 12 Point Standard SAE Socket 9/16" |
| CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17mm | CDS56N | 1/2" Drive 12 Point Standard SAE Socket 5/8" |
| CDS48N | 3/8" Drive 12 Point Standard Metric Socket 18mm | CDS57N | 1/2" Drive 12 Point Standard SAE Socket 11/16" |
| CDS49N | 3/8" Drive 12 Point Standard Metric Socket 19mm | CDS58N | 1/2" Drive 12 Point Standard SAE Socket 3/4" |
| CDDS26N | 3/8" Drive 6 Point Deep SAE Socket 7/16" | CDS59N | 1/2" Drive 12 Point Standard SAE Socket 13/16" |
| CDDS27N | 3/8" Drive 6 Point Deep SAE Socket 1/2" | CDS60N | 1/2" Drive 12 Point Standard SAE Socket 7/8" |
| CDDS28N | 3/8" Drive 6 Point Deep SAE Socket 9/16" | CCW3 | 3/8" 12 Point Combination Wrench |
| CDDS29N | 3/8" Drive 6 Point Deep SAE Socket 5/8" | CCW4 | 7/16" 12 Point Combination Wrench |
| CDDS30N | 3/8" Drive 6 Point Deep SAE Socket 11/16" | CCW5 | 1/2" 12 Point Combination Wrench |
| CDDS31N | 3/8" Drive 6 Point Deep SAE Socket 3/4" | CCW21 | 10mm 12 Point Combination Wrench |
| CDDS39N | 3/8" Drive 6 Point Deep Metric Socket 9mm | CCW23 | 12mm 12 Point Combination Wrench |
| CDDS40N | 3/8" Drive 6 Point Deep Metric Socket 10mm | CCW24 | 13mm 12 Point Combination Wrench |
| CDDS41N | 3/8" Drive 6 Point Deep Metric Socket 11mm | CRW25N | 1/4" Drive Magnetic Bit Holding Screwdriver Handle |
| CDDS42N | 3/8" Drive 6 Point Deep Metric Socket 12mm | - | 12 Pc Short Arm SAE Hex Key Set with Caddie |
| CDDS43N | 3/8" Drive 6 Point Deep Metric Socket 13mm | - | 12 Pc Short Arm Metric Hex Key Set with Caddie |
| CDDS44N | 3/8" Drive 6 Point Deep Metric Socket 14mm | - | 1/4" Drive Bit Adapter |
| CDDS45N | 3/8" Drive 6 Point Deep Metric Socket 15mm | - | 10 Assorted Insert Bits in Holder |
| CDDS46N | 3/8" Drive 6 Point Deep Metric Socket 16mm | - | 7 SAE Nut Setter Bits |
| CDDS47N | 3/8" Drive 6 Point Deep Metric Socket 17mm | - | 5 Metric Nut Setter Bits |
| | | | |

121 Pc. 1/4" and 3/8" Drive 6 and 12 **Point SAE/Metric Mechanics Tool Set**

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical and consumer applications
- Heavy-duty 1/4" and 3/8" drive 60-tooth ratchets feature a compact teardrop shaped head for getting into limited access spaces and long, balanced handles for better leverage and control
- Acetate magnetic bit driver for improved impact, UV, and solvent resistance
- Innovative new hex key caddy makes accessing the size you need quick and easy
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications

| Cat. No. | Included Storage | Product Weight | | |
|----------|---------------------------|-------------------------------|----------|--------|
| CTK121 | Blow Mold Case | 12.050 lb | _ | |
| Cat. No. | Description | | Cat. No. | Descr |
| CRWON | 1/4" Drive 60 Tooth Quick | k Release Teardrop Ratchet 6" | CRW6N | 3/8" 🗅 |





| Description | Cat. No. | Description |
|---|----------|---|
| 1/4" Drive 60 Tooth Quick Release Teardrop Ratchet 6" | CRW6N | 3/8" Drive 60 Tooth Quick Release Teardrop Ratchet 9" |

| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|--|
| CDTA8N | 3/8" Drive Extension 3" | CDS25N | 3/8" Drive 12 Point Standard SAE Socket 3/8" |
| CDSON | 1/4" Drive 6 Point Standard SAE Socket 5/32" | CDS26N | 3/8" Drive 12 Point Standard SAE Socket 7/16" |
| CDS1N | 1/4" Drive 6 Point Standard SAE Socket 3/16" | CDS27N | 3/8" Drive 12 Point Standard SAE Socket 1/2" |
| CDS2N | 1/4" Drive 6 Point Standard SAE Socket 7/32" | CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" |
| CDS3N | 1/4" Drive 6 Point Standard SAE Socket 1/4" | CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" |
| CDS4N | 1/4" Drive 6 Point Standard SAE Socket 9/32" | CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" |
| CDS5N | 1/4" Drive 6 Point Standard SAE Socket 5/16" | - | 3/8" Drive 12 Point Standard Metric Socket 6mm |
| CDS6N | 1/4" Drive 6 Point Standard SAE Socket 11/32" | CDS37N | 3/8" Drive 12 Point Standard Metric Socket 7mm |
| CDS7N | 1/4" Drive 6 Point Standard SAE Socket 3/8" | CDS38N | 3/8" Drive 12 Point Standard Metric Socket 8mm |
| CDS8N | 1/4" Drive 6 Point Standard SAE Socket 7/16" | CDS39N | 3/8" Drive 12 Point Standard Metric Socket 9mm |
| CDS9N | 1/4" Drive 6 Point Standard SAE Socket 1/2" | CDS40N | 3/8" Drive 12 Point Standard Metric Socket 10mm |
| - | 1/4" Drive 6 Point Standard SAE Socket 9/16" | CDS41N | 3/8" Drive 12 Point Standard Metric Socket 11mm |
| CDS11N | 1/4" Drive 6 Point Standard Metric Socket 4mm | CDS42N | 3/8" Drive 12 Point Standard Metric Socket 12mm |
| CDS12N | 1/4" Drive 6 Point Standard Metric Socket 5mm | CDS43N | 3/8" Drive 12 Point Standard Metric Socket 13mm |
| | 1/4" Drive 6 Point Standard Metric Socket 5.5mm | CDS44N | 3/8" Drive 12 Point Standard Metric Socket 14mm |
| CDS13N | 1/4" Drive 6 Point Standard Metric Socket 6mm | CDS45N | 3/8" Drive 12 Point Standard Metric Socket 15mm |
| CDS14N | 1/4" Drive 6 Point Standard Metric Socket 7mm | CDS46N | 3/8" Drive 12 Point Standard Metric Socket 16mm |
| CDS15N | 1/4" Drive 6 Point Standard Metric Socket 8mm | CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17mm |
| CDS16N | 1/4" Drive 6 Point Standard Metric Socket 9mm | CDS48N | 3/8" Drive 12 Point Standard Metric Socket 18mm |
| CDS17N | 1/4" Drive 6 Point Standard Metric Socket 10mm | CDS49N | 3/8" Drive 12 Point Standard Metric Socket 19mm |
| CDS18N | 1/4" Drive 6 Point Standard Metric Socket 11mm | CDDS26N | 3/8" Drive 6 Point Deep SAE Socket 7/16" |
| CDS19N | 1/4" Drive 6 Point Standard Metric Socket 12mm | CDDS27N | 3/8" Drive 6 Point Deep SAE Socket 1/2" |
| CDS20N | 1/4" Drive 6 Point Standard Metric Socket 13mm | CDDS28N | 3/8" Drive 6 Point Deep SAE Socket 9/16" |
| CDDS3N | 1/4" Drive 6 Point Deep SAE Socket 1/4" | CDDS29N | 3/8" Drive 6 Point Deep SAE Socket 5/8" |
| CDDS4N | 1/4" Drive 6 Point Deep SAE Socket 9/32" | CDDS30N | 3/8" Drive 6 Point Deep SAE Socket 11/16" |
| CDDS5N | 1/4" Drive 6 Point Deep SAE Socket 5/16" | CDDS31N | 3/8" Drive 6 Point Deep SAE Socket 3/4" |
| CDDS6N | 1/4" Drive 6 Point Deep SAE Socket 11/32" | CDDS39N | 3/8" Drive 6 Point Deep Metric Socket 9mm |
| CDDS7N | 1/4" Drive 6 Point Deep SAE Socket 3/8" | CDDS40N | 3/8" Drive 6 Point Deep Metric Socket 10mm |
| CDDS8N | 1/4" Drive 6 Point Deep SAE Socket 7/16" | CDDS41N | 3/8" Drive 6 Point Deep Metric Socket 11mm |
| CDDS13N | 1/4" Drive 6 Point Deep Metric Socket 6mm | CDDS42N | 3/8" Drive 6 Point Deep Metric Socket 12mm |
| CDDS14N | 1/4" Drive 6 Point Deep Metric Socket 7mm | CDDS43N | 3/8" Drive 6 Point Deep Metric Socket 13mm |
| CDDS15N | 1/4" Drive 6 Point Deep Metric Socket 8mm | CDDS44N | 3/8" Drive 6 Point Deep Metric Socket 14mm |
| CDDS16N | 1/4" Drive 6 Point Deep Metric Socket 9mm | CRW25N | 1/4" Drive Magnetic Bit Holding Screwdriver Handle |
| CDDS17N | 1/4" Drive 6 Point Deep Metric Socket 10mm | - | 1/4" Drive Bit Adapter |
| CDDS18N | 1/4" Drive 6 Point Deep Metric Socket 11mm | - | 12 Pc Short Arm SAE Hex Key Set with Caddie |
| CDDS19N | 1/4" Drive 6 Point Deep Metric Socket 12mm | - | 12 Pc Short Arm Metric Hex Key Set with Caddie |
| | 1/4" Drive 6 Point Deep Metric Socket 14mm | - | 9 Assorted Insert Bits in Holder |
| | 3/8" Drive 12 Point Standard SAE Socket 3/16" | - | 7 SAE Nut Setter Bits |
| CDS23N | 3/8" Drive 12 Point Standard SAE Socket 1/4" | - | 5 Metric Nut Setter Bits |
| CDS24N | 3/8" Drive 12 Point Standard SAE Socket 5/16" | | |



84 Pc. 1/4" and 3/8" Drive 6 and 12 **Point SAE/Metric Mechanics Tool Set**

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical and consumer applications
- Acetate magnetic bit driver for improved impact, UV, and solvent resistance

Product Weight

- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications

Included Storage





| CTK84CMPN | Blow Mold Case | 6.830 lb | | 6 12 |
|-----------|----------------------|-----------------------------------|----------|--|
| Cat. No. | Description | | Cat. No. | Description |
| CRWON | 1/4" Drive 60 Tooth | Quick Release Teardrop Ratchet 6" | CDDS15N | 1/4" Drive 6 Point Deep Metric Socket 8mm |
| CRW6N | 3/8" Drive 60 Tooth | Quick Release Teardrop Ratchet 9" | CDDS17N | 1/4" Drive 6 Point Deep Metric Socket 10mm |
| CDTA8N | 3/8" Drive Extensio | n 3" | CDDS18N | 1/4" Drive 6 Point Deep Metric Socket 11mm |
| CDTA1N | 3/8" Drive 3/8" F x | 1/4" M Adapter | CDDS19N | 1/4" Drive 6 Point Deep Metric Socket 12mm |
| CDSON | 1/4" Drive 6 Point S | Standard SAE Socket 5/32" | CDS26N | 3/8" Drive 12 Point Standard SAE Socket 7/16" |
| CDS1N | 1/4" Drive 6 Point S | Standard SAE Socket 3/16" | CDS27N | 3/8" Drive 12 Point Standard SAE Socket 1/2" |
| CDS2N | 1/4" Drive 6 Point S | Standard SAE Socket 7/32" | CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" |
| CDS3N | 1/4" Drive 6 Point S | Standard SAE Socket 1/4" | CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" |
| CDS4N | 1/4" Drive 6 Point S | Standard SAE Socket 9/32" | CDS30N | 3/8" Drive 12 Point Standard SAE Socket 11/16" |
| CDS5N | 1/4" Drive 6 Point S | Standard SAE Socket 5/16" | CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" |
| CDS6N | 1/4" Drive 6 Point S | Standard SAE Socket 11/32" | CDS32N | 3/8" Drive 12 Point Standard SAE Socket 13/16" |
| CDS7N | 1/4" Drive 6 Point S | Standard SAE Socket 3/8" | CDS33N | 3/8" Drive 12 Point Standard SAE Socket 7/8" |
| CDS11N | 1/4" Drive 6 Point S | Standard Metric Socket 4mm | CDS42N | 3/8" Drive 12 Point Standard Metric Socket 12mm |
| CDS12N | 1/4" Drive 6 Point S | Standard Metric Socket 5mm | CDS43N | 3/8" Drive 12 Point Standard Metric Socket 13mm |
| CDS13N | 1/4" Drive 6 Point S | Standard Metric Socket 6mm | CDS44N | 3/8" Drive 12 Point Standard Metric Socket 14mm |
| CDS14N | 1/4" Drive 6 Point S | Standard Metric Socket 7mm | CDS45N | 3/8" Drive 12 Point Standard Metric Socket 15mm |
| CDS15N | 1/4" Drive 6 Point S | Standard Metric Socket 8mm | CDS46N | 3/8" Drive 12 Point Standard Metric Socket 16mm |
| CDS16N | 1/4" Drive 6 Point S | Standard Metric Socket 9mm | CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17mm |
| CDS17N | 1/4" Drive 6 Point S | Standard Metric Socket 10mm | CDS48N | 3/8" Drive 12 Point Standard Metric Socket 18mm |
| CDS18N | 1/4" Drive 6 Point S | Standard Metric Socket 11mm | CDS49N | 3/8" Drive 12 Point Standard Metric Socket 19mm |
| CDDS1N | 1/4" Drive 6 Point [| Deep SAE Socket 3/16" | CRW25N | 1/4" Drive Magnetic Bit Holding Screwdriver Handle |
| CDDS3N | 1/4" Drive 6 Point [| Deep SAE Socket 1/4" | - | 15 Assorted Insert Bits in Holder |
| CDDS5N | 1/4" Drive 6 Point D | Deep SAE Socket 5/16" | - | 6 SAE Nut Setter Bits |
| CDDS7N | 1/4" Drive 6 Point [| Deep SAE Socket 3/8" | - | 8 Short Arm SAE Hex Keys with Caddie |
| CDDS8N | 1/4" Drive 6 Point D | Deep SAE Socket 7/16" | - | 8 Short Arm Metric Hex Keys with Caddie |
| CDDS13N | 1/4" Drive 6 Point D | Deep Metric Socket 6mm | | |

70 Pc. 1/4" and 3/8" Drive 6 and 12 **Point SAE/Metric Mechanics Tool Set**

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical and consumer applications
- Incredible access from longer wrenches with narrower heads as well as a new ratchet design with 10% longer beam and smaller teardrop head
- Innovative new hex key caddy makes accessing the size you need quick and easy
- Acetate magnetic bit driver for improved impact, UV, and solvent resistance
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications





| Cat. No. | Included Storage | Product Weight | | | SAE mm |
|----------|------------------------------|----------------------------|----------|--|--------|
| CTK70MPN | Blow Mold Case | 8.500 lb | _ | | 6 12 |
| Cat. No. | Description | | Cat. No. | Description | |
| CRWON | 1/4" Drive 60 Tooth Quick R | elease Teardrop Ratchet 6" | CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" | |
| CRW6N | 3/8" Drive 60 Tooth Quick R | elease Teardrop Ratchet 9" | CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" | |
| CDTA6N | 1/4" Drive Extension 2" | | CDS30N | 3/8" Drive 12 Point Standard SAE Socket 11/16" | |
| CDTA8N | 3/8" Drive Extension 3" | | CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" | |
| CDTA1N | 3/8" Drive 3/8" F x 1/4" M A | Adapter | CDS40N | 3/8" Drive 12 Point Standard Metric Socket 10mm | |
| CDSON | 1/4" Drive 6 Point Standard | SAE Socket 5/32" | CDS41N | 3/8" Drive 12 Point Standard Metric Socket 11mm | |
| CDS1N | 1/4" Drive 6 Point Standard | SAE Socket 3/16" | CDS42N | 3/8" Drive 12 Point Standard Metric Socket 12mm | |
| CDS2N | 1/4" Drive 6 Point Standard | SAE Socket 7/32" | CDS43N | 3/8" Drive 12 Point Standard Metric Socket 13mm | |
| CDS3N | 1/4" Drive 6 Point Standard | SAE Socket 1/4" | CDS44N | 3/8" Drive 12 Point Standard Metric Socket 14mm | |
| CDS4N | 1/4" Drive 6 Point Standard | SAE Socket 9/32" | CDS45N | 3/8" Drive 12 Point Standard Metric Socket 15mm | |
| CDS5N | 1/4" Drive 6 Point Standard | SAE Socket 5/16" | CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17mm | |
| CDS6N | 1/4" Drive 6 Point Standard | SAE Socket 11/32" | CCW3 | 3/8" 12 Point Combination Wrench | |
| CDS7N | 1/4" Drive 6 Point Standard | SAE Socket 3/8" | CCW4 | 7/16" 12 Point Combination Wrench | |
| CDS8N | 1/4" Drive 6 Point Standard | SAE Socket 7/16" | CCW5 | 1/2" 12 Point Combination Wrench | |
| CDS11N | 1/4" Drive 6 Point Standard | Metric Socket 4mm | CCW6 | 9/16" 12 Point Combination Wrench | |
| CDS12N | 1/4" Drive 6 Point Standard | Metric Socket 5mm | CCW7 | 5/8" 12 Point Combination Wrench | |
| CDS13N | 1/4" Drive 6 Point Standard | Metric Socket 6mm | CCW8 | 11/16" 12 Point Combination Wrench | |
| CDS14N | 1/4" Drive 6 Point Standard | Metric Socket 7mm | CCW21 | 10mm 12 Point Combination Wrench | |
| CDS15N | 1/4" Drive 6 Point Standard | Metric Socket 8mm | CCW23 | 12mm 12 Point Combination Wrench | |
| CDS16N | 1/4" Drive 6 Point Standard | Metric Socket 9mm | CCW24 | 13mm 12 Point Combination Wrench | |
| CDS17N | 1/4" Drive 6 Point Standard | Metric Socket 10mm | CCW25 | 14mm 12 Point Combination Wrench | |
| CDS18N | 1/4" Drive 6 Point Standard | Metric Socket 11mm | CCW26 | 15mm 12 Point Combination Wrench | |
| CDS19N | 1/4" Drive 6 Point Standard | Metric Socket 12mm | CCW28 | 17mm 12 Point Combination Wrench | |
| CDS25N | 3/8" Drive 12 Point Standard | d SAE Socket 3/8" | CRW25N | 1/4" Drive Magnetic Bit Holding Screwdriver Handle | |
| CDS26N | 3/8" Drive 12 Point Standard | d SAE Socket 7/16" | - | 12 Assorted Insert Bits in Holder | |
| CDS27N | 3/8" Drive 12 Point Standard | d SAE Socket 1/2" | - | 8 Short Arm SAE Hex Keys with Caddie | |

45 Pc. 1/4" and 3/8" Drive 6 and 12 Point SAE/Metric Mechanics Tool Set

| I OIIIL | DAL/ MCHIC | MCCHailles 100 | |
|--|--|--|--------|
| TeardroQuick roSocketsfastene | op ratchet head for impr elease design allows for s feature off-corner load er rounding | rapid socket removal ing technology to virtually elimir | nate |
| tool life Include | | | 10nger |
| Cat. No. | Included Storage | Product Weight | 0.0 |
| CSWS13N | Blow Mold Case | 5.150 lb | |



| 6 | (12) | |
|---|------|--|

| CSWS13N | Blow Mold Case | 5.150 lb | | | 6 (12) |
|----------|-----------------------------|-----------------------------|----------|---|--------|
| Cat. No. | Description | | Cat. No. | Description | |
| CRW6N | 3/8" Drive 60 Tooth Quick F | Release Teardrop Ratchet 9" | CDS20N | 1/4" Drive 6 Point Standard Metric Socket 13mr | n |
| CRW4N | 1/4" Socket Driver | | CDS24N | 3/8" Drive 12 Point Standard SAE Socket 5/16" | |
| CDTA8N | 3/8" Drive Extension 3" | | CDS25N | 3/8" Drive 12 Point Standard SAE Socket 3/8" | |
| CDTA1N | 3/8" Drive 3/8" F x 1/4" M | Adapter | CDS26N | 3/8" Drive 12 Point Standard SAE Socket 7/16" | |
| CDSON | 1/4" Drive 6 Point Standard | I SAE Socket 5/32" | CDS27N | 3/8" Drive 12 Point Standard SAE Socket 1/2" | |
| CDS1N | 1/4" Drive 6 Point Standard | I SAE Socket 3/16" | CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" | |
| CDS2N | 1/4" Drive 6 Point Standard | I SAE Socket 7/32" | CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" | |
| CDS3N | 1/4" Drive 6 Point Standard | I SAE Socket 1/4" | CDS30N | 3/8" Drive 12 Point Standard SAE Socket 11/16' | , |
| CDS4N | 1/4" Drive 6 Point Standard | I SAE Socket 9/32" | CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" | |
| CDS5N | 1/4" Drive 6 Point Standard | I SAE Socket 5/16" | CDS32N | 3/8" Drive 12 Point Standard SAE Socket 13/16' | , |
| CDS6N | 1/4" Drive 6 Point Standard | I SAE Socket 11/32" | CDS40N | 3/8" Drive 12 Point Standard Metric Socket 10m | ım |
| CDS7N | 1/4" Drive 6 Point Standard | I SAE Socket 3/8" | CDS41N | 3/8" Drive 12 Point Standard Metric Socket 11m | im |
| CDS8N | 1/4" Drive 6 Point Standard | I SAE Socket 7/16" | CDS42N | 3/8" Drive 12 Point Standard Metric Socket 12m | ım |
| CDS9N | 1/4" Drive 6 Point Standard | I SAE Socket 1/2" | CDS43N | 3/8" Drive 12 Point Standard Metric Socket 13m | ım |
| CDS11N | 1/4" Drive 6 Point Standard | I Metric Socket 4mm | CDS44N | 3/8" Drive 12 Point Standard Metric Socket 14m | ım |
| CDS12N | 1/4" Drive 6 Point Standard | I Metric Socket 5mm | CDS45N | 3/8" Drive 12 Point Standard Metric Socket 15m | ım |
| CDS13N | 1/4" Drive 6 Point Standard | I Metric Socket 6mm | CDS46N | 3/8" Drive 12 Point Standard Metric Socket 16m | ım |
| CDS14N | 1/4" Drive 6 Point Standard | I Metric Socket 7mm | CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17m | ım |
| CDS15N | 1/4" Drive 6 Point Standard | I Metric Socket 8mm | CDS48N | 3/8" Drive 12 Point Standard Metric Socket 18m | ım |
| CDS16N | 1/4" Drive 6 Point Standard | I Metric Socket 9mm | CDS49N | 3/8" Drive 12 Point Standard Metric Socket 19m | ım |
| CDS17N | 1/4" Drive 6 Point Standard | Metric Socket 10mm | CSPSON | 3/8" Drive 6 Point 2-1/2" Spark Plug Socket 5/8 | " |
| CDS18N | 1/4" Drive 6 Point Standard | I Metric Socket 11mm | CSPS2N | 3/8" Drive 6 Point 2-1/2" Spark Plug Socket 13/ | 16" |
| CDS19N | 1/4" Drive 6 Point Standard | Metric Socket 12mm | | | |
| | | | | | |

12 Pc. 1/4" and 3/8" Drive Torx® Bit Socket Set

- Manufactured from chrome alloy steel for better strength and longer tool life
- Size markings stamped on base for quick size identification
- Insert bits made of S2 steel for strength and durability
- Nickel chrome plated base for durability
- Meets or exceeds ASME specifications



| Cat. No. | Included Storage | Product Weight | | | |
|----------|-------------------------|----------------|----------|---------------------------------|---|
| CBSS2N | None | 0.890 lb | | | 0 |
| Cat. No. | Description | | Cat. No. | Description | |
| CDTSON | 1/4" Drive Torx® Bit So | ocket T10 | CDTS6N | 3/8" Drive Torx® Bit Socket T40 | |
| CDTS1N | 1/4" Drive Torx® Bit So | ocket T15 | CDTS7N | 3/8" Drive Torx® Bit Socket T45 | |
| CDTS2N | 1/4" Drive Torx® Bit So | ocket T20 | CDTS8N | 3/8" Drive Torx® Bit Socket T47 | |
| CDTS3N | 1/4" Drive Torx® Bit So | ocket T25 | CDTS9N | 3/8" Drive Torx® Bit Socket T50 | |
| CDTS4N | 1/4" Drive Torx® Bit So | ocket T27 | CDTS10N | 3/8" Drive Torx® Bit Socket T55 | |
| CDTS5N | 1/4" Drive Torx® Bit So | ocket T30 | CDTS11N | 3/8" Drive Torx® Bit Socket T60 | |

12 Pc. 1/4" and 3/8" Drive Tamper **Proof Torx**[®] Bit Socket Set

Product Weight

- Manufactured from chrome alloy steel for better strength and longer tool life
- Size markings stamped on base for quick size identification
- Insert bits made of S2 steel for strength and durability
- Nickel chrome plated base for durability
- Meets or exceeds ASME specifications

Included Storage

|--|

| CBSS2TN | None | 0.890 lb | | | ① |
|----------|-----------------|-------------------------------|----------|--|----------|
| Cat. No. | Description | | Cat. No. | Description | |
| - | 1/4" Drive Tamp | er-Proof Torx® Bit Socket T10 | - | 3/8" Drive Tamper-Proof Torx® Bit Socket T40 | |
| - | 1/4" Drive Tamp | er-Proof Torx® Bit Socket T15 | - | 3/8" Drive Tamper-Proof Torx® Bit Socket T45 | |
| - | 1/4" Drive Tamp | er-Proof Torx® Bit Socket T20 | - | 3/8" Drive Tamper-Proof Torx® Bit Socket T47 | |
| - | 1/4" Drive Tamp | er-Proof Torx® Bit Socket T25 | - | 3/8" Drive Tamper-Proof Torx® Bit Socket T50 | |
| - | 1/4" Drive Tamp | er-Proof Torx® Bit Socket T27 | - | 3/8" Drive Tamper-Proof Torx® Bit Socket T55 | |
| - | 1/4" Drive Tamp | er-Proof Torx® Bit Socket T30 | - | 3/8" Drive Tamper-Proof Torx® Bit Socket T60 | |

16 Piece Socket Accessories Set

- Covers 1/4" to 3/4" drive sizes
- Manufactured from chrome alloy steel for better strength and longer tool life

Product Weight

- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes 18" breaker bar
- Includes all the adapters needed for most jobs
- Meets or exceeds ASME specifications

| CTK16ASET | Blow Mold Case 7.800 lb | | |
|-----------|--|----------|------------------------------------|
| Cat. No. | Description | Cat. No. | Description |
| CRW15N | 3/8" Drive Full Polish Flex Handle 10" | CDTA13N | 1/2" Drive Extension 10" |
| CRW16N | 1/2" Drive Full Polish Flex Handle 18" | CDTAON | 1/4" Drive 1/4" F x 3/8" M Adapter |
| - | 1/4" Drive Extension 3" | CDTA1N | 3/8" Drive 3/8" F x 1/4" M Adapter |
| CDTA7N | 1/4" Drive Extension 6" | CDTA2N | 3/8" Drive 3/8" F x 1/2" M Adapter |
| CDTA8N | 3/8" Drive Extension 3" | CDTA3N | 1/2" Drive 1/2" F x 3/8" M Adapter |
| CDTA9N | 3/8" Drive Extension 6" | CDTA4N | 1/2" Drive 1/2" F x 3/4" M Adapter |
| CDTA10N | 3/8" Drive Extension 10" | CDTA16N | 1/4" Drive Universal Joint |
| CDTA12N | 1/2" Drive Extension 5" | CDTA17N | 3/8" Drive Universal Joint |

3 Pc. 1/4" 3/8" & 1/2" Drive Extension Set

- Manufactured from chrome alloy steel for better strength and longer tool life
- Nickel chrome plated for long-lasting protection
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications

| Cat. No. | Included Storage | Product Weight | 1 | 5 | |
|-----------|--------------------------|----------------|---|---|-----|
| CDTA15MDN | None | 1.320 lb | 7 | 7 | (x) |
| Cat. No. | Description | | | | |
| CDTA6N | 1/4" Drive Extension 2" | | | | |
| CDTA9N | 3/8" Drive Extension 6" | | | | |
| CDTA13N | 1/2" Drive Extension 10" | | | | |



- Manufactured from chrome alloy steel for better strength and longer tool life
- Nickel chrome plated for long-lasting protection
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications

| Cat. No. | Included Storage | Product Weight | |
|----------|--------------------------|----------------|--|
| CDTA14N | None | 0.290 lb | |
| Cat. No. | Description | | |
| CDTA1N | 3/8" Drive 3/8" F x 1/4" | M Adapter | |
| CDTA16N | 1/4" Drive Universal Joi | nt | |
| CDTA17N | 3/8" Drive Universal Joi | nt | |

20 Pc. 1/4" Drive 6 Point SAE/Metric **Socket Wrench Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate fastener
- Manufactured from chrome alloy steel for better strength and longer tool life
- Meets or exceeds ASME and ANSI specifications

| Gal. No. | iliciuucu Storaye | Froduct Weight | | | SAE mm |
|----------|---------------------------|-------------------------------|----------|---|--------|
| CSWS1N | None | 1.255 lb | | | 6 |
| Cat. No. | Description | | Cat. No. | Description | |
| CRWON | 1/4" Drive 60 Tooth Quic | k Release Teardrop Ratchet 6" | CDS9N | 1/4" Drive 6 Point Standard SAE Socket 1/2" | |
| CDTA6N | 1/4" Drive Extension 2" | | CDS12N | 1/4" Drive 6 Point Standard Metric Socket 5mm | n |
| CDS1N | 1/4" Drive 6 Point Standa | ard SAE Socket 3/16" | CDS13N | 1/4" Drive 6 Point Standard Metric Socket 6mm | n |
| CDS2N | 1/4" Drive 6 Point Standa | ard SAE Socket 7/32" | CDS14N | 1/4" Drive 6 Point Standard Metric Socket 7mm | n |
| CDS3N | 1/4" Drive 6 Point Standa | ard SAE Socket 1/4" | CDS15N | 1/4" Drive 6 Point Standard Metric Socket 8mm | n |
| CDS4N | 1/4" Drive 6 Point Standa | ard SAE Socket 9/32" | CDS16N | 1/4" Drive 6 Point Standard Metric Socket 9mm | n |
| CDS5N | 1/4" Drive 6 Point Standa | ard SAE Socket 5/16" | CDS17N | 1/4" Drive 6 Point Standard Metric Socket 10m | ım |
| CDS6N | 1/4" Drive 6 Point Standa | ard SAE Socket 11/32" | CDS18N | 1/4" Drive 6 Point Standard Metric Socket 11m | ım |
| CDS7N | 1/4" Drive 6 Point Standa | ard SAE Socket 3/8" | CDS19N | 1/4" Drive 6 Point Standard Metric Socket 12m | ım |
| CDS8N | 1/4" Drive 6 Point Standa | ard SAE Socket 7/16" | CDS20N | 1/4" Drive 6 Point Standard Metric Socket 13m | ım |



21 Pc. 1/4" Drive 6 Point SAE **Mechanics Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight | | |
|----------|---------------------------|----------------------|----------|--------------|
| CSWS2N | Blow Mold Case | 2.000 lb | | |
| Cat. No. | Description | | Cat. No. | Description |
| CRWON | 1/4" Drive Extension 6" | | CDS9N | 1/4" Drive 6 |
| CDTA7N | | | CDDS1N | 1/4" Drive 6 |
| CDSON | | | CDDS2N | 1/4" Drive 6 |
| CDS1N | 1/4" Drive 6 Point Standa | ard SAE Socket 3/16" | CDDS3N | 1/4" Drive 6 |

| outi iioi | 2000.154.011 | Juli 1101 | Dooonpaon |
|-----------|---|------------------|---|
| CRWON | 1/4" Drive 60 Tooth Quick Release Teardrop Ratchet 6" | CDS9N | 1/4" Drive 6 Point Standard SAE Socket 1/2" |
| CDTA7N | 1/4" Drive Extension 6" | CDDS1N | 1/4" Drive 6 Point Deep SAE Socket 3/16" |
| CDSON | 1/4" Drive 6 Point Standard SAE Socket 5/32" | CDDS2N | 1/4" Drive 6 Point Deep SAE Socket 7/32" |
| CDS1N | 1/4" Drive 6 Point Standard SAE Socket 3/16" | CDDS3N | 1/4" Drive 6 Point Deep SAE Socket 1/4" |
| CDS2N | 1/4" Drive 6 Point Standard SAE Socket 7/32" | CDDS4N | 1/4" Drive 6 Point Deep SAE Socket 9/32" |
| CDS3N | 1/4" Drive 6 Point Standard SAE Socket 1/4" | CDDS5N | 1/4" Drive 6 Point Deep SAE Socket 5/16" |
| CDS4N | 1/4" Drive 6 Point Standard SAE Socket 9/32" | CDDS6N | 1/4" Drive 6 Point Deep SAE Socket 11/32" |
| CDS5N | 1/4" Drive 6 Point Standard SAE Socket 5/16" | CDDS7N | 1/4" Drive 6 Point Deep SAE Socket 3/8" |
| CDS6N | 1/4" Drive 6 Point Standard SAE Socket 11/32" | CDDS8N | 1/4" Drive 6 Point Deep SAE Socket 7/16" |
| CDS7N | 1/4" Drive 6 Point Standard SAE Socket 3/8" | CDDS9N | 1/4" Drive 6 Point Deep SAE Socket 1/2" |
| CDS8N | 1/4" Drive 6 Point Standard SAE Socket 7/16" | | |
| | | | |

22 Pc. 1/4" Drive 6 Point Metric **Mechanics Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life

Product Weight

- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

Included Storage

| CSWS3N | Blow Mold Case | 2.140 lb | | | 6 |
|----------|---|-------------------|----------|--|---|
| Cat. No. | Description | | Cat. No. | Description | |
| CRWON | 1/4" Drive 60 Tooth Quick Release Teardrop Ratchet 6" | | CDS20N | 1/4" Drive 6 Point Standard Metric Socket 13mm | l |
| CDTA7N | 1/4" Drive Extension 6" | | CDDS11N | 1/4" Drive 6 Point Deep Metric Socket 4mm | |
| CDS11N | 1/4" Drive 6 Point Standard | Metric Socket 4mm | CDDS12N | 1/4" Drive 6 Point Deep Metric Socket 5mm | |



| Cat. No. | Description | Cat. No. | Description |
|----------|--|----------|--|
| CDS12N | 1/4" Drive 6 Point Standard Metric Socket 5mm | CDDS13N | 1/4" Drive 6 Point Deep Metric Socket 6mm |
| CDS13N | 1/4" Drive 6 Point Standard Metric Socket 6mm | CDDS14N | 1/4" Drive 6 Point Deep Metric Socket 7mm |
| CDS14N | 1/4" Drive 6 Point Standard Metric Socket 7mm | CDDS15N | 1/4" Drive 6 Point Deep Metric Socket 8mm |
| CDS15N | 1/4" Drive 6 Point Standard Metric Socket 8mm | CDDS16N | 1/4" Drive 6 Point Deep Metric Socket 9mm |
| CDS16N | 1/4" Drive 6 Point Standard Metric Socket 9mm | CDDS17N | 1/4" Drive 6 Point Deep Metric Socket 10mm |
| CDS17N | 1/4" Drive 6 Point Standard Metric Socket 10mm | CDDS18N | 1/4" Drive 6 Point Deep Metric Socket 11mm |
| CDS18N | 1/4" Drive 6 Point Standard Metric Socket 11mm | CDDS19N | 1/4" Drive 6 Point Deep Metric Socket 12mm |
| CDS19N | 1/4" Drive 6 Point Standard Metric Socket 12mm | CDDS20N | 1/4" Drive 6 Point Deep Metric Socket 13mm |
| | | | , |

12 Pc. 1/4" Drive 6 Point SAE **Mechanics Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight |
|-------------|------------------|----------------|
| CSWS14SAE12 | Blow Mold Case | 1.555 lb |

| Cat. No. | Description | Cat. No. | Description | |
|----------|---|----------|---|--|
| CRWON | 1/4" Drive 60 Tooth Quick Release Teardrop Ratchet 6" | CDS4N | 1/4" Drive 6 Point Standard SAE Socket 9/32" | |
| - | 1/4" Drive Extension 3" | CDS5N | 1/4" Drive 6 Point Standard SAE Socket 5/16" | |
| CDSON | 1/4" Drive 6 Point Standard SAE Socket 5/32" | CDS6N | 1/4" Drive 6 Point Standard SAE Socket 11/32" | |
| CDS1N | 1/4" Drive 6 Point Standard SAE Socket 3/16" | CDS7N | 1/4" Drive 6 Point Standard SAE Socket 3/8" | |
| CDS2N | 1/4" Drive 6 Point Standard SAE Socket 7/32" | CDS8N | 1/4" Drive 6 Point Standard SAE Socket 7/16" | |
| CDS3N | 1/4" Drive 6 Point Standard SAE Socket 1/4" | CDS9N | 1/4" Drive 6 Point Standard SAE Socket 1/2" | |





$(\mathsf{T}\mathsf{CRESCENT}^\circ$

12 Pc. 1/4" Drive 6 Point Metric **Mechanics Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate fastener
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization

Included Storage Product Weight

Meets or exceeds ASME and ANSI specifications

| CSWS14MM12 | Blow Mold Case 1.575 lb | | |
|------------|---|----------|---------------------------------|
| Cat. No. | Description | Cat. No. | Description |
| CRWON | 1/4" Drive 60 Tooth Quick Release Teardrop Ratchet 6" | CDS16N | 1/4" Drive 6 Point Standard Met |
| - | 1/4" Drive Extension 3" | CDS17N | 1/4" Drive 6 Point Standard Met |
| CDS12N | 1/4" Drive 6 Point Standard Metric Socket 5mm | CDS18N | 1/4" Drive 6 Point Standard Met |
| | | | |



1/4" Drive 6 Point Standard SAE Socket 1/2"



| CRWON | 1/4" Drive 60 Tooth Quick Release Teardrop Ratchet 6" | CDS16N | 1/4" Drive 6 Point Standard Metric Socket 9mm |
|--------|---|--------|--|
| - | 1/4" Drive Extension 3" | CDS17N | 1/4" Drive 6 Point Standard Metric Socket 10mm |
| CDS12N | 1/4" Drive 6 Point Standard Metric Socket 5mm | CDS18N | 1/4" Drive 6 Point Standard Metric Socket 11mm |
| CDS13N | 1/4" Drive 6 Point Standard Metric Socket 6mm | CDS19N | 1/4" Drive 6 Point Standard Metric Socket 12mm |
| CDS14N | 1/4" Drive 6 Point Standard Metric Socket 7mm | CDS20N | 1/4" Drive 6 Point Standard Metric Socket 13mm |
| CDS15N | 1/4" Drive 6 Point Standard Metric Socket 8mm | - | 1/4" Drive 6 Point Standard Metric Socket 14mm |
| | | | |

10 Pc. 1/4" Drive 6 Point Standard **SAE Socket Set**

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding

1/4" Drive 6 Point Standard SAE Socket 9/32"

- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability

CDS4N

Meets or exceeds ASME specifications

| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|---------------------------|----------------------|----------|---|-----|
| CSAS8N | Socket Rail | 0.450 lb | | | 6 |
| Cat. No. | Description | | Cat. No. | Description | |
| CDSON | 1/4" Drive 6 Point Standa | ard SAE Socket 5/32" | CDS5N | 1/4" Drive 6 Point Standard SAE Socket 5/16" | |
| CDS1N | 1/4" Drive 6 Point Standa | ard SAE Socket 3/16" | CDS6N | 1/4" Drive 6 Point Standard SAE Socket 11/32" | |
| CDS2N | 1/4" Drive 6 Point Standa | ard SAE Socket 7/32" | CDS7N | 1/4" Drive 6 Point Standard SAE Socket 3/8" | |
| CDS3N | 1/4" Drive 6 Point Standa | ard SAE Socket 1/4" | CDS8N | 1/4" Drive 6 Point Standard SAE Socket 7/16" | |

CDS9N

10 Pc. 1/4" Drive 6 Point Standard **Metric Socket Set**

- Manufactured from chrome alloy steel for better strength and longer
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| Cat. No. | Included Storage | Product Weight | | | |
|----------|----------------------------|----------------------|----------|--|---|
| CSAS9N | Socket Rail | 0.490 lb | | | 6 |
| Cat. No. | Description | | Cat. No. | Description | |
| CDS11N | 1/4" Drive 6 Point Standar | rd Metric Socket 4mm | CDS16N | 1/4" Drive 6 Point Standard Metric Socket 9mm | |
| CDS12N | 1/4" Drive 6 Point Standar | rd Metric Socket 5mm | CDS17N | 1/4" Drive 6 Point Standard Metric Socket 10mm | |
| CDS13N | 1/4" Drive 6 Point Standar | rd Metric Socket 6mm | CDS18N | 1/4" Drive 6 Point Standard Metric Socket 11mm | |
| CDS14N | 1/4" Drive 6 Point Standar | rd Metric Socket 7mm | CDS19N | 1/4" Drive 6 Point Standard Metric Socket 12mm | |
| CDS15N | 1/4" Drive 6 Point Standar | rd Metric Socket 8mm | CDS20N | 1/4" Drive 6 Point Standard Metric Socket 13mm | |
| | | | | | |

10 Pc. 1/4" Drive 6 Point Deep **SAE Socket Set**

- Manufactured from chrome alloy steel for better strength and longer
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications

| r tool life | | | | -19 |
|-------------|-----|-----|---|-----|
| ıg | | | ш | |
| | 0.0 | | | |
| | | 3/8 | | |
| | | | | |

TTTT

| Cat. No. | Included Storage | Product Weight | |
|----------|------------------|----------------|----|
| CSAS10N | Socket Rail | 0.785 lb | |
| Cat. No. | Description | | Ca |



| Cat. No. | Description | Cat. No. | Description |
|----------|--|----------|---|
| CDDSON | 1/4" Drive 6 Point Deep SAE Socket 5/32" | CDDS5N | 1/4" Drive 6 Point Deep SAE Socket 5/16" |
| CDDS1N | 1/4" Drive 6 Point Deep SAE Socket 3/16" | CDDS6N | 1/4" Drive 6 Point Deep SAE Socket 11/32" |
| CDDS2N | 1/4" Drive 6 Point Deep SAE Socket 7/32" | CDDS7N | 1/4" Drive 6 Point Deep SAE Socket 3/8" |
| CDDS3N | 1/4" Drive 6 Point Deep SAE Socket 1/4" | CDDS8N | 1/4" Drive 6 Point Deep SAE Socket 7/16" |
| CDDS4N | 1/4" Drive 6 Point Deep SAE Socket 9/32" | CDDS9N | 1/4" Drive 6 Point Deep SAE Socket 1/2" |

50 l 51

$(\prod \mathsf{CRESCENT}^\circ)$

10 Pc. 1/4" Drive 6 Point Deep Metric Socket Set

Manufactured from chrome alloy steel for better strength and longer tool life

Product Weight

- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications

Included Storage



| CSAS11N | Socket Rail | 0.810 lb | | | 6 |
|----------|----------------------|------------------------|----------|--|---|
| Cat. No. | Description | | Cat. No. | Description | |
| CDDS11N | 1/4" Drive 6 Point D | Deep Metric Socket 4mm | CDDS16N | 1/4" Drive 6 Point Deep Metric Socket 9mm | |
| CDDS12N | 1/4" Drive 6 Point [| Deep Metric Socket 5mm | CDDS17N | 1/4" Drive 6 Point Deep Metric Socket 10mm | |
| CDDS13N | 1/4" Drive 6 Point D | eep Metric Socket 6mm | CDDS18N | 1/4" Drive 6 Point Deep Metric Socket 11mm | |
| CDDS14N | 1/4" Drive 6 Point D | eep Metric Socket 7mm | CDDS19N | 1/4" Drive 6 Point Deep Metric Socket 12mm | |
| CDDS15N | 1/4" Drive 6 Point D | een Metric Socket 8mm | CDDS20N | 1/4" Drive 6 Point Deep Metric Socket 13mm | |

1/4" Drive Quick Release 60 Tooth **Teardrop Ratchet**

- 60-tooth ratchet turns fasteners with a 6° swing arc
- Extra-long handle for improved access
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Head Width | Head Thickness | Tooth Count | Product Weight |
|----------|----------------|------------|----------------|-------------|----------------|
| CRWON | 6 in | .98 in | .48 in | 60 | 0.370 lb |

1/4" Drive Flex Handle/Breaker Bar 6"

- Flexible head for better access
- Long handle for greater torque
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications



1/4" Drive Quick Release 72 Tooth **Dual Material Ratchet**

- 72-tooth ratchet turns fasteners with a 5° swing arc
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome vanadium alloy steel for better strength and longer tool life
- Dual material comfort grip handle
- Nickel chrome plated for long-lasting protection
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Tooth Count | Product Weight |
|----------|----------------|------------|-------------|----------------|
| CRW1 | 6.69 in | 1.1 in | 72 | 0.44 lb |


1/4" Drive Spinner Handle

- Spinner handle for turning 1/4" Drive sockets is 7" long for access
- Ball detent for secure socket retention
- Acetate handle for improved impact, UV, and solvent resistance
- Manufactured from chrome alloy steel for better strength and longer tool life
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Product Weight |
|----------|----------------|------------|----------------|
| CRW4N | 7 in | 1.05 in | 0.230 lb |

1/4" Drive Extensions

- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications







1/4" Drive Adapters

- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Female Drive Size | Male Drive Size | Product Weight |
|----------|----------------|-------------------|-----------------|----------------|
| CDTAON | 1 in | 1/4" | 3/8" | 0.060 lb |

1/4" Drive Universal Joint

- Universal joint gives improved access to hard to reach fasteners
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications




| Cat. No. | Overall Length | Product Weight |
|----------|----------------|----------------|
| CDTA16N | 1.45 in | 0.070 lb |

1/4" Drive 6 Point Standard Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications








| | | | | | | | | _ |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
| CDSON | SAE | 5/32 in | 0.45 in | 0.28 in | 0.88 in | 0.09 in | 0.22 in | 0.040 lb |
| CDS1N | SAE | 3/16 in | 0.45 in | 0.31 in | 0.88 in | 0.12 in | 0.22 in | 0.040 lb |
| CDS2N | SAE | 7/32 in | 0.45 in | 0.35 in | 0.88 in | 0.12 in | 0.22 in | 0.040 lb |
| CDS3N | SAE | 1/4 in | 0.45 in | 0.39 in | 0.88 in | 0.16 in | 0.22 in | 0.040 lb |
| CDS4N | SAE | 9/32 in | 0.45 in | 0.42 in | 0.88 in | 0.16 in | 0.35 in | 0.040 lb |
| CDS5N | SAE | 5/16 in | 0.46 in | 0.46 in | 0.88 in | 0.21 in | 0.35 in | 0.040 lb |
| CDS6N | SAE | 11/32 in | 0.51 in | 0.51 in | 0.88 in | 0.21 in | 0.35 in | 0.050 lb |
| CDS7N | SAE | 3/8 in | 0.55 in | 0.55 in | 0.88 in | 0.291 in | 0.50 in | 0.050 lb |
| CDS8N | SAE | 7/16 in | 0.62 in | 0.62 in | 0.88 in | 0.496 in | 0.50 in | 0.070 lb |
| | | | | | | | | |

| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDS9N | SAE | 1/2 in | 0.69 in | 0.69 in | 0.88 in | 0.496 in | 0.50 in | 0.080 lb |
| CDS11N | Metric | 4 mm | 0.45 in | 0.28 in | 0.88 in | 0.09 in | 0.18 in | 0.040 lb |
| CDS12N | Metric | 5 mm | 0.45 in | 0.31 in | 0.88 in | 0.12 in | 0.18 in | 0.040 lb |
| CDS13N | Metric | 6 mm | 0.45 in | 0.37 in | 0.88 in | 0.15 in | 0.22 in | 0.040 lb |
| CDS14N | Metric | 7 mm | 0.45 in | 0.42 in | 0.88 in | 0.15 in | 0.22 in | 0.040 lb |
| CDS15N | Metric | 8 mm | 0.47 in | 0.47 in | 0.88 in | 0.20 in | 0.28 in | 0.050 lb |
| CDS16N | Metric | 9 mm | 0.51 in | 0.51 in | 0.88 in | 0.20 in | 0.28 in | 0.050 lb |
| CDS17N | Metric | 10 mm | 0.55 in | 0.55 in | 0.88 in | 0.291 in | 0.50 in | 0.050 lb |
| CDS18N | Metric | 11 mm | 0.62 in | 0.62 in | 0.88 in | 0.496 in | 0.50 in | 0.070 lb |
| CDS19N | Metric | 12 mm | 0.66 in | 0.66 in | 0.88 in | 0.496 in | 0.50 in | 0.080 lb |
| CDS20N | Metric | 13 mm | 0.70 in | 0.70 in | 0.88 in | 0.496 in | 0.50 in | 0.080 lb |

1/4" Drive 6 Point Deep Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications

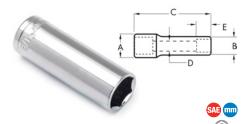

| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDDSON | SAE | 5/32 in | 0.45 in | 0.28 in | 2 in | 0.09 in | 0.22 in | 0.060 lb |
| CDDS1N | SAE | 3/16 in | 0.45 in | 0.30 in | 2 in | 0.12 in | 0.22 in | 0.060 lb |
| CDDS2N | SAE | 7/32 in | 0.45 in | 0.35 in | 2 in | 0.12 in | 0.22 in | 0.060 lb |
| CDDS3N | SAE | 1/4 in | 0.45 in | 0.39 in | 2 in | 0.16 in | 0.22 in | 0.070 lb |
| CDDS4N | SAE | 9/32 in | 0.45 in | 0.42 in | 2 in | 0.16 in | 0.22 in | 0.070 lb |
| CDDS5N | SAE | 5/16 in | 0.45 in | 0.45 in | 2 in | 0.21 in | 0.80 in | 0.070 lb |
| CDDS6N | SAE | 11/32 in | 0.51 in | 0.51 in | 2 in | 0.21 in | 0.80 in | 0.080 lb |
| CDDS7N | SAE | 3/8 in | 0.57 in | 0.57 in | 2 in | 0.826 in | 0.80 in | 0.100 lb |
| CDDS8N | SAE | 7/16 in | 0.62 in | 0.62 in | 2 in | 0.826 in | 0.80 in | 0.110 lb |
| CDDS9N | SAE | 1/2 in | 0.68 in | 0.68 in | 2 in | 0.826 in | 0.80 in | 0.130 lb |
| CDDS11N | Metric | 4 mm | 0.45 in | 0.28 in | 2 in | 0.09 in | 0.20 in | 0.060 lb |
| CDDS12N | Metric | 5 mm | 0.45 in | 0.32 in | 2 in | 0.12 in | 0.20 in | 0.060 lb |
| CDDS13N | Metric | 6 mm | 0.45 in | 0.36 in | 2 in | 0.15 in | 0.20 in | 0.070 lb |
| CDDS14N | Metric | 7 mm | 0.45 in | 0.42 in | 2 in | 0.15 in | 0.20 in | 0.070 lb |
| CDDS15N | Metric | 8 mm | 0.45 in | 0.45 in | 2 in | 0.20 in | 0.70 in | 0.070 lb |
| CDDS16N | Metric | 9 mm | 0.51 in | 0.51 in | 2 in | 0.20 in | 0.70 in | 0.080 lb |
| CDDS17N | Metric | 10 mm | 0.58 in | 0.58 in | 2 in | 0.20 in | 0.70 in | 0.100 lb |
| CDDS18N | Metric | 11 mm | 0.62 in | 0.62 in | 2 in | 0.20 in | 0.70 in | 0.110 lb |

Continued on next page

1/4" Drive 6 Point Deep Sockets Continued from previous page

| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDDS19N | Metric | 12 mm | 0.66 in | 0.66 in | 2 in | 0.20 in | 0.70 in | 0.120 lb |
| CDDS20N | Metric | 13 mm | 0.70 in | 0.70 in | 2 in | 0.20 in | 0.70 in | 0.130 lb |

1/4" Drive Torx® Bit Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Size markings stamped on base for quick size identification
- Insert bits made of S2 steel for strength and durability
- Nickel chrome plated base for durability
- Meets or exceeds ASME specifications



| Cat. No. | Fastener Size | Dim. A: Drive End | Dim. B: Nose Diameter | Dim. C: Overall Length | Dim. D: Bit Length | Dim. E: Wrench Depth | Product Weight |
|----------|------------------|----------------------|--------------------------|---------------------------|-----------------------|-------------------------|-------------------|
| CDTSON | T10 | .46 in | .25 in | 1.58 in | 1.1 in | .36 in | 0.050 lb |
| CDTS1N | T15 | .46 in | .25 in | 1.58 in | 1.1 in | .36 in | 0.050 lb |
| CDTS2N | T20 | .46 in | .25 in | 1.58 in | 1.1 in | .36 in | 0.050 lb |
| CDTS3N | T25 | .46 in | .25 in | 1.58 in | 1.1 in | .36 in | 0.050 lb |
| CDTS4N | T27 | .46 in | .25 in | 1.58 in | 1.1 in | .36 in | 0.050 lb |
| CDTS5N | T30 | .46 in | .25 in | 1.58 in | 1.1 in | .36 in | 0.050 lb |

1/4" Drive Socket Rail

- Perfect to store, organize, and easily find all your sockets
- Drilled at end for easy attachment to wall, workbench, or drawer
- Blue color for easy identification
- Includes 14 socket clips




| Cat. No. | Drive Size | Color | Overall Length | Number of Clips | Product Weight |
|----------|------------|-------|----------------|-----------------|----------------|
| CSR0 | 1/4 in | Blue | 17.5 in | 14 | 0.40 lb |

20 Pc. X10 3/8" Drive 6 Point **SAE/Metric Mechanics Tool Set**

- 84-tooth gear offers a 4.3° swing arc for easy access
- Teardrop ratchet head for improved access
- Enclosed ratchet head design for improved reliability in the harshest environments
- Sockets feature off-corner loading technology to virtually eliminate
- High contrast colored rings on sockets allow you to quickly differentiate and identify sizes
- Knurled surfaces on the ratchet and sockets give you better grip and control in
- Manufactured from alloy steel for better strength and longer tool life
- Black manganese phosphate finish for extreme corrosion resistance and smooth-ground surfaces to reduce friction

| Meets of | r exceeds ASME and ANSI | specifications | | | |
|----------|----------------------------|----------------|----------|---|----|
| Cat. No. | Included Storage | Product Weight | | | SA |
| CSWS38B | None | 2.595 lb | _ | | (|
| Cat. No. | Description | | Cat. No. | Description | |
| - | 3/8" Drive 84 Tooth Ratche | et | - | 3/8" Drive 6 Point Standard SAE Socket 13/16" | |
| - | 3/8" Drive Extension 3" | | - | 3/8" Drive 6 Point Standard Metric Socket 9mm | |
| | | | | | |

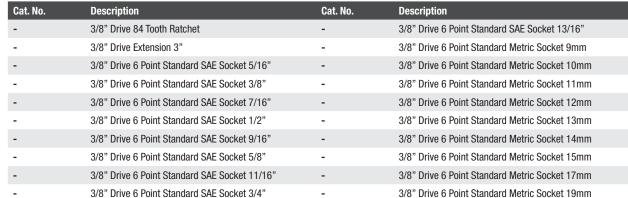



CRESCENT®

20 Pc. 3/8" Drive X6™ SAE/Metric Pass-Thru™ Mechanics Tool Set

- Pass-Thru[™] system works over any length threaded rod, where normal ratchets and sockets won't fit
- Pass-Thru™ socket and ratchet system eliminates the need for deep sockets
 Fits six fastener types: Hex, Square, 12 pt., E-Torx®, Rounded Hex, and Spline
- Up to 50% thinner than standard ratchets to give you greater access
- Ratchet has just a 5° swing arc, so it can turn fasteners in very tight spaces
- Up to 40% stronger than standard ratchets
- Included adapter allows X6 box end to work with standard square 3/8-drive sockets
- Includes tray for storage and organization
- Meets or exceeds ANSI and ASME specifications
- Some square nuts & bolts may not engage with sockets

| Cat. No. | Included Storage | Product Weight | | 6 | SAE mm |
|----------|--------------------------------------|-------------------------|----------|---|--------|
| CX6PT20 | Tray | 2.86 lb | | | (\$) |
| Cat. No. | Description | | Cat. No. | Description | |
| - | 3/8" Drive X6 Pass-Thru | [™] Ratchet | - | 3/8" Drive Pass-Thru™ Spline SAE Socket 7/8" | |
| - | 3/8" Drive Pass-Thru™ Ad | dapter | - | 3/8" Drive Pass-Thru™ Spline Metric Socket 10mm | |
| - | 3/8" Drive Pass-Thru™ S _l | oline SAE Socket 3/8" | - | 3/8" Drive Pass-Thru™ Spline Metric Socket 11mm | |
| - | 3/8" Drive Pass-Thru™ S _l | oline SAE Socket 7/16" | - | 3/8" Drive Pass-Thru™ Spline Metric Socket 12mm | |
| - | 3/8" Drive Pass-Thru™ S _l | oline SAE Socket 1/2" | - | 3/8" Drive Pass-Thru™ Spline Metric Socket 13mm | |
| - | 3/8" Drive Pass-Thru™ S _l | oline SAE Socket 9/16" | - | 3/8" Drive Pass-Thru™ Spline Metric Socket 14mm | |
| - | 3/8" Drive Pass-Thru™ S _l | oline SAE Socket 5/8" | - | 3/8" Drive Pass-Thru™ Spline Metric Socket 15mm | |
| - | 3/8" Drive Pass-Thru™ S _l | oline SAE Socket 11/16" | - | 3/8" Drive Pass-Thru™ Spline Metric Socket 17mm | |
| - | 3/8" Drive Pass-Thru™ S _l | oline SAE Socket 3/4" | - | 3/8" Drive Pass-Thru™ Spline Metric Socket 18mm | |

52 Pc. 3/8" Drive 6 and 12 Point SAE/Metric Mechanics Tool Set

3/8" Drive Pass-Thru™ Spline SAE Socket 13/16"

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

| CSWS10N | Blow Mold Case 10.990 lb | | | 6 |
|----------|---|-----------------|--|-----|
| Cat. No. | Description | Cat. No. | Description | |
| CRW6N | 3/8" Drive 60 Tooth Quick Release Teardrop Ra | tchet 9" CDS49N | 3/8" Drive 12 Point Standard Metric Socket 1 | 9mm |
| CDTA8N | 3/8" Drive Extension 3" | CDDS23N | 3/8" Drive 6 Point Deep SAE Socket 1/4" | |



3/8" Drive Pass-Thru™ Spline Metric Socket 19mm

000000 00000

| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|--|
| CDTA9N | 3/8" Drive Extension 6" | CDDS24N | 3/8" Drive 6 Point Deep SAE Socket 5/16" |
| CDTA17N | 3/8" Drive Universal Joint | CDDS25N | 3/8" Drive 6 Point Deep SAE Socket 3/8" |
| CDS23N | 3/8" Drive 12 Point Standard SAE Socket 1/4" | CDDS26N | 3/8" Drive 6 Point Deep SAE Socket 7/16" |
| CDS24N | 3/8" Drive 12 Point Standard SAE Socket 5/16" | CDDS27N | 3/8" Drive 6 Point Deep SAE Socket 1/2" |
| CDS25N | 3/8" Drive 12 Point Standard SAE Socket 3/8" | CDDS28N | 3/8" Drive 6 Point Deep SAE Socket 9/16" |
| CDS26N | 3/8" Drive 12 Point Standard SAE Socket 7/16" | CDDS29N | 3/8" Drive 6 Point Deep SAE Socket 5/8" |
| CDS27N | 3/8" Drive 12 Point Standard SAE Socket 1/2" | CDDS30N | 3/8" Drive 6 Point Deep SAE Socket 11/16" |
| CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" | CDDS31N | 3/8" Drive 6 Point Deep SAE Socket 3/4" |
| CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" | CDDS32N | 3/8" Drive 6 Point Deep SAE Socket 13/16" |
| CDS30N | 3/8" Drive 12 Point Standard SAE Socket 11/16" | CDDS33N | 3/8" Drive 6 Point Deep SAE Socket 7/8" |
| CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" | - | 3/8" Drive 6 Point Deep Metric Socket 7mm |
| CDS32N | 3/8" Drive 12 Point Standard SAE Socket 13/16" | CDDS38N | 3/8" Drive 6 Point Deep Metric Socket 8mm |
| CDS33N | 3/8" Drive 12 Point Standard SAE Socket 7/8" | CDDS39N | 3/8" Drive 6 Point Deep Metric Socket 9mm |
| CDS38N | 3/8" Drive 12 Point Standard Metric Socket 8mm | CDDS40N | 3/8" Drive 6 Point Deep Metric Socket 10mm |
| CDS39N | 3/8" Drive 12 Point Standard Metric Socket 9mm | CDDS41N | 3/8" Drive 6 Point Deep Metric Socket 11mm |
| CDS40N | 3/8" Drive 12 Point Standard Metric Socket 10mm | CDDS42N | 3/8" Drive 6 Point Deep Metric Socket 12mm |
| CDS41N | 3/8" Drive 12 Point Standard Metric Socket 11mm | CDDS43N | 3/8" Drive 6 Point Deep Metric Socket 13mm |
| CDS42N | 3/8" Drive 12 Point Standard Metric Socket 12mm | CDDS44N | 3/8" Drive 6 Point Deep Metric Socket 14mm |
| CDS43N | 3/8" Drive 12 Point Standard Metric Socket 13mm | CDDS45N | 3/8" Drive 6 Point Deep Metric Socket 15mm |
| CDS44N | 3/8" Drive 12 Point Standard Metric Socket 14mm | CDDS46N | 3/8" Drive 6 Point Deep Metric Socket 16mm |
| CDS45N | 3/8" Drive 12 Point Standard Metric Socket 15mm | CDDS47N | 3/8" Drive 6 Point Deep Metric Socket 17mm |
| CDS46N | 3/8" Drive 12 Point Standard Metric Socket 16mm | CDDS48N | 3/8" Drive 6 Point Deep Metric Socket 18mm |
| CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17mm | CDDS49N | 3/8" Drive 6 Point Deep Metric Socket 19mm |
| CDS48N | 3/8" Drive 12 Point Standard Metric Socket 18mm | CSPSON | 3/8" Drive 6 Point 2-1/2" Spark Plug Socket 5/8" |

25 Pc. 3/8" Drive 6 and 12 Point SAE Mechanics Tool Set

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight | | SA |
|----------|---------------------------|-----------------------------|----------|--|
| CSWS8N | Blow Mold Case | 6.310 lb | | 6 |
| Cat. No. | Description | | Cat. No. | Description |
| CRW6N | 3/8" Drive 60 Tooth Quick | Release Teardrop Ratchet 9" | CDS33N | 3/8" Drive 12 Point Standard SAE Socket 7/8" |
| CDTA8N | 3/8" Drive Extension 3" | | CDDS23N | 3/8" Drive 6 Point Deep SAE Socket 1/4" |

Continued on next page

25 Pc. 3/8" Drive 6 and 12 Point SAE Mechanics Tool Set

Continued from previous page

| Cat. No. | Description | Cat. No. | Description |
|----------|--|----------|---|
| CDTA9N | 3/8" Drive Extension 6" | CDDS24N | 3/8" Drive 6 Point Deep SAE Socket 5/16" |
| CDS23N | 3/8" Drive 12 Point Standard SAE Socket 1/4" | CDDS25N | 3/8" Drive 6 Point Deep SAE Socket 3/8" |
| CDS24N | 3/8" Drive 12 Point Standard SAE Socket 5/16" | CDDS26N | 3/8" Drive 6 Point Deep SAE Socket 7/16" |
| CDS25N | 3/8" Drive 12 Point Standard SAE Socket 3/8" | CDDS27N | 3/8" Drive 6 Point Deep SAE Socket 1/2" |
| CDS26N | 3/8" Drive 12 Point Standard SAE Socket 7/16" | CDDS28N | 3/8" Drive 6 Point Deep SAE Socket 9/16" |
| CDS27N | 3/8" Drive 12 Point Standard SAE Socket 1/2" | CDDS29N | 3/8" Drive 6 Point Deep SAE Socket 5/8" |
| CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" | CDDS30N | 3/8" Drive 6 Point Deep SAE Socket 11/16" |
| CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" | CDDS31N | 3/8" Drive 6 Point Deep SAE Socket 3/4" |
| CDS30N | 3/8" Drive 12 Point Standard SAE Socket 11/16" | CDDS32N | 3/8" Drive 6 Point Deep SAE Socket 13/16" |
| CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" | CDDS33N | 3/8" Drive 6 Point Deep SAE Socket 7/8" |
| CDS32N | 3/8" Drive 12 Point Standard SAE Socket 13/16" | | |

27 Pc. 3/8" Drive 6 and 12 Point **Metric Mechanics Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate

3/8" Drive 12 Point Standard Metric Socket 18mm

- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight | | |
|----------|-------------------------|--------------------------------|----------|---|
| CSWS9N | Blow Mold Case | 6.030 lb | | 6 12 |
| Cat. No. | Description | | Cat. No. | Description |
| CRW6N | 3/8" Drive 60 Tooth Qui | ck Release Teardrop Ratchet 9" | CDS49N | 3/8" Drive 12 Point Standard Metric Socket 19mm |
| CDTA8N | 3/8" Drive Extension 3" | | CDDS38N | 3/8" Drive 6 Point Deep Metric Socket 8mm |
| CDTA9N | 3/8" Drive Extension 6" | | CDDS39N | 3/8" Drive 6 Point Deep Metric Socket 9mm |
| CDS38N | 3/8" Drive 12 Point Sta | ndard Metric Socket 8mm | CDDS40N | 3/8" Drive 6 Point Deep Metric Socket 10mm |
| CDS39N | 3/8" Drive 12 Point Sta | ndard Metric Socket 9mm | CDDS41N | 3/8" Drive 6 Point Deep Metric Socket 11mm |
| CDS40N | 3/8" Drive 12 Point Sta | ndard Metric Socket 10mm | CDDS42N | 3/8" Drive 6 Point Deep Metric Socket 12mm |
| CDS41N | 3/8" Drive 12 Point Sta | ndard Metric Socket 11mm | CDDS43N | 3/8" Drive 6 Point Deep Metric Socket 13mm |
| CDS42N | 3/8" Drive 12 Point Sta | ndard Metric Socket 12mm | CDDS44N | 3/8" Drive 6 Point Deep Metric Socket 14mm |
| CDS43N | 3/8" Drive 12 Point Sta | ndard Metric Socket 13mm | CDDS45N | 3/8" Drive 6 Point Deep Metric Socket 15mm |
| CDS44N | 3/8" Drive 12 Point Sta | ndard Metric Socket 14mm | CDDS46N | 3/8" Drive 6 Point Deep Metric Socket 16mm |
| CDS45N | 3/8" Drive 12 Point Sta | ndard Metric Socket 15mm | CDDS47N | 3/8" Drive 6 Point Deep Metric Socket 17mm |
| CDS46N | 3/8" Drive 12 Point Sta | ndard Metric Socket 16mm | CDDS48N | 3/8" Drive 6 Point Deep Metric Socket 18mm |
| CDS47N | 3/8" Drive 12 Point Sta | ndard Metric Socket 17mm | CDDS49N | 3/8" Drive 6 Point Deep Metric Socket 19mm |
| | | | | |

128 Pc. 3/8" Drive 12 Point SAE/ **Metric Standard Mechanics Tool Set** Contains a carefully selected assortment of hand tools needed for most

- industrial, mechanical and consumer applications
- Incredible access from long wrenches with narrow heads, adjustable wrenches and pliers, and a long-beam ratchets with small teardrop heads
- Upgraded set includes Torx® bit sockets and Tamper-Proof Torx® driver bits
- Innovative new hex key caddy makes accessing the size you need quick and easy
- Acetate screwdrivers and magnetic bit driver for improved impact, UV, and
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications



| Cat. No. | Included Storage | Product Weight | | | SAE mm |
|------------|------------------------------|----------------------------|----------|--|--------|
| CTK128MP2N | Blow Mold Case | 13.500 lb | | | (12) |
| Cat. No. | Description | | Cat. No. | Description | |
| CRW6N | 3/8" Drive 60 Tooth Quick R | elease Teardrop Ratchet 9" | CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17mm | |
| CDTA8N | 3/8" Drive Extension 3" | | CDS48N | 3/8" Drive 12 Point Standard Metric Socket 18mm | |
| CDTA9N | 3/8" Drive Extension 6" | | CDS49N | 3/8" Drive 12 Point Standard Metric Socket 19mm | |
| - | 1/4" Hex to 1/4" Square Driv | ve Adapter | CSPSON | 3/8" Drive 6 Point 2-1/2" Spark Plug Socket 5/8" | |
| - | 3/8" Drive 12 Point Standard | d SAE Socket 3/16" | CSPS2N | 3/8" Drive 6 Point 2-1/2" Spark Plug Socket 13/16 | " |
| CDS23N | 3/8" Drive 12 Point Standard | d SAE Socket 1/4" | CCW0 | 1/4" 12 Point Combination Wrench | |
| CDS24N | 3/8" Drive 12 Point Standard | d SAE Socket 5/16" | CCW1 | 5/16" 12 Point Combination Wrench | |
| CDS25N | 3/8" Drive 12 Point Standard | d SAE Socket 3/8" | CCW3 | 3/8" 12 Point Combination Wrench | |
| CDS26N | 3/8" Drive 12 Point Standard | d SAE Socket 7/16" | CCW4 | 7/16" 12 Point Combination Wrench | |
| CDS27N | 3/8" Drive 12 Point Standard | d SAE Socket 1/2" | CCW5 | 1/2" 12 Point Combination Wrench | |
| CDS28N | 3/8" Drive 12 Point Standard | d SAE Socket 9/16" | CCW6 | 9/16" 12 Point Combination Wrench | |
| CDS29N | 3/8" Drive 12 Point Standard | d SAE Socket 5/8" | CCW7 | 5/8" 12 Point Combination Wrench | |
| CDS30N | 3/8" Drive 12 Point Standard | d SAE Socket 11/16" | - | 6mm 12 Point Combination Wrench | |
| CDS31N | 3/8" Drive 12 Point Standard | d SAE Socket 3/4" | CCW19 | 8mm 12 Point Combination Wrench | |
| CDS32N | 3/8" Drive 12 Point Standard | d SAE Socket 13/16" | CCW21 | 10mm 12 Point Combination Wrench | |
| - | 3/8" Drive 12 Point Standard | d Metric Socket 6mm | CCW23 | 12mm 12 Point Combination Wrench | |
| CDS37N | 3/8" Drive 12 Point Standard | d Metric Socket 7mm | CCW24 | 13mm 12 Point Combination Wrench | |
| CDS38N | 3/8" Drive 12 Point Standard | d Metric Socket 8mm | CCW25 | 14mm 12 Point Combination Wrench | |
| CDS39N | 3/8" Drive 12 Point Standard | d Metric Socket 9mm | CCW26 | 15mm 12 Point Combination Wrench | |
| CDS40N | 3/8" Drive 12 Point Standard | d Metric Socket 10mm | CRW25N | 1/4" Drive Magnetic Bit Holding Screwdriver Handle | е |
| CDS41N | 3/8" Drive 12 Point Standard | d Metric Socket 11mm | - | 43 Assorted Insert Bits in Holder | |
| CDS42N | 3/8" Drive 12 Point Standard | d Metric Socket 12mm | - | 8 SAE Nut Setter Bits | |
| CDS43N | 3/8" Drive 12 Point Standard | d Metric Socket 13mm | - | 8 Metric Nut Setter Bits | |
| CDS44N | 3/8" Drive 12 Point Standard | d Metric Socket 14mm | - | 12 Pc Short Arm SAE Hex Key Set with Caddie | |
| CDS45N | 3/8" Drive 12 Point Standard | Metric Socket 15mm | - | 12 Pc Short Arm Metric Hex Key Set with Caddie | |
| | | | | | |

CDS48N

30 Pc. 3/8" Drive 12 Point SAE/Metric **Standard and Deep Mechanics Tool Set**

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical and consumer applications
- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Ratchets have a large, quick-release button for easy operation
- Sockets feature off-corner loading technology to virtually eliminate fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications

| CTK30SETN | Blow Mold Case 6.470 lb | ı | 12 |
|-----------|---|----------|--|
| Cat. No. | Description | Cat. No. | Description |
| CRW6N | 3/8" Drive 60 Tooth Quick Release Teardrop Ratchet 9" | CDS44N | 3/8" Drive 12 Point Standard Metric Socket 14mm |
| CDTA8N | 3/8" Drive Extension 3" | CDS45N | 3/8" Drive 12 Point Standard Metric Socket 15mm |
| CDTA9N | 3/8" Drive Extension 6" | CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17mm |
| CDS24N | 3/8" Drive 12 Point Standard SAE Socket 5/16" | CDS49N | 3/8" Drive 12 Point Standard Metric Socket 19mm |
| CDS25N | 3/8" Drive 12 Point Standard SAE Socket 3/8" | CDDS26N | 3/8" Drive 6 Point Deep SAE Socket 7/16" |
| CDS26N | 3/8" Drive 12 Point Standard SAE Socket 7/16" | CDDS27N | 3/8" Drive 6 Point Deep SAE Socket 1/2" |
| CDS27N | 3/8" Drive 12 Point Standard SAE Socket 1/2" | CDDS28N | 3/8" Drive 6 Point Deep SAE Socket 9/16" |
| CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" | CDDS29N | 3/8" Drive 6 Point Deep SAE Socket 5/8" |
| CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" | CDDS30N | 3/8" Drive 6 Point Deep SAE Socket 11/16" |
| CDS30N | 3/8" Drive 12 Point Standard SAE Socket 11/16" | CDDS42N | 3/8" Drive 6 Point Deep Metric Socket 12mm |
| CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" | CDDS43N | 3/8" Drive 6 Point Deep Metric Socket 13mm |
| CDS39N | 3/8" Drive 12 Point Standard Metric Socket 9mm | CDDS44N | 3/8" Drive 6 Point Deep Metric Socket 14mm |
| CDS40N | 3/8" Drive 12 Point Standard Metric Socket 10mm | CDDS46N | 3/8" Drive 6 Point Deep Metric Socket 16mm |
| CDS42N | 3/8" Drive 12 Point Standard Metric Socket 12mm | CDDS47N | 3/8" Drive 6 Point Deep Metric Socket 17mm |
| CDS43N | 3/8" Drive 12 Point Standard Metric Socket 13mm | CSPS2N | 3/8" Drive 6 Point 2-1/2" Spark Plug Socket 13/16" |


Included Storage Product Weight

| SAE mm | |
|--------|--|
| (12) | |

20 Pc. 3/8" Drive 12 Point SAE/Metric Mechanics Tool Set

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|-------------------------|--------------------------------|----------|--|-----|
| CSWS7N | None | 2.730 lb | | | E |
| Cat. No. | Description | | Cat. No. | Description | |
| CRW6N | 3/8" Drive 60 Tooth Qui | ck Release Teardrop Ratchet 9" | CDS32N | 3/8" Drive 12 Point Standard SAE Socket 13/16" | |

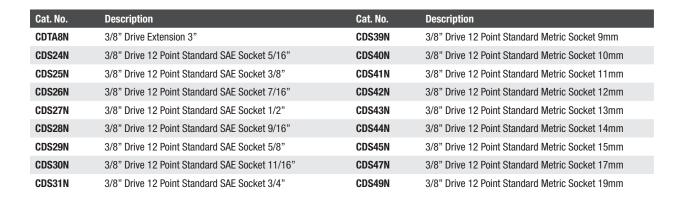

10 Pc. 3/8" Drive 6 Point SAE **Mechanics Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight |
|-------------|------------------|----------------|
| CSWS38SAE10 | Blow Mold Case | 3.085 lb |



| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|---|
| CRW6N | 3/8" Drive 60 Tooth Quick Release Teardrop Ratchet 9" | - | 3/8" Drive 6 Point Standard SAE Socket 5/8" |
| - | 3/8" Drive 6 Point Standard SAE Socket 3/8" | - | 3/8" Drive 6 Point Standard SAE Socket 11/16" |
| - | 3/8" Drive 6 Point Standard SAE Socket 7/16" | - | 3/8" Drive 6 Point Standard SAE Socket 3/4" |
| - | 3/8" Drive 6 Point Standard SAE Socket 1/2" | - | 3/8" Drive 6 Point Standard SAE Socket 13/16" |
| - | 3/8" Drive 6 Point Standard SAE Socket 9/16" | - | 3/8" Drive 6 Point Standard SAE Socket 7/8" |



Cat. No.

CDS40N

CDS41N

CDS42N

CDS43N

(TCRESCENT®

10 Pc. 3/8" Drive 6 Point Metric **Mechanics Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization

| ■ Meets or e | Meets or exceeds ASME and ANSI specifications | | | | |
|--------------|---|----------------|--|--|--|
| Cat. No. | Included Storage | Product Weight | | | |
| CSWS38MM10 | Blow Mold Case | 0.820 lb | | | |

3/8" Drive 60 Tooth Quick Release Teardrop Ratchet 9"

3/8" Drive 12 Point Standard Metric Socket 10mm

3/8" Drive 12 Point Standard Metric Socket 11mm

3/8" Drive 12 Point Standard Metric Socket 12mm

3/8" Drive 12 Point Standard Metric Socket 13mm



3/8" Drive 12 Point Standard Metric Socket 18mm

| | 6 |
|---|---|
| Description | |
| 3/8" Drive 12 Point Standard Metric Socket 14mm | |
| 3/8" Drive 12 Point Standard Metric Socket 15mm | |
| 3/8" Drive 12 Point Standard Metric Socket 16mm | |
| 3/8" Drive 12 Point Standard Metric Socket 17mm | |

11 Pc. 3/8" Drive 12 Point SAE **Mechanics Tool Set**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Sockets feature off-corner loading technology to virtually eliminate
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|-------------------------|---------------------------------|----------|--|-----|
| CSWS6N | Blow Mold Case | 2.650 lb | | | 12 |
| Cat. No. | Description | | Cat. No. | Description | |
| CRW6N | 3/8" Drive 60 Tooth Qu | ick Release Teardrop Ratchet 9" | CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" | |
| CDTA9N | 3/8" Drive Extension 6 | , | CDS30N | 3/8" Drive 12 Point Standard SAE Socket 11/16" | |
| CDS25N | 3/8" Drive 12 Point Sta | ndard SAE Socket 3/8" | CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" | |
| CDS26N | 3/8" Drive 12 Point Sta | ndard SAE Socket 7/16" | CDS32N | 3/8" Drive 12 Point Standard SAE Socket 13/16" | |
| CDS27N | 3/8" Drive 12 Point Sta | ndard SAE Socket 1/2" | CDS33N | 3/8" Drive 12 Point Standard SAE Socket 7/8" | |
| CDS28N | 3/8" Drive 12 Point Sta | ndard SAE Socket 9/16" | | | |

Cat. No.

CDS44N

CDS45N

CDS46N

CDS47N

CDS48N



9 Pc. 3/8" Drive 12 Point Standard **SAE Socket Set**

- Manufactured from chrome alloy steel for better strength and longer
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications

| The same of the sa | |
|--|--|
| 11/16 | |

| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|--------------------------|------------------------|----------|--|-----|
| CSAS4N | Socket Rail | 0.830 lb | | | 12 |
| Cat. No. | Description | | Cat. No. | Description | |
| CDS23N | 3/8" Drive 12 Point Star | ndard SAE Socket 1/4" | CDS28N | 3/8" Drive 12 Point Standard SAE Socket 9/16" | |
| CDS24N | 3/8" Drive 12 Point Star | ndard SAE Socket 5/16" | CDS29N | 3/8" Drive 12 Point Standard SAE Socket 5/8" | |
| CDS25N | 3/8" Drive 12 Point Star | ndard SAE Socket 3/8" | CDS30N | 3/8" Drive 12 Point Standard SAE Socket 11/16" | |
| CDS26N | 3/8" Drive 12 Point Star | ndard SAE Socket 7/16" | CDS31N | 3/8" Drive 12 Point Standard SAE Socket 3/4" | |
| CDS27N | 3/8" Drive 12 Point Star | ndard SAE Socket 1/2" | | | |
| | | | | | |

9 Pc. 3/8" Drive 12 Point Standard **Metric Socket Set**

- Manufactured from chrome alloy steel for better strength and longer
- Off-corner loading technology to virtually eliminate fastener rounding

Product Weight

- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability


Cat. No.

Meets or exceeds ASME specifications

Included Storage



| CSAS5N | Socket Rail | 0.840 lb | | | 12 |
|----------|-----------------------|----------------------------|----------|---|----|
| Cat. No. | Description | | Cat. No. | Description | |
| CDS39N | 3/8" Drive 12 Point S | tandard Metric Socket 9mm | CDS44N | 3/8" Drive 12 Point Standard Metric Socket 14mm | |
| CDS40N | 3/8" Drive 12 Point S | tandard Metric Socket 10mm | CDS45N | 3/8" Drive 12 Point Standard Metric Socket 15mm | |
| CDS41N | 3/8" Drive 12 Point S | tandard Metric Socket 11mm | CDS47N | 3/8" Drive 12 Point Standard Metric Socket 17mm | |
| CDS42N | 3/8" Drive 12 Point S | tandard Metric Socket 12mm | CDS49N | 3/8" Drive 12 Point Standard Metric Socket 19mm | |
| CDS43N | 3/8" Drive 12 Point S | tandard Metric Socket 13mm | | | |



9 Pc. 3/8" Drive 6 Point Deep SAE Socket Set

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|-------------------------|------------------|----------|---|-----|
| CSAS6N | Socket Rail | 1.730 lb | | | 6 |
| Cat. No. | Description | | Cat. No. | Description | |
| CDDS23N | 3/8" Drive 6 Point Deep | SAE Socket 1/4" | CDDS28N | 3/8" Drive 6 Point Deep SAE Socket 9/16" | |
| CDDS24N | 3/8" Drive 6 Point Deep | SAE Socket 5/16" | CDDS29N | 3/8" Drive 6 Point Deep SAE Socket 5/8" | |
| CDDS25N | 3/8" Drive 6 Point Deep | SAE Socket 3/8" | CDDS30N | 3/8" Drive 6 Point Deep SAE Socket 11/16" | |
| CDDS26N | 3/8" Drive 6 Point Deep | SAE Socket 7/16" | CDDS31N | 3/8" Drive 6 Point Deep SAE Socket 3/4" | |
| CDDS27N | 3/8" Drive 6 Point Deep | SAE Socket 1/2" | | | |

9 Pc. 3/8" Drive 6 Point Deep Metric Socket Set

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| CSAS7N | Socket Rail | 1.720 lb | | | 6 |
|----------|-----------------------|-----------------------|----------|--|---|
| Cat. No. | Description | | Cat. No. | Description | |
| CDDS39N | 3/8" Drive 6 Point De | ep Metric Socket 9mm | CDDS44N | 3/8" Drive 6 Point Deep Metric Socket 14mm | |
| CDDS40N | 3/8" Drive 6 Point De | ep Metric Socket 10mm | CDDS45N | 3/8" Drive 6 Point Deep Metric Socket 15mm | |
| CDDS41N | 3/8" Drive 6 Point De | ep Metric Socket 11mm | CDDS47N | 3/8" Drive 6 Point Deep Metric Socket 17mm | |
| CDDS42N | 3/8" Drive 6 Point De | ep Metric Socket 12mm | CDDS49N | 3/8" Drive 6 Point Deep Metric Socket 19mm | |
| CDDS43N | 3/8" Drive 6 Point De | ep Metric Socket 13mm | | | |

7 Pc. 3/8" Drive SAE Hex Bit Socket Set

- Manufactured from chrome alloy steel for better strength and longer tool life
- Size markings stamped on base for quick size identification
- Insert bits made of S2 steel for strength and durability
- Nickel chrome plated base for durability
- Meets or exceeds ASME specifications



| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|--------------------------|----------------|----------|-------------------------------------|-----|
| CBSSON | None | .73 lb | | | 0 |
| Cat. No. | Description | | Cat. No. | Description | |
| - | 3/8" Drive Hex Bit SAE S | Socket 1/8" | - | 3/8" Drive Hex Bit SAE Socket 1/4" | |
| - | 3/8" Drive Hex Bit SAE S | Socket 5/32" | - | 3/8" Drive Hex Bit SAE Socket 5/16" | |
| - | 3/8" Drive Hex Bit SAE S | Socket 3/16" | - | 3/8" Drive Hex Bit SAE Socket 3/8" | |
| - | 3/8" Drive Hex Bit SAE S | Socket 7/32" | | | |

7 Pc. 3/8" Drive Metric Hex Bit Socket Set

- Manufactured from chrome alloy steel for better strength and longer tool life
- Size markings stamped on base for quick size identification
- Insert bits made of S2 steel for strength and durability
- Nickel chrome plated base for durability
- Meets or exceeds ASME specifications



| Included Storage | Product Weight | | | Q Q |
|---------------------------|--|----------|--|--|
| None | 0.700 lb | | | |
| Description | | Cat. No. | Description | |
| 3/8" Drive Hex Bit Metric | Socket 3mm | CHBS10N | 3/8" Drive Hex Bit Metric Socket 7mm | |
| 3/8" Drive Hex Bit Metric | Socket 4mm | CHBS11N | 3/8" Drive Hex Bit Metric Socket 8mm | |
| 3/8" Drive Hex Bit Metric | Socket 5mm | CHBS12N | 3/8" Drive Hex Bit Metric Socket 10mm | |
| 3/8" Drive Hex Bit Metric | Socket 6mm | | | |
| | Description 3/8" Drive Hex Bit Metric 3/8" Drive Hex Bit Metric 3/8" Drive Hex Bit Metric | | DescriptionCat. No.3/8" Drive Hex Bit Metric Socket 3mmCHBS10N3/8" Drive Hex Bit Metric Socket 4mmCHBS11N3/8" Drive Hex Bit Metric Socket 5mmCHBS12N | DescriptionCat. No.Description3/8" Drive Hex Bit Metric Socket 3mmCHBS10N3/8" Drive Hex Bit Metric Socket 7mm3/8" Drive Hex Bit Metric Socket 4mmCHBS11N3/8" Drive Hex Bit Metric Socket 8mm3/8" Drive Hex Bit Metric Socket 5mmCHBS12N3/8" Drive Hex Bit Metric Socket 10mm |

66 | 67

Teardrop Ratchet

- 60-tooth ratchet turns fasteners with a 6° swing arc
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion

3/8" Drive Quick Release 60 Tooth

Meets or exceeds ASME specifications

| Cat. No. Ov | erall Length | Head Width | Head Thickness | Tooth Count | Product Weight |
|-------------|--------------|------------|----------------|-------------|----------------|
| CRW6N | 9 in | 1.281 in | .625 in | 60 | 1.010 lb |

(C)

3/8" Drive Quick Release 72 Tooth **Teardrop Ratchet**

- 72-tooth ratchet turns fasteners with a 5° swing arc
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome vanadium alloy steel for increased strength and
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Tooth Count | Product Weight |
|----------|----------------|------------|-------------|----------------|
| CRW6 | 7.95 in | 1.42 in | 72 | 0.81 lb |

3/8" Drive Quick Release 72 Tooth **Stubby Teardrop Ratchet**

- 72-tooth ratchet turns fasteners with a 5° swing arc
- Stubby handle length for when clearance is limited
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Tooth Count | Product Weight |
|----------|----------------|------------|-------------|----------------|
| CRW11 | 4.57 in | 1.42 in | 72 | 0.59 lb |

3/8" Drive Quick Release 72 Tooth **Dual Material Ratchet**

- 72-tooth ratchet turns fasteners with a 5° swing arc
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome vanadium alloy steel for better strength and longer tool life
- Dual material comfort grip handle
- Nickel chrome plated for long-lasting protection
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Tooth Count | Product Weight |
|----------|----------------|------------|-------------|----------------|
| CRW7 | 8.46 in | 1.42 in | 72 | 0.88 lb |

3/8" Drive Quick Release 72 Tooth Flex Head Teardrop Ratchet

- 72-tooth ratchet turns fasteners with a 5° swing arc
- Flexible head provides access for hard to reach fasteners
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome vanadium alloy steel for better strength and
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Tooth Count | Product Weight |
|----------|----------------|------------|-------------|----------------|
| CRW10 | 11.34 in | 1.38 in | 72 | 1.09 lb |

3/8" Drive Flex Handle / Breaker Bar

- Flexible head for better access
- Long handle for greater torque
- Manufactured from chrome alloy steel for better strength and
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Product Weight |
|----------|----------------|----------------|
| CRW15N | 10 in | 0.770 lb |







(TCRESCENT®

3 Pc. 3/8" Drive Extension Set

- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications





- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Wobble | Product Weight |
|----------|----------------|--------|----------------|
| CDTA8N | 3 in | No | 0.180 lb |
| CDTA9N | 6 in | No | 0.340 lb |
| CDTA10N | 10 in | No | 0.540 lb |

3/8" Drive Adapters

- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Female Drive Size | Male Drive Size | Product Weight |
|----------|----------------|-------------------|-----------------|----------------|
| CDTA1N | 1 in | 3/8" | 1/4" | 0.060 lb |
| CDTA2N | 1.4 in | 3/8" | 1/2" | 0.110 lb |

3/8" Drive Universal Joint

- Universal joint gives improved access to hard to reach fasteners
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Product Weight |
|----------|----------------|----------------|
| CDTA17N | 2 in | 0.150 lb |

3/8" Drive 12 Point Standard Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications




| | A E | SAE (12) |
|------------------|-------------------------|-------------------|
| n. D: earance | Dim. E: Wrench Depth | Product Weight |
| 5 in | 0.30 in | 0.070 lb |

| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDS23N | SAE | 1/4 in | 0.65 in | 0.35 in | 0.95 in | 0.15 in | 0.30 in | 0.070 lb |
| CDS24N | SAE | 5/16 in | 0.65 in | 0.43 in | 0.95 in | 0.22 in | 0.30 in | 0.070 lb |
| CDS25N | SAE | 3/8 in | 0.65 in | 0.48 in | 0.95 in | 0.28 in | 0.30 in | 0.070 lb |
| CDS26N | SAE | 7/16 in | 0.65 in | 0.58 in | 0.95 in | 0.35 in | 0.30 in | 0.070 lb |
| CDS27N | SAE | 1/2 in | 0.65 in | 0.65 in | 0.95 in | 0.36 in | 0.30 in | 0.080 lb |
| CDS28N | SAE | 9/16 in | 0.74 in | 0.74 in | 0.98 in | 0.496 in | 0.53 in | 0.100 lb |
| CDS29N | SAE | 5/8 in | 0.78 in | 0.78 in | 0.98 in | 0.562 in | 0.53 in | 0.110 lb |
| CDS30N | SAE | 11/16 in | 0.88 in | 0.88 in | 1.02 in | 0.562 in | 0.53 in | 0.130 lb |
| CDS31N | SAE | 3/4 in | 1 in | 1 in | 1.13 in | 0.657 in | 0.65 in | 0.150 lb |
| CDS32N | SAE | 13/16 in | 1.2 in | 1.2 in | 1.2 in | 0.681 in | 0.65 in | 0.190 lb |
| CDS33N | SAE | 7/8 in | 1.3 in | 1.3 in | 1.2 in | 0.751 in | 0.65 in | 0.210 lb |
| CDS37N | Metric | 7 mm | 0.65 in | 0.43 in | 0.94 in | 0.20 in | 0.28 in | 0.070 lb |
| CDS38N | Metric | 8 mm | 0.65 in | 0.49 in | 0.94 in | 0.27 in | 0.28 in | 0.070 lb |
| CDS39N | Metric | 9 mm | 0.65 in | 0.53 in | 0.94 in | 0.30 in | 0.28 in | 0.070 lb |
| CDS40N | Metric | 10 mm | 0.65 in | 0.58 in | 0.94 in | 0.34 in | 0.28 in | 0.070 lb |
| CDS41N | Metric | 11 mm | 0.65 in | 0.65 in | 0.94 in | 0.34 in | 0.28 in | 0.070 lb |
| CDS42N | Metric | 12 mm | 0.68 in | 0.68 in | 1 in | 0.283 in | 0.53 in | 0.070 lb |
| CDS43N | Metric | 13 mm | 0.74 in | 0.74 in | 1 in | 0.275 in | 0.53 in | 0.080 lb |
| CDS44N | Metric | 14 mm | 0.78 in | 0.78 in | 1 in | 0.496 in | 0.53 in | 0.100 lb |
| CDS45N | Metric | 15 mm | 0.82 in | 0.82 in | 1 in | 0.496 in | 0.63 in | 0.120 lb |
| CDS46N | Metric | 16 mm | 0.87 in | 0.87 in | 1 in | 0.566 in | 0.63 in | 0.110 lb |
| CDS47N | Metric | 17 mm | 0.93 in | 0.93 in | 1 in | 0.566 in | 0.63 in | 0.140 lb |
| CDS48N | Metric | 18 mm | 0.95 in | 0.95 in | 1 in | 0.606 in | 0.63 in | 0.140 lb |
| CDS49N | Metric | 19 mm | 1 in | 1 in | 1.11 in | 0.657 in | 0.70 in | 0.150 lb |
| CDS51N | Metric | 21 mm | 1.2 in | 1.2 in | 1.2 in | 0.688 in | 0.70 in | 0.190 lb |
| CDS52N | Metric | 22 mm | 1.3 in | 1.3 in | 1.2 in | 0.732 in | 0.70 in | 0.210 lb |

3/8" Drive 6 Point Deep Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDDS23N | SAE | 1/4 in | 0.67 in | 0.45 in | 2.5 in | 0.15 in | 0.35 in | 0.140 lb |
| CDDS24N | SAE | 5/16 in | 0.67 in | 0.48 in | 2.5 in | 0.22 in | 0.68 in | 0.130 lb |
| CDDS25N | SAE | 3/8 in | 0.67 in | 0.58 in | 2.5 in | 0.28 in | 0.68 in | 0.150 lb |
| CDDS26N | SAE | 7/16 in | 0.66 in | 0.66 in | 2.5 in | 0.30 in | 0.68 in | 0.140 lb |
| CDDS27N | SAE | 1/2 in | 0.73 in | 0.73 in | 2.5 in | 0.30 in | 1.13 in | 0.190 lb |
| CDDS28N | SAE | 9/16 in | 0.77 in | 0.77 in | 2.5 in | 0.30 in | 1.13 in | 0.200 lb |
| CDDS29N | SAE | 5/8 in | 0.86 in | 0.86 in | 2.5 in | 0.30 in | 1.13 in | 0.240 lb |
| CDDS30N | SAE | 11/16 in | 0.92 in | 0.92 in | 2.5 in | 0.30 in | 1.13 in | 0.280 lb |
| CDDS31N | SAE | 3/4 in | 1 in | 1 in | 2.5 in | 0.30 in | 1.13 in | 0.320 lb |
| CDDS32N | SAE | 13/16 in | 1.1 in | 1.1 in | 2.5 in | 0.30 in | 1.13 in | 0.360 lb |
| CDDS33N | SAE | 7/8 in | 1.2 in | 1.2 in | 2.5 in | 0.30 in | 1.13 in | 0.090 lb |
| CDDS38N | Metric | 8 mm | 0.65 in | 0.65 in | 2.5 in | 0.15 in | 0.43 in | 0.130 lb |
| CDDS39N | Metric | 9 mm | 0.65 in | 0.65 in | 2.5 in | 0.22 in | 0.43 in | 0.140 lb |
| CDDS40N | Metric | 10 mm | 0.65 in | 0.65 in | 2.5 in | 0.30 in | 0.43 in | 0.140 lb |
| CDDS41N | Metric | 11 mm | 0.66 in | 0.66 in | 2.5 in | 0.30 in | 0.71 in | 0.140 lb |
| CDDS42N | Metric | 12 mm | 0.73 in | 0.73 in | 2.5 in | 0.30 in | 0.71 in | 0.170 lb |
| CDDS43N | Metric | 13 mm | 0.73 in | 0.73 in | 2.5 in | 0.30 in | 1.12 in | 0.180 lb |
| CDDS44N | Metric | 14 mm | 0.79 in | 0.79 in | 2.5 in | 0.30 in | 1.12 in | 0.190 lb |
| CDDS45N | Metric | 15 mm | 0.81 in | 0.81 in | 2.5 in | 0.30 in | 1.12 in | 0.210 lb |
| CDDS46N | Metric | 16 mm | 0.93 in | 0.93 in | 2.5 in | 0.30 in | 1.25 in | 0.230 lb |
| CDDS47N | Metric | 17 mm | 0.94 in | 0.94 in | 2.5 in | 0.30 in | 1.25 in | 0.280 lb |
| CDDS48N | Metric | 18 mm | 1 in | 1 in | 2.5 in | 0.30 in | 1.25 in | 0.290 lb |
| CDDS49N | Metric | 19 mm | 1 in | 1 in | 2.5 in | 0.30 in | 1.25 in | 0.310 lb |

3/8" Drive Hex Bit Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Size markings stamped on base for quick size identification
- Insert bits made of S2 steel for strength and durability
- Nickel chrome plated base for durability
- Meets or exceeds ASME specifications

| | K. | | C |
|---|----|---|-----------|
|) | | Å | |
| | | | D |
| | 70 | | SAE (IIII |
| | | | 0 |

| Cat. No. | SAE/ | Fastener | Dim. A: | Dim. B: | Dim. C: | Dim. D: | Dim. E: | Product |
|----------|--------|----------|-----------|---------------|----------------|------------|--------------|----------|
| | Metric | Size | Drive End | Nose Diameter | Overall Length | Bit Length | Wrench Depth | Weight |
| CHBSON | SAE | 1/8 in | 0.70 in | 0.25 in | 1.9 in | 1.35 in | .52 in | 0.090 lb |

| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Nose Diameter | Dim. C: Overall Length | Dim. D: Bit Length | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|--------------------------|---------------------------|-----------------------|-------------------------|-------------------|
| CHBS1N | SAE | 5/32 in | 0.70 in | 0.25 in | 1.9 in | 1.35 in | .52 in | 0.090 lb |
| CHBS2N | SAE | 3/16 in | 0.70 in | 0.25 in | 1.9 in | 1.35 in | .52 in | 0.090 lb |
| CHBS3N | SAE | 7/32 in | 0.70 in | 0.25 in | 1.9 in | 1.35 in | .52 in | 0.090 lb |
| CHBS4N | SAE | 1/4 in | 0.70 in | 0.31 in | 1.9 in | 1.35 in | .52 in | 0.100 lb |
| CHBS5N | SAE | 5/16 in | 0.70 in | 0.31 in | 1.9 in | 1.35 in | .52 in | 0.110 lb |
| CHBS6N | SAE | 3/8 in | 0.70 in | 0.31 in | 1.9 in | 1.35 in | .52 in | 0.130 lb |
| CHBS7N | Metric | 4 mm | 0.70 in | 0.25 in | 1.9 in | 1.35 in | .52 in | 0.090 lb |
| CHBS8N | Metric | 5 mm | 0.70 in | 0.25 in | 1.9 in | 1.35 in | .52 in | 0.090 lb |
| CHBS9N | Metric | 6 mm | 0.70 in | 0.25 in | 1.9 in | 1.35 in | .52 in | 0.100 lb |
| CHBS10N | Metric | 7 mm | 0.70 in | 0.25 in | 1.9 in | 1.35 in | .52 in | 0.110 lb |
| CHBS11N | Metric | 8 mm | 0.70 in | 0.31 in | 1.9 in | 1.35 in | .52 in | 0.110 lb |
| CHBS12N | Metric | 10 mm | 0.70 in | 0.31 in | 1.9 in | 1.35 in | .52 in | 0.130 lb |

3/8" Drive Torx® Bit Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Size markings stamped on base for quick size identification
- Insert bits made of S2 steel for strength and durability
- Nickel chrome plated base for durability
- Meets or exceeds ASME specifications

| C |
|---|
| 0 |

| Cat. No. | Fastener Size | Dim. A: Drive End | Dim. B: Nose Diameter | Dim. C: Overall Length | Dim. D: Bit Length | Dim. E: Wrench Depth | Product Weight |
|----------|------------------|----------------------|--------------------------|---------------------------|-----------------------|-------------------------|-------------------|
| CDTS6N | T40 | 0.70 in | 0.25 in | 1.9 in | 1.35 in | 0.52 in | 0.090 lb |
| CDTS7N | T45 | 0.70 in | 0.31 in | 1.9 in | 1.35 in | 0.52 in | 0.110 lb |
| CDTS8N | T47 | 0.70 in | 0.31 in | 1.9 in | 1.35 in | 0.52 in | 0.120 lb |
| CDTS9N | T50 | 0.70 in | 0.31 in | 1.9 in | 1.35 in | 0.52 in | 0.110 lb |
| CDTS10N | T55 | 0.70 in | 0.31 in | 1.9 in | 1.35 in | 0.52 in | 0.120 lb |
| CDTS11N | T60 | 0.70 in | 0.31 in | 1.9 in | 1.35 in | 0.52 in | 0.130 lb |

$(\mathsf{T}\mathsf{CRESCENT}^\circ$

3/8" Drive 6 Point Spark Plug Sockets

- Use with 3/8" square drive hand tool
- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| | | | | | | | | · · |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
| CSPSON | SAE | 5/8 in | .87 in | 0.87 in | 2.5 in | 0.18 in | 0.75 in | 0.230 lb |
| CSPS1N | SAE | 3/4 in | 1.01 in | 1.01 in | 2.63 in | 0.10 in | 0.75 in | 0.280 lb |
| CSPS2N | SAE | 13/16 in | 1.07 in | 1.07 in | 2.73 in | 0.10 in | 0.75 in | 0.310 lb |

3/8" Drive Socket Rail


- Perfect to store, organize, and easily find all your sockets
- Drilled at end for easy attachment to wall, workbench, or drawer
- Red color for easy identification
- Includes 14 socket clips

| Cat. No. | Drive Size | Color | Overall Length | Number of Clips | Product Weight |
|----------|------------|-------|----------------|-----------------|----------------|
| CSR1 | 3/8 in | Red | 17.5 in | 14 | 0.44 lb |

12 Pc. 1/2" Drive 12 Point SAE Mechanics **Tool Set with Blow Mold Case**

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Manufactured from chrome alloy steel for better strength and longer tool life
- Sockets feature off-corner loading technology to virtually eliminate fastener rounding
- Includes blow mold case for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|--------------------------|-------------------------------------|----------|--|-----|
| CSWS11N | Blow Mold Case | 4.580 lb | | | 12 |
| Cat. No. | Description | | Cat. No. | Description | |
| CRW12N | 1/2" Drive 60 Tooth Qui | ck Release Teardrop Ratchet 10-1/2" | CDS57N | 1/2" Drive 12 Point Standard SAE Socket 11/16" | |
| CDTA11N | 1/2" Drive Extension 3" | | CDS58N | 1/2" Drive 12 Point Standard SAE Socket 3/4" | |
| CDS53N | 1/2" Drive 12 Point Star | ndard SAE Socket 7/16" | CDS59N | 1/2" Drive 12 Point Standard SAE Socket 13/16" | |
| CDS54N | 1/2" Drive 12 Point Star | ndard SAE Socket 1/2" | CDS60N | 1/2" Drive 12 Point Standard SAE Socket 7/8" | |



12 Pc. 1/2" Drive 12 Point SAE Mechanics Tool Set

- 60-tooth ratchet requires only a 6-degree swing arc to turn a fastener
- Teardrop ratchet head for improved access
- Quick release design allows for rapid socket removal
- Socke faster

Cat. No.

| ets fe ener r | eature off-corner lo ounding | alloy steel for better strength and longer to cading technology to virtually eliminate ANSI specifications | pal life | |
|------------------|---------------------------------|---|----------|-----|
| | Included Storage | Product Weight | S | |
| I | Socket Rail | 3.695 lb | (1) | 764 |

| | | · · · · · · · · · · · · · · · · · · · | | | |
|----------|---------------------|--|----------|--|----|
| CSWS12N | Socket Rail | 3.695 lb | | | 12 |
| Cat. No. | Description | | Cat. No. | Description | |
| CRW12N | 1/2" Drive 60 Tooth | Quick Release Teardrop Ratchet 10-1/2" | CDS57N | 1/2" Drive 12 Point Standard SAE Socket 11/16" | |
| CDTA11N | 1/2" Drive Extensio | on 3" | CDS58N | 1/2" Drive 12 Point Standard SAE Socket 3/4" | |
| CDS53N | 1/2" Drive 12 Point | Standard SAE Socket 7/16" | CDS59N | 1/2" Drive 12 Point Standard SAE Socket 13/16" | |
| CDS54N | 1/2" Drive 12 Point | Standard SAE Socket 1/2" | CDS60N | 1/2" Drive 12 Point Standard SAE Socket 7/8" | |
| CDS55N | 1/2" Drive 12 Point | Standard SAE Socket 9/16" | CDS61N | 1/2" Drive 12 Point Standard SAE Socket 15/16" | |
| CDS56N | 1/2" Drive 12 Point | Standard SAE Socket 5/8" | CDS62N | 1/2" Drive 12 Point Standard SAE Socket 1" | |

8 Pc. 1/2" Drive 12 Point Standard **SAE Socket Set**

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications

| | | | _ | |
|----------|---------------------------|-----------------------|----------|--|
| Cat. No. | Included Storage | Product Weight | | |
| CSASON | Socket Rail | 1.530 lb | | |
| Cat. No. | Description | | Cat. No. | Description |
| CDS54N | 1/2" Drive 12 Point Stand | lard SAE Socket 1/2" | CDS58N | 1/2" Drive 12 Point Standard SAE Socket 3/4" |
| CDS55N | 1/2" Drive 12 Point Stand | lard SAE Socket 9/16" | CDS59N | 1/2" Drive 12 Point Standard SAE Socket 13/16" |
| CDS56N | 1/2" Drive 12 Point Stand | lard SAE Socket 5/8" | CDS60N | 1/2" Drive 12 Point Standard SAE Socket 7/8" |
| CDS57N | 1/2" Drive 12 Point Stand | ard SAE Socket 11/16" | CDS61N | 1/2" Drive 12 Point Standard SAE Socket 15/16" |





8 Pc. 1/2" Drive 12 Point Standard **Metric Socket Set**

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| Cat. No. | Included Storage | Product Weight | | | |
|----------|--------------------------|-------------------------|----------|---|------|
| CSAS1N | Socket Rail | 1.320 lb | | | (12) |
| Cat. No. | Description | | Cat. No. | Description | |
| CDS72N | 1/2" Drive 12 Point Stan | dard Metric Socket 12mm | CDS77N | 1/2" Drive 12 Point Standard Metric Socket 17mm | |
| CDS73N | 1/2" Drive 12 Point Stan | dard Metric Socket 13mm | CDS78N | 1/2" Drive 12 Point Standard Metric Socket 18mm | |
| CDS74N | 1/2" Drive 12 Point Stan | dard Metric Socket 14mm | CDS79N | 1/2" Drive 12 Point Standard Metric Socket 19mm | |
| CDS75N | 1/2" Drive 12 Point Stan | dard Metric Socket 15mm | CDS81N | 1/2" Drive 12 Point Standard Metric Socket 21mm | |

8 Pc. 1/2" Drive 6 Point Deep SAE **Socket Set**

- Manufactured from chrome alloy steel for better strength and longer tool life

| Off-corne Size mark Nickel chr | r loading technology to v | | |
|--------------------------------------|---------------------------|----------------|---|
| No. | Included Storage | Product Weight | S |

| CSAS2N | Socket Rail | 3.020 lb | | | 6 |
|----------|-------------------------|-------------------|----------|---|---|
| Cat. No. | Description | | Cat. No. | Description | |
| CDDS56N | 1/2" Drive 6 Point Deep | SAE Socket 1/2" | CDDS60N | 1/2" Drive 6 Point Deep SAE Socket 3/4" | |
| CDDS57N | 1/2" Drive 6 Point Deep | SAE Socket 9/16" | CDDS61N | 1/2" Drive 6 Point Deep SAE Socket 13/16" | |
| CDDS58N | 1/2" Drive 6 Point Deep | SAE Socket 5/8" | CDDS62N | 1/2" Drive 6 Point Deep SAE Socket 7/8" | |
| CDDS59N | 1/2" Drive 6 Point Deep | SAE Socket 11/16" | CDDS63N | 1/2" Drive 6 Point Deep SAE Socket 15/16" | |
| | | | | | |

8 Pc. 1/2" Drive 6 Point Deep **Metric Socket Set**

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications

| | ш | Ш | П | Ш | | |
|---------|-----|--------------|------|---|--|--|
| Ш | ш | Ш | П | | | |
| C* 23nn | 900 | the state of | 17mm | | | |

| Cat. No. | Included Storage | Product Weight | | | mm |
|----------|------------------------|----------------------|----------|--|----|
| CSAS3N | Socket Rail | 2.620 lb | | | 6 |
| Cat. No. | Description | | Cat. No. | Description | |
| CDDS71N | 1/2" Drive 6 Point Dee | p Metric Socket 12mm | CDDS76N | 1/2" Drive 6 Point Deep Metric Socket 17mm | |
| CDDS72N | 1/2" Drive 6 Point Dee | p Metric Socket 13mm | CDDS77N | 1/2" Drive 6 Point Deep Metric Socket 18mm | |
| CDDS73N | 1/2" Drive 6 Point Dee | p Metric Socket 14mm | CDDS78N | 1/2" Drive 6 Point Deep Metric Socket 19mm | |
| CDDS74N | 1/2" Drive 6 Point Dee | p Metric Socket 15mm | CDDS80N | 1/2" Drive 6 Point Deep Metric Socket 21mm | |
| | | | | | |

1/2" Drive Quick Release 60 Tooth Teardrop Ratchet

- 60-tooth ratchet turns fasteners with a 6° swing arc
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Head Width | Head Thickness | Tooth Count | Product Weight |
|----------|----------------|------------|----------------|--------------------|----------------|
| CRW12N | 10.5 in | 1.67 in | .77 in | 60 | 1.690 lb |

1/2" Drive Quick Release 72 Tooth **Teardrop Ratchets**

- Teardrop head for improved access
- 72 tooth ratchet turns fasteners with a 5° swing arc
- Manufactured from chrome vanadium alloy steel for better strength and longer tool life
- Meets or exceeds ANSI specifications
- Quick release design allows for rapid socket removal

| Cat. No. | Overall Length | Head Width | Tooth Count | Product Weight |
|----------|----------------|------------|-------------|----------------|
| CRW12 | 12.28 in | 2.4 in | 72 | 1.50 lb |



TCRESCENT°

1/2" Drive Quick Release 72 Tooth Dual Material Ratchet

- 72-tooth ratchet turns fasteners with a 5° swing arc
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome vanadium alloy steel for better strength and longer tool life
- Dual material comfort grip handle
- Nickel chrome plated for long-lasting protection
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Tooth Count | Product Weight |
|----------|----------------|------------|-------------|----------------|
| CRW13 | 10.83 in | 1.61 in | 72 | 1.54 lb |

1/2" Drive Quick Release 72 Tooth Flex Head Teardrop Ratchet

- 72-tooth ratchet turns fasteners with a 5° swing arc
- Flexible head provides access for hard to reach fasteners
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome vanadium alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Tooth Count | Product Weight |
|----------|----------------|------------|-------------|----------------|
| CRW14 | 12.25 in | 1.65 in | 72 | 1.77 lb |

1/2" Drive Quick Release 72 Tooth Extendable Teardrop Ratchet

- 72-tooth ratchet turns fasteners with a 5° swing arc
- Extends from 12" to 17.5"
- Quick-release design allows for rapid socket removal
- Teardrop head for improved access
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

| Cat. No. | Cont. Length | Ext. Length | Head Width | Head Thickness | Tooth Count | Product Weight |
|----------|--------------|-------------|------------|----------------|-------------|----------------|
| CRW12EXT | 12 in | 17.5 in | 1.875 in | .812 in | 72 | 1.890 lb |



1/2" Drive Flex Handle/Breaker Bar

- Flexible head for better access
- Long handle for greater torque
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Product Weight |
|----------|----------------|----------------|
| CRW16N | 18 in | 1.810 lb |

1/2" Drive Extensions

- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Wobble | Product Weight |
|----------|----------------|--------|----------------|
| CDTA11N | 3 in | No | 0.290 lb |
| CDTA12N | 5 in | No | 0.460 lb |
| CDTA13N | 10 in | No | 0.870 lb |

1/2" Drive Universal Joint

- Universal joint gives improved access to hard to reach fasteners
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Product Weight |
|----------|----------------|----------------|
| CDTA18N | 2.83 in | 0.340 lb |

1/2" Drive Adapters


- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Female Drive Size | Male Drive Size | Product Weight |
|----------|----------------|-------------------|-----------------|----------------|
| CDTA3N | 1.47 in | 1/2" | 3/8" | 0.120 lb |
| CDTA4N | 1.9 in | 1/2" | 3/4" | 0.030 lb |

1/2" Drive 12 Point Standard Sockets

- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDS53N | SAE | 7/16 in | 0.85 in | 0.76 in | 1.5 in | 0.38 in | 0.36 in | 0.130 lb |
| CDS54N | SAE | 1/2 in | 0.85 in | 0.76 in | 1.5 in | 0.38 in | 0.36 in | 0.140 lb |
| CDS55N | SAE | 9/16 in | 0.85 in | 0.84 in | 1.5 in | 0.38 in | 0.36 in | 0.130 lb |
| CDS56N | SAE | 5/8 in | 0.91 in | 0.91 in | 1.5 in | 0.48 in | 0.54 in | 0.140 lb |
| CDS57N | SAE | 11/16 in | 0.99 in | 0.99 in | 1.5 in | 0.48 in | 0.54 in | 0.170 lb |
| CDS58N | SAE | 3/4 in | 1.06 in | 1.06 in | 1.5 in | 0.661 in | 0.80 in | 0.190 lb |
| CDS59N | SAE | 13/16 in | 1.09 in | 1.09 in | 1.5 in | 0.685 in | 0.80 in | 0.220 lb |
| CDS60N | SAE | 7/8 in | 1.17 in | 1.17 in | 1.5 in | 0.75 in | 0.80 in | 0.260 lb |
| CDS61N | SAE | 15/16 in | 1.27 in | 1.27 in | 1.5 in | 0.755 in | 0.80 in | 0.290 lb |
| CDS62N | SAE | 1 in | 1.30 in | 1.3 in | 1.5 in | 0.826 in | 0.80 in | 0.360 lb |
| CDS63N | SAE | 1-1/16 in | 1.43 in | 1.43 in | 1.5 in | 0.944 in | 0.80 in | 0.420 lb |
| CDS64N | SAE | 1-1/8 in | 1.49 in | 1.49 in | 1.5 in | 0.988 in | 0.80 in | 0.460 lb |
| CDS66N | SAE | 1-1/4 in | 1.65 in | 1.65 in | 1.5 in | 1.129 in | 0.80 in | 0.580 lb |
| CDS72N | Metric | 12 mm | 0.85 in | 0.73 in | 1.5 in | 0.30 in | 0.38 in | 0.120 lb |
| CDS73N | Metric | 13 mm | 0.85 in | 0.76 in | 1.5 in | 0.30 in | 0.38 in | 0.130 lb |
| CDS74N | Metric | 14 mm | 0.85 in | 0.83 in | 1.5 in | 0.37 in | 0.38 in | 0.130 lb |
| CDS75N | Metric | 15 mm | 0.87 in | 0.87 in | 1.5 in | 0.41 in | 0.53 in | 0.140 lb |
| CDS76N | Metric | 16 mm | 0.94 in | 0.94 in | 1.5 in | 0.41 in | 0.53 in | 0.140 lb |
| CDS77N | Metric | 17 mm | 0.94 in | 0.94 in | 1.5 in | 0.43 in | 0.53 in | 0.170 lb |
| CDS78N | Metric | 18 mm | 1.02 in | 1.02 in | 1.5 in | 0.43 in | 0.55 in | 0.210 lb |
| CDS79N | Metric | 19 mm | 1.06 in | 1.06 in | 1.5 in | 0.661 in | 0.80 in | 0.180 lb |
| CDS80N | Metric | 20 mm | 1.1 in | 1.10 in | 1.5 in | 0.685 in | 0.80 in | 0.230 lb |
| CDS81N | Metric | 21 mm | 1.17 in | 1.17 in | 1.5 in | 0.696 in | 0.80 in | 0.220 lb |
| | | | | | | | | |

| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDS82N | Metric | 22 mm | 1.17 in | 1.17 in | 1.5 in | 0.740 in | 0.80 in | 0.250 lb |
| CDS84N | Metric | 24 mm | 1.25 in | 1.25 in | 1.5 in | 0.822 in | 0.80 in | 0.290 lb |
| CDS87N | Metric | 27 mm | 1.41 in | 1.41 in | 1.5 in | 0.937 in | 0.80 in | 0.400 lb |

1/2" Drive 6 Point Deep Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDDS55N | SAE | 7/16 in | 0.85 in | 0.75 in | 3.27 in | 0.38 in | 0.48 in | 0.270 lb |
| CDDS56N | SAE | 1/2 in | 0.89 in | 0.77 in | 3.27 in | 0.38 in | 0.48 in | 0.290 lb |
| CDDS57N | SAE | 9/16 in | 0.89 in | 0.85 in | 3.27 in | 0.38 in | 0.48 in | 0.260 lb |
| CDDS58N | SAE | 5/8 in | 0.90 in | 0.9 in | 3.27 in | 0.48 in | 1.4 in | 0.260 lb |
| CDDS59N | SAE | 11/16 in | 0.98 in | 0.98 in | 3.27 in | 0.48 in | 1.4 in | 0.310 lb |
| CDDS60N | SAE | 3/4 in | 1.07 in | 1.07 in | 3.27 in | 1.338 in | 1.4 in | 0.370 lb |
| CDDS61N | SAE | 13/16 in | 1.09 in | 1.09 in | 3.27 in | 1.338 in | 1.4 in | 0.430 lb |
| CDDS62N | SAE | 7/8 in | 1.17 in | 1.17 in | 3.27 in | 1.338 in | 1.4 in | 0.510 lb |
| CDDS63N | SAE | 15/16 in | 1.25 in | 1.25 in | 3.27 in | 1.338 in | 1.4 in | 0.580 lb |
| CDDS64N | SAE | 1 in | 1.30 in | 1.3 in | 3.27 in | 1.338 in | 1.4 in | 0.660 lb |
| CDDS65N | SAE | 1-1/16 in | 1.40 in | 1.4 in | 3.27 in | 1.338 in | 1.4 in | 0.750 lb |
| CDDS66N | SAE | 1-1/8 in | 1.48 in | 1.48 in | 3.27 in | 1.338 in | 1.4 in | 0.860 lb |
| CDDS67N | SAE | 1-1/4 in | 1.65 in | 1.65 in | 3.27 in | 1.338 in | 1.4 in | 1.050 lb |
| CDDS71N | Metric | 12 mm | 0.88 in | 0.73 in | 3.27 in | 0.30 in | 0.50 in | 0.260 lb |
| CDDS72N | Metric | 13 mm | 0.88 in | 0.77 in | 3.27 in | 0.30 in | 0.50 in | 0.280 lb |
| CDDS73N | Metric | 14 mm | 0.88 in | 0.84 in | 3.27 in | 0.37 in | 0.50 in | 0.250 lb |
| CDDS74N | Metric | 15 mm | 0.86 in | 0.86 in | 3.27 in | 0.41 in | 1.4 in | 0.280 lb |
| CDDS75N | Metric | 16 mm | 0.93 in | 0.93 in | 3.27 in | 0.41 in | 1.4 in | 0.260 lb |
| CDDS76N | Metric | 17 mm | 0.95 in | 0.95 in | 3.27 in | 0.43 in | 1.4 in | 0.320 lb |
| CDDS77N | Metric | 18 mm | 1.02 in | 1.02 in | 3.27 in | 0.43 in | 1.4 in | 0.400 lb |
| CDDS78N | Metric | 19 mm | 1.06 in | 1.06 in | 3.27 in | 1.338 in | 1.4 in | 0.370 lb |
| CDDS80N | Metric | 21 mm | 1.09 in | 1.09 in | 3.27 in | 1.338 in | 1.4 in | 0.430 lb |

$(\prod \mathsf{CRESCENT}^\circ)$

1/2" Drive 6 Point Magnetic Spark Plug Sockets

- Use with 1/2" square drive hand tool
- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Magnetic insert holds plug for removal and installation
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications



| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CSPS3N | SAE | 5/8 in | .87 in | 0.87 in | 2.5 in | 0.18 in | 0.75 in | 0.220 lb |
| CSPS4N | SAF | 13/16 in | 1 07 in | 1 07 in | 2 73 in | 0.10 in | 0.75 in | 0.340 lb |

1/2" Drive Socket Rail

- Perfect to store, organize, and easily find all your sockets
- Drilled at end for easy attachment to wall, workbench, or drawer
- Yellow color for easy identification
- Includes 14 socket clips

| Cat. No. | Drive Size | Color | Overall Length | Number of Clips | Product Weight |
|----------|------------|--------|----------------|-----------------|----------------|
| CSR2 | 1/2 in | Yellow | 17.5 in | 14 | 0.46 lb |

21 Pc. 3/4" Drive 12 Point SAE Standard **Mechanics Tool Set**

- Contains a carefully selected assortment of tools to handle most large mechanical applications
- Heavy-duty, 45-tooth ratchet with quick release socket retention button to hold sockets securely
- Sockets feature off-corner loading technology to reduce fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization
- Meets or exceeds ANSI and ASME specifications

3/4" Drive Extension 4"

| CTK21SAEN | Blow Mold Case | 26.500 lb | | |
|---|--------------------------------|-----------------------------|----------|---|
| Cat. No. | Description | | Cat. No. | Description |
| CRW19N | 3/4" Drive 45 Tooth Quick Rele | ease Round Head Ratchet 20" | CDS97N | 3/4" Drive 12 Point Standard SAE Socket 1-1/4" |
| CRW23N 3/4" Drive Full Polish Flex Handle 19" | | dle 19" | CDS98N | 3/4" Drive 12 Point Standard SAE Socket 1-5/16" |

Product Weight



3/4" Drive 12 Point Standard SAE Socket 1-3/8"

| _ | | l |
|---|---|---|
| Y | Q | |
| | | |

| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|--|
| CRW21N | 3/4" Drive Extension 8" | CDS100N | 3/4" Drive 12 Point Standard SAE Socket 1-7/16" |
| CRW22N | 3/4" Drive Extension 16" | CDS101N | 3/4" Drive 12 Point Standard SAE Socket 1-1/2" |
| CDS91N | 3/4" Drive 12 Point Standard SAE Socket 7/8" | CDS102N | 3/4" Drive 12 Point Standard SAE Socket 1-5/8" |
| CDS92N | 3/4" Drive 12 Point Standard SAE Socket 15/16" | CDS104N | 3/4" Drive 12 Point Standard SAE Socket 1-3/4" |
| CDS93N | 3/4" Drive 12 Point Standard SAE Socket 1" | CDS105N | 3/4" Drive 12 Point Standard SAE Socket 1-13/16" |
| CDS94N | 3/4" Drive 12 Point Standard SAE Socket 1-1/16" | CDS106N | 3/4" Drive 12 Point Standard SAE Socket 1-7/8" |
| CDS95N | 3/4" Drive 12 Point Standard SAE Socket 1-1/8" | CDS107N | 3/4" Drive 12 Point Standard SAE Socket 2" |
| - | 3/4" Drive 12 Point Standard SAE Socket 1-3/16 | | |

14 Pc. 3/4" Drive 12 Point SAE **Standard Mechanics Tool Set**

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical and consumer applications
- Heavy-duty, 45-tooth ratchet with quick release socket retention button to hold sockets securely
- Sockets feature off-corner loading technology to reduce fastener rounding
- Manufactured from chrome alloy steel for better strength and longer tool life
- Includes blow mold case for storage and organization

Included Storage Product Weight

Meets or exceeds ANSI and ASME specifications



| CTK14SAEN | Blow Mold Case | 35.500 lb | | (|
|-----------|------------------------|-------------------------------------|----------|---|
| Cat. No. | Description | | Cat. No. | Description |
| CRW19N | 3/4" Drive 45 Tooth Q | uick Release Round Head Ratchet 20" | CDS95N | 3/4" Drive 12 Point Standard SAE Socket 1-1/8" |
| CRW23N | 3/4" Drive Full Polish | Flex Handle 19" | CDS97N | 3/4" Drive 12 Point Standard SAE Socket 1-1/4" |
| CRW20N | 3/4" Drive Extension 4 | " | CDS100N | 3/4" Drive 12 Point Standard SAE Socket 1-7/16" |
| CRW21N | 3/4" Drive Extension 8 | 3" | CDS101N | 3/4" Drive 12 Point Standard SAE Socket 1-1/2" |
| CDS91N | 3/4" Drive 12 Point St | andard SAE Socket 7/8" | CDS102N | 3/4" Drive 12 Point Standard SAE Socket 1-5/8" |
| CDS92N | 3/4" Drive 12 Point St | andard SAE Socket 15/16" | CDS104N | 3/4" Drive 12 Point Standard SAE Socket 1-3/4" |
| CDS93N | 3/4" Drive 12 Point St | andard SAE Socket 1" | CDS107N | 3/4" Drive 12 Point Standard SAE Socket 2" |
| | | | | |

4" DRIVE

CRESCENT®

3/4" Drive Quick Release 45 Tooth Rour

- 45-tooth ratchet turns fasteners with a 8° swing arc
- 20" long handle for improved reach, leverage and torque
- Quick-release design allows for rapid socket removal
- Round-shaped head
- Features a knurled grip, providing a non-slip surface
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

| Cat. No. | Overall Length | Head Width | Head Thickness | Tooth Count | Product Weight |
|----------|----------------|------------|----------------|-------------|----------------|
| CRW19N | 20 in | 2.7 in | 1.7 in | 45 | 5.290 lb |

3/4" Drive Flex Handle / Breaker Bar

- Flexible head for better acces
- Long handle for greater torque
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications



3/4" Drive Sliding T-Handle

- Sliding tang for variable torque
- Long handle for greater torque
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications



3/4" Drive Extensions

- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Wobble | Product Weight |
|----------|----------------|--------|----------------|
| CRW20N | 4 in | No | 1.050 lb |
| CRW21N | 8 in | No | 1.620 lb |
| CRW22N | 16 in | No | 2.990 lb |
| | | | |

3/4" Drive Adapters

- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Female Drive Size | Male Drive Size | Product Weight |
|----------|----------------|-------------------|-----------------|----------------|
| CDTA5N | 1.9 in | 3/4" | 1/2" | 0.450 lb |

3/4" Drive 12 Point Standard Sockets

- Manufactured from chrome alloy steel for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped on socket for quick size identification
- Nickel chrome plated for durability
- Meets or exceeds ASME specifications





| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDS91N | SAE | 7/8 in | 1.41 in | 1.29 in | 1.97 in | 0.62 in | 0.70 in | 0.490 lb |
| CDS92N | SAE | 15/16 in | 1.41 in | 1.39 in | 1.97 in | 0.66 in | 0.70 in | 0.500 lb |
| CDS93N | SAE | 1 in | 1.41 in | 1.41 in | 1.97 in | 0.590 in | 1 in | 0.440 lb |
| CDS94N | SAE | 1-1/16 in | 1.50 in | 1.50 in | 2 in | 0.944 in | 1 in | 0.490 lb |
| CDS95N | SAE | 1-1/8 in | 1.56 in | 1.56 in | 2.06 in | 0.988 in | 1 in | 0.530 lb |
| CDS97N | SAE | 1-1/4 in | 1.73 in | 1.73 in | 2.18 in | 0.751 in | 1 in | 0.710 lb |
| CDS98N | SAE | 1-5/16 in | 1.80 in | 1.80 in | 2.18 in | 0.767 in | 1 in | 0.500 lb |
| CDS99N | SAE | 1-3/8 in | 1.86 in | 1.86 in | 2.18 in | 0.783 in | 1 in | 0.830 lb |
| CDS100N | SAE | 1-7/16 in | 1.96 in | 1.96 in | 2.3 in | 0.854 in | 1.14 in | 1.000 lb |

Continued on next page

(T CRESCENT®

3/4" Drive 12 Point Standard Sockets Continued from previous page

| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CDS101N | SAE | 1-1/2 in | 2.04 in | 2.04 in | 2.45 in | 0.854 in | 1.22 in | 1.070 lb |
| CDS102N | SAE | 1-5/8 in | 2.20 in | 2.2 in | 2.6 in | 1.003 in | 1.36 in | 1.410 lb |
| CDS103N | SAE | 1-11/16 in | 2.30 in | 2.3 in | 2.67 in | 1.003 in | 1.45 in | 1.320 lb |
| CDS104N | SAE | 1-3/4 in | 2.36 in | 2.36 in | 2.73 in | 1.094 in | 1.58 in | 1.500 lb |
| CDS105N | SAE | 1-13/16 in | 2.45 in | 2.45 in | 2.84 in | 1.129 in | 1.60 in | 1.520 lb |
| CDS106N | SAE | 1-7/8 in | 2.55 in | 2.55 in | 2.93 in | 1.129 in | 1.60 in | 1.790 lb |
| CDS107N | SAE | 2 in | 2.68 in | 2.68 in | 3 in | 1.220 in | 1.70 in | 1.870 lb |

8 Pc. 1/2" Drive 6 Point Standard Impact SAE Socket Set

- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped for quick size identification
- Black phosphate finish for corrosion resistance
- Meets or exceeds ASME specifications



| CIMS5N 1/2" Drive 6 Point Standard Impact SAE Socket 1/2" CIMS9N 1/2" Drive 6 Point Standard Impact SAE Socket 3/4" CIMS6N 1/2" Drive 6 Point Standard Impact SAE Socket 9/16" CIMS10N 1/2" Drive 6 Point Standard Impact SAE Socket 13/16 | Cat. No. | Included Storage | Product Weight | | | SAE |
|--|----------|--------------------------|------------------------------|----------|--|-----|
| CIMS4N 1/2" Drive 6 Point Standard Impact SAE Socket 7/16" CIMS8N 1/2" Drive 6 Point Standard Impact SAE Socket 11/16 CIMS5N 1/2" Drive 6 Point Standard Impact SAE Socket 1/2" CIMS9N 1/2" Drive 6 Point Standard Impact SAE Socket 3/4" CIMS6N 1/2" Drive 6 Point Standard Impact SAE Socket 9/16" CIMS10N 1/2" Drive 6 Point Standard Impact SAE Socket 13/16 | CIMSON | Socket Rail | 1.850 lb | | | 6 |
| CIMS5N 1/2" Drive 6 Point Standard Impact SAE Socket 1/2" CIMS9N 1/2" Drive 6 Point Standard Impact SAE Socket 3/4" CIMS6N 1/2" Drive 6 Point Standard Impact SAE Socket 9/16" CIMS10N 1/2" Drive 6 Point Standard Impact SAE Socket 13/16 | Cat. No. | Description | | Cat. No. | Description | |
| CIMS6N 1/2" Drive 6 Point Standard Impact SAE Socket 9/16" CIMS10N 1/2" Drive 6 Point Standard Impact SAE Socket 13/16 | CIMS4N | 1/2" Drive 6 Point Stand | lard Impact SAE Socket 7/16" | CIMS8N | 1/2" Drive 6 Point Standard Impact SAE Socket 11/16" | |
| The second secon | CIMS5N | 1/2" Drive 6 Point Stand | lard Impact SAE Socket 1/2" | CIMS9N | 1/2" Drive 6 Point Standard Impact SAE Socket 3/4" | |
| OBSCAL 1/02 Daire C Daire Chandard Impact CAE Coalest E/02 OBSCALN 1/02 Daire C Daire Chandard Impact CAE Coalest E/02 | CIMS6N | 1/2" Drive 6 Point Stand | lard Impact SAE Socket 9/16" | CIMS10N | 1/2" Drive 6 Point Standard Impact SAE Socket 13/16" | |
| CIMS7N 1/2" Drive 6 Point Standard Impact SAE Socket 5/8" CIMS11N 1/2" Drive 6 Point Standard Impact SAE Socket 7/8" | CIMS7N | 1/2" Drive 6 Point Stand | lard Impact SAE Socket 5/8" | CIMS11N | 1/2" Drive 6 Point Standard Impact SAE Socket 7/8" | |
| | | | | | | |

8 Pc. 1/2" Drive 6 Point Standard **Impact Metric Socket Set**

- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped for quick size identification
- Black phosphate finish for corrosion resistance
- Meets or exceeds ASME specifications



| Gat. No. | included Storage | Product Weight | | | |
|----------|--------------------------|--------------------------------|----------|---|---|
| CIMS1N | Socket Rail | 1.830 lb | _ | | 6 |
| Cat. No. | Description | | Cat. No. | Description | |
| CIMS12N | 1/2" Drive 6 Point Stand | lard Impact Metric Socket 12mm | CIMS16N | 1/2" Drive 6 Point Standard Impact Metric Socket 17mm | n |
| CIMS13N | 1/2" Drive 6 Point Stand | lard Impact Metric Socket 13mm | CIMS17N | 1/2" Drive 6 Point Standard Impact Metric Socket 18mm | n |
| CIMS14N | 1/2" Drive 6 Point Stand | lard Impact Metric Socket 14mm | CIMS18N | 1/2" Drive 6 Point Standard Impact Metric Socket 19mm | n |
| CIMS15N | 1/2" Drive 6 Point Stand | dard Impact Metric Socket 15mm | CIMS19N | 1/2" Drive 6 Point Standard Impact Metric Socket 21mr | n |

8 Pc. 1/2" Drive 6 Point Deep **Impact SAE Socket Set**

- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding

Product Weight

- Size markings stamped for quick size identification
- Black oxide finish for corrosion resistance
- Meets or exceeds ASME specifications

Included Storage

| 1 | | | | Ĭ | | | • |
|--------|-----|--------|-----|---|-------|--------|-----------|
| 7/16-6 | 1/2 | £ 1840 | 5/8 | | 3/468 | 137164 | 7/9/00/05 |

| CIMS2N | Socket Rail | 3.780 lb | | | 6 |
|----------|----------------------|-----------------------------|----------|--|---|
| Cat. No. | Description | | Cat. No. | Description | |
| CIMS20N | 1/2" Drive 6 Point D | eep Impact SAE Socket 7/16" | CIMS24N | 1/2" Drive 6 Point Deep Impact SAE Socket 11/16" | |
| CIMS21N | 1/2" Drive 6 Point D | eep Impact SAE Socket 1/2" | CIMS25N | 1/2" Drive 6 Point Deep Impact SAE Socket 3/4" | |
| CIMS22N | 1/2" Drive 6 Point D | eep Impact SAE Socket 9/16" | CIMS26N | 1/2" Drive 6 Point Deep Impact SAE Socket 13/16" | |
| CIMS23N | 1/2" Drive 6 Point D | eep Impact SAE Socket 5/8" | CIMS27N | 1/2" Drive 6 Point Deep Impact SAE Socket 7/8" | |

86 I 87 CIMS28N CIMS29N CIMS30N

CIMS31N

(T CRESCENT®

8 Pc. 1/2" Drive 6 Point Deep Impact **Metric Socket Set**

- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped for quick size identification
- Black phosphate finish for corrosion resistance
- Meets or exceeds ASME specifications



| Cat. No. | Included Storage | Product Weight | | |
|----------|------------------|----------------|----------|-------------|
| CIMS3N | Socket Rail | 3.650 lb | | |
| Cat. No. | Description | | Cat. No. | Description |

| ooket Hall | 0.000 lb | | | 0 |
|----------------------------|-------------------------|----------|---|---|
| Description | | Cat. No. | Description | |
| 1/2" Drive 6 Point Deep Im | pact Metric Socket 12mm | CIMS32N | 1/2" Drive 6 Point Deep Impact Metric Socket 17mm | |
| 1/2" Drive 6 Point Deep Im | pact Metric Socket 13mm | CIMS33N | 1/2" Drive 6 Point Deep Impact Metric Socket 18mm | |
| 1/2" Drive 6 Point Deep Im | pact Metric Socket 14mm | CIMS34N | 1/2" Drive 6 Point Deep Impact Metric Socket 19mm | |
| 1/2" Drive 6 Point Deep Im | pact Metric Socket 15mm | CIMS35N | 1/2" Drive 6 Point Deep Impact Metric Socket 21mm | |

7 Pc. 1/2" Drive Hex Bit Impact SAE Socket Set

- Manufactured from chrome molybdenum alloy steel (CR-MO) for hetter strength and longer tool life.

| Insert bits r Black oxide | made of S2 steel for s finish for corrosion r ceeds ASME specific | trength and durability esistance | Same Same Same Same Same Same Same Same |
|------------------------------|---|----------------------------------|---|
| at. No. | Included Storage | Product Weight | Chian Bir |
| IMBS11N | None | 2.305 lb | |

| Cat. No. | Description | Cat. No. | Description |
|----------|--|----------|---|
| - | 1/2" Drive Impact Hex Bit SAE Socket 3/8" | - | 1/2" Drive Impact Hex Bit SAE Socket 5/8" |
| - | 1/2" Drive Impact Hex Bit SAE Socket 7/16" | - | 1/2" Drive Impact Hex Bit SAE Socket 11/16" |
| - | 1/2" Drive Impact Hex Bit SAE Socket 1/2" | - | 1/2" Drive Impact Hex Bit SAE Socket 3/4" |
| _ | 1/2" Drive Impact Hex Bit SAF Socket 9/16" | | |

1/2" Drive Impact Extension

- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Black oxide finish for corrosion resistance
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Overall Length | Wobble | Product Weight |
|----------|----------------|--------|----------------|
| CIMSA3N | 5 in | No | 0.530 lb |

1/2" Drive Impact Adapters

- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Black oxide finish for corrosion resistance
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Female Drive Size | Male Drive Size | Product Weight |
|----------|-------------------|-----------------|----------------|
| CIMSA2N | 1/2" | 3/8" | 0.170 lb |
| CIMSA1N | 1/2" | 3/4" | 0.290 lb |

1/2" Drive Impact Universal Joint

- Universal joint gives improved access to hard to reach fasteners
- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Black oxide finish for corrosion resistance
- Ball detent for secure socket retention
- Meets or exceeds ASME specifications



| Cat. No. | Product Weight |
|----------|----------------|
| CIMSA4N | 0.310 lb |



1/2" Drive 6 Point Standard Impact Sockets

- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped for quick size identification
- Black phosphate finish for corrosion resistance
- Meets or exceeds ASME specifications





| Cat. No. | SAE/Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|------------|---------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CIMS4N | SAE | 7/16 in | 0.98 in | 0.66 in | 1.62 in | 0.33 in | 0.5 in | 0.200 lb |
| CIMS5N | SAE | 1/2 in | 0.98 in | 0.72 in | 1.62 in | 0.33 in | 0.5 in | 0.200 lb |
| CIMS6N | SAE | 9/16 in | 0.98 in | 0.98 in | 1.62 in | 0.43 in | 0.5 in | 0.200 lb |
| CIMS7N | SAE | 5/8 in | 0.98 in | 0.98 in | 1.62 in | 0.43 in | 0.5 in | 0.190 lb |
| CIMS8N | SAE | 11/16 in | 1 in | 1 in | 1.62 in | 0.5 in | 0.5 in | 0.230 lb |
| CIMS9N | SAE | 3/4 in | 1.17 in | 1.17 in | 1.62 in | 0.49 in | 0.75 in | 0.250 lb |
| CIMS10N | SAE | 13/16 in | 1.25 in | 1.25 in | 1.62 in | 0.49 in | 0.75 in | 0.290 lb |
| CIMS11N | SAE | 7/8 in | 1.25 in | 1.25 in | 1.62 in | 0.49 in | 0.75 in | 0.330 lb |
| CIMS12N | Metric | 12 mm | 0.98 in | 0.70 in | 1.5 in | 0.35 in | 0.5 in | 0.200 lb |
| CIMS13N | Metric | 13 mm | 0.98 in | 0.70 in | 1.5 in | 0.35 in | 0.54 in | 0.190 lb |
| CIMS14N | Metric | 14 mm | 0.98 in | 0.77 in | 1.5 in | 0.45 in | 0.54 in | 0.200 lb |
| CIMS15N | Metric | 15 mm | 0.98 in | 0.98 in | 1.5 in | 0.45 in | 0.54 in | 0.200 lb |
| CIMS16N | Metric | 17 mm | 1 in | 1 in | 1.5 in | 0.45 in | 0.54 in | 0.220 lb |
| CIMS17N | Metric | 18 mm | 1.1 in | 1.1 in | 1.5 in | 0.49 in | 0.54 in | 0.280 lb |
| CIMS18N | Metric | 19 mm | 1.17 in | 1.17 in | 1.5 in | 0.49 in | 0.75 in | 0.250 lb |
| CIMS19N | Metric | 21 mm | 1.25 in | 1.25 in | 1.5 in | 0.49 in | 0.75 in | 0.280 lb |

1/2" Drive 6 Point Deep Impact Sockets

- Manufactured from chrome molybdenum alloy steel (CR-MO) for better strength and longer tool life
- Off-corner loading technology to virtually eliminate fastener rounding
- Size markings stamped for quick size identification
- Black phosphate finish for corrosion resistance
- Meets or exceeds ASME specifications



| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CIMS20N | SAE | 7/16 in | 0.95 in | 0.73 in | 3.17 in | 0.36 in | 0.50 in | 0.420 lb |
| CIMS21N | SAE | 1/2 in | 0.95 in | 0.73 in | 3.17 in | 0.36 in | 0.50 in | 0.410 lb |
| CIMS22N | SAE | 9/16 in | 0.95 in | 0.73 in | 3.17 in | 0.36 in | 1.15 in | 0.410 lb |
| CIMS23N | SAE | 5/8 in | 0.95 in | 0.95 in | 3.17 in | 0.36 in | 1.15 in | 0.370 lb |
| CIMS24N | SAE | 11/16 in | 0.95 in | 0.95 in | 3.17 in | 0.45 in | 1.15 in | 0.440 lb |
| CIMS25N | SAE | 3/4 in | 1.1 in | 1.1 in | 3.17 in | 0.45 in | 1.15 in | 0.490 lb |
| CIMS26N | SAE | 13/16 in | 1.18 in | 1.18 in | 3.17 in | 0.45 in | 1.15 in | 0.570 lb |

| Cat. No. | SAE/ Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|----------------|------------------|----------------------|-----------------------|---------------------------|---------------------------|-------------------------|-------------------|
| CIMS27N | SAE | 7/8 in | 1.26 in | 1.26 in | 3.17 in | 0.45 in | 1.15 in | 0.660 lb |
| CIMS28N | Metric | 12 mm | 0.95 in | 0.73 in | 3.21 in | 0.36 in | 0.50 in | 0.410 lb |
| CIMS29N | Metric | 13 mm | 0.95 in | 0.73 in | 3.21 in | 0.36 in | 0.50 in | 0.410 lb |
| CIMS30N | Metric | 14 mm | 0.95 in | 0.73 in | 3.21 in | 0.36 in | 1.15 in | 0.410 lb |
| CIMS31N | Metric | 15 mm | 0.95 in | 0.95 in | 3.21 in | 0.36 in | 1.15 in | 0.370 lb |
| CIMS32N | Metric | 17 mm | 0.95 in | 0.95 in | 3.21 in | 0.45 in | 1.15 in | 0.450 lb |
| CIMS33N | Metric | 18 mm | 1.1 in | 1.1 in | 3.21 in | 0.45 in | 1.15 in | 0.530 lb |
| CIMS34N | Metric | 19 mm | 1.18 in | 1.18 in | 3.21 in | 0.45 in | 1.15 in | 0.500 lb |
| CIMS35N | Metric | 21 mm | 1.26 in | 1.26 in | 3.21 in | 0.45 in | 1.15 in | 0.560 lb |

9 Pc. X10 12 Point SAE Long Pattern Combination Wrench Set

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading technology on the box-end reduces fastener rounding
- 15 degree box end offset for additional knuckle clearance
- Open end has anti-slip feature for better gripping power on fasteners
- Long pattern design increases both reach and leverage
- Large markings for quick size identification
- Black manganese phosphate finish for extreme corrosion resistance and smooth-ground surfaces to reduce friction
- Includes rack for storage and organization
- Meets or exceeds ASME and ANSI specifications



| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|------------------------|---------------------------|----------|---|-----|
| CCWS9BS | Wrench Rack | 2.380 lb | | | 12 |
| Cat. No. | Description | | Cat. No. | Description | |
| - | 1/4" 12 Point Long Pat | tern Combination Wrench | - | 9/16" 12 Point Long Pattern Combination Wrench | |
| - | 5/16" 12 Point Long Pa | attern Combination Wrench | - | 5/8" 12 Point Long Pattern Combination Wrench | |
| - | 3/8" 12 Point Long Pat | tern Combination Wrench | - | 11/16" 12 Point Long Pattern Combination Wrench | |
| - | 7/16" 12 Point Long Pa | attern Combination Wrench | - | 3/4" 12 Point Long Pattern Combination Wrench | |
| - | 1/2" 12 Point Long Pat | tern Combination Wrench | | | |
| | | | | | |

90 l



9 Pc. X10 12 Point Metric Long Pattern **Combination Wrench Set**

- Incred and h
- Off-co
- 15 de
- Πnen
- Long
- smoo
- Include
- Meets

| heat-treated chrome alloy s corner loading technology o egree box end offset for add n end has anti-slip feature f g pattern design increases b e markings for quick size id | on the box-end reduces faste ditional knuckle clearance or better gripping power on footh reach and leverage lentification nish for extreme corrosion reduce friction | ner rounding asteners | Tomas 1 Common 1 Comm |
|---|---|--------------------------|--|
| Included Stayons | Droduct Weight | | |

| | m |
|--|------|
| | FI. |
| | CIT. |

(12)

| CCWS9BM | Wrench Rack | 2.475 lb | | | 12 |
|----------|--------------------|----------------------------|----------|---|----|
| Cat. No. | Description | | Cat. No. | Description | |
| - | 8mm 12 Point Long | Pattern Combination Wrench | - | 14mm 12 Point Long Pattern Combination Wrench | |
| - | 10mm 12 Point Long | Pattern Combination Wrench | - | 15mm 12 Point Long Pattern Combination Wrench | |
| - | 11mm 12 Point Long | Pattern Combination Wrench | - | 17mm 12 Point Long Pattern Combination Wrench | |
| - | 12mm 12 Point Long | Pattern Combination Wrench | - | 19mm 12 Point Long Pattern Combination Wrench | |
| _ | 13mm 12 Point Long | Pattern Combination Wrench | | | |

14 Pc. 12 Point SAE Combination Wrench Set

Product Weight

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification

11/16" 12 Point Combination Wrench

3/4" 12 Point Combination Wrench

- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes tool roll for storage and organization

Cat. No.

CCW8

CCW9

Meets or exceeds ASME and ANSI specifications

Included Storage

| 0 | | |
|-----|---|-------------------|
| | | |
| 020 | 3 | The second second |

1-1/8" 12 Point Combination Wrench

1-1/4" 12 Point Combination Wrench

| CCWS4 | Tool Roll 12.68 I |) | | |
|----------|-----------------------------------|----------|-------------------------------------|--|
| Cat. No. | Description | Cat. No. | Description | |
| CCW3 | 3/8" 12 Point Combination Wrench | CCW10 | 13/16" 12 Point Combination Wrench | |
| CCW4 | 7/16" 12 Point Combination Wrench | CCW11 | 7/8" 12 Point Combination Wrench | |
| CCW5 | 1/2" 12 Point Combination Wrench | CCW12 | 15/16" 12 Point Combination Wrench | |
| CCW6 | 9/16" 12 Point Combination Wrench | CCW13 | 1" 12 Point Combination Wrench | |
| CCW7 | 5/8" 12 Point Combination Wrench | CCW14 | 1-1/16" 12 Point Combination Wrench | |

CCW15

CCW16

15 Pc. 12 Point Metric Combination Wrench Set

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes tool roll for storage and organization
- Meets or exceeds ASME and ANSI specifications

| | No. | 2 | 10 |
|-----|-----|---|----|
| | | | |
| | 11 | 1 | 13 |
| CH | | | |
| A B | N | | |

| Cat. No. | Included Storage | Product Weight | | 00 00 | mm |
|----------|-----------------------|----------------|----------|----------------------------------|----|
| CCWS5 | Tool Roll | 5.69 lb | | | 12 |
| Cat. No. | Description | | Cat. No. | Description | |
| CCW18 | 7mm 12 Point Combinat | ion Wrench | CCW26 | 15mm 12 Point Combination Wrench | |
| CCW19 | 8mm 12 Point Combinat | ion Wrench | CCW27 | 16mm 12 Point Combination Wrench | |
| CCW20 | 9mm 12 Point Combinat | ion Wrench | CCW28 | 17mm 12 Point Combination Wrench | |
| CCW21 | 10mm 12 Point Combina | ation Wrench | CCW29 | 18mm 12 Point Combination Wrench | |
| CCW22 | 11mm 12 Point Combina | ation Wrench | CCW30 | 19mm 12 Point Combination Wrench | |
| CCW23 | 12mm 12 Point Combina | ation Wrench | CCW31 | 20mm 12 Point Combination Wrench | |
| CCW24 | 13mm 12 Point Combina | ation Wrench | CCW32 | 21mm 12 Point Combination Wrench | |
| CCW25 | 14mm 12 Point Combina | ation Wrench | | | |

10 Pc. 12 Point SAE Combination Wrench Set

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes rack for storage and organization
- Meets or exceeds ASME and ANSI specifications



| Cat. No. | Included Storage | Product Weight | | | SAE |
|----------|------------------------|----------------|----------|------------------------------------|------|
| CCWS2 | Wrench Rack | 2.34 lb | | | (12) |
| Cat. No. | Description | | Cat. No. | Description | |
| CCW0 | 1/4" 12 Point Combinat | tion Wrench | CCW5 | 1/2" 12 Point Combination Wrench | |
| CCW1 | 5/16" 12 Point Combina | ation Wrench | CCW6 | 9/16" 12 Point Combination Wrench | |
| - | 11/32" 12 Point Combi | nation Wrench | CCW7 | 5/8" 12 Point Combination Wrench | |
| CCW3 | 3/8" 12 Point Combinat | tion Wrench | CCW8 | 11/16" 12 Point Combination Wrench | |
| CCW4 | 7/16" 12 Point Combina | ation Wrench | CCW9 | 3/4" 12 Point Combination Wrench | |
| | | | | | |



10 Pc. 12 Point Metric Combination **Wrench Set**

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes rack for storage and organization
- Meets or exceeds ASME and ANSI specifications

| | | • | | | |
|----------|----------------------|----------------|----------|----------------------------------|-----|
| Cat. No. | Included Storage | Product Weight | | | |
| CCWS3 | Wrench Rack | 2.43 lb | | | (12 |
| Cat. No. | Description | | Cat. No. | Description | |
| CCW19 | 8mm 12 Point Combina | tion Wrench | CCW24 | 13mm 12 Point Combination Wrench | |
| CCW20 | 9mm 12 Point Combina | tion Wrench | CCW25 | 14mm 12 Point Combination Wrench | |
| CCW21 | 10mm 12 Point Combin | ation Wrench | CCW26 | 15mm 12 Point Combination Wrench | |
| CCW22 | 11mm 12 Point Combin | ation Wrench | CCW28 | 17mm 12 Point Combination Wrench | |



7 Pc. 12 Point SAE Combination **Wrench Set**

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes tool roll for storage and organization
- Meets or exceeds ASME and ANSI specifications

| | | | | 200 | |
|-----------|-----------------------------|----------------|----------|-----------------------------------|------|
| Cat. No. | Included Storage | Product Weight | | | SAE |
| CCWSRSAE7 | Tool Roll | 1.000 lb | | | (12) |
| Cat. No. | Description | | Cat. No. | Description | |
| CCWO | 1/4" 12 Point Combination V | /rench | CCW4 | 7/16" 12 Point Combination Wrench | |
| CCW1 | 5/16" 12 Point Combination | Wrench | CCW5 | 1/2" 12 Point Combination Wrench | |
| - | 11/32" 12 Point Combination | n Wrench | CCW6 | 9/16" 12 Point Combination Wrench | |
| CCW3 | 3/8" 12 Point Combination V | /rench | | | |



- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification

9mm 12 Point Combination Wrench

10mm 12 Point Combination Wrench

- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes tool roll for storage and organization

CCW20

CCW21

Meets or exceeds ASME and ANSI specifications

| CCWSRMM7 | Tool Roll | 0.970 lb | | |
|----------|--------------------------|----------|----------|----------------------------------|
| Cat. No. | Description | | Cat. No. | Description |
| - | 6mm 12 Point Combination | n Wrench | CCW22 | 11mm 12 Point Combination Wrench |
| CCW19 | 8mm 12 Point Combination | n Wrench | CCW23 | 12mm 12 Point Combination Wrench |

CCW24



13mm 12 Point Combination Wrench

6 Pc. 12 Point SAE Combination **Wrench Set**

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes rack for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight | | | |
|----------|--------------------------|----------------|----------|------------------------------------|--|
| CCWS0 | Wrench Rack | 1.54 lb | | | |
| Cat. No. | Description | | Cat. No. | Description | |
| CCM3 | 3/8" 12 Point Combinatio | n Wrench | CCW6 | 9/16" 12 Point Combination Wrench | |
| CCW4 | 7/16" 12 Point Combinati | on Wrench | CCW7 | 5/8" 12 Point Combination Wrench | |
| CCW5 | 1/2" 12 Point Combinatio | n Wrench | CCW8 | 11/16" 12 Point Combination Wrench | |





6 Pc. 12 Point Metric Combination Wrench Set

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes rack for storage and organization
- Meets or exceeds ASME and ANSI specifications



| Cat. No. | Included Storage | Product Weight | | | | |
|----------|----------------------------------|----------------|----------|----------------------------------|------|--|
| CCWS1 | Wrench Rack | 1.54 lb | | | (12) | |
| Cat. No. | Description | | Cat. No. | Description | | |
| CCW19 | 8mm 12 Point Combination Wrench | | CCW23 | 12mm 12 Point Combination Wrench | | |
| CCW20 | 9mm 12 Point Combination Wrench | | CCW24 | 13mm 12 Point Combination Wrench | | |
| CCW21 | 10mm 12 Point Combination Wrench | | CCW25 | 14mm 12 Point Combination Wrench | | |

12 Point Jumbo Combination Wrenches

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME and ANSI specifications



| Cat. No. | SAE/ Metric | Fastener Size | End A Width | End A Thickness | End B Width | End B Thickness | Overall Length | Product Weight |
|----------|----------------|------------------|----------------|--------------------|----------------|--------------------|-------------------|-------------------|
| CJCW0 | SAE | 1-5/16 in | 71 in | 14.5 in | 49.6 in | 21.4 in | 18.70 in | 2.23 lb |
| CJCW1 | SAE | 1-3/8 in | 71 in | 14.5 in | 49.6 in | 21.4 in | 18.70 in | 2.40 lb |
| CJCW2 | SAE | 1-7/16 in | 78.8 in | 15.5 in | 55.5 in | 23.5 in | 19.69 in | 3.18 lb |
| CJCW3 | SAE | 1-1/2 in | 78.8 in | 15.5 in | 55.5 in | 23.5 in | 19.69 in | 3.34 lb |
| CJCW4 | SAE | 1-5/8 in | 86.8 in | 16.5 in | 61 in | 24.6 in | 22.83 in | 4.21 lb |
| CJCW5 | SAE | 1-11/16 in | 88.6 in | 20.1 in | 65 in | 25.4 in | 22.83 in | 4.45 lb |
| CJCW6 | SAE | 1-3/4 in | 88.6 in | 20.1 in | 65 in | 25.4 in | 24.02 in | 5.27 lb |
| CJCW7 | SAE | 1-13/16 in | 94 in | 21.2 in | 69 in | 25.4 in | 24.02 in | 5.51 lb |
| CJCW8 | SAE | 1-7/8 in | 94 in | 21.2 in | 69 in | 25.4 in | 25.59 in | 6.68 lb |
| CJCW9 | SAE | 2 in | 3.94 in | 0.85 in | 2.93 in | 1.04 in | 25.59 in | 6.61 lb |

12 Point Combination Wrenches

- Incredible strength and corrosion resistance from specially formulated and heat-treated chrome alloy steel
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Sizes stamped on both sides of each wrench for easy identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME and ANSI specifications



| Cat. No. SAE/ Metrio Fastener Size End A Width End B Thickness End B Thickness Corpular Weight Product Weight CCW0 SAE 1/4 in 0.51 in 0.13 in 0.44 in 0.17 in 0.05 in 0.06 ib CCW1 SAE 5/16 in 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 ib CCW4 SAE 7/16 in 22.41 in 4.8 in 17.19 in 6.5 in 6.50 in 0.15 ib CCW4 SAE 7/16 in 22.41 in 4.8 in 17.19 in 6.5 in 6.97 in 0.17 ib CCW6 SAE 9/16 in 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW7 SAE 5/8 in 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW7 SAE 11/16 in 3.47 in 1.8 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW7 SAE 13/16 in 3.47 in | | | | | | | | | (12) |
|--|----------|--------|-----------|----------|---------|----------|---------|----------|---------|
| CCW1 SAE 5/16 in 0.64 in 0.15 in 0.053 in 0.19 in 5.51 in 0.07 lb CCW3 SAE 3/8 in 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW4 SAE 7/6 in 22.44 in 4.8 in 17.7 in 6.5 in 6.50 in 0.15 lb CCW5 SAE 1/2 in 26.45 in 5.4 in 19.55 in 0.73 in 6.97 in 0.17 lb CCW6 SAE 3/16 in 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW7 SAE 5/8 in 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW8 SAE 13/16 in 42.75 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW10 SAE 13/16 in 42.75 in 0.31 in 1.09 in 0.43 in 11.54 in 0.64 lb CCW11 SAE 7/8 in 1.77 in 0.33 in 1.25 i | Cat. No. | | | | | | | | |
| CCW3 SAE 3/8 in 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW4 SAE 7/16 in 22.41 in 4.8 in 17.19 in 6.5 in 6.50 in 0.15 lb CCW5 SAE 1/2 in 26.45 in 5.4 in 19.55 in 7.7 in 6.97 in 0.17 lb CCW6 SAE 9/16 in 1.13 in 0.23 in 0.84 in 0.33 in 8.19 in 0.29 lb CCW7 SAE 5/8 in 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW8 SAE 11/16 in 34.77 in 6.8 in 2.55 in 9.9 in 8.90 in 0.31 lb CCW9 SAE 3/4 in 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW10 SAE 1.3/16 in 42.75 in 8.3 in 30.11 in 11.8 in 10.67 in 0.62 lb CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in< | CCWO | SAE | 1/4 in | 0.51 in | 0.13 in | 0.44 in | 0.17 in | 5.00 in | 0.06 lb |
| CCW4 SAE 7/16 in 22.41 in 4.8 in 17.19 in 6.5 in 6.50 in 0.15 lb CCW5 SAE 1/2 in 26.45 in 5.4 in 19.55 in 7.7 in 6.97 in 0.17 lb CCW6 SAE 9/16 in 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW7 SAE 5/8 in 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW8 SAE 11/16 in 3.477 in 6.8 in 25.51 in 9.9 in 0.41 lb CCW9 SAE 3/4 in 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.41 lb CCW10 SAE 13/16 in 42.75 in 8.3 in 30.11 in 11.8 in 10.67 in 0.42 lb CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb CCW12 SAE 1.5/16 in 48.96 in 9.3 in 33.29 in 13 | CCW1 | SAE | 5/16 in | 0.64 in | 0.15 in | .053 in | 0.19 in | 5.51 in | 0.07 lb |
| CCW5 SAE 1/2 in 26.45 in 5.4 in 19.55 in 7.7 in 6.97 in 0.17 lb CCW6 SAE 9/16 in 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW7 SAE 5/8 in 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW8 SAE 11/16 in 34.77 in 6.8 in 25.51 in 9.9 in 8.90 in 0.31 lb CCW9 SAE 3/4 in 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW10 SAE 13/16 in 42.75 in 8.3 in 30.11 in 11.8 in 10.67 in 0.62 lb CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb CCW12 SAE 15/16 in 48.96 in 9.3 in 33.29 in 13.3 in 12.40 in 0.86 lb CCW12 SAE 1.1/16 in 2.21 in 0.40 in <th< td=""><td>CCW3</td><td>SAE</td><td>3/8 in</td><td>0.80 in</td><td>0.17 in</td><td>0.62 in</td><td>0.23 in</td><td>6.22 in</td><td>0.12 lb</td></th<> | CCW3 | SAE | 3/8 in | 0.80 in | 0.17 in | 0.62 in | 0.23 in | 6.22 in | 0.12 lb |
| CCW6 SAE 9/16 in 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW7 SAE 5/8 in 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW8 SAE 11/16 in 34.77 in 6.8 in 25.51 in 9.9 in 8.90 in 0.31 lb CCW9 SAE 3/4 in 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW10 SAE 13/16 in 42.75 in 8.3 in 30.11 in 11.8 in 10.67 in 0.62 lb CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb CCW12 SAE 1 in 2.01 in 0.38 in 1.46 in 0.48 in 11.54 in 0.64 lb CCW13 SAE 1 in 2.01 in 0.33 in 1.46 in 0.54 in 13.15 in 0.88 lb CCW14 SAE 1 -1/16 in 2.21 in 0.40 in 1.5 | CCW4 | SAE | 7/16 in | 22.41 in | 4.8 in | 17.19 in | 6.5 in | 6.50 in | 0.15 lb |
| CCW7 SAE 5/8 in 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW8 SAE 11/16 in 34.77 in 6.8 in 25.51 in 9.9 in 8.90 in 0.31 lb CCW9 SAE 3/4 in 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW10 SAE 13/16 in 42.75 in 8.3 in 30.11 in 11.8 in 10.67 in 0.62 lb CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb CCW12 SAE 15/16 in 48.96 in 9.3 in 33.29 in 13.3 in 12.40 in 0.86 lb CCW13 SAE 1 in 2.01 in 0.38 in 1.46 in 0.54 in 13.15 in 0.86 lb CCW14 SAE 1-1/8 in 61.1 in 11.1 in 42.41 in 16.3 in 15.87 in 1.43 lb CCW15 SAE 1-1/4 in 66.45 in 11.5 in | CCW5 | SAE | 1/2 in | 26.45 in | 5.4 in | 19.55 in | 7.7 in | 6.97 in | 0.17 lb |
| CCW8 SAE 11/16 in 34.77 in 6.8 in 25.51 in 9.9 in 8.90 in 0.31 lb CCW9 SAE 3/4 in 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW10 SAE 13/16 in 42.75 in 8.3 in 30.11 in 11.8 in 10.67 in 0.62 lb CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb CCW12 SAE 15/16 in 48.96 in 9.3 in 33.29 in 13.3 in 12.40 in 0.86 lb CCW13 SAE 1 in 2.01 in 0.38 in 1.46 in 0.54 in 13.15 in 0.88 lb CCW14 SAE 1-1/16 in 2.21 in 0.40 in 1.52 in 0.59 in 14.13 in 1.21 lb CCW15 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW16 Metric 8 mm 0.64 in 0.15 in | CCW6 | SAE | 9/16 in | 1.13 in | 0.23 in | 0.84 in | 0.33 in | 7.52 in | 0.20 lb |
| CCW9 SAE 3/4 in 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW10 SAE 13/16 in 42.75 in 8.3 in 30.11 in 11.8 in 10.67 in 0.62 lb CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb CCW12 SAE 15/16 in 48.96 in 9.3 in 33.29 in 13.3 in 12.40 in 0.86 lb CCW13 SAE 1 in 2.01 in 0.38 in 1.46 in 0.54 in 13.15 in 0.88 lb CCW14 SAE 1-1/16 in 2.21 in 0.40 in 1.52 in 0.59 in 14.13 in 1.21 lb CCW15 SAE 1-1/8 in 61.1 in 11.1 in 42.41 in 16.3 in 15.87 in 1.43 lb CCW16 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW18 Metric 7 mm 0.56 in 0.13 in | CCW7 | SAE | 5/8 in | 1.28 in | 0.25 in | 0.93 in | 0.37 in | 8.19 in | 0.29 lb |
| CCW10 SAE 13/16 in 42.75 in 8.3 in 30.11 in 11.8 in 10.67 in 0.62 lb CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb CCW12 SAE 15/16 in 48.96 in 9.3 in 33.29 in 13.3 in 12.40 in 0.86 lb CCW13 SAE 1 in 2.01 in 0.38 in 1.46 in 0.54 in 13.15 in 0.88 lb CCW14 SAE 1-1/16 in 2.21 in 0.40 in 1.52 in 0.59 in 14.13 in 1.21 lb CCW15 SAE 1-1/8 in 61.1 in 11.1 in 42.41 in 16.3 in 15.87 in 1.43 lb CCW16 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW18 Metric 7 mm 0.56 in 0.13 in 0.47 in 0.17 in 5.28 in 0.06 lb CCW19 Metric 9 mm 0.72 in 0.16 in <td>CCW8</td> <td>SAE</td> <td>11/16 in</td> <td>34.77 in</td> <td>6.8 in</td> <td>25.51 in</td> <td>9.9 in</td> <td>8.90 in</td> <td>0.31 lb</td> | CCW8 | SAE | 11/16 in | 34.77 in | 6.8 in | 25.51 in | 9.9 in | 8.90 in | 0.31 lb |
| CCW11 SAE 7/8 in 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb CCW12 SAE 15/16 in 48.96 in 9.3 in 33.29 in 13.3 in 12.40 in 0.86 lb CCW13 SAE 1 in 2.01 in 0.38 in 1.46 in 0.54 in 13.15 in 0.88 lb CCW14 SAE 1-1/16 in 2.21 in 0.40 in 1.52 in 0.59 in 14.13 in 1.21 lb CCW15 SAE 1-1/8 in 61.1 in 11.1 in 42.41 in 16.3 in 15.87 in 1.43 lb CCW16 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW18 Metric 7 mm 0.56 in 0.13 in 0.47 in 0.17 in 5.28 in 0.06 lb CCW19 Metric 8 mm 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 lb CCW20 Metric 10 mm 0.80 in 0.17 in | CCW9 | SAE | 3/4 in | 1.54 in | 0.31 in | 1.09 in | 0.43 in | 9.76 in | 0.44 lb |
| CCW12 SAE 15/16 in 48.96 in 9.3 in 33.29 in 13.3 in 12.40 in 0.86 ib CCW13 SAE 1 in 2.01 in 0.38 in 1.46 in 0.54 in 13.15 in 0.88 lb CCW14 SAE 1-1/16 in 2.21 in 0.40 in 1.52 in 0.59 in 14.13 in 1.21 lb CCW15 SAE 1-1/8 in 61.1 in 11.1 in 42.41 in 16.3 in 15.87 in 1.43 lb CCW16 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW18 Metric 7 mm 0.56 in 0.13 in 0.47 in 0.17 in 5.28 in 0.06 lb CCW19 Metric 8 mm 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 lb CCW20 Metric 9 mm 0.72 in 0.16 in 0.57 in 0.21 in 5.91 in 0.09 lb CCW21 Metric 10 mm 0.80 in 0.17 in | CCW10 | SAE | 13/16 in | 42.75 in | 8.3 in | 30.11 in | 11.8 in | 10.67 in | 0.62 lb |
| CCW13 SAE 1 in 2.01 in 0.38 in 1.46 in 0.54 in 13.15 in 0.88 lb CCW14 SAE 1-1/16 in 2.21 in 0.40 in 1.52 in 0.59 in 14.13 in 1.21 lb CCW15 SAE 1-1/8 in 61.1 in 11.1 in 42.41 in 16.3 in 15.87 in 1.43 lb CCW16 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW18 Metric 7 mm 0.56 in 0.13 in 0.47 in 0.17 in 5.28 in 0.06 lb CCW19 Metric 8 mm 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 lb CCW20 Metric 9 mm 0.72 in 0.16 in 0.57 in 0.21 in 5.91 in 0.09 lb CCW21 Metric 10 mm 0.88 in 0.19 in 0.62 in 0.23 in 6.22 in 0.15 lb CCW22 Metric 11 mm 0.88 in 0.19 in | CCW11 | SAE | 7/8 in | 1.77 in | 0.34 in | 1.25 in | 0.48 in | 11.54 in | 0.64 lb |
| CCW14 SAE 1-1/16 in 2.21 in 0.40 in 1.52 in 0.59 in 14.13 in 1.21 lb CCW15 SAE 1-1/8 in 61.1 in 11.1 in 42.41 in 16.3 in 15.87 in 1.43 lb CCW16 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW18 Metric 7 mm 0.56 in 0.13 in 0.47 in 0.17 in 5.28 in 0.06 lb CCW19 Metric 8 mm 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 lb CCW20 Metric 9 mm 0.72 in 0.16 in 0.57 in 0.21 in 5.91 in 0.09 lb CCW21 Metric 10 mm 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW22 Metric 11 mm 0.88 in 0.19 in 0.68 in 0.26 in 6.50 in 0.15 lb CCW23 Metric 12 mm 0.96 in 0.20 in | CCW12 | SAE | 15/16 in | 48.96 in | 9.3 in | 33.29 in | 13.3 in | 12.40 in | 0.86 lb |
| CCW15 SAE 1-1/8 in 61.1 in 11.1 in 42.41 in 16.3 in 15.87 in 1.43 lb CCW16 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW18 Metric 7 mm 0.56 in 0.13 in 0.47 in 0.17 in 5.28 in 0.06 lb CCW19 Metric 8 mm 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 lb CCW20 Metric 9 mm 0.72 in 0.16 in 0.57 in 0.21 in 5.91 in 0.09 lb CCW21 Metric 10 mm 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW22 Metric 11 mm 0.88 in 0.19 in 0.68 in 0.26 in 6.50 in 0.15 lb CCW23 Metric 12 mm 0.96 in 0.20 in 0.72 in 0.28 in 6.77 in 0.16 lb CCW24 Metric 13 mm 1.04 in 0.21 in | CCW13 | SAE | 1 in | 2.01 in | 0.38 in | 1.46 in | 0.54 in | 13.15 in | 0.88 lb |
| CCW16 SAE 1-1/4 in 66.45 in 11.5 in 45.56 in 16.8 in 16.95 in 1.94 lb CCW18 Metric 7 mm 0.56 in 0.13 in 0.47 in 0.17 in 5.28 in 0.06 lb CCW19 Metric 8 mm 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 lb CCW20 Metric 9 mm 0.72 in 0.16 in 0.57 in 0.21 in 5.91 in 0.09 lb CCW21 Metric 10 mm 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW22 Metric 11 mm 0.88 in 0.19 in 0.68 in 0.26 in 6.50 in 0.15 lb CCW23 Metric 12 mm 0.96 in 0.20 in 0.72 in 0.28 in 6.77 in 0.16 lb CCW24 Metric 13 mm 1.04 in 0.21 in 0.77 in 0.30 in 6.97 in 0.17 lb CCW25 Metric 14 mm 1.13 in 0.23 in | CCW14 | SAE | 1-1/16 in | 2.21 in | 0.40 in | 1.52 in | 0.59 in | 14.13 in | 1.21 lb |
| CCW18 Metric 7 mm 0.56 in 0.13 in 0.47 in 0.17 in 5.28 in 0.06 lb CCW19 Metric 8 mm 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 lb CCW20 Metric 9 mm 0.72 in 0.16 in 0.57 in 0.21 in 5.91 in 0.09 lb CCW21 Metric 10 mm 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW22 Metric 11 mm 0.88 in 0.19 in 0.68 in 0.26 in 6.50 in 0.15 lb CCW23 Metric 12 mm 0.96 in 0.20 in 0.72 in 0.28 in 6.77 in 0.16 lb CCW24 Metric 13 mm 1.04 in 0.21 in 0.77 in 0.30 in 6.97 in 0.17 lb CCW25 Metric 14 mm 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW26 Metric 15 mm 1.20 in 0.24 in | CCW15 | SAE | 1-1/8 in | 61.1 in | 11.1 in | 42.41 in | 16.3 in | 15.87 in | 1.43 lb |
| CCW19 Metric 8 mm 0.64 in 0.15 in 0.53 in 0.19 in 5.51 in 0.07 lb CCW20 Metric 9 mm 0.72 in 0.16 in 0.57 in 0.21 in 5.91 in 0.09 lb CCW21 Metric 10 mm 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW22 Metric 11 mm 0.88 in 0.19 in 0.68 in 0.26 in 6.50 in 0.15 lb CCW23 Metric 12 mm 0.96 in 0.20 in 0.72 in 0.28 in 6.77 in 0.16 lb CCW24 Metric 13 mm 1.04 in 0.21 in 0.77 in 0.30 in 6.97 in 0.17 lb CCW25 Metric 14 mm 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW26 Metric 15 mm 1.20 in 0.24 in 0.88 in 0.35 in 7.87 in 0.28 lb CCW27 Metric 16 mm 1.28 in 0.25 in | CCW16 | SAE | 1-1/4 in | 66.45 in | 11.5 in | 45.56 in | 16.8 in | 16.95 in | 1.94 lb |
| CCW20 Metric 9 mm 0.72 in 0.16 in 0.57 in 0.21 in 5.91 in 0.09 lb CCW21 Metric 10 mm 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW22 Metric 11 mm 0.88 in 0.19 in 0.68 in 0.26 in 6.50 in 0.15 lb CCW23 Metric 12 mm 0.96 in 0.20 in 0.72 in 0.28 in 6.77 in 0.16 lb CCW24 Metric 13 mm 1.04 in 0.21 in 0.77 in 0.30 in 6.97 in 0.17 lb CCW25 Metric 14 mm 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW26 Metric 15 mm 1.20 in 0.24 in 0.88 in 0.35 in 7.87 in 0.28 lb CCW27 Metric 16 mm 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW28 Metric 17 mm 1.37 in 0.27 in | CCW18 | Metric | 7 mm | 0.56 in | 0.13 in | 0.47 in | 0.17 in | 5.28 in | 0.06 lb |
| CCW21 Metric 10 mm 0.80 in 0.17 in 0.62 in 0.23 in 6.22 in 0.12 lb CCW22 Metric 11 mm 0.88 in 0.19 in 0.68 in 0.26 in 6.50 in 0.15 lb CCW23 Metric 12 mm 0.96 in 0.20 in 0.72 in 0.28 in 6.77 in 0.16 lb CCW24 Metric 13 mm 1.04 in 0.21 in 0.77 in 0.30 in 6.97 in 0.17 lb CCW25 Metric 14 mm 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW26 Metric 15 mm 1.20 in 0.24 in 0.88 in 0.35 in 7.87 in 0.28 lb CCW27 Metric 16 mm 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW28 Metric 17 mm 1.37 in 0.27 in 1 in 0.39 in 8.90 in 0.31 lb CCW30 Metric 19 mm 1.45 in 0.29 in | CCW19 | Metric | 8 mm | 0.64 in | 0.15 in | 0.53 in | 0.19 in | 5.51 in | 0.07 lb |
| CCW22 Metric 11 mm 0.88 in 0.19 in 0.68 in 0.26 in 6.50 in 0.15 lb CCW23 Metric 12 mm 0.96 in 0.20 in 0.72 in 0.28 in 6.77 in 0.16 lb CCW24 Metric 13 mm 1.04 in 0.21 in 0.77 in 0.30 in 6.97 in 0.17 lb CCW25 Metric 14 mm 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW26 Metric 15 mm 1.20 in 0.24 in 0.88 in 0.35 in 7.87 in 0.28 lb CCW27 Metric 16 mm 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW28 Metric 17 mm 1.37 in 0.27 in 1 in 0.39 in 8.90 in 0.31 lb CCW30 Metric 18 mm 1.45 in 0.29 in 1.04 in 0.41 in 9.33 in 0.42 lb CCW31 Metric 20 mm 1.68 in 0.33 in | CCW20 | Metric | 9 mm | 0.72 in | 0.16 in | 0.57 in | 0.21 in | 5.91 in | 0.09 lb |
| CCW23 Metric 12 mm 0.96 in 0.20 in 0.72 in 0.28 in 6.77 in 0.16 lb CCW24 Metric 13 mm 1.04 in 0.21 in 0.77 in 0.30 in 6.97 in 0.17 lb CCW25 Metric 14 mm 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW26 Metric 15 mm 1.20 in 0.24 in 0.88 in 0.35 in 7.87 in 0.28 lb CCW27 Metric 16 mm 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW28 Metric 17 mm 1.37 in 0.27 in 1 in 0.39 in 8.90 in 0.31 lb CCW29 Metric 18 mm 1.45 in 0.29 in 1.04 in 0.41 in 9.33 in 0.42 lb CCW30 Metric 19 mm 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW31 Metric 20 mm 1.68 in 0.33 in | CCW21 | Metric | 10 mm | 0.80 in | 0.17 in | 0.62 in | 0.23 in | 6.22 in | 0.12 lb |
| CCW24 Metric 13 mm 1.04 in 0.21 in 0.77 in 0.30 in 6.97 in 0.17 lb CCW25 Metric 14 mm 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW26 Metric 15 mm 1.20 in 0.24 in 0.88 in 0.35 in 7.87 in 0.28 lb CCW27 Metric 16 mm 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW28 Metric 17 mm 1.37 in 0.27 in 1 in 0.39 in 8.90 in 0.31 lb CCW29 Metric 18 mm 1.45 in 0.29 in 1.04 in 0.41 in 9.33 in 0.42 lb CCW30 Metric 19 mm 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW31 Metric 20 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.43 in 0.62 lb CCW32 Metric 21 mm 1.68 in 0.33 in | CCW22 | Metric | 11 mm | 0.88 in | 0.19 in | 0.68 in | 0.26 in | 6.50 in | 0.15 lb |
| CCW25 Metric 14 mm 1.13 in 0.23 in 0.84 in 0.33 in 7.52 in 0.20 lb CCW26 Metric 15 mm 1.20 in 0.24 in 0.88 in 0.35 in 7.87 in 0.28 lb CCW27 Metric 16 mm 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW28 Metric 17 mm 1.37 in 0.27 in 1 in 0.39 in 8.90 in 0.31 lb CCW29 Metric 18 mm 1.45 in 0.29 in 1.04 in 0.41 in 9.33 in 0.42 lb CCW30 Metric 19 mm 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW31 Metric 20 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.43 in 0.61 lb CCW32 Metric 21 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.67 in 0.62 lb CCW33 Metric 22 mm 1.77 in 0.34 in | CCW23 | Metric | 12 mm | 0.96 in | 0.20 in | 0.72 in | 0.28 in | 6.77 in | 0.16 lb |
| CCW26 Metric 15 mm 1.20 in 0.24 in 0.88 in 0.35 in 7.87 in 0.28 lb CCW27 Metric 16 mm 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW28 Metric 17 mm 1.37 in 0.27 in 1 in 0.39 in 8.90 in 0.31 lb CCW29 Metric 18 mm 1.45 in 0.29 in 1.04 in 0.41 in 9.33 in 0.42 lb CCW30 Metric 19 mm 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW31 Metric 20 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.43 in 0.62 lb CCW32 Metric 21 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.67 in 0.62 lb CCW33 Metric 22 mm 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb | CCW24 | Metric | 13 mm | 1.04 in | 0.21 in | 0.77 in | 0.30 in | 6.97 in | 0.17 lb |
| CCW27 Metric 16 mm 1.28 in 0.25 in 0.93 in 0.37 in 8.19 in 0.29 lb CCW28 Metric 17 mm 1.37 in 0.27 in 1 in 0.39 in 8.90 in 0.31 lb CCW29 Metric 18 mm 1.45 in 0.29 in 1.04 in 0.41 in 9.33 in 0.42 lb CCW30 Metric 19 mm 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW31 Metric 20 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.43 in 0.61 lb CCW32 Metric 21 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.67 in 0.62 lb CCW33 Metric 22 mm 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb | CCW25 | Metric | 14 mm | 1.13 in | 0.23 in | 0.84 in | 0.33 in | 7.52 in | 0.20 lb |
| CCW28 Metric 17 mm 1.37 in 0.27 in 1 in 0.39 in 8.90 in 0.31 lb CCW29 Metric 18 mm 1.45 in 0.29 in 1.04 in 0.41 in 9.33 in 0.42 lb CCW30 Metric 19 mm 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW31 Metric 20 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.43 in 0.62 lb CCW32 Metric 21 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.67 in 0.62 lb CCW33 Metric 22 mm 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb | CCW26 | Metric | 15 mm | 1.20 in | 0.24 in | 0.88 in | 0.35 in | 7.87 in | 0.28 lb |
| CCW29 Metric 18 mm 1.45 in 0.29 in 1.04 in 0.41 in 9.33 in 0.42 lb CCW30 Metric 19 mm 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW31 Metric 20 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.43 in 0.61 lb CCW32 Metric 21 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.67 in 0.62 lb CCW33 Metric 22 mm 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb | CCW27 | Metric | 16 mm | 1.28 in | 0.25 in | 0.93 in | 0.37 in | 8.19 in | 0.29 lb |
| CCW30 Metric 19 mm 1.54 in 0.31 in 1.09 in 0.43 in 9.76 in 0.44 lb CCW31 Metric 20 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.43 in 0.61 lb CCW32 Metric 21 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.67 in 0.62 lb CCW33 Metric 22 mm 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb | CCW28 | Metric | 17 mm | 1.37 in | 0.27 in | 1 in | 0.39 in | 8.90 in | 0.31 lb |
| CCW31 Metric 20 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.43 in 0.61 lb CCW32 Metric 21 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.67 in 0.62 lb CCW33 Metric 22 mm 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb | CCW29 | Metric | 18 mm | 1.45 in | 0.29 in | 1.04 in | 0.41 in | 9.33 in | 0.42 lb |
| CCW32 Metric 21 mm 1.68 in 0.33 in 1.19 in 0.46 in 10.67 in 0.62 lb CCW33 Metric 22 mm 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb | CCW30 | Metric | 19 mm | 1.54 in | 0.31 in | 1.09 in | 0.43 in | 9.76 in | 0.44 lb |
| CCW33 Metric 22 mm 1.77 in 0.34 in 1.25 in 0.48 in 11.54 in 0.64 lb | CCW31 | Metric | 20 mm | 1.68 in | 0.33 in | 1.19 in | 0.46 in | 10.43 in | 0.61 lb |
| | CCW32 | Metric | 21 mm | 1.68 in | 0.33 in | 1.19 in | 0.46 in | 10.67 in | 0.62 lb |
| CCW35 Metric 24 mm 48.96 in 9.3 in 33.29 in 13.3 in 12.40 in 0.86 lb | CCW33 | Metric | 22 mm | 1.77 in | 0.34 in | 1.25 in | 0.48 in | 11.54 in | 0.64 lb |
| | CCW35 | Metric | 24 mm | 48.96 in | 9.3 in | 33.29 in | 13.3 in | 12.40 in | 0.86 lb |

96 | 97

7 Pc. X6™ SAE Ratcheting Open End Wrench Set

- Ratcheting open end turn nuts and bolts without removing the wrench from the fastener
- Universal spline box end fits six common styles of fasteners hex, square, 12 pt., E-Torx®, rounded hex, and spline
- Rapid ratcheting action turns fasteners in tight spaces

(T CRESCENT®

- Ergonomic beams let you apply more torque to fasteners
- Laser-etched size markings make identifying the correct tool quick and easy
- Specially formulated and heat-treated chrome alloy steel construction for superior strength and resistance to corrosion
- Meets or exceeds ASME and ANSI specifications
- For fasteners that do not engage the box end of the wrench, the open end may be used

| Cat. No. | Included Storage | Product Weight | | SAI |
|----------|---|-------------------------------|----------|--|
| CX6RWS7 | Tray | 2.64 lb | | (§ |
| Cat. No. | Description | | Cat. No. | Description |
| - | 5/16" X6™ Spline Open End | Ratcheting Combination Wrench | - | 9/16" X6™ Spline Open End Ratcheting Combination Wrench |
| - | 3/8" X6™ Spline Open End | Ratcheting Combination Wrench | - | 5/8" X6™ Spline Open End Ratcheting Combination Wrench |
| - | 7/16" X6™ Spline Open End Ratcheting Combination Wrench | | | 11/16" X6™ Spline Open End Ratcheting Combination Wrench |
| - | 1/2" X6™ Spline Open End | Ratcheting Combination Wrench | | |

7 Pc. X6™ Metric Ratcheting Open End Wrench Set

- Ratcheting open end turn nuts and bolts without removing the wrench from the fastener
- Universal spline box end fits six common styles of fasteners hex, square, 12 pt., E-Torx®, rounded hex, and spline
- Rapid ratcheting action turns fasteners in tight spaces
- Ergonomic beams let you apply more torque to fasteners
- Laser-etched size markings make identifying the correct tool quick and easy
- Specially formulated and heat-treated chrome alloy steel construction for superior strength and resistance to corrosion
- Meets or exceeds ASME and ANSI specifications
- For fasteners that do not engage the box end of the wrench, the open end may be used

| Cat. No. | Included Storage | Product Weight | | mn en |
|----------|------------------------------------|-----------------------------------|----------|--|
| CX6RWM7 | Tray | 2.64 lb | | (\$) |
| Cat. No. | Description | | Cat. No. | Description |
| - | 8mm X6™ Spline Open Er | nd Ratcheting Combination Wrench | - | 14mm X6™ Spline Open End Ratcheting Combination Wrench |
| - | 10mm X6™ Spline Open E | End Ratcheting Combination Wrench | - | 15mm X6™ Spline Open End Ratcheting Combination Wrench |
| - | 12mm X6™ Spline Open E | End Ratcheting Combination Wrench | - | 17mm X6™ Spline Open End Ratcheting Combination Wrench |
| - | 13mm X6 [™] Spline Open E | End Ratcheting Combination Wrench | | |



2 Pc. X6[™] 4-in-1 SAE Ratcheting Wrench Set

- 5° ratcheting arc lets you turn fasteners in tight spaces
- Universal spline box end fits six common styles of fasteners hex, square, 12 pt., E-Torx®, rounded hex, and spline
- The most versatile wrenches available each X6 can be used on six different styles of fasteners, in four common sizes
- Ergonomic beams let you apply more torque to fasteners
- Specially formulated and heat-treated chrome alloy steel construction for superior strength and resistance to corrosion
- Includes tray for storage and organization
- Some square nuts and bolts may not engage with ratcheting box ends

| Cat. No. | Included Storage | Product Weight |
|----------|-----------------------------------|---------------------------------------|
| CX6DBS2 | None | 1.10 lb |
| Cat. No. | Description | |
| - | X6 [™] 4-in-1 Spline Rev | ersible Ratcheting Wrench 5/16" x 3/8 |
| - | X6 [™] 4-in-1 Spline Rev | ersible Ratcheting Wrench 9/16" x 5/8 |

2 Pc. X6™ 4-in-1 Metric Ratcheting Wrench Set

- 5° ratcheting arc lets you turn fasteners in tight spaces
- Universal spline box end fits six common styles of fasteners hex, square, 12 pt., E-Torx®, rounded hex, and spline
- The most versatile wrenches available each X6 can be used on six different styles of fasteners, in four common sizes
- Ergonomic beams let you apply more torque to fasteners
- Specially formulated and heat-treated chrome alloy steel construction for superior strength and resistance to corrosion
- Includes tray for storage and organization
- Some square nuts and bolts may not engage with ratcheting box ends

| Cat. No. | Included Storage | Product Weight | m |
|----------|------------------------------------|------------------------------------|-------------------|
| CX6DBM2 | None | 1.10 lb | (\$) |
| Cat. No. | Description | | |
| - | X6 [™] 4-in-1 Spline Reve | ersible Ratcheting Wrench 8mm x 10 | mm & 12mm x 13mm |
| - | X6 [™] 4-in-1 Spline Reve | ersible Ratcheting Wrench 14mm x | 5mm & 17mm x 19mm |
| | | | |



3 Pc. 3/8" Drive SAE Flare Nut Wrench Set

- Hex shaped heads give more points of contact on the fastener to prevent damage
- Ideal for use on hex nuts made of softer materials
- Manufactured from chrome vanadium steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Sizes stamped on both sides of the wrench beam for quick identification
- Meets or exceeds ASME and ANSI specifications



| Cat. No. | Included Storage | Product Weight |
|----------|-----------------------|----------------|
| CFNWS0 | None | 0.72 lb |
| Cat. No. | Description | |
| - | Flare Nut Wrench 3/8" | x 7/16" |
| - | Flare Nut Wrench 1/2" | x 9/16" |
| _ | Flare Nut Wrench 5/8" | x 11/16" |

3 Pc. 3/8" Drive Metric Flare Nut Wrench Set

- $\quad\blacksquare\quad$ Hex shaped heads give more points of contact on the fastener to prevent damage
- Ideal for use on hex nuts made of softer materials
- Manufactured from chrome vanadium steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Sizes stamped on both sides of the wrench beam for quick identification
- Meets or exceeds ASME and ANSI specifications



| Cat. No. | Included Storage | Product Weight | |
|----------|-----------------------|----------------|--|
| CFNWS1 | None | 0.72 lb | |
| Cat. No. | Description | | |
| - | Flare Nut Wrench 9mm | x 11mm | |
| - | Flare Nut Wrench 10mm | n x 12mm | |
| - | Flare Nut Wrench 13mm | 1 x 14mm | |

10 Pc. 3/8" Drive SAE Flare Nut Set

- Hex shaped heads give more points of contact on the fastener to prevent damage
- Ideal for use on hex nuts made of softer materials
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes socket rail for storage and organization
- Meets or exceeds ASME and ANSI specifications



| Cat. No. | Included Storage | Product Weight | | | |
|----------|------------------------|----------------|----------|------------------------------------|---|
| CCFWSON | Socket Rail | 1.650 lb | | | S |
| Cat. No. | Description | | Cat. No. | Description | |
| - | 3/8" Drive Flare Nut W | rench 3/8" | - | 3/8" Drive Flare Nut Wrench 11/16" | |
| - | 3/8" Drive Flare Nut W | rench 7/16" | - | 3/8" Drive Flare Nut Wrench 3/4" | |
| - | 3/8" Drive Flare Nut W | rench 1/2" | - | 3/8" Drive Flare Nut Wrench 13/16" | |
| - | 3/8" Drive Flare Nut W | rench 9/16" | - | 3/8" Drive Flare Nut Wrench 7/8" | |
| - | 3/8" Drive Flare Nut W | rench 5/8" | - | 3/8" Drive Flare Nut Wrench 1" | |
| | | | | | |

10 Pc. 3/8" Drive Metric Flare Nut Set

- Hex shaped heads give more points of contact on the fastener to prevent damage
- Ideal for use on hex nuts made of softer materials
- Manufactured from chrome alloy steel for better strength and longer tool life
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Includes socket rail for storage and organization
- Meets or exceeds ASME and ANSI specifications

| Cat. No. | Included Storage | Product Weight | | | |
|----------|-------------------------|----------------|----------|----------------------------------|--|
| CCFWS1N | Socket Rail | 1.340 lb | | | |
| Cat. No. | Description | | Cat. No. | Description | |
| - | 3/8" Drive Flare Nut Wr | ench 9mm | - | 3/8" Drive Flare Nut Wrench 14mm | |
| - | 3/8" Drive Flare Nut Wr | ench 10mm | - | 3/8" Drive Flare Nut Wrench 15mm | |
| - | 3/8" Drive Flare Nut Wr | ench 11mm | - | 3/8" Drive Flare Nut Wrench 17mm | |
| - | 3/8" Drive Flare Nut Wr | ench 12mm | - | 3/8" Drive Flare Nut Wrench 18mm | |
| - | 3/8" Drive Flare Nut Wr | ench 13mm | - | 3/8" Drive Flare Nut Wrench 19mm | |

100 | 101

3/8" Micrometer Torque Wrench

- Reversible 45-tooth round ratcheting head
- Accuracy within 4% of specified torque target
- Clockwise direction marking on shaft simplifies calibration
- Slide-back adjustment collar lets you set the target torque quickly and easily
- SAE and metric scales on the hand grip and shaft are large and easy to read
- Audible signal alerts you when you reach the target torque
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Non-slip hand grip is comfortable and adjusts quickly
- Meets or exceeds ASME specifications
- 1 year limited warranty; calibration accuracy warrantied for 90 days




| Cat. No. | Drive Tang Size | Primary Scale Range - Max Torque | | Alternate Scale Range - Max Torque | Alt Scale Increments | Head Thickness | Head Width | Overall Length | Product Weight |
|----------|--------------------|-------------------------------------|---------|---------------------------------------|-------------------------|-------------------|---------------|-------------------|-------------------|
| CRTW38 | 3/8 in | 50 in/lb - 250 in/lb | 1 in/lb | 6 Nm - 30 Nm | .1 Nm | 1.3 in | 1.3 in | 14.375 in | 2.485 lb |

1/2" Micrometer Torque Wrench

- Reversible 45-tooth round ratcheting head
- Accuracy within 4% of specified torque target
- Clockwise direction marking on shaft simplifies calibration
- Slide-back adjustment collar lets you set the target torque quickly and easily
- SAE and metric scales on the hand grip and shaft are large and easy to read
- Audible signal alerts you when you reach the target torque
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Non-slip hand grip is comfortable and adjusts quickly
- Meets or exceeds ASME specifications
- 1 year limited warranty; calibration accuracy warrantied for 90 days





| Cat. No. | Drive Tang Size | Primary Scale Range - Max Torque | | Alternate Scale Range - Max Torque | Alt Scale Increments | Head Thickness | Head Width | | Product Weight |
|----------|--------------------|-------------------------------------|---------|---------------------------------------|-------------------------|-------------------|---------------|----------|-------------------|
| CRTW12 | 1/2 in | 50 ft/lb - 250 ft/lb | 1 ft/lb | 70 Nm - 340 Nm | 1.5 Nm | 1.8 in | 1.625 in | 23.25 in | 4.200 lb |

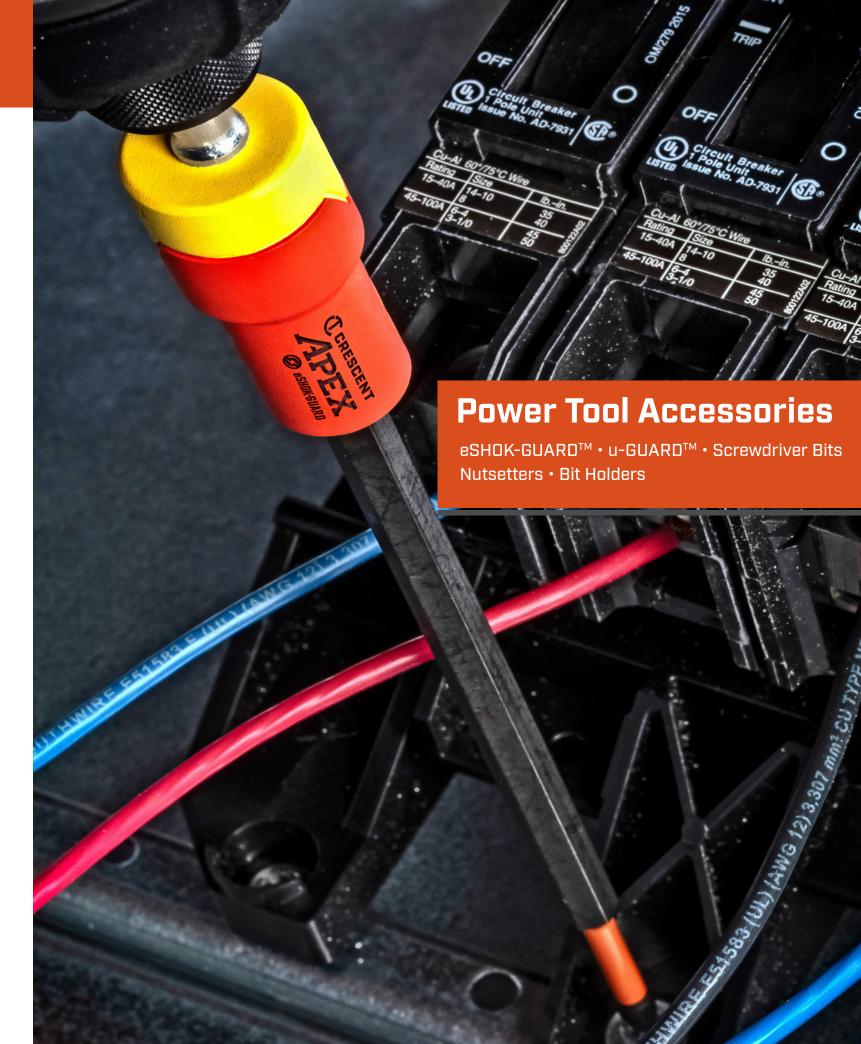

The Crescent APEX eSHOK-GUARD™ Isolated Power Tool Accessories

85% of professionals experiencing shocks on construction job sites. Protect yourself from electric shock with Crescent APEX's new patented isolated technology, eSHOK-GUARD $^{\text{TM}}$, providing insulation of up to 1,000 volts. Combining safety and convenience for a revolutionary experience when working around potential live wire applications, eSHOK-GUARD $^{\text{TM}}$ is protecting you – for life.

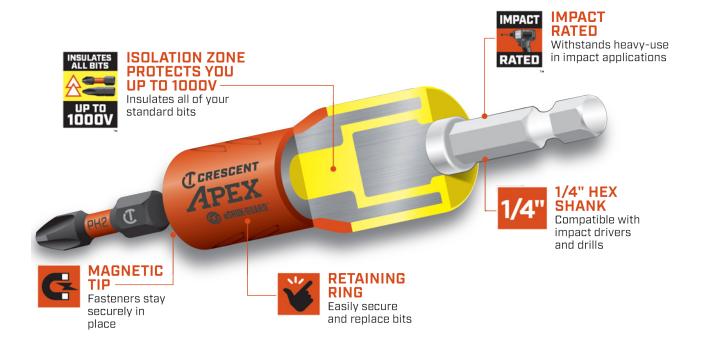

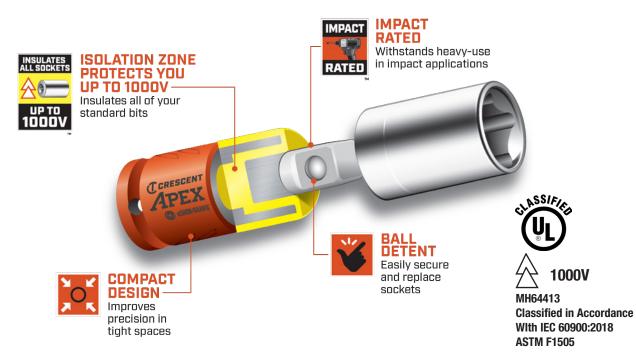

eSHOK-GUARD™ Isolated Bit Holder

- Isolation zone insulates all your standard bits, protecting you up to 1000V
- Withstands heavy-use in impact applications
- Magnetic tip keeps fasteners securely in place
- Easily secure and replace bits with a retaining ring
- 1/4" hex shank is compatible with impact drivers and drills



| Cat. No. | Size | Overall Length | Rated Voltage | Product Weight |
|----------|--------|----------------|---------------|----------------|
| CAEBH2C | 1/4 in | 3 in | 1000V | 0.492 lb |

eSHOK-GUARD™ Socket Isolators

- Isolation zone insulates all your standard bits, protecting you up to 1000V
- Withstands heavy-use in impact applications
- Compact design improves precision in tight spaces
- Ball detent for secure fastener retention and easy replacement



| Cat. No. | Size | Overall Length | Rated Voltage | Product Weight |
|----------|--------|----------------|---------------|----------------|
| CAEAD316 | 1/4 in | 2.125 in | 1000V | 0.137 lb |
| CAEAD324 | 3/8 in | 2.25 in | 1000V | 0.168 lb |
| CAEAD332 | 1/2 in | 2.625 in | 1000V | 0.284 lb |

u-GUARD™ Covered Bit Holders

- Non-marring cover protects from scratching or damages
- Thin wall maximizes access
- Free spinning sleeve enhances control and safety
- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
 Helps to eliminate cam-out and promotes fastener retention



| Cat. No. | Size | Overall Length | Product Weight |
|-----------|--------|----------------|----------------|
| AUGBQ2A-1 | 1/4 in | 2.25 in | 0.101 lb |
| AUGBH3-1 | 1/4 in | 3 in | 0.124 lb |
| | | | |

104 | 105



The Crescent APEX u-GUARD™ Non-Marring **Covered Tools**

The Crescent APEX series of u-GUARD™ non-marring covered tools gives you protection and control on the jobsite. These patented tools allow the user to grab directly onto the drive tool while it spins freely inside the cover, increasing fastening control and significantly reducing contact from the rotating tool.



30 Pc. u-GUARD™ alphaCASE™ Set

- Non-marring cover protects from scratching or damages
- Free spinning design enhances control and safety
- Optimized tip geometry for best fit (50% better grip measured on Phillips® bit only)
- Superior durability to withstand the toughest jobs
- Full body design for greater strength and durability
- Proprietary heat treat process maximizes bit life (2x more durable)
- Pivoting insert rails for ease of use
- Stackable for convenient storage




| Cat. No. | Included Storage | Product W | /eight | | |
|-----------|-----------------------------------|-----------|------------|---|------|
| AUGSET-30 | alphaCASE™ | 1.583 lb | | | |
| Cat. No. | Description | Qty. | Cat. No. | Description | Qty. |
| AMB1SL6 | 6 - 8 x 1" Slotted Insert Bit | 1 | AMB2TX25 | T25 x 2" Torx® Power Insert Bit | 2 |
| AMB1TX20 | T20 x 1" Torx® Insert Bit | 1 | AUMB3BPH2 | #2 Phillips® u-GUARD™ Covered Impact Power Bit with Ring Magnet | 1 |
| AMB1TX25 | T25 x 1" Torx® Insert Bit | 4 | AUGB3BTX25 | T25 Torx [®] u-GUARD™ Covered Impact Power Bit | 1 |
| AMB1SQ2 | #2 x 1" Square Insert Bit | 2 | AUGN2B20 | 5/16" u-GUARD™ Covered Magnetic Nutsetter | 1 |
| AMB1PH1 | #1 x 1" Phillips® Insert Bit | 2 | AUGN2B16 | 1/4" u-GUARD™ Covered Magnetic Nutsetter | 1 |
| AMB1PH2 | #2 x 1" Phillips® Insert Bit | 6 | AUGBQ2A | u-GUARD™ Covered Quick Release Bit Holder 1/4" x 2-1/4" | 1 |
| AMB2PH2 | #2 x 2" Phillips® Power Insert Bi | t 4 | AMBQ2A | 2-1/4" Quick Release Bit Holder | 1 |
| AMB2SQ2 | #2 x 2" Square Power Insert Bit | 2 | | | |

3 Pc. u-GUARD™ Covered Magnetic **Nutsetter Set**

- Non-marring cover protects from scratching or damages
- Thin wall maximizes access
- Free spinning sleeve enhances control and safety
- Full body design for greater strength and durability Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention

| Cat. No. | Included Storage | Product Weight |
|-------------|------------------|----------------|
| AUGN2BSET-3 | None | 0.240 lb |

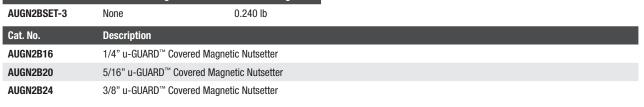





u-GUARD™ Covered Magnetic Nutsetters

- Non-marring cover protects from scratching or damages
- Thin wall maximizes access
- Free spinning sleeve enhances control and safety
- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention



| Cat. No. | Size | Overall Length | Product Weight |
|------------|---------|----------------|----------------|
| AUGN2B16-1 | 1/4 in | 2.56 in | 0.095 lb |
| AUGN2B20-1 | 5/16 in | 2.56 in | 0.100 lb |
| AUGN2B24-1 | 3/8 in | 2.56 in | 0.101 lb |
| AUGN2B28-1 | 7/16 in | 2.56 in | 0.131 lb |
| AUGN2B32-1 | 1/2 in | 2.56 in | 0.155 lb |

u-GUARD™ Covered Impact Power Bits

- Non-marring cover protects from scratching or damages
- Thin wall maximizes access
- Free spinning sleeve enhances control and safety
- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention



| Cat. No. | Tip Style | Tip Size | Overall Length | Product Weight |
|--------------|-----------|----------|----------------|----------------|
| AUGB3BPH2-1 | Phillips® | #2 | 3.5 in | 0.081 lb |
| AUGB3BSQ2-1 | Square | #2 | 3.5 in | 0.080 lb |
| AUGB3BTX25-1 | Torx® | T25 | 3.5 in | 0.067 lb |

u-GUARD[™] Covered Magnetic Impact Power Bits

- Non-marring cover protects from scratching or damages
- Thin wall maximizes access
- Free spinning sleeve enhances control and safety
- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention



| Cat. No. | Tip Style | Tip Size | Overall Length | Product Weight |
|--------------|-----------|----------|----------------|----------------|
| AUMB3BPH2-1 | Phillips® | #2 | 3.5 in | 0.080 lb |
| AUMB3BSQ2-1 | Square | #2 | 3.5 in | 0.079 lb |
| AUMB3BTX25-1 | Torx® | T25 | 3.5 in | 0.075 lb |

38 Pc. alphaCASE™ Set

- Superior durability to withstand the toughest jobs
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Attachment points for versatility on the job
- Full length metal hinge for improved case life
- Pivoting insert rails for ease of use
- Stackable for convenient storage
- Exterior labels for visibility and marking

|--|

| Gal. No. | iliciuueu Storage | Product weig | ш | | | |
|----------|-------------------------------|--------------|------|----------|-------------------------------|------|
| AMSET-38 | alphaCASE™ | 1.282 lb | | | | |
| Cat. No. | Description | | Qty. | Cat. No. | Description | Qty. |
| AMB2PH2 | #2 x 2" Phillips® Power Inser | t Bit | 2 | AMB1PH2 | #2 x 1" Phillips® Insert Bit | 8 |
| AMB2SQ2 | #2 x 2" Square Power Insert | Bit | 1 | AMB1PH3 | #3 x 1" Phillips® Insert Bit | 2 |
| AMB2TX25 | T25 x 2" Torx® Power Insert E | Bit | 2 | AMB1SL6 | 6 - 8 x 1" Slotted Insert Bit | 2 |
| AMN2B16 | 1/4" x 2-9/16" Magnetic Nut | setter | 1 | AMB1TX20 | T20 x 1" Torx® Insert Bit | 2 |
| AMN2B20 | 5/16" x 2-9/16" Magnetic Nu | itsetter | 1 | AMB1TX25 | T25 x 1" Torx® Insert Bit | 6 |
| AMBQ2A | 2-1/4" Quick Release Bit Hole | der | 1 | AMB1SQ1 | #1 x 1" Square Insert Bit | 2 |
| AMB1PH1 | #1 x 1" Phillips® Insert Bit | | 2 | AMB1SQ2 | #2 x 1" Square Insert Bit | 6 |

9 Pc. SAE Hex Insert Bit Set

Full body design for greater strength and durability

None

AMB1HXSET-9

 Optimized tip geometry for exact fastener fitment; helps to eliminate cam-out and promotes fastener retention

Included Storage

- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification



| Cat. No. | Description | Cat. No. | Description | |
|----------|-------------------------------|----------|-------------------------------|--|
| AMB1HX5 | 5/64" x 1" SAE Hex Insert Bit | AMB1HX10 | 5/32" x 1" SAE Hex Insert Bit | |
| AMB1HX6 | 3/32" x 1" SAE Hex Insert Bit | AMB1HX12 | 3/16" x 1" SAE Hex Insert Bit | |
| AMB1HX7 | 7/64" x 1" SAE Hex Insert Bit | AMB1HX14 | 7/32" x 1" SAE Hex Insert Bit | |
| AMB1HX8 | 1/8" x 1" SAE Hex Insert Bit | AMB1HX16 | 1/4" x 1" SAE Hex Insert Bit | |
| AMB1HX9 | 9/64" x 1" SAE Hex Insert Bit | | | |

Product Weight

0.090 lb



AMD1UMCET G

Cat. No.

6 Pc. Metric Hex Insert Bit Set

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment; helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification



| AIVID I TIVISE I-0 | None | U.000 ID | | |
|--------------------|----------------------|---------------|----------|--------------------------------|
| Cat. No. | Description | | Cat. No. | Description |
| AMB1HM2 | 2mm x 1" Metric Hex | Insert Bit | AMB1HM4 | 4mm x 1" Metric Hex Insert Bit |
| AMB1HM25 | 2.5mm x 1" Metric He | ex Insert Bit | AMB1HM5 | 5mm x 1" Metric Hex Insert Bit |
| AMB1HM3 | 3mm x 1" Metric Hex | Insert Bit | AMB1HM6 | 6mm x 1" Metric Hex Insert Bit |

Product Weight

7 Pc. Security Hex Insert Bit Set

Full body design for greater strength and durability

Included Storage

- Optimized tip geometry for exact fastener fitment; helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification



| AMB1HXRSET-7 | None | 0.090 lb | | | |
|--------------|-------------------------|----------------|----------|--|--|
| Cat. No. | Description | | Cat. No. | Description | |
| AMB1HXR10 | 5/32" x 1" SAE Security | Hex Insert Bit | AMB1HXR7 | 7/64" x 1" SAE Security Hex Insert Bit | |
| AMB1HXR12 | 3/16" x 1" SAE Security | Hex Insert Bit | AMB1HXR8 | 1/8" x 1" SAE Security Hex Insert Bit | |
| AMB1HXR5 | 5/64" x 1" SAE Security | Hex Insert Bit | AMB1HXR9 | 9/64" x 1" SAE Security Hex Insert Bit | |
| AMB1HXR6 | 3/32" x 1" SAE Security | Hex Insert Bit | | | |
| | | | | | |

Product Weight

7 Pc. Tamper Proof Torx® Insert Bit Set

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment; helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification

| Cat. No. | Included Storage | Product Weight |
|-------------|------------------|----------------|
| AMB1TRSET-7 | None | 0.095 lb |



| Cat. No. | Description | Cat. No. | Description |
|----------|--|----------|--|
| AMB1TR10 | T10 x 1" Tamper Proof Torx® Insert Bit | AMB1TR27 | T27 x 1" Tamper Proof Torx® Insert Bit |
| AMB1TR15 | T15 x 1" Tamper Proof Torx® Insert Bit | AMB1TR30 | T30 x 1" Tamper Proof Torx® Insert Bit |
| AMB1TR20 | T20 x 1" Tamper Proof Torx® Insert Bit | AMB1TR40 | T40 x 1" Tamper Proof Torx® Insert Bit |
| AMB1TR25 | T25 x 1" Tamper Proof Torx® Insert Bit | | |

Insert Bits

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification



| Cat. No. | Tip Style | Tip Size | Overall Length | Quantity Per Package | Product Weight |
|--------------|-----------------------|----------|----------------|----------------------|----------------|
| AMB1HX5-25 | Hex | 5/64 in | 1 in | 25 | 0.010 lb |
| AMB1HX6-25 | Hex | 3/32 in | 1 in | 25 | 0.012 lb |
| AMB1HX7-25 | Hex | 7/64 in | 1 in | 25 | 0.012 lb |
| AMB1HX8-25 | Hex | 1/8 in | 1 in | 25 | 0.012 lb |
| AMB1HX9-25 | Hex | 9/64 in | 1 in | 25 | 0.012 lb |
| AMB1HX10-25 | Hex | 5/32 in | 1 in | 25 | 0.011 lb |
| AMB1HX12-25 | Hex | 3/16 in | 1 in | 25 | 0.012 lb |
| AMB1HX14-25 | Hex | 7/32 in | 1 in | 25 | 0.015 lb |
| AMB1HX16-25 | Hex | 1/4 in | 1 in | 25 | 0.017 lb |
| AMB1HM2-25 | Hex | 2mm | 1 in | 25 | 0.012 lb |
| AMB1HM25-25 | Hex | 2.5mm | 1 in | 25 | 0.011 lb |
| AMB1HM3-25 | Hex | 3mm | 1 in | 25 | 0.013 lb |
| AMB1HM4-25 | Hex | 4mm | 1 in | 25 | 0.013 lb |
| AMB1HM5-25 | Hex | 5mm | 1 in | 25 | 0.013 lb |
| AMB1HM6-25 | Hex | 6mm | 1 in | 25 | 0.015 lb |
| AMB1HXR5-25 | Security Hex | 5/64 in | 1 in | 25 | 0.011 lb |
| AMB1HXR6-25 | Security Hex | 3/32 in | 1 in | 25 | 0.012 lb |
| AMB1HXR7-25 | Security Hex | 7/64 in | 1 in | 25 | 0.011 lb |
| AMB1HXR8-25 | Security Hex | 1/8 in | 1 in | 25 | 0.011 lb |
| AMB1HXR9-25 | Security Hex | 9/64 in | 1 in | 25 | 0.010 lb |
| AMB1HXR10-25 | Security Hex | 5/32 in | 1 in | 25 | 0.011 lb |
| AMB1HXR12-25 | Security Hex | 3/16 in | 1 in | 25 | 0.013 lb |
| AMB1PH1-2 | Phillips [®] | #1 | 1 in | 2 | 0.030 lb |
| AMB1PH1-50 | Phillips [®] | #1 | 1 in | 50 | 0.012 lb |
| AMB1PH2-2 | Phillips® | #2 | 1 in | 2 | 0.080 lb |
| AMB1PH2-10 | Phillips® | #2 | 1 in | 10 | 0.105 lb |
| AMB1PH2-15 | Phillips® | #2 | 1 in | 15 | 0.265 lb |
| | | | | | |

Continued on next page

Insert Bits

Continued from previous page

| Insert Bits | Continued from previous page | | | | | | |
|-------------|------------------------------|----------|----------------|----------------------|----------------|--|--|
| Cat. No. | Tip Style | Tip Size | Overall Length | Quantity Per Package | Product Weight | | |
| AMB1PH2-30 | Phillips® | #2 | 1 in | 30 | 0.440 lb | | |
| AMB1PH2-50 | Phillips® | #2 | 1 in | 50 | 0.010 lb | | |
| AMB1PH3-2 | Phillips [®] | #3 | 1 in | 2 | 0.080 lb | | |
| AMB1PH3-50 | Phillips® | #3 | 1 in | 50 | 0.010 lb | | |
| AMB1PH4-25 | Phillips® | #4 | 1 in | 25 | 0.011 lb | | |
| AMB1PT1-50 | Recessed Phillips® | #1 | 1 in | 50 | 0.010 lb | | |
| AMB1PT2-2 | Recessed Phillips® | #2 | 1 in | 2 | 0.025 lb | | |
| AMB1PT2-50 | Recessed Phillips® | #2 | 1 in | 50 | 0.008 lb | | |
| AMB1SL1-25 | Slotted | 1 - 2 | 1 in | 25 | 0.009 lb | | |
| AMB1SL2-25 | Slotted | 2 - 3 | 1 in | 25 | 0.009 lb | | |
| AMB1SL3-25 | Slotted | 3 - 4 | 1 in | 25 | 0.001 lb | | |
| AMB1SL4-25 | Slotted | 4 - 5 | 1 in | 25 | 0.011 lb | | |
| AMB1SL6-25 | Slotted | 6 - 8 | 1 in | 25 | 0.011 lb | | |
| AMB1SL8-2 | Slotted | 8 - 10 | 1 in | 2 | 0.030 lb | | |
| AMB1SL8-25 | Slotted | 8 - 10 | 1 in | 25 | 0.011 lb | | |
| AMB1SQ1-2 | Square | #1 | 1 in | 2 | 0.080 lb | | |
| AMB1SQ1-50 | Square | #1 | 1 in | 50 | 0.012 lb | | |
| AMB1SQ2-2 | Square | #2 | 1 in | 2 | 0.035 lb | | |
| AMB1SQ2-10 | Square | #2 | 1 in | 10 | 0.152 lb | | |
| AMB1SQ2-50 | Square | #2 | 1 in | 50 | 0.013 lb | | |
| AMB1SQ3-50 | Square | #3 | 1 in | 50 | 0.013 lb | | |
| AMB1TX10-25 | Torx® | T10 | 1 in | 25 | 0.012 lb | | |
| AMB1TX15-2 | Torx® | T15 | 1 in | 2 | 0.030 lb | | |
| AMB1TX15-25 | Torx® | T15 | 1 in | 25 | 0.012 lb | | |
| AMB1TX20-2 | Torx® | T20 | 1 in | 2 | 0.025 lb | | |
| AMB1TX20-25 | Torx® | T20 | 1 in | 25 | 0.012 lb | | |
| AMB1TX25-2 | Torx® | T25 | 1 in | 2 | 0.060 lb | | |
| AMB1TX25-10 | Torx® | T25 | 1 in | 10 | 0.155 lb | | |
| AMB1TX25-15 | Torx® | T25 | 1 in | 15 | 0.255 lb | | |
| AMB1TX25-30 | Torx® | T25 | 1 in | 30 | 0.390 lb | | |
| AMB1TX25-50 | Torx® | T25 | 1 in | 50 | 0.012 lb | | |
| AMB1TX27-50 | Torx® | T27 | 1 in | 50 | 0.012 lb | | |
| AMB1TX30-50 | Torx® | T30 | 1 in | 50 | 0.013 lb | | |
| AMB1TX40-25 | Torx® | T40 | 1 in | 25 | 0.015 lb | | |
| AMB1TR10-25 | Tamper-Proof Torx® | T10 | 1 in | 25 | 0.012 lb | | |
| AMB1TR15-25 | Tamper-Proof Torx® | T15 | 1 in | 25 | 0.001 lb | | |
| AMB1TR20-25 | Tamper-Proof Torx® | T20 | 1 in | 25 | 0.012 lb | | |
| AMB1TR25-25 | Tamper-Proof Torx® | T25 | 1 in | 25 | 0.013 lb | | |
| AMB1TR27-25 | Tamper-Proof Torx® | T27 | 1 in | 25 | 0.013 lb | | |
| AMB1TR30-25 | Tamper-Proof Torx® | T30 | 1 in | 25 | 0.014 lb | | |
| AMB1TR40-25 | Tamper-Proof Torx® | T40 | 1 in | 25 | 0.015 lb | | |
| AMB1PZ1-25 | Pozidriv [®] | #1 | 1 in | 25 | 0.007 lb | | |
| AMB1PZ2-25 | Pozidriv [®] | #2 | 1 in | 25 | 0.013 lb | | |
| AMB1PZ3-25 | Pozidriv [®] | #3 | 1 in | 25 | 0.008 lb | | |
| | | | | | | | |

Power Insert Bits

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification



| Cat. No. | Tip Style | Tip Size | Overall Length | Quantity Per Package | Product Weight |
|-------------|-----------------------|----------|----------------|----------------------|----------------|
| AMB2PH1-50 | Phillips® | #1 | 2 in | 50 | 0.023 lb |
| AMB2CPH1-25 | Phillips [®] | #1 | 2.75 in | 25 | 0.026 lb |
| AMB3BPH1-25 | Phillips® | #1 | 3.5 in | 25 | 0.031 lb |
| AMB6PH1-25 | Phillips® | #1 | 6 in | 25 | 0.052 lb |
| AMB2PH2-1 | Phillips® | #2 | 2 in | 1 | 0.060 lb |
| AMB2PH2-5 | Phillips® | #2 | 2 in | 5 | 0.165 lb |
| AMB2PH2-15 | Phillips® | #2 | 2 in | 15 | 0.410 lb |
| AMB2PH2-50 | Phillips® | #2 | 2 in | 50 | 0.024 lb |
| AMB2CPH2-25 | Phillips [®] | #2 | 2.75 in | 25 | 0.036 lb |
| AMB3BPH2-1 | Phillips® | #2 | 3.5 in | 1 | 0.060 lb |
| AMB3BPH2-25 | Phillips® | #2 | 3.5 in | 25 | 0.045 lb |
| AMB6PH2-1 | Phillips® | #2 | 6 in | 1 | 0.095 lb |
| AMB6PH2-25 | Phillips® | #2 | 6 in | 25 | 0.080 lb |
| AMB2PH3-50 | Phillips® | #3 | 2 in | 50 | 0.023 lb |
| AMB2CPH3-25 | Phillips® | #3 | 2.75 in | 25 | 0.049 lb |
| AMB3BPH3-25 | Phillips® | #3 | 3.5 in | 25 | 0.065 lb |
| AMB6PH3-25 | Phillips® | #3 | 6 in | 25 | 0.122 lb |
| AMB2SL4-25 | Slotted | 4 - 5 | 2 in | 25 | 0.021 lb |
| AMB2SL6-25 | Slotted | 6 - 8 | 2 in | 25 | 0.027 lb |
| AMB2SL8-1 | Slotted | 8 - 10 | 2 in | 1 | 0.065 lb |
| AMB2SL8-25 | Slotted | 8 - 10 | 2 in | 25 | 0.028 lb |
| AMB2SQ1-50 | Square | #1 | 2 in | 50 | 0.020 lb |
| AMB3BSQ1-25 | Square | #1 | 3.5 in | 25 | 0.046 lb |
| AMB6SQ1-25 | Square | #1 | 6 in | 25 | 0.052 lb |
| AMB2SQ2-1 | Square | #2 | 2 in | 1 | 0.055 lb |
| AMB2SQ2-5 | Square | #2 | 2 in | 5 | 0.160 lb |
| AMB2SQ2-50 | Square | #2 | 2 in | 50 | 0.025 lb |
| AMB3BSQ2-1 | Square | #2 | 3.5 in | 1 | 0.060 lb |
| AMB3BSQ2-25 | Square | #2 | 3.5 in | 25 | 0.046 lb |
| AMB6SQ2-25 | Square | #2 | 6 in | 25 | 0.082 lb |
| AMB2SQ3-50 | Square | #3 | 2 in | 50 | 0.026 lb |
| AMB3BSQ3-25 | Square | #3 | 3.5 in | 25 | 0.046 lb |
| AMB6SQ3-25 | Square | #3 | 6 in | 25 | 0.082 lb |
| AMB2TX15-2 | Torx® | T15 | 2 in | 2 | 0.060 lb |
| AMB2TX15-25 | Torx® | T15 | 2 in | 25 | 0.018 lb |
| AMB2TX20-2 | Torx® | T20 | 2 in | 2 | 0.045 lb |
| AMB2TX20-25 | Torx® | T20 | 2 in | 25 | 0.020 lb |
| AMB2TX25-2 | Torx® | T25 | 2 in | 2 | 0.075 lb |

Continued on next page

CRESCENT APEX

Power Insert Bits Continued from previous page

| Cat. No. | Tip Style | Tip Size | Overall Length | Quantity Per Package | Product Weight |
|--------------|-----------|----------|----------------|----------------------|----------------|
| AMB2TX25-5 | Torx® | T25 | 2 in | 5 | 0.115 lb |
| AMB2TX25-50 | Torx® | T25 | 2 in | 50 | 0.023 lb |
| AMB3BTX25-1 | Torx® | T25 | 3.5 in | 1 | 0.055 lb |
| AMB3BTX25-25 | Torx® | T25 | 3.5 in | 25 | 0.035 lb |
| AMB6TX25-1 | Torx® | T25 | 6 in | 1 | 0.095 lb |
| AMB6TX25-25 | Torx® | T25 | 6 in | 25 | 0.056 lb |
| AMB2TX27-50 | Torx® | T27 | 2 in | 50 | 0.023 lb |
| AMB2TX30-2 | Torx® | T30 | 2 in | 2 | 0.060 lb |
| AMB2TX30-50 | Torx® | T30 | 2 in | 50 | 0.023 lb |
| AMB2TX40-2 | Torx® | T40 | 2 in | 2 | 0.105 lb |
| AMB2TX40-50 | Torx® | T40 | 2 in | 50 | 0.034 lb |

Impact Drive Guides

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification



| Cat. No. | Shank Diameter | Overall Length | Quantity Per Package | Product Weight |
|----------|----------------|----------------|----------------------|----------------|
| AMDG3-1 | 1/4 in | 3 in | 1 | 0.250 lb |
| AMDG3-25 | 1/4 in | 3 in | 25 | 0.081 lb |

3 Pc. Magnetic Nutsetter Set

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification

| Cat. No. | Included Storage | Product Weight | | 44 | A A | ₽ PE |
|------------|-----------------------------------|----------------------------------|--|-----------|-----|------|
| AMN1CSET-3 | None | 0.155 lb | | | | |
| Cat. No. | Description | | | | | |
| AMN1C16 | 1/4" x 1-7/8" Magnetic N | 1/4" x 1-7/8" Magnetic Nutsetter | | | | |
| AMN1C20 | 5/16" x 1-7/8" Magnetic Nutsetter | | | | | |
| AMN1C24 | 3/8" x 1-7/8" Magnetic N | utsetter | | | | |

Magnetic Nutsetters

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification



| Cat. No. | SAE/Metric | Size | Overall Length | Quantity Per Package | Product Weight |
|------------|------------|---------|----------------|----------------------|----------------|
| AMN1C16-1 | SAE | 1/4 in | 1.875 in | 1 | 0.050 lb |
| AMN1C16-25 | SAE | 1/4 in | 1.875 in | 25 | 0.042 lb |
| AMN2B16-1 | SAE | 1/4 in | 2.56 in | 1 | 0.070 lb |
| AMN2B16-25 | SAE | 1/4 in | 2.56 in | 25 | 0.063 lb |
| AMN616-25 | SAE | 1/4 in | 6 in | 25 | 0.153 lb |
| AMN1C20-1 | SAE | 5/16 in | 1.875 in | 1 | 0.060 lb |
| AMN1C20-25 | SAE | 5/16 in | 1.875 in | 25 | 0.048 lb |
| AMN2B20-1 | SAE | 5/16 in | 2.56 in | 1 | 0.085 lb |
| AMN2B20-25 | SAE | 5/16 in | 2.56 in | 25 | 0.075 lb |
| AMN620-25 | SAE | 5/16 in | 6 in | 25 | 0.158 lb |
| AMN1C24-1 | SAE | 3/8 in | 1.875 in | 1 | 0.060 lb |
| AMN1C24-25 | SAE | 3/8 in | 1.875 in | 25 | 0.056 lb |
| AMN2B24-1 | SAE | 3/8 in | 2.56 in | 1 | 0.090 lb |
| AMN2B24-25 | SAE | 3/8 in | 2.56 in | 25 | 0.081 lb |
| AMN624-25 | SAE | 3/8 in | 6 in | 25 | 0.167 lb |
| AMN1C28-1 | SAE | 7/16 in | 1.875 in | 1 | 0.065 lb |
| AMN1C28-25 | SAE | 7/16 in | 1.875 in | 25 | 0.056 lb |
| AMN2B28-1 | SAE | 7/16 in | 2.56 in | 1 | 0.110 lb |
| AMN2B28-25 | SAE | 7/16 in | 2.56 in | 25 | 0.102 lb |
| AMN1C32-1 | SAE | 1/2 in | 1.875 in | 1 | 0.075 lb |
| AMN1C32-25 | SAE | 1/2 in | 1.875 in | 25 | 0.070 lb |
| AMN2B32-1 | SAE | 1/2 in | 2.56 in | 1 | 0.140 lb |
| AMN2B32-25 | SAE | 1/2 in | 2.56 in | 25 | 0.136 lb |
| | | | | | |

Quick Release Bit Holders

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment

Shank Diameter

1/4 in

1/4 in

Cat. No.

AMBQ2A-1

AMBQ2A-25

- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life

Overall Length

2-1/4 in

2-1/4 in

■ Laser markings for long-lasting quick and easy size identification



25



0.067 lb

CRESCENT APEX

Magnetic Bit Holders

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification




| Cat. No. | Shank Diameter | Overall Length | Quantity Per Package | Product Weight |
|----------|----------------|----------------|----------------------|----------------|
| AMBH2-25 | 1/4 in | 2 in | 25 | 0.039 lb |
| AMBH3-1 | 1/4 in | 3 in | 1 | 0.070 lb |
| AMBH3-25 | 1/4 in | 3 in | 25 | 0.081 lb |

Extension Bit Holders

- Full body design for greater strength and durability
- Optimized tip geometry for exact fastener fitment
- Helps to eliminate cam-out and promotes fastener retention
- Modified S2 steel and proprietary heat treat process maximizes bit life
- Laser markings for long-lasting quick and easy size identification



| Cat. No. | Shank Diameter | Overall Length | Quantity Per Package | Product Weight |
|-----------|----------------|----------------|----------------------|----------------|
| AMBH6-1 | 1/4 in | 6 in | 1 | 0.120 lb |
| AMBH6-25 | 1/4 in | 6 in | 25 | 0.129 lb |
| AMBH12-1 | 1/4 in | 12 in | 1 | 0.225 lb |
| AMBH12-25 | 1/4 in | 12 in | 25 | 0.216 lb |

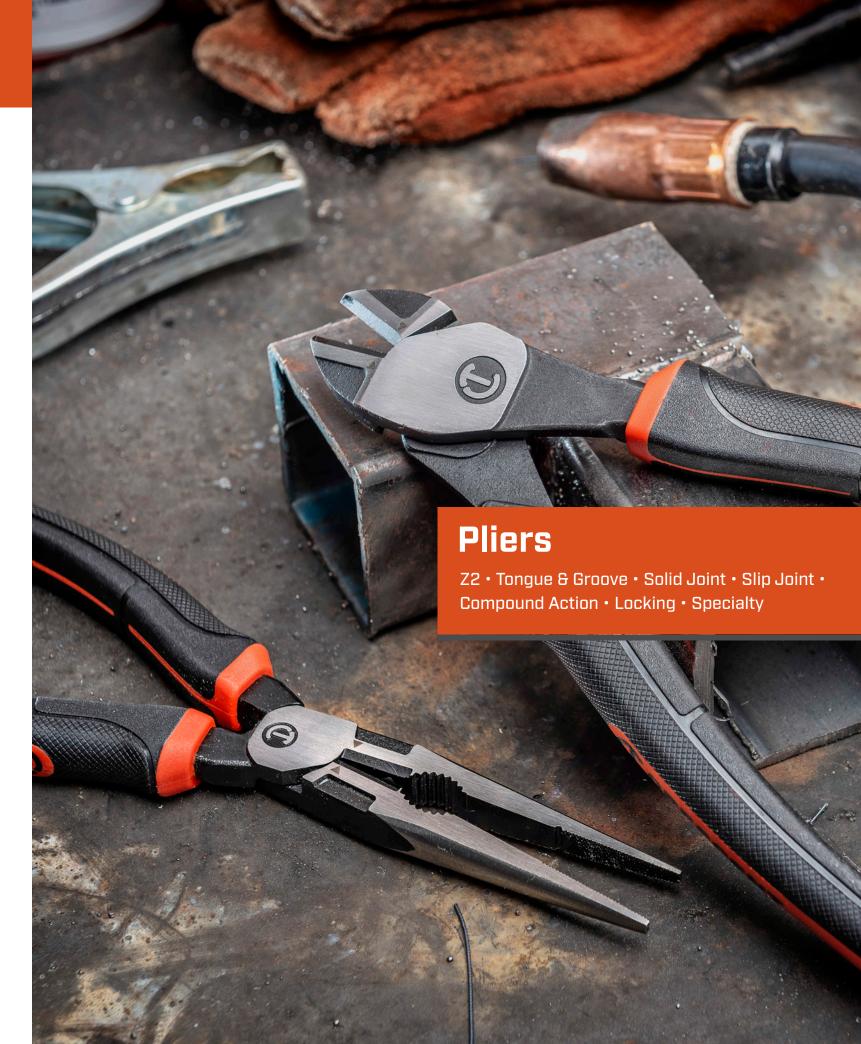

3 Pc. Z2 Auto-Bite™ Tongue & Groove Plier Set

- Patented Auto-Bite™ lever enables one handed jaw adjustment
- Thumb adjust Auto-Bite™ knob to engage or disengage Auto-Bite™ lever
- With the Auto-Bite[™] lever engaged, simply squeeze the handles and the jaw automatically adjust to a precise grip
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 25 & 30 jaw positions for more flexibility, grip comfort and jaw capacity
- Grip Zone™ handles for non-marring grip
- V" jaws and self-locking adjustment
- Ergonomic handles with tether point increase overall comfort and safety



| Cat. No. | Included Storage | Product Weight |
|------------|---------------------------|-------------------------------|
| RTABCGSET3 | None | 3.285 lb |
| Cat. No. | Description | |
| RTAB8CG | 8" Z2 Auto-Bite™ Tongue & | & Groove Dual Material Pliers |
| RTAB10CG | 10" Z2 Auto-Bite™ Tongue | & Groove Dual Material Pliers |
| RTAB12CG | 12" Z2 Auto-Bite™ Tongue | & Groove Dual Material Pliers |

2 Pc. Z2 Auto-Bite™ Tongue & Groove Plier Set

- Patented Auto-Bite™ lever enables one handed jaw adjustment
- Thumb adjust Auto-Bite™ knob to engage or disengage Auto-Bite™ lever
- With the Auto-Bite™ lever engaged, simply squeeze the handles and the jaw automatically adjust to a precise grip
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 25 & 30 jaw positions for more flexibility, grip comfort and jaw capacity
- Grip Zone™ handles for non-marring grip
- V" jaws and self-locking adjustment
- Ergonomic handles with tether point increase overall comfort and safety



| Cat. No. | Included Storage | Product Weight |
|------------|-----------------------|-----------------------------------|
| RTABCGSET2 | None | 2.646 lb |
| Cat. No. | Description | |
| RTAB10CG | 10" Z2 Auto-Bite™ Ton | gue & Groove Dual Material Pliers |
| RTAB12CG | 12" Z2 Auto-Bite™ Ton | gue & Groove Dual Material Pliers |
| | | |

Auto-Bite™ Tongue and Groove Pliers

True one handed automatic adjustment and slim design make these pliers perfect for work in cramped, hard to reach spaces. Just flip the patented Auto-Bite™ lever with your thumb and squeeze the handles to fit the jaws securely around any object. The Auto-Bite™ has an aggressive tooth design that grips tight for maximum turning power then releases just as easily.



Z2 Auto-Bite™ Tongue & Groove Dual Material Pliers

- Patented Auto-Bite™ lever enables one handed jaw adjustment
- Thumb adjust Auto-Bite[™] knob to engage or disengage Auto-Bite[™] lever
- With the Auto-Bite[™] lever engaged, simply squeeze the handles and the jaw automatically adjust to a precise grip
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- Grip Zone™ handles for non-marring grip
- V" jaws and self-locking adjustment
- Ergonomic handles with tether point increase overall comfort and safety

| Cat. No. | Jaw Positions | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|----------|------------------|-------------------|---------------|--------------|------------------|-----------------|-----------------|----------------|-------------------|
| RTAB6CG | 14 | 6.9 in | 1 in | 1 in | 0.25 in | 1.25 in | No | No | 0.500 lb |
| RTAB8CG | 20 | 8.7 in | 1 in | 1 in | 0.28 in | 1.85 in | No | No | 0.600 lb |
| RTAB10CG | 25 | 10.9 in | 1.25 in | 1.3 in | 0.3 in | 2.2 in | No | No | 1.000 lb |
| RTAB12CG | 30 | 12.8 in | 2 in | 1.8 in | 0.35 in | 2.75 in | No | No | 1.700 lb |

3 Pc. Z2 K9™ Straight Jaw Dipped Handle Tongue and Groove Plier Set

- K9™ jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 8 jaw positions for more flexibility, grip comfort and jaw capacity
- Ergonomic handles increase overall comfort
- Professional easy clean dipped grips

| Cat. No. | Included Storage | Product Weight |
|----------|------------------------|--|
| RTZ2SET3 | None | 3.300 lb |
| Cat. No. | Description | |
| RT728 | 8" 72 K9™ Straight Jaw | V Dinned Handle Tonque and Groove Pliers |

| IIIZZO | 6 22 No ottaight daw Dippod Handio Tongdo and Groove Filoro |
|--------|--|
| RTZ210 | 10" Z2 K9™ Straight Jaw Dipped Handle Tongue and Groove Pliers |
| RTZ212 | 12" Z2 K9™ Straight Jaw Dipped Handle Tongue and Groove Pliers |



Z2 K9™ Straight Jaw Dipped Handle Tongue and Groove Pliers

- K9[™] jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 8 or 10 jaw positions for more flexibility, grip comfort and jaw capacity
- Ergonomic handles increase overall comfort
- Professional easy clean dipped grips



| Cat. No. | Jaw Positions | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|----------|------------------|-------------------|---------------|--------------|------------------|-----------------|-----------------|----------------|-------------------|
| RTZ28 | 8 | 8.1 in | 1 in | 1.1 in | 0.33 in | 1.6 in | No | No | 0.545 lb |
| RTZ210 | 8 | 10.2 in | 1.25 in | 1.4 in | 0.38 in | 2.1 in | No | No | 0.875 lb |
| RTZ212 | 8 | 12.1 in | 1.8 in | 1.85 in | 0.42 in | 2.6 in | No | No | 1.525 lb |
| RTZ216 | 10 | 16.5 in | 2.5 in | 2.5 in | 0.58 in | 4.2 in | No | No | 3.100 lb |

Z2 K9™ V-Jaw Dipped Handle Tongue and Groove Pliers

- K9[™] jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 8 or 10 jaw positions for more flexibility, grip comfort and jaw capacity
- Ergonomic handles increase overall comfort
- Professional easy clean dipped grips
- V-jaws and self-locking adjustment



| Cat. No. | Jaw Positions | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|----------|------------------|-------------------|---------------|--------------|------------------|-----------------|-----------------|----------------|-------------------|
| RTZ28V | 8 | 8.1 in | 1 in | 1.1 in | 0.33 in | 1.6 in | No | No | 0.545 lb |
| RTZ210V | 8 | 10.2 in | 1.25 in | 1.4 in | 0.38 in | 2.1 in | No | No | 0.875 lb |
| RTZ212V | 8 | 12.1 in | 1.8 in | 1.85 in | 0.42 in | 2.6 in | No | No | 1.525 lb |
| RTZ216V | 10 | 16.5 in | 2.5 in | 2.5 in | 0.58 in | 4.2 in | No | No | 3.100 lb |

2 Pc. Z2 K9™ Straight Jaw Dual Material Tongue and Groove Plier Set

- K9™ jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- **B** jaw positions for more flexibility, grip comfort and jaw capacity
- Grip Zone™ handles for non-marring grip
- Ergonomic handles with tether point increase overall comfort and safety

| | | | 1 | • |
|------------|------------------------|---|----|---|
| Cat. No. | Included Storage | Product Weight | | |
| RTZ2CGSET2 | None | 2.300 lb | | |
| Cat. No. | Description | | | |
| RTZ28CG | 8" Z2 K9™ Straight Jav | w Dual Material Tongue and Groove Plier | | |
| RTZ212CG | 12" Z2 K9™ Straight Ja | aw Dual Material Tongue and Groove Plie | 'S | |



- K9™ jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 8 jaw positions for more flexibility, grip comfort and jaw capacity
- Grip Zone™ handles for non-marring grip
- Ergonomic handles with tether point increase overall comfort and safety



| Cat. No. | Jaw Positions | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|----------|------------------|-------------------|---------------|--------------|------------------|-----------------|-----------------|----------------|-------------------|
| RTZ28CG | 8 | 8.5 in | 1 in | 1.1 in | 0.33 in | 1.6 in | No | No | 0.545 lb |
| RTZ210CG | 8 | 10.8 in | 1.25 in | 1.4 in | 0.38 in | 2.1 in | No | No | 0.875 lb |
| RTZ212CG | 8 | 12.8 in | 1.8 in | 1.85 in | 0.42 in | 2.6 in | No | No | 1.525 lb |

2 Pc. Z2 K9™ V-Jaw Dual Material Tongue and Groove Plier Set

- K9[™] jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 8 jaw positions for more flexibility, grip comfort and jaw capacity
- Grip Zone™ handles for non-marring grip
- Ergonomic handles with tether point increase overall comfort and safety
- V-jaws and self-locking adjustment

| RTZ2CGVSET2 | None | 2.600 lb | _ | |
|-------------|--------------------|-------------------------------------|------|--|
| Cat. No. | Description | | | |
| RTZ210CGV | 10" Z2 K9™ V-Jaw [| Dual Material Tongue and Groove Pli | iers | |
| RTZ212CGV | 12" Z2 K9™ V-Jaw [| Dual Material Tongue and Groove Pli | iers | |

Z2 K9[™] V-Jaw Dual Material Tongue and Groove Pliers

- K9™ jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 8 jaw positions for more flexibility, grip comfort and jaw capacity
- Grip Zone™ handles for non-marring grip
- Ergonomic handles with tether point increase overall comfort and safety
- V-jaws and self-locking adjustment





5 Pc. Z2 Mixed Dual Material Plier Set

- K9™ jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- 8 jaw positions for more flexibility, grip comfort and jaw capacity
- Ergonomic handles increase overall comfort
- High leverage joint design provides up to 35% greater cutting power
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Cross hatched jaw for gripping and pulling
- Fastener grip area for turning nuts and bolts
- Ergonomic handles with tether point increase overall comfort and safety



| Gal. No. | iliciuded Storage | Product Weight | | |
|----------|-------------------|----------------|----------|--|
| Z2SET5CG | None | 4.000 lb | | |
| Cat. No. | Description | | Cat. No. | |
| | | | | |

| Cat. No. | Description | Cat. No. | Description |
|----------|---|----------|--|
| HTZ28CG | 8" Z2 Dual Material Slip Joint Pliers | Z20509CG | 9-1/2" Z2 Dual Material Lineman's Pliers |
| Z6548CG | 8" Z2 Dual Material Long Nose Pliers | RTZ210CG | 10" Z2 K9™ Straight Jaw Dual Material Tongue and Groove Pliers |
| Z5428CG | 8" Z2 Dual Material Diagonal Cutting Pliers | | |

3 Pc. Z2 Mixed Dual Material Plier Set

- K9™ jaw design provides a strong grip, even when on a 35° angle
- Slim jaws provide 40% greater access
- Aggressive tooth design increases torque transfer
- **B** jaw positions for more flexibility, grip comfort and jaw capacity
- Ergonomic handles increase overall comfort
- High leverage joint design provides up to 35% greater cutting power
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Cross hatched jaw for gripping and pulling

729FT30G

- Fastener grip area for turning nuts and bolts
- Ergonomic handles with tether point increase overall comfort and safety

2 510 lb



| 223E13GU | None | 2.31010 | | | |
|----------|-----------------|------------------------------|-----------------------|--|--|
| Cat. No. | Description | | | | |
| Z6548CG | 8" Z2 Dual Mate | rial Long Nose Pliers | | | |
| Z20508CG | 8" Z2 Dual Mate | rial Lineman's Pliers | | | |
| RTZ210CG | 10" Z2 K9™ Str | aight Jaw Dual Material Tong | jue and Groove Pliers | | |

Z2 Dipped Handle Diagonal Cutting Pliers

- High leverage joint design provides up to 35% greater cutting power
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- 20° head angle for true flush cutting
- Professional easy clean dipped grips



| Cat. No. | Overall Length | Jaw Length | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Cutting Edge Length | Product Weight |
|----------|-------------------|---------------|------------------|----------------------------|-----------------|------------------------|-------------------|
| Z5426 | 6.1 in | 0.75 in | 0.4 in | KNIFE-KNIFE / AWG 8 | 0.75 in | 0.75 in | 0.450 lb |
| Z5428 | 8.1 in | 0.75 in | 0.53 in | KNIFE-KNIFE / AWG 7 | 0.75 in | 0.75 in | 0.650 lb |

Z2 Dual Material Diagonal Cutting Pliers

- High leverage joint design provides up to 35% greater cutting power
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- 20° head angle for true flush cutting
- Ergonomic handles with tether point increase overall comfort and safety



| Cat. No. | Overall Length | Jaw Length | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Cutting Edge Length | Product Weight |
|----------|-------------------|---------------|------------------|----------------------------|-----------------|------------------------|-------------------|
| Z5426CG | 6.5 in | 0.75 in | 0.4 in | KNIFE-KNIFE / AWG 8 | 0.75 in | 0.75 in | 0.500 lb |
| Z5428CG | 8.6 in | 0.75 in | 0.53 in | KNIFE-KNIFE / AWG 7 | 0.75 in | 0.75 in | 0.700 lb |

Z2 Dipped Handle Long Nose Pliers

- High leverage joint design provides up to 35% greater cutting power
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Cross hatched jaw for gripping and pulling
- Fastener grip area for turning nuts and bolts
- Professional easy clean dipped grips



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Product Weight |
|----------|-------------------|---------------|--------------|------------------|----------------------------|-----------------|-------------------|
| Z6546 | 6.2 in | 2 in | 0.12 in | 0.37 in | KNIFE-KNIFE / AWG 11 | 1.5 in | 0.250 lb |
| Z6548 | 8.1 in | 3 in | 0.16 in | 0.38 in | KNIFE-KNIFE / AWG 11 | 2 in | 0.400 lb |

CRESCENT°

Long Nose Pliers

Like other pliers in the Z2 line, these offer outstanding cutting ability due to their pivot-forward high leverage joint design. With laser-hardened cutting edges, they offer 50% longer life. And they are the only long nose pliers that feature a "Six Zone" head for exceptional gripping, cutting, wire pulling, nail holding, fastener turning, and non-marring capabilities.



Z2 Dual Material Long Nose Pliers

- High leverage joint design provides up to 35% greater cutting power
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Cross hatched jaw for gripping and pulling
- Fastener grip area for turning nuts and bolts
- Ergonomic handles with tether point increase overall comfort and safety



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Product Weight |
|----------|-------------------|---------------|--------------|------------------|----------------------------|-----------------|-------------------|
| Z6546CG | 6.6 in | 2 in | 0.12 in | 0.37 in | KNIFE-KNIFE / AWG 11 | 1.5 in | 0.300 lb |
| Z6548CG | 8.5 in | 3 in | 0.16 in | 0.38 in | KNIFE-KNIFE / AWG 11 | 2 in | 0.450 lb |

Z2 Dipped Handle Lineman's Pliers

- High leverage joint design provides up to 35% greater cutting power
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Cross hatched jaw for gripping and pulling
- Fish tape channel for use with flat steel tapes
- Professional easy clean dipped grips



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Product Weight |
|----------|-------------------|---------------|--------------|------------------|----------------------------|-----------------|-------------------|
| Z20508 | 8.4 in | 1.5 in | 0.28 in | 0.53 in | KNIFE-KNIFE / AWG 6 | 1.5 in | 0.900 lb |
| Z20509 | 9.1 in | 1.6 in | 0.31 in | 0.62 in | KNIFE-KNIFE / AWG 5 | 1.6 in | 1.100 lb |

Z2 Dual Material Lineman's Pliers

- High leverage joint design provides up to 35% greater cutting power
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Cross hatched jaw for gripping and pulling
- Fish tape channel for use with flat steel tapes
- Ergonomic handles with tether point increase overall comfort and safety



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Product Weight |
|----------|-------------------|---------------|--------------|------------------|----------------------------|-----------------|-------------------|
| Z20508CG | 8.9 in | 1.5 in | 0.28 in | 0.53 in | KNIFE-KNIFE / AWG 6 | 1.5 in | 0.950 lb |
| Z20509CG | 9.6 in | 1.6 in | 0.31 in | 0.62 in | KNIFE-KNIFE / AWG 5 | 1.6 in | 1.200 lb |

126 | 127

(T CRESCENT®

Z2 Lineman's Pliers

These are Crescent's best cutting lineman's pliers ever with a pivot-forward high-leverage joint design that lowers force required to cut by 35%, reducing hand fatigue on repetitive cuts. Combine that with laser-hardened cutting edges that provide 50% longer cutting life and you have tools made for the high demands of professional tradespeople.





Dipped Grip Option: Ergonomic, easy clean dipped grips

Z2 Dipped Handle Slip Joint Pliers

- Curved jaws design for gripping and turning round objects such as pipes, rods and pins
- Fastener grip area for turing nuts and bolts
- Cross hatched jaw for gripping and pulling
- Deep integrated wire cutter reduces cutting effort
- Professional easy clean dipped grips



| Cat. No. | Application | Overall Length | Jaw Length | Jaw Thickness | Jaw Capacity | Product Weight |
|----------|-------------|----------------|------------|---------------|--------------|----------------|
| HTZ26 | Gripping | 6.38 in | 1.35 in | 0.42 in | 1.25 in | 0.415 lb |
| HTZ28 | Gripping | 8.1 in | 1.35 in | 0.42 in | 1.5 in | 0.645 lb |

Z2 Dual Material Slip Joint Pliers

- Curved jaws design for gripping and turning round objects such as pipes, rods and pins
- Fastener grip area for turing nuts and bolts
- Integrated non-marring Grip Zone™ pipe grip area in the handle, made of high-impact rubber
- Cross hatched jaw for gripping and pulling
- Deep integrated wire cutter reduces cutting effort




| Cat. No. | Application | Overall Length | Jaw Length | Jaw Thickness | Jaw Capacity | Product Weight |
|----------|-------------|----------------|------------|---------------|--------------|----------------|
| HTZ26CG | Gripping | 6.75 in | 1.35 in | 0.42 in | 1.25 in | 0.415 lb |
| HTZ28CG | Gripping | 8.65 in | 1.35 in | 0.42 in | 1.5 in | 0.645 lb |

2 Pc. Grip Zone™ V-Jaw Dual Material **Tonque & Groove Plier Set**

- V-shaped jaws allow for a firmer grip on various shapes
- Rivet construction with precision machined joint interlock assures smooth. positive joint action, no chance of slipping position or coming apart under load
- Unique tooth design grips tighter, giving you increased torque using less effort
- Angled teeth for increased grip on pipes and fasteners
- Integrated non-marring Grip Zone™ pipe grip area in the handle, made of
- Maximum durability from alloy steel construction with induction-hardened teeth
- Black oxide finish wipes clean easily and resists corrosion

| Included Storage | Product Weight | | |
|------------------|----------------|---------------|---------------|
| None | 2.640 lb | | |
| Description | | | |
| | | | |
| | None | None 2.640 lb | None 2.640 lb |

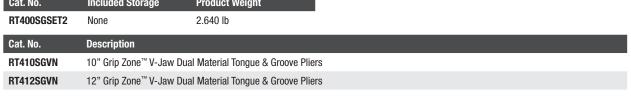

$(\prod \mathsf{CRESCENT}^\circ)$

Grip Zone™ V-Jaw Dual Material Tongue & Groove Pliers

- V-shaped jaws allow for a firmer grip on various shapes
- Rivet construction with precision machined joint interlock assures smooth, positive joint action, no chance of slipping position or coming apart under load
- Unique tooth design grips tighter, giving you increased torque using less effort
- Angled teeth for increased grip on pipes and fasteners
- Integrated non-marring Grip Zone™ pipe grip area in the handle, made of high-impact rubber
- Maximum durability from alloy steel construction with induction-hardened teeth
- Black oxide finish wipes clean easily and resists corrosion

| Cat. No. | Jaw Positions | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|-----------|------------------|-------------------|---------------|--------------|------------------|-----------------|-----------------|----------------|-------------------|
| RT410SGVN | 6 | 10 in | 1.57 in | 1.67 in | 0.46 in | 1.99 in | No | No | 0.870 lb |
| RT412SGVN | 8 | 12 in | 2.02 in | 2.06 in | 0.50 in | 2.51 in | No | No | 1.485 lb |

3 Pc. Straight Jaw Dipped Handle **Tongue and Groove Plier Set**

- Rivet construction with precision machined joint interlock assures smooth, positive joint action, no chance of slipping position or coming apart under load
- Self-locking jaw opening adjustment
- Alloy steel construction with induction-hardened teeth for maximum durability
- Long handles provide additional leverage
- Secure grip from the single-dip handles that easily wipe clean
- Black oxide finish to prevent corrosion

| Cat. No. | Included Storage | Product Weight | |
|-----------|--------------------------|---------------------------------|--|
| RT200SET3 | None | 3.015 lb | |
| Cat. No. | Description | | |
| RT27CVN | 7" Straight Jaw Dipped H | andle Tongue and Groove Pliers | |
| RT210CVN | 10" Straight Jaw Dipped | Handle Tongue and Groove Pliers | |
| RT212CVN | 12" Straight Jaw Dipped | Handle Tongue and Groove Pliers | |




Straight Jaw Dipped Handle Tongue and Groove Pliers

- Rivet construction with precision machined joint interlock assures smooth, positive joint action, no chance of slipping position or coming apart under load
- Self-locking jaw opening adjustment
- Alloy steel construction with induction-hardened teeth for maximum durability
- Long handles provide additional leverage
- Secure grip from the single-dip handles that easily wipe clean
- Black oxide finish to prevent corrosion



V-Jaw Dipped Handle Tongue and **Groove Pliers**



- joint action with no chance of slipping position or coming apart under load
- Unique tooth design grips tighter and provides increased torque with less effort
- Maximum durability from alloy steel construction with induction-hardened teeth
- Secure grip from the single-dip handles that easily wipe clean
- Black oxide finish to prevent corrosion







$(\prod \mathsf{CRESCENT}^\circ)$

Mini V-Jaw Dipped Handle Tongue and Groove Pliers

- V-shaped jaws with an offset, self-locking adjustment grip tightly in any configuration
- Rivet construction with precision-machined joint interlock assures smooth, positive joint action with no chance of slipping position or coming apart under load
- Unique tooth design grips tighter and provides increased torque with less effort
- Maximum durability from alloy steel construction with induction-hardened teeth
- Four jaw positions for flexibility and comfort
- Secure grip from the single-dip handles that easily wipe clean
- Black oxide finish to prevent corrosion



| Cat. No. | Jaw | Overall | Jaw | Jaw | Jaw | Jaw | Wire | Wire | Product |
|----------|-----------|---------|---------|---------|-----------|----------|---------|--------|----------|
| | Positions | Length | Length | Width | Thickness | Capacity | Crimper | Cutter | Weight |
| RT24CVS | 4 | 4.9 in | 0.50 in | 0.75 in | 0.22 in | 0.75 in | No | No | 0.145 lb |

Heavy-Duty Dipped Handle Diagonal Cutting Pliers

- Designed for heavy-duty wire cutting
- Standard or flush cutting edges
- Angled head for offset cutting
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Dipped handle grips for easy cleaning and better control
- Polished head resists rust and corrosion



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Wire Crimper | Product Weight |
|----------|-------------------|---------------|--------------|------------------|----------------------------|-----------------|-----------------|-------------------|
| 5427CVNN | 7 in | 0.78 in | 1.218 in | 0.468 in | Std./12 AWG | 0.4 in | No | 0.685 lb |
| 5428CVNN | 8 in | 0.78 in | 1.218 in | 0.468 in | Std./22 AWG | 0.4 in | No | 0.74 lb |
| 5437CENN | 7 in | 0.78 in | 1.218 in | 0.468 in | Flush/22 AWG | 0.4 in | No | 0.635 lb |
| 5438CENN | 8 in | 0.78 in | 1.218 in | 0.468 in | Flush/12 AWG | 0.4 in | No | 0.70 lb |

General Purpose Diagonal Cutting Pliers

- Designed for general wire cutting in confined spaces
- Long cutting edges for harder wires
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Polished head resists rust and corrosion



| Cat. No. | Handle Material | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/Cut Capacity | Jaw Capacity | Wire Crimper | Product Weight |
|----------|--------------------|-------------------|---------------|--------------|------------------|---------------------------|-----------------|-----------------|-------------------|
| 9336NN | Alloy Steel | 6 in | 0.81 in | 0.75 in | 0.437 in | Std./12 AWG | 0.4 in | No | 0.335 lb |
| 9336CVNN | Double Dip | 6 in | 0.81 in | 0.75 in | 0.437 in | Std./12 AWG | 0.4 in | No | 0.410 lb |
| 9337CVNN | Double Dip | 7 in | 1 in | 0.906 in | 0.468 in | Std./12 AWG | 0.5 in | No | 0.580 lb |

Dipped Handle Long Needle Nose Pliers

- Long needle nose with excellent gripping ability
- Designed for work in tight, narrow areas
- Manufactured from forged alloy tool steel for durability
- Polished head resists rust and corrosion
- Dipped handle grips for easy cleaning and better control



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|----------|----------------|------------|-----------|---------------|--------------|--------------|-------------|----------------|
| 7776CVNN | 6.5 in | 2.062 in | 0.687 in | 0.343 in | 1.1 in | No | No | 0.320 lb |
| 7777CVNN | 7.46 in | 2.687 in | 0.687 in | 0.328 in | 1.4 in | No | No | 0.350 lb |

Dipped Handle Bent Needle Nose Pliers

- Designed for working in out-of-the-way confined corners
- Thin bent nose, tempered tips are made to bend slightly when gripping, returning to normal when pressure is released
- Manufactured from forged alloy tool steel for durability
- Polished head resists rust and corrosion
- Dipped handle grips for easy cleaning and better control



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|----------|----------------|------------|-----------|---------------|--------------|--------------|-------------|----------------|
| 8886CVNN | 6.6 in | 1 in | 0.687 in | 0.375 in | 0.50 in | No | No | 0.46 lb |

High Leverage Lineman's Pliers

- Designed for electrical work
- Cutting edges cut clean and remain sharp
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Streamlined head design allows easy sliding in and out of belt loops
- Polished head resists rust and corrosion



| Cat. No. | Handle Material | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/Cut Capacity | Jaw Capacity | Wire Crimper | Product Weight |
|--------------|--------------------|-------------------|---------------|--------------|------------------|---------------------------|-----------------|-----------------|-------------------|
| 20509CVSMLNN | Double Dip | 9.25 in | 1.562 in | 1.28 in | 0.625 in | Std./11 AWG | 0.70 in | No | 1.170 lb |
| 20509NN | Alloy Steel | 9.25 in | 1.562 in | 1.28 in | 0.625 in | Std./11 AWG | 0.70 in | No | 1.100 lb |

Dipped Handle Lineman's Side Cutting Pliers

- Designed for electrical work
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Polished head resists rust and corrosion
- Spring tempered handles with dipped grips



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/Cut Capacity | Jaw Capacity | Wire Crimper | Product Weight |
|----------|-------------------|---------------|--------------|------------------|---------------------------|-----------------|-----------------|-------------------|
| 507CVNN | 7.25 in | 1.281 in | 1 in | 0.50 in | Std./12 AWG | 0.60 in | No | 0.660 lb |
| 508CVNN | 8.31 in | 1.468 in | 1.125 in | 0.562 in | Std./11 AWG | 0.70 in | No | 1.025 lb |

Button Pliers Fence Tool

- Designed for construction and maintenance of wire fencing
- Flat nose with three wire cutters, pipe grips, and teeth in extreme tip of nose
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Black finish with polished head resists rust and corrosion
- Knurled handles for better grip



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Product Weight |
|-----------|----------------|------------|-----------|---------------|----------------------------|--------------|----------------|
| 10008VNN | 8 in | 1.281 in | 1.375 in | 0.562 in | Std./12 AWG | 0.70 in | 0.860 lb |
| 100010VNN | 10.25 in | 1.5 in | 1.562 in | 0.625 in | Std./11 AWG | 0.70 in | 1.335 lb |

Heavy-Duty End Cutting Nipper Pliers

- Strong and lightweight for demanding construction use
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Black finish with polished head resists rust and corrosion
- High leverage design to cut large diameter nails and wire



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/Cut Capacity | Jaw Capacity | Wire Crimper | Product Weight |
|----------|-------------------|---------------|--------------|------------------|---------------------------|-----------------|-----------------|-------------------|
| GG010HNN | 10 in | 0.64 in | 2.156 in | 0.578 in | Std./12 AWG | 0.50 in | No | 1.04 lb |
| GG014HNN | 14 in | 0.718 in | 1.656 in | 0.64 in | Std./12 AWG | 0.60 in | No | 2.15 lb |

Dipped Handle End Cutting Nipper Pliers

- Manufactured from forged alloy tool steel for durability
- Electronically induction hardened hand-honed, long lasting cutting edges
- Thin throat and flush rivet size for improved access
- Dipped handles designed with a high leverage ratio for easier cutting
- Polished, durable forged alloy tool steel head



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Wire Crimper | Product Weight |
|----------|-------------------|---------------|--------------|------------------|----------------------------|-----------------|-----------------|-------------------|
| 727CVN | 7.25 in | 0.375 in | 1.75 in | 0.53 in | Std./12 AWG | 0.40 in | No | 0.815 lb |
| 728CVNN | 8.25 in | 0.375 in | 1.75 in | 0.53 in | Std./12 AWG | 0.60 in | No | 0.905 lb |
| 729CVNN | 9.25 in | 0.406 in | 1.75 in | 0.59 in | Std./12 AWG | 0.60 in | No | 0.980 lb |

Dipped Handle Long Chain Nose Pliers

- Designed for work in confined areas
- Long chain nose with serrated jaws to easily make wire loops and bends
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Polished head resists rust and corrosion
- Dipped handle grips for easy cleaning and better control



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Product Weight |
|-----------|----------------|------------|-----------|---------------|--------------|--------------|----------------|
| 10336CVNN | 6.625 in | 1.875 in | 0.687 in | 0.375 in | 0.80 in | No | 0.390 lb |
| 10337CVNN | 7.5 in | 1.656 in | 0.75 in | 0.375 in | 1 in | No | 0.430 lb |

Long Side Cutting Chain Nose Pliers

- Designed for reaching confined areas
- Long chain nose with fine serrated jaws to easily make wire loops and bends
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Polished head resists rust and corrosion



| Cat. No. | Handle Material | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Edge Type/ Cut Capacity | Jaw Capacity | Wire Crimper | Product Weight |
|-------------|--------------------|-------------------|---------------|--------------|------------------|----------------------------|-----------------|-----------------|-------------------|
| 6546NN | Alloy Steel | 6.625 in | 1.875 in | 0.687 in | 0.375 in | Std./14 AWG | 0.80 in | No | 0.315 lb |
| 6546CVSMLNN | Double Dip | 6.625 in | 1.875 in | 0.687 in | 0.375 in | Std./14 AWG | 0.80 in | No | 0.380 lb |
| 6547CVNN | Double Dip | 7.5 in | 1.656 in | 0.75 in | 0.375 in | Std./14 AWG | 1 in | No | 0.415 lb |

Heavy-Duty Solid Joint Fence Tool Pliers

- Designed for heavy-duty wire cutting
- Standard or flush cutting edges
- Angled head for offset cutting
- Electronically induction hardened hand-honed, long lasting cutting edges
- Manufactured from forged alloy tool steel for durability
- Polished head resists rust and corrosion



| Cat. No. | Handle Material | Overall Length | Edge Type/Cut Capacity | Wire Cutter | Product Weight |
|--------------|-----------------|----------------|------------------------|-------------|----------------|
| 193610CVSMNN | Double Dip | 10.437 in | Std./11 AWG | Yes | 1.835 lb |
| 193610VNN | Alloy Steel | 10.437 in | Std./11 AWG | Yes | 1.765 lb |

Electrical Connector Pliers

- Fits A-N electrical connectors
- Three adjustment positions
- Replacement insert kit available 52910KITN



| Cat. No. | Overall | Jaw | Jaw | Jaw | Jaw | Wire | Wire | Rplc. | Product |
|----------|---------|-----------------------------------|--------|-----------|------------------|---------|--------|-----------|---------|
| | Length | Length | Width | Thickness | Capacity | Crimper | Cutter | Part | Weight |
| 52910N | 10 in | 1.6 in (inside) 2.53 in (outside) | 1.5 in | 0.375 in | 0.75 in - 2.5 in | No | No | 52910KITN | 0.70 lb |

Cee Tee Co.® Curved Jaw Slip Joint Pliers

- Curved jaws with hardened teeth for gripping and turning round objects such as pipes, rods and pins
- Flat jaw tips with hardened teeth for general purpose gripping
- Wire cutter positioned very close to the pivot to provide maximum leverage and powerful cutting
- Forged from accurately machined, hardened and tempered alloy steel
- Nickel chrome plated finish
- Non-slip textured handles for improved grip
- Two different locking jaw positions

| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Packaging | Product Weight |
|----------|-------------------|---------------|--------------|------------------|-----------------|-----------------|----------------|-----------|-------------------|
| H26VN | 6.5 in | 1.32 in | 1.06 in | 0.39 in | 1 in | No | Yes | Carded | 0.50 lb |
| H26N | 6.5 in | 1.32 in | 1.12 in | 0.39 in | 1 in | No | Yes | Boxed | 0.45 lb |
| H28VN | 8 in | 1.35 in | 1.12 in | 0.39 in | 1 in | No | Yes | Carded | 0.65 lb |
| H28N | 8 in | 1.35 in | 1.12 in | 0.39 in | 1 in | No | Yes | Boxed | 0.60 lb |

2 Pc. Pro Series Dual Material Compound Action Cutting Plier Set

- Co-molded grips for added comfort
- Compound leverage design increases cutting and gripping pressure by 50%
- Chrome vanadium steel for increased durability
- Heat-treated joint rivet for smooth and consistent operation
- Induction-hardened edges for a long cutting life
- 1/3 lighter than standard pliers for reduced fatigue

| Cat. No. | Included Storage | Product Weight | | | | | | |
|----------|---|--|--|--|--|--|--|--|
| PSCA2SET | None | 1.350 lb | | | | | | |
| Cat. No. | Description | | | | | | | |
| PS5429C | 8" Pro Series Dual Material Diagonal Compound Action Cutting Pliers | | | | | | | |
| PS20509C | 8" Pro Series Dual Mate | 8" Pro Series Dual Material Lineman's Compound Action Cutting Pliers | | | | | | |



$(\prod \mathsf{CRESCENT}^\circ)$

Pro Series Dual Material Diagonal Compound Action Cutting Pliers

- Co-molded grips for added comfort
- Compound leverage design increases cutting and gripping pressure by 50%
- Chrome vanadium steel for increased durability
- Heat-treated joint rivet for smooth and consistent operation
- Induction-hardened edges for a long cutting life
- 1/3 lighter than standard pliers for reduced fatigue



| Cat. No. | Overall | Jaw | Jaw | Jaw | Edge Type/ | Jaw | Wire | Product |
|----------|---------|--------|-------|-----------|--------------|----------|---------|---------|
| | Length | Length | Width | Thickness | Cut Capacity | Capacity | Crimper | Weight |
| PS5429C | 8 in | 1 in | 1 in | 0.437 in | Std./11 AWG | 0.50 in | No | 0.50 lb |

Pro Series Dual Material Long Nose Compound Action Cutting Pliers

- Co-molded grips for added comfort
- Compound leverage design increases cutting and gripping pressure by 50%
- Chrome vanadium steel for increased durability
- Heat-treated joint rivet for smooth and consistent operation
- Induction-hardened edges for a long cutting life
- 1/3 lighter than standard pliers for reduced fatigue



| Cat. No. | Overall | Jaw | Jaw | Jaw | Edge Type/ | Jaw | Wire | Product |
|----------|---------|----------|---------|-----------|--------------|----------|---------|---------|
| | Length | Length | Width | Thickness | Cut Capacity | Capacity | Crimper | Weight |
| PS6549C | 9 in | 1.562 in | 1.28 in | 0.625 in | Std./11 AWG | 0.80 in | No | 0.60 lb |

Pro Series Dual Material Lineman's Compound Action Cutting Pliers

- Co-molded grips for added comfort
- Compound leverage design increases cutting and gripping pressure by 50%
- Chrome vanadium steel for increased durability
- Heat-treated joint rivet for smooth and consistent operation
- Induction-hardened edges for a long cutting life
- 1/3 lighter than standard pliers for reduced fatigue



| Cat. No. | Overall | Jaw | Jaw | Jaw | Edge Type/ | Jaw | Wire | Product |
|----------|---------|----------|-------|-----------|--------------|----------|---------|---------|
| | Length | Length | Width | Thickness | Cut Capacity | Capacity | Crimper | Weight |
| PS20509C | 8 in | 1.312 in | 1 in | 0.437 in | Std./11 AWG | 0.65 in | No | 0.60 lb |

Pivot Action Dual Material Diagonal Compound Action Cutting Pliers

- Unique pivoting design cuts with 40% less force
- Compound design puts more force behind the cutting edge compared to traditional pliers
- Forged steel body is durable and strong
- Induction-hardened cutting edge for a long blade life
- Durable dual-material grips for added ergonomic comfort
- Anti-rust coating
- Designed with standard bevel edges for general wire cutting



| Cat. No. | Overall | Jaw | Jaw | Jaw | Jaw | Wire | Cutting Edge | Product |
|----------|---------|---------|--------|-----------|----------|---------|--------------|---------|
| | Length | Length | Width | Thickness | Capacity | Crimper | Length | Weight |
| CCA5428 | 8 in | 1.06 in | 1.2 in | 0.55 in | 0.50 in | No | 1.06 in | 0.80 lb |

Pivot Action Dual Material Lineman's Compound Action Pliers

- Unique pivoting design cuts with 40% less force
- Compound design puts more force behind the cutting edge compared to traditional pliers
- Forged steel body is durable and strong
- Machined cross-check knurling pattern on the serrated jaw for a non-slip grip
- Induction-hardened cutting edge for a long blade life
- Durable dual-material grips for added ergonomic comfort
- Anti-rust coating
- Designed with standard bevel edges for general wire cutting



| Cat. No. | Overall | Jaw | Jaw | Jaw | Jaw | Wire | Cutting Edge | Product |
|----------|---------|---------|--------|-----------|----------|---------|--------------|---------|
| | Length | Length | Width | Thickness | Capacity | Crimper | Length | Weight |
| CA20509 | 9 in | 1.65 in | 1.3 in | 0.55 in | .65 in | No | 0.83 in | 1.02 lb |

2 Pc. X2™ Straight and Bent Long Nose Dual Material Plier Set

- Long reach pliers for better access in tight spaces
- Double joint design allows the jaws to open a greater distance than the handle
- Compound joint opens wider with less effort
- Flush rivets are stronger and have a thinner profile
- Dual material handles offer a more comfortable grip
- Milled grooves in the tips grip fasteners and other objects tightly
- Made from corrosion-resistant alloy steel

| Gal. No. | iliciuueu Storaye | Floudet Weight | |
|----------|-----------------------|-----------------------------|--|
| PSX204C | None | 2.00 lb | |
| Cat. No. | Description | | |
| PSX200C | 13" X2™ Dual Material | Long Reach Pliers | |
| PSX201C | 13" X2™ Dual Material | Long Reach Bent Nose Pliers | |



X2™ Dual Material Long Reach Pliers

- Long reach pliers for better access in tight spaces
- Double joint design allows the jaws to open a greater distance than the handle
- Compound joint opens wider with less effort
- Flush rivets are stronger and have a thinner profile
- Dual-material grips for improved ergonomics and comfort
- Milled grooves in the tips grip fasteners and other objects tightly
- Made from corrosion-resistant alloy steel

| Cat. No. | Overall Length | Jaw Length | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|----------|----------------|------------|--------------|--------------|-------------|----------------|
| PSX200C | 13.468 in | 2.75 in | 1.4 in | No | No | 0.87 lb |

X2™ Dual Material Long Reach Bent Nose

- Designed for working in out-of-the-way confined corners
- Double joint design allows the jaws to open a greater distance than the handle
- Compound joint opens wider with less effort
- Flush rivets are stronger and have a thinner profile
- Dual-material grips for improved ergonomics and comfort
- Milled grooves in the tips grip fasteners and other objects tightly
- Made from corrosion-resistant alloy steel

| Cat. No. | UPC No. | Packaging | Application | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | |
|----------|--------------|-----------|-------------|-------------------|---------------|--------------|------------------|-----------------|-----------------|----------------|---------|
| PSX201C | 037103241801 | Carded | Gripping | 13.265 in | 2.5 in | 0.359 in | 0.406 in | 1.3 in | No | No | 0.89 lb |



- Versatile curved jaw also features integral wire cutter
- Angled tooth pattern for a better grip
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- After initial grip is set, pliers can be tightened further by turning the adjusting screw with a hex key
- Compound action for powerful non-slip locking grip
- Plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion

Included Storage

Maximum jaw opening size matches ASME specifications

| O O O O O | O O O O O O O O O O O O O O O O O O O | 1000 mg | |
|-----------|---------------------------------------|---------|-----|
| 1 X | N | , | 1 基 |

| CLP5SETN | None | 4.06 lb | | |
|----------|-----------------|---------------------------------|----------|--|
| Cat. No. | Description | | Cat. No. | Description |
| C5CVN | 5" Curved Jaw L | ocking Pliers with Wire Cutter | C6NVN | 6" Long Nose Locking Pliers with Wire Cutter |
| C7CVN | 7" Curved Jaw L | ocking Pliers with Wire Cutter | C9NVN | 9" Long Nose Locking Pliers with Wire Cutter |
| C10CVN | 10" Curved Jaw | Locking Pliers with Wire Cutter | | |

3 Pc. Curved Jaw Locking Pliers with Wire Cutter Set

- Versatile curved jaw also features integral wire cutter
- Angled tooth pattern for a better grip
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- After initial grip is set, pliers can be tightened further by turning the adjusting screw with a hex key
- Compound action for powerful non-slip locking grip
- Plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion
 Maximum jaw opening size matches ASME specifications



| Cat. No. | Included Storage | Product Weight |
|----------|------------------------|---------------------------|
| CLP3SETN | None | 2.54 lb |
| Cat. No. | Description | |
| C5CVN | 5" Curved Jaw Locking | Pliers with Wire Cutter |
| C7CVN | 7" Curved Jaw Locking | Pliers with Wire Cutter |
| C10CVN | 10" Curved Jaw Locking | g Pliers with Wire Cutter |

2 Pc. Curved Jaw Locking Pliers with **Wire Cutter Set**

- Versatile curved iaw also features integral wire cutter
- Angled tooth pattern for a better grip
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- After initial grip is set, pliers can be tightened further by turning the adjusting screw with a hex key
- Compound action for powerful non-slip locking grip
- Plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion



| Cat. No. | Description | |
|----------|--|--|
| C7CVN | 7" Curved Jaw Locking Pliers with Wire Cutter | |
| C10CVN | 10" Curved Jaw Locking Pliers with Wire Cutter | |

Curved Jaw Locking Pliers with Wire Cutter

- Versatile curved jaw also features integral wire cutter
- Angled tooth pattern for a better grip
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- After initial grip is set, pliers can be tightened further by turning the adjusting screw with a hex key
- Compound action for powerful non-slip locking grip
- Plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion
- Maximum jaw opening size matches ASME specifications



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Product Weight |
|----------|----------------|------------|-----------|---------------|--------------|--------------|----------------|
| C5CVN | 5 in | 4 in | 1.15 in | 0.30 in | 1.25 in | No | 0.370 lb |
| C7CVN | 7 in | 5 in | 1.85 in | 0.40 in | 1.625 in | No | 0.755 lb |
| C10CVN | 10 in | 6 in | 2.15 in | 0.56 in | 1.875 in | No | 1.155 lb |

Straight Jaw Locking Pliers

- Straight jaws for maximum grip
- Angled tooth pattern for a better grip
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- After initial grip is set, pliers can be tightened further by turning the adjusting screw with a hex key
- Compound action for powerful non-slip locking grip
- Plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion
- Maximum jaw opening size matches ASME specifications



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Product Weight |
|----------|----------------|------------|-----------|---------------|--------------|--------------|----------------|
| C7SVN | 7 in | 1.15 in | 1.85 in | 0.40 in | 1.625 in | No | 0.870 lb |
| C10SVN | 10 in | 1.25 in | 2.15 in | 0.56 in | 1.875 in | No | 1.245 lb |

Long Nose Locking Pliers with Wire Cutter

- Versatile curved jaw also features integral wire cutter
- Angled tooth pattern for a better grip
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- After initial grip is set, pliers can be tightened further by turning the adjusting screw with a hex key
- Compound action for powerful non-slip locking grip
- Plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion
- Maximum jaw opening size matches ASME specifications



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Product Weight |
|----------|----------------|------------|-----------|---------------|--------------|--------------|----------------|
| C6NVN | 6 in | 1.87 in | 1.15 in | 0.30 in | 2.25 in | No | 0.405 lb |
| C9NVN | 9 in | 2.65 in | 1.6 in | 0.40 in | 2.875 in | No | 0.875 lb |

(TCRESCENT®

Locking C-Clamps with Regular Tips

- Locking "C" clamps are faster and easier to use than standard clamps
- Regular tips work with hard surface materials
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- After initial grip is set, clamp can be tightened further by turning the adjusting screw with a hex key
- Compound action for powerful non-slip locking grip
- Plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion
- Maximum jaw opening meets ASME specifications



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Packaging | Product Weight |
|----------|-------------------|---------------|--------------|------------------|-----------------|-----------------|-----------|-------------------|
| C6CCVN | 6 in | 2.25 in | 3.4 in | 0.80 in | 2 in | No | Carded | 0.555 lb |
| C11CCVN | 11 in | 4.05 in | 5.6 in | 0.90 in | 3.5 in | No | Boxed | 1.765 lb |
| C11CCVBN | 11 in | 4.05 in | 5.6 in | 0.90 in | 3.5 in | No | Bagged | 1.685 lb |
| C18CCRN | 18 in | 11 in | 5.6 in | 0.90 in | 9.25 in | No | Boxed | 2.790 lb |

Locking C-Clamps with Swivel Pad Tips

- Locking "C" clamps are faster and easier to use than standard clamps
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- After initial grip is set, clamp can be tightened further by turning the adjusting screw with a hex key
- Compound action for powerful non-slip locking grip
- Plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion
- Maximum jaw opening meets ASME specifications



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Product Weight |
|----------|----------------|------------|-----------|---------------|--------------|--------------|----------------|
| C6CCSVN | 6.8 in | 2.25 in | 3.4 in | 0.80 in | 2.35 in | No | 0.665 lb |
| C11CCSVN | 11 in | 4.05 in | 5.6 in | 0.90 in | 4 in | No | 1.930 lb |
| C18CCSN | 18 in | 11 in | 5.6 in | 0.90 in | 9.5 in | No | 3.170 lb |

Locking Sheet Metal Clamp

- Compound action for powerful non-slip locking grip
- After initial grip is set, clamp can be tightened further by turning the adjusting screw with a hex key
- Red plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion
- Maximum jaw opening meets ASME specifications



| Cat. No. | Overall Length | Jaw Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Product Weight |
|----------|----------------|------------|-----------|---------------|--------------|--------------|----------------|
| C8SMVN | 8 in | 1.7 in | 1.95 in | 3.8 in | 1.63 in | No | 1.130 lb |
| C9WN | 8.8 in | 2.9 in | 2.75 in | 2.7 in | 3 in | No | 1.305 lb |

Quick Release Locking Chain Clamp

- 18" long chain
- Compound action for powerful non-slip locking grip
- Knurled adjusting screw turns easily by hand or with a hex key inserted into the hex key receiver on bottom of screw
- Red plastisol dip on release lever for improved comfort
- Nickel-plated finish resists rust and corrosion



| Cat. No. | Overall Length | Jaw Width | Jaw Thickness | Jaw Capacity | Wire Crimper | Wire Cutter | Product Weight |
|----------|----------------|-----------|---------------|--------------|--------------|-------------|----------------|
| C20CHN | 20 in | 2.45 in | 0.50 in | 5.7 in | No | No | 1.670 lb |

Electrician's Wire Stripper, Cutter and Crimper Pliers

- 5-in-1 scissor-action tool
- Wire stripper, wire cutter, bolt cutter, pliers and crimper
- Pliers nose permits wire pulling and looping of wire
- Cleanly strips and cuts 10 22 AWG wire
- Cuts bolts through No. 10, leaving perfect lead thread
- Crimps insulated and non-insulated solderless terminals
- Lifetime pivot bearing and red dipped handle grips



| Cat. No. | Product Weight |
|----------|----------------|
| WS19H | 0.52 lb |


CRESCENT®

2-in-1 Combo Linesman Pliers

- Unique design combines a lineman's plier and wire stripper in one tool
- Performs both cutting and stripping operations
- Provides the flexibility of a multi-purpose tool with the precision and performance of high quality pliers
- Wire stripper cuts and strips 20-10 AWG and 0.8 mm-2.6 mm wire
- Locking switch can be operated with one hand
- Forged alloy steel heads are strong and durable
- Induction-hardened cutting edges
- Dual material handles offer a more comfortable grip
- Wire stripper head is laser-etched with corresponding AWG and metric sizing
- Industrial black finish for corrosion protection



| Cat. No. | Overall Length | Jaw Length | Wire Size | Jaw Width | Jaw Thickness | Jaw Capacity | Cutting Edge Length | Product Weight |
|----------|----------------|------------|-----------|-----------|---------------|--------------------|------------------------|-------------------|
| CCP8V | 8.25 in | 1.375 in | 20-10AWG | 1.062 in | 0.35 in | 10 - 20 Gauge Wire | 0.562 in | 0.670 lb |

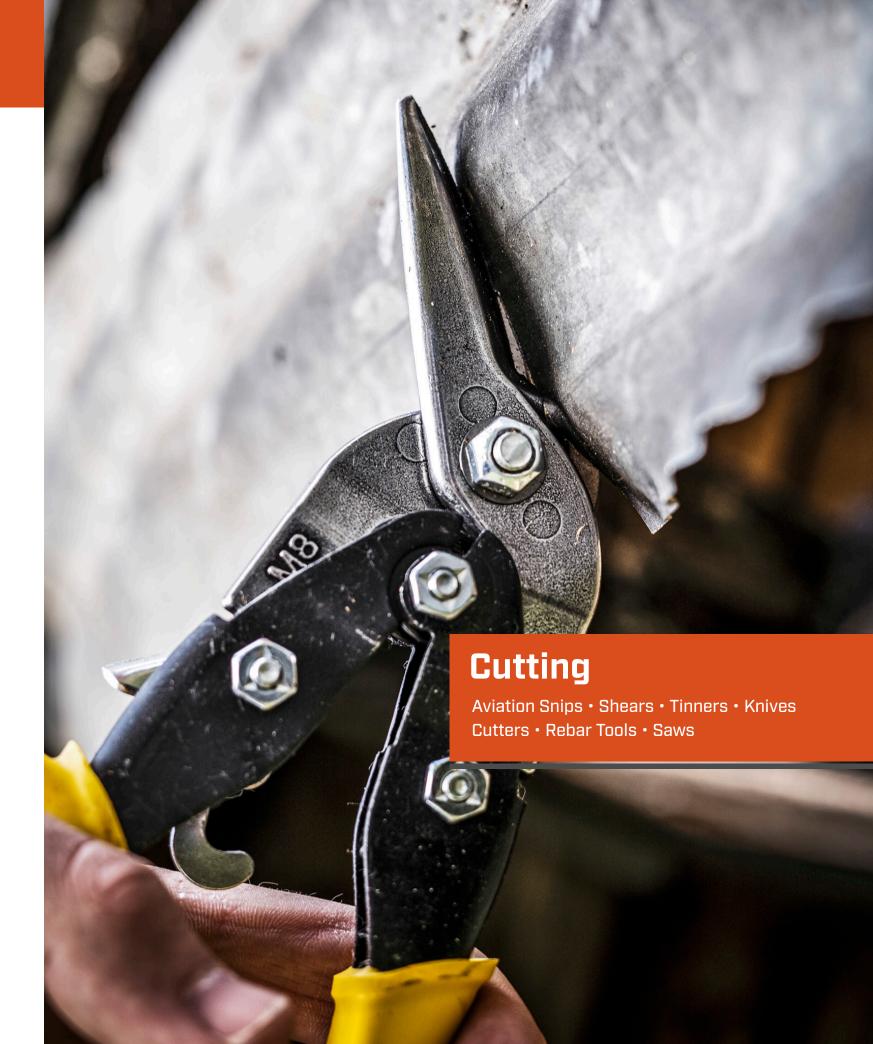



Next Generation Aviation Snips Snips made to earn the trust of a new generation.

Continuous improvement means never being satisfied. That's why these new Next Generation snips last 60% longer and require 20% less force to cut on average compared to our snips from just five years ago. And that's why Crescent Wiss is the undisputed leading brand of snips for sheet metal professionals.



M1R Aviation Snips

- Cuts left from tight curves to straight with red handles for quick identification
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Superior design prevents tears at end of cuts by controlling blade bypass;
 minimizes folding and burrs
- Cuts up to 18 gauge low carbon, rolled steel
- Spring-action handle for a faster, effortless feed
- Handles have built-in stops, providing consistent operation and blade opening
- Free float design on the pivot bolt provides longer life
- Single-handed latch operation for left or right-handed use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA





| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Replacement Parts | Product Weight |
|----------|--------------|--------|-------------------------|--------------|---------------------------|----------------------|-------------------|
| M1R | Red | Both | Serrated | 1.375 in | 18 Gauge Low Carbon Steel | P406 Spring | 0.40 lb |

M2R Aviation Snips

- Cuts right from tight curves to straight with green handles for quick identification
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Superior design prevents tears at end of cuts by controlling blade bypass;
 minimizes folding and burrs
- Cuts up to 18 gauge low carbon, rolled steel
- Spring-action handle for a faster, effortless feed
- Handles have built-in stops, providing consistent operation and blade opening
- Free float design on the pivot bolt provides longer life
- Single-handed latch operation for left or right-handed use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Replacement Parts | Product Weight |
|----------|--------------|--------|-------------------------|--------------|---------------------------|----------------------|-------------------|
| | nanule color | | / Diaues | . | <u> </u> | | · · · · · · |
| M2R | Green | Both | Serrated | 1.375 in | 18 Gauge Low Carbon Steel | P407 Spring | 0.40 lb |

AVIATIO

M3R Aviation Snips

- Cuts straight and slight left and right curves with yellow handles for quick identification
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Superior design prevents tears at end of cuts by controlling blade bypass; minimizes folding and burrs
- Cuts up to 18 gauge low carbon, rolled steel
- Spring-action handle for a faster, effortless feed
- Handles have built-in stops, providing consistent operation and blade opening
- Free float design on the pivot bolt provides longer life
- Single-handed latch operation for left or right-handed use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA





| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Replacement Parts | Product Weight |
|----------|--------------|--------|-------------------------|-----------------|---------------------------|----------------------|-------------------|
| M3R | Yellow | Both | Serrated | 1.5 in | 18 Gauge Low Carbon Steel | P406 Spring | .90 lb |

M5R Bulldog Aviation Snips

- Cuts straight lines
- For notching or trimming extra heavy stock
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Cuts up to 16 gauge low carbon, rolled steel
- Withstands strain of cutting heavy stock and tight curves
- Spring-action handle for a faster, effortless feed
- Handle latch keeps blades closed during storage or when not in use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Replacement Parts | Product Weight |
|----------|--------------|--------|-------------------------|-----------------|---------------------------|----------------------|-------------------|
| M5R | Red | Both | Serrated | .875 in | 16 Gauge Low Carbon Steel | P406 Spring | 0.95 lb |

M6R Offset Aviation Snips

- Cuts straight lines and left arcs
- Offset blades keep hands clear of metal while cutting
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Cuts up to 18 gauge low carbon, rolled steel
- Spring-action handle for a faster, effortless feed
- Handle latch keeps blades closed during storage or when not in use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Replacement Parts | Product Weight |
|----------|--------------|--------|-------------------------|-----------------|---------------------------|----------------------|-------------------|
| M6R | Red | Both | Serrated | 1.25 in | 18 Gauge Low Carbon Steel | P406 Spring | 0.40 lb |

M7R Offset Aviation Snips

- Cuts straight lines and right arcs with green handles for quick identification
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Offset blades keep hands clear of metal while cutting
- Cuts up to 18 gauge low carbon, rolled steel
- Spring-action handle for a faster, effortless feed
- Handle latch keeps blades closed during storage or when not in use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Replacement Parts | Product Weight |
|----------|--------------|--------|-------------------------|-----------------|---------------------------|----------------------|-------------------|
| M7R | Green | Both | Serrated | 1.25 in | 18 Gauge Low Carbon Steel | P407 Spring | 0.40 lb |

AVIATIO

M80SS Offset Straight Aviation Snips

- Cuts straight lines and right and left arcs
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Offset blades keep hands clear of metal while cutting
- Unique total system design requires 20% less force to cut
- Cuts up to 18 gauge low carbon, rolled steel
- Withstands strain of cutting heavy stock and tight curves
- Spring-action handle for a faster, effortless feed
- Handle latch keeps blades closed during storage or when not in use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA





| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|-------------------------|----------------|
| M80SS | Yellow | Both | Serrated | 3 in | Up to 18 Gauge Steel | 1.020 lb |

M1X Edge Aviation Snips

- Cuts straight lines and left arcs with red handles for quick identification
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Handle design and compound-leverage mechanism make cutting easier and reduce hand fatique
- Integrated stops make sure the blades open all the way, every time, for maximum length of cut
- Cuts up to 18 gauge low carbon, rolled steel
- Handle latch keeps blades closed during storage or when not in use
- Dual material handle grips provide comfortable grip with built-in hang hook
- Meets or exceeds ASME specifications
- Made in the USA





| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|---------------------------|----------------|
| M1X | Red | Both | Serrated | 1.25 in | 18 Gauge Low Carbon Steel | 0.95 lb |

M2X Edge Aviation Snips

- Cuts straight lines and right arcs with green handles for quick identification
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Handle design and compound-leverage mechanism make cutting easier and reduce hand fatigue
- Integrated stops make sure the blades open all the way, every time, for maximum length of cut
- Cuts up to 18 gauge low carbon, rolled steel
- Handle latch keeps blades closed during storage or when not in use
- Dual material handle grips provide comfortable grip with built-in hang hook
- Meets or exceeds ASME specifications
- Made in the USA





| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|---------------------------|----------------|
| M2X | Green | Both | Serrated | 1.25 in | 18 Gauge Low Carbon Steel | 0.95 lb |

M3X Edge Aviation Snips

- Cuts straight lines and right and left arcs with yellow handles for quick identification
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Handle design and compound-leverage mechanism make cutting easier and reduce hand fatigue
- Integrated stops make sure the blades open all the way, every time, for maximum length of cut
- Cuts up to 18 gauge low carbon, rolled steel
- Handle latch keeps blades closed during storage or when not in use
- Dual material handle grips provide comfortable grip with built-in hang hook
- Meets or exceeds ASME specifications
- Made in the USA



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|---------------------------|----------------|
| МЗХ | Yellow | Both | Serrated | 1.375 in | 18 Gauge Low Carbon Steel | 0.95 lb |

M4R Pipe & Duct Cutting Snips

- Cuts any shape ducts, seams, sheet metal stock, vinyl tiles, and plastic laminates
- Jaw action automatically adjusts blade clearance for squarer, cleaner cuts
- Spring-action handle for a faster, effortless feed
- Handle latch keeps blades closed during storage or when not in use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|---------------------------|----------------|
| M4RN | Gray | Both | Double Cut | .562 in | 20 Gauge Low Carbon Steel | 0.95 lb |

MPX5 Multi-Purpose Cutter

- Blade design includes a twine cutter, wire cutter, bottle opener, and wire bending holes for added versatility
- 3" blade for cutting sheet metal, plastics, vinyl, carpet, gutters, cardboard, paper, screen, wire mesh, hose, roof shingles, wallpaper, cloth, leather, and much more
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Compound action design delivers 1.5x the cutting power of traditional design to save you effort
- Quick-release lock for easy one-handed operation
- Nickel chrome blades resist rust and corrosion
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|---------------------------|----------------|
| MPX5 | Rawhide | Both | Serrated | 3 in | 20 Gauge Low Carbon Steel | 0.97 lb |

M300 Long Cut Aviation Snips

- Cuts straight lines and right and left arcs
- Combines long cut of tinner's snips with the strength of compound action
- Great for making long, fast cuts in sheet metal, aluminum, and much more
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Cuts up to 20 gauge low carbon, rolled steel
- Compound action multiplies the cutting force
- Handle latch keeps blades closed during storage or when not in use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|---------------------------|----------------|
| M300N | Rawhide | Both | Serrated | 3 in | 20 Gauge Low Carbon Steel | 0.98 lb |

M400 Long Cut Offset Aviation Snips

- Offset blades keep hands clear of metal while cutting
- Combines long cut of tinner's snips with the strength of compound action
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Longer blade length reduces cutting frequency for faster work
- Cuts up to 20 gauge low carbon cold rolled steel, aluminum, and plastic
- Compound action design increases force for improved performance
- Handle latch keeps blades closed during storage or when not in use
 Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|---------------------------|----------------|
| M400N | Rawhide | Both | Serrated | 3 in | 20 Gauge Low Carbon Steel | 1.05 lb |

MPC3 Multipurpose Snips

- Cuts curves, straight lines, or any combination
- Used for cutting light-gauge metals, screening, floor tiles, vinyl, plastic, leather, paper, rubber, hardware cloth, shingles, tile gutters, downspouts, carpeting, and more
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Cuts up to 20 gauge low carbon steel
- Spring-action handle for a faster, effortless feed
- Handle latch keeps blades closed during storage or when not in use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage





| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|---------------------------|----------------|
| MPC3SN | Rawhide | Both | Serrated | 1.375 in | 20 Gauge Low Carbon Steel | 0.600 lb |

M1RS1 Special Series Aviation Snips

- Cuts left from tight curves to straight
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Superior design prevents tears at end of cuts by controlling blade bypass;
 minimizes folding and burrs
- Cuts inconel, titanium, and up to 18 gauge stainless steel
- Spring-action handle for a faster, effortless feed
- Handles have built-in stops, providing consistent operation and blade opening
- Free float design on the pivot bolt provides longer life
- Single-handed latch operation for left or right-handed use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA





| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|--------------------------|----------------|
| M1RS1 | Blue | Both | Serrated | 1.375 in | 18 Gauge Stainless Steel | 0.90 lb |

M2RS1 Special Series Aviation Snips

- Cuts right from tight curves to straight
- Blade serrations hold material firmly and spread cutting force uniformly across blade edge, improving cut quality and tool life
- Superior design prevents tears at end of cuts by controlling blade bypass;
 minimizes folding and burrs
- Cuts inconel, titanium, and up to 18 gauge stainless steel
- Spring-action handle for a faster, effortless feed
- Handles have built-in stops, providing consistent operation and blade opening
- Free float design on the pivot bolt provides longer life
- Single-handed latch operation for left or right-handed use
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Made in the USA



| Cat. No. | Handle Color | Handed | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------------|--------|----------------------|--------------|--------------------------|----------------|
| M2RS1 | Blue | Both | Serrated | 1.375 in | 18 Gauge Stainless Steel | 0.90 lb |

Not just scissors and shears... Precision cutting tools made for pros.

The new and improved line of Crescent Wiss shears and scissors offers the performance, strength, and durability professional users need. Every scissor and shear has been upgraded with new features that deliver more comfort, superior results, and longer life. High-performance models feature titanium-coated blades for smooth, powerful cuts and several have a full metal core for maximum strength and durability.





Titanium Coated Tradesman Utility Shears

- Heavy-duty blades feature premium grade stainless steel and are precision engineered for knife-like cutting edges
- Compact 7.5 inch design allows for easy storage and provides excellent portability
- Titanium coated blades provide corrosion resistance and are 3X harder than steel for durability and tool life
- Quick release ergonomic latch provides consistent easy operation and secures the tool in the closed and locked position for safe storage
- TPR comfort grip handles with soft-grip texture provide best-in-class comfort and control
- Touch point ergonomics optimize hand and finger contact points in handles to maximize fit, control, and user ergonomics

| Cat. No. | Handed | Cutter Head / Blades | Blade Length | Product Weight |
|----------|--------|----------------------|--------------|----------------|
| CW7T | Both | Bottom Serrated | 2 in | 0.400 lb |

Stainless Steel All Purpose Tradesman Shears

- Precision ground blades feature premium grade stainless steel and are precision engineered for knife-like cutting edges
- Easy adjust pivot bolt allows quick and easy adjustment to fine tune cutting blade tension for optimal cutting performance
- Ambidextrous handle design features symmetrical handle ring contouring for comfortable right or left hand usage
- Stainless steel blades provide corrosion resistance and are harder than steel for durability and tool life



| Cat. No. | Handed | Cutter Head / Blades | Blade Length | Product Weight | |
|----------|--------|----------------------|--------------|----------------|--|
| CW812S | Both | Smooth | 3.25 in | 0.300 lb | |

Heavy-Duty Titanium Coated Single Ring Tradesman Shears

- Heavy-duty blades feature titanium coated premium grade stainless steel and are precision engineered for knife-like cutting edges
- Spring-loaded design automatically opens when latch is disengaged for reduced hand fatigue
- Touch point ergonomics optimize hand and finger contact points in handles to maximize fit, control, and user ergonomics
- Full metal core extends through the handle for maximum strength and increased durability
- Serrated bottom blade grips material as it is being cut for increased cutting control and cleaner cuts
- Control channel accommodates index finger for increased control and cutting stability
- Quick release ergonomic latch provides consistent easy operation and secures the tool in the closed and locked position for safe storage

| Cat. No. | Handed | Cutter Head / Blades | Blade Length | Product Weight |
|----------|--------|----------------------|--------------|----------------|
| CW11TM | Both | Bottom Serrated | 4 in | 0.800 lb |

Heavy-Duty Titanium Coated Tradesman Shears

- Heavy-duty blades feature premium grade stainless steel and are precision engineered for knife-like cutting edges
- Serrated bottom blade grips material as it is being cut for increased cutting control and cleaner cuts
- Titanium coated blades provide corrosion resistance and are 3X harder than steel for durability and tool life
- Control channel accommodates index finger for increased control and cutting stability
- Full metal core extends through the handle for maximum strength and increased durability
- Touch point ergonomics optimize hand and finger contact points in handles to maximize fit, control, and user ergonomics

| Cat. No. | Handed | Cutter Head / Blades | Blade Length | Product Weight |
|----------|--------|----------------------|--------------|----------------|
| CW10TM | Right | Bottom Serrated | 4 in | 0.700 lb |



CRESCENT

Titanium Coated Offset Tradesman Shears

- Precision cut blades feature titanium coated premium grade steel and are precision engineered for knife-like cutting edges
- Offset handle design keeps hands above material for safety and easy table top cuts
- Touch point ergonomics optimize hand and finger contact points in handles to maximize fit, control, and user ergonomics
- Titanium coated blades provide corrosion resistance and are 3X harder than steel for durability and tool life
- Control channel accommodates index finger for increased control and cutting stability
- TPR comfort grip handles ae strategically textured using soft-grip TPR to provide best-in-class user comfort and control



| Cat. No. | Handed | Cutter Head / Blades | Blade Length | Product Weight |
|----------|--------|----------------------|--------------|----------------|
| CW10T | Right | Smooth | 3.75 in | 0.600 lb |
| CW10TL | Left | Smooth | 3.75 in | 0.600 lb |

Electrician's Data Shears

- Integrated wire strippers in scissor blade for quick and easy stripping of 19 and 23 AWG wires
- Serrated outside edges of blades for reaming knockouts and conduit
- Grip-Zone area for tightening wire nuts and crimping low voltage connections
- Precision ground blades feature durable serrations on the bottom blade that grip material for better control and cleaner cuts
- Integrated cable cutter provides added power and grip needed to make clean shear cuts through electrical cable
- Touch point ergonomics optimize hand and finger contact points in handles to maximize fit, control, and user ergonomics



| Cat. No. | Handed | Cutter Head / Blades | Blade Length | Product Weight |
|----------|--------|----------------------|--------------|----------------|
| CW5T | Both | Bottom Serrated | 1.75 in | 0.300 lb |

Electronics and Filament Scissors

- Hot drop-forged solid steel
- Coil spring handle opens blades after each cut
- Straight blades
- Polished blades with black handles



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| 605N | Both | .75 in | 5 in | 0.22 lb |

Electrician's Scissors

- Double stripping notch for 19 gauge (0.035) and 23 gauge (0.022) wire
- Hot drop-forged solid steel
- Serrated along entire bottom blade
- Scraper and file on back edge of blade
- Fully nickel-plated
- Packaged in vinyl pouch



| Cat. No. | Handed | Cutter Head / Blades | Blade Length | Overall Length | Packaging | Product Weight |
|----------|--------|----------------------|--------------|----------------|-----------|----------------|
| 175E | Both | No Serrations | 1.75 in | 5.25 in | Boxed | 0.20 lb |
| 175E5V | Both | Bottom Serrated | 1.75 in | 5.25 in | Carded | 0.20 lb |
| 175E5 | Both | Bottom Serrated | 1.75 in | 5.25 in | Boxed | 0.20 lb |

2 Pc. Home, Craft, and Sew Scissor Set

- Strong, stainless steel blades for corrosion resistance
- Sharp points cut cleanly through the tip
- Long-lasting precision ground straight edges can be sharpened
- Adjustable pivot screw for best feel
- Soft touch handles for added comfort
- Lightweight



| Product Weight | |
|---|--|
| 0.44 lb | |
| Description | |
| 5" Sewing Scissors with Soft Touch Handles | |
| 8-1/4" Craft Scissors with Soft Touch Handles | |
| | 0.44 lb Description 5" Sewing Scissors with Soft Touch Handles |

Shop Shears

- Strong, high quality stainless steel blades for corrosion resistance
- Serrated lower blade for better grip on materials being cut
- Cutting notch on lower blade for rope and twine
- Adjustable pivot to change cutting tension for best feel
- Hard plastic handles clean easily
- Safety point



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| W912 | Both | 4.25 in | 10 in | 0.33 lb |



Take-Apart Utility Scissors

- Strong, high quality stainless steel blades for corrosion resistance
- Take-apart blades for easy cleaning
- Hard handles are dishwasher safe
- Lightweight



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| W8TA | Both | 4 in | 8 in | 0.25 lb |

Easy Snip Utility Shears

- Strong, stainless steel blades for corrosion resistance
- Textured and molded handles for a secure, comfortable grip
- Spring assist action minimizes hand fatigue
- Wire cutting notch in the lower blade
- Thumb latch secures blades closed during storage
- Ideal for use in the shop, garden, and home



| Cat. No. | Handed | Cutter Head / Blades | Blade Length | Overall Length | Product Weight |
|----------|--------|------------------------|--------------|----------------|----------------|
| WEZSNIP | Both | Stainless Steel Blades | 4 in | 8.5 in | 0.18 lb |

Heavy Duty Industrial Shears

- Commonly used in cutting fabrics, upholstery, and composite materials
- Precision ground blades provide sharper cutting edges and a longer blade life
- Hot drop-forged nickel-plated blades are strong and durable
- Handle rings designed to comfortably fit users' hands
- Configure the SET-EASY® pivot adjustment to match your preference



| Cat. No. | Handed | Handle Style | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|--------------|----------------|----------------|
| W20 | Both | Bent | 4.75 in | 10.375 in | 0.88 lb |
| W20LH | Left | Bent | 5 in | 10.375 in | 0.88 lb |
| W22N | Both | Bent | 6 in | 12.5 in | 1.20 lb |

Heavy Duty Cushion Grip Industrial Shears

- Commonly used in cutting fabrics, upholstery, and composite materials
- Precision ground blades provide sharper cutting edges and a longer blade life
- Hot drop-forged nickel-plated blades are strong and durable
- Red dipped handle rings designed to comfortably fit users' hands

| ■ Configure the SET-EASY® pivot adjustment to match your preference |
|---|
|---|

| Cat. No. | Handed | Handle Style | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|--------------|----------------|----------------|
| W20P | Both | Bent | 5 in | 10.375 in | 0.88 lb |
| W22P | Both | Bent | 6 in | 12.5 in | 1.20 lb |

Industrial Shears

- Perfect for a professional dressmaker or industrial use
- Primarily used for working with fabric and thread
- Precision ground blades for sharper cutting edges and longer blade life
- Hot drop-forged nickel-plated blades are strong and durable
- Handles made of coated high carbon steel
- SET-EASY® pivot easily and securely adjusts to user preference

| Cat. No. Handed Blade Length | Overall Length 6.25 in | Packaging | Product Weight |
|------------------------------|---------------------------|-----------|----------------|
| | C OF in | | |
| 426N Both 2.375 in | 0.23 111 | Carded | 0.22 lb |
| 427N Both 2.75 in | 7 in | Carded | 0.30 lb |
| 27N Both 2.75 in | 7 in | Boxed | 0.30 lb |
| 428N Both 3.375 in | 8 in | Carded | 0.40 lb |
| 28N Both 3.375 in | 8 in | Boxed | 0.45 lb |
| 29N Both 4 in | 9 in | Boxed | 0.45 lb |

High Leverage Industrial Shears

- Precision ground blades for sharper cutting edges and longer blade life
- Hot drop-forged nickel-plated blades are strong and durable
- Blade tips rounded for extra protection
- Handle rings designed to comfortably fit users' hands
- Red cushion grip handles provide maximum comfort
- SET-EASY® pivot easily and securely adjusts to user preference



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|-----------|--------|--------------|----------------|----------------|
| W1225HLSP | Both | 5 in | 10.375 in | 0.88 lb |



Upholstery, Carpet, Drapery, and Fabric Shears

- Ideal for cutting upholstery, carpet, and drapery
- Precision ground blades for sharper cutting edges and longer blade life
- Hot drop-forged nickel-plated blades are strong and durable
- Thick heavy-duty blades for cutting multiple layers and tough materials
- Handle rings designed to comfortably fit users' hands
- SET-EASY® pivot easily and securely adjusts to user preference



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| W20W | Both | 5 in | 10.375 in | 0.88 lb |
| W22W | Both | 6 in | 12.5 in | 1.20 lb |

Upholstery, Carpet, and Fabric Shears

- Ideal for cutting carpet, synthetic fibers and composite materials
- Precision ground blades for sharper cutting edges and longer blade life
- Hot drop-forged nickel-plated blades are strong and durable
- Precision ground blades for sharper cutting edges and longer blade life
- One blade ground to knife edge for faster, cleaner cutting
- Handle rings designed to comfortably fit users' hands
- SET-EASY® pivot easily and securely adjusts to user preference



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| W1225 | Both | 5 in | 10.375 in | 0.88 lb |
| W1226 | Both | 6 in | 12.5 in | 1.20 lb |

Rug Shears for Hooked and Candlewick Rugs

- Hot drop-forged solid steel blades
- Nickel-plated blades with sharp points
- Black baked enamel handle



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| RS1N | Both | 2.875 in | 8 in | 0.35 lb |

Double Rounded Shears

- Precision ground blades for sharper cutting edges and longer blade life
- Hot drop-forged nickel-plated blades are strong and durable
- Blade tips rounded for extra protection
- Handle rings designed to comfortably fit users' hands



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| W20SP | Both | 5 in | 10.375 in | 0.88 lb |

Industrial Straight Trimmers

- Ideal for cutting various fabrics and upholstery
- Precision ground blades for sharper cutting edges and longer blade life
- Hot drop-forged nickel-plated blades and handles are strong and durable
- Handle rings designed to comfortably fit users' hands
- SET-EASY® pivot easily and securely adjusts to user preference



| Cat. No. | Handed | Blade Length | Overall Length | Packaging | Product Weight |
|----------|--------|--------------|----------------|-----------|----------------|
| 37N | Both | 2.875 in | 7 in | Boxed | 0.20 lb |
| 438N | Both | 3.625 in | 8.25 in | Carded | 0.40 lb |
| T38N | Both | 3.625 in | 8.25 in | Boxed | 0.35 lb |
| W30 | Both | 5 in | 10.375 in | Carded | 0.88 lb |

Belt and Leather Cutting Shears

- Ideal for cutting leather and welt cord
- Hot drop-forged nickel-plated blades are strong and durable
- One blade is serrated; the other blade is edged
- Handle rings designed to comfortably fit users' hands
- SET-EASY® pivot easily and securely adjusts to user preference



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| W8BLT | Both | 3.375 in | 8.5 in | 0.75 lb |

Pinking Shears

- Cuts a wide range of fabrics and leaves a ruffled edge that will not fray
- Pinks and cuts in one operation, saving time and labor
- Sawtooth blade design reduces the time spent finishing edges on fabrics
- Hot drop-forged nickel-plated blades are strong and durable



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| CB8 | Both | 4.5 in | 8.25 in | 0.55 lb |

Pocket Scissors

- Blades are a flat pattern with double blunt points
- Hot drop-forged nickel-plated blades and handles are strong and durable
- Ring handle



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| 166 | Both | 2.75 in | 6.25 in | 0.20 lb |

Sewing and Embroidery Scissors

- Specially designed for intricate cutting, embroidery, and fine needlework
- Hot drop-forged nickel-plated blades and handles are strong and durable
- Double sharp points
- Flat pattern
- Ring handle
- Packaged in vinyl pouch



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| T764 | Both | 1.25 in | 4.125 in | 0.10 lb |
| 765 | Both | 2 in | 5.125 in | 0.10 lb |

Industrial Thread Nippers

- Hot drop-forged nickel-plated blades are strong and durable
- Self-opening spring-action assures fast, effortless cutting



| Cat. No. | Point Style | Handed | Blade Length | Overall Length | Product Weight |
|----------|-------------|--------|--------------|----------------|----------------|
| TC5 | Blunt | Both | 1 in | 4.625 in | 0.13 lb |
| TC1 | Sharp | Both | 1.125 in | 4.75 in | 0.13 lb |

Quick-Clip® Speed Cutters

- Rust-resistant stainless steel replaceable blades
- Positive spring-action opens the blades for fast cutting
- Heavy-duty contoured design
- Durable plastic handle made of industrial PVC



| Cat. No. | Point Style | Handed | Blade Length | Overall Length | Replacement Blade No. | Product Weight |
|----------|-------------|--------|--------------|----------------|-----------------------|----------------|
| 1571BN | Blunt | Both | 1 in | 4.75 in | T9329 | 0.090 lb |
| 1570BN | Sharp | Both | 1 in | 4.75 in | T9328 | 0.090 lb |

Industrial Shears

- Used extensively in the poultry industry
- Precision ground blades for sharper cutting edges and longer blade life
- Hot drop-forged nickel-plated blades and handles are strong and durable
- Handle rings designed to comfortably fit users' hands
- Enlarged lower ring for increased comfort
- SET-EASY® pivot easily and securely adjusts to user preference



INDUSTRIAL SHEARS

| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| 1DSN | Both | 2.75 in | 8.125 in | 0.45 lb |

INDUSTRIA

Poultry Processing Shears

- Used extensively in poultry processing
- Special ball point for poultry processing
- Hot drop-forged nickel-plated blades and handles are strong and durable
- Adjustable pivot nut



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| 41DBN | Both | 2.875 in | 8.625 in | 0.50 lb |

High Leverage Shears

- Cuts wire used in floral designs and other similar crafts
- Hot drop-forged commercial nickel-plated solid steel
- Serrated nickel-plated blades grip material being cut
- Black, curved handle designed for comfort and reduced fatigue



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| 2DAN | Both | 2 in | 7.75 in | 0.50 lb |

Kitchen Shears

- Ideal for many miscellaneous jobs in and around the home
- Cuts a variety of materials including twine, rope, cardboard, light metal
- Hot drop-forged stainless steel blades are strong and durable
- One blade is serrated
- Black baked enamel handle



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| KSRN | Both | 2.625 in | 8 in | 0.28 lb |

Industrial Trimming, Grape Thinning & Orchid Snips

- Hot drop-forged solid steel blades are strong and durable
- Straight, polished blades with adjustable nut
- Coil spring handle opens blades after each cut
- Black baked enamel handle with closing latch



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| C4ASN | Both | 2.25 in | 8 in | 0.44 lb |

Light Metal-Cutting Snips

- Used in electronic and appliance light metal cutting
- Comes with polished straight blades



| Cat. No. | Handed | Blade Length | Overall Length | Product Weight |
|----------|--------|--------------|----------------|----------------|
| J7SN | Both | 1 in | 7 in | 0.25 lb |

Straight Pattern Tinner Snips

- Hot drop-forged steel blades provide market-leading strength, durability, and excellent cutting performance over tool life
- Precision-ground cutting edges provide superior cutting quality and reduced cutting effort through optimized blade geometry
- Through broached bolt allows for market leading cycle cut life yielding greater than 3X the ASME specification
- High durometer grips for superior comfort, control, and overall product durability
- Torque control handle rings provide superior comfort, fit, and are sized to accommodate hands with or without gloves
- Touch point ergonomics optimize hand & finger contact points in handles to maximize fit, control, and user ergonomics

| Cat. No. | Cutter Head / Blades | Overall Length | Blade Length | Cutting Capacity | Product Weight |
|----------|----------------------|----------------|--------------|-----------------------|----------------|
| WDF7S | Smooth | 7.2 in | 1.62 in | Light Steel and Vinyl | 1.440 lb |
| WDF10S | Smooth | 10.35 in | 2 in | Light Steel and Vinyl | 1.440 lb |
| WDF12S | Smooth | 12.28 in | 2.75 in | Light Steel and Vinyl | 1.700 lb |





Offset Pattern Tinner Snips

- Hot drop-forged steel blades provide market-leading strength, durability, and excellent cutting performance over tool life
- Precision-ground cutting edges provide superior cutting quality and reduced cutting effort through optimized blade geometry
- Through broached bolt allows for market leading cycle cut life yielding greater than 3X the ASME specification
- High durometer grips for superior comfort, control, and overall product durability
- Torque control handle rings provide superior comfort, fit, and are sized to accommodate hands with or without gloves
- Touch point ergonomics optimize hand 8 finger contact points in handles to maximize fit, control, and user ergonomics

| Cat. No. | Cutter Head / Blades | Overall Length | Blade Length | Cutting Capacity | Product Weight |
|----------|----------------------|----------------|--------------|-------------------------|----------------|
| WDF100 | Smooth | 11.25 in | 2 in | Light Steel and Vinyl | 1.455 lb |

Duckbill Pattern Tinner Snips

- Hot drop-forged steel blades provide market-leading strength, durability, and excellent cutting performance over tool life
- Precision-ground cutting edges provide superior cutting quality and reduced cutting effort through optimized blade geometry
- Through broached bolt allows for market leading cycle cut life yielding greater than 3X the ASME specification
- High durometer grips for superior comfort, control, and overall product durability
- Torque control handle rings provide superior comfort, fit, and are sized to accommodate hands with or without gloves
- Touch point ergonomics optimize hand & finger contact points in handles to maximize fit, control, and user ergonomics

| Cat. No. | Cutter Head / Blades | Overall Length | Blade Length | Cutting Capacity | Product Weight |
|----------|----------------------|----------------|--------------|-----------------------|----------------|
| WDF10D | Smooth | 10.35 in | 2 in | Light Steel and Vinyl | 1.125 lb |
| WDF12D | Smooth | 12.28 in | 2.75 in | Light Steel and Vinyl | 1.715 lb |

Bulldog Pattern Tinner Snips

- Hot drop-forged steel blades provide market-leading strength, durability, and excellent cutting performance over tool life
- Precision-ground cutting edges provide superior cutting quality and reduced cutting effort through optimized blade geometry
- Through broached bolt allows for market leading cycle cut life yielding greater than 3X the ASME specification
- High durometer grips for superior comfort, control, and overall product durability
- Torque control handle rings provide superior comfort, fit, and are sized to accommodate hands with or without gloves
- Touch point ergonomics optimize hand & finger contact points in handles to maximize fit, control, and user ergonomics

| Cat. No. | Cutter Head / Blades | Overall Length | Blade Length | Cutting Capacity | Product Weight |
|----------|----------------------|----------------|--------------|-------------------------|----------------|
| WDF16BD | Smooth | 16.57 in | 2.25 in | Light Steel and Vinyl | 3.500 lb |

Lightweight Aluminum Tinner Snips

- Precision-ground cutting edges provide superior cutting quality and reduced cutting effort through optimized blade geometry
- Torque control handle rings provide superior comfort, fit, and are sized to accommodate hands with or without gloves
- Lightweight design heavy-duty die cast aluminum construction is durable and reduces user fatique
- Control channel accommodates index finger for increased control and cutting stability
- Touch point ergonomics optimize hand & finger contact points in handles to maximize fit, control, and user ergonomics
- Easy adjust pivot bolt allows quick and easy adjustment to fine tune cutting blade tension for optimal cutting performance

| Cat. No. | Cutter Head / Blades | Overall Length | Blade Length | Cutting Capacity | Product Weight | |
|----------|----------------------|----------------|--------------|-------------------------|----------------|--|
| WAL13S | Smooth | 12.8 in | 3 in | Light Steel and Vinyl | 1.395 lb | |





The Hardest-Working Every Day Carry

When you have a Crescent pocket knife, you've got the hardest-working Every Day Carry on the jobsite. Designed for professional tradespeople, each one is a no-nonsense tool that can be counted on to perform reliably every time it's needed. And with a selection of blade types and blade and handle materials, there's a Crescent pocket knife made to suit every personal style and requirement.



Drop Point Aluminum Handle Pocket Knife

- Heavy-duty D2 steel blade provides excellent strength, edge retention, and overall product durability
- Smooth action heavy-duty ball bearing system provides quick and easy blade deployment for the life of the tool
- Ergonomic handle optimizes hand and finger contact points to maximize fit, control, and user ergonomics
- Drop point blade design provides tip strength and overall blade durability for a variety of cutting applications
- Easy action flipper tab for easy blade deployment
- Liner lock mechanism provides secure locking of blade in open position and easy closing action
- Heavy-duty anodized aluminum handle provides excellent strength to weight ratio for optimal performance

| Cat. No. | Handed | Cutter Head / Blades | Handle Material | Blade Length | Overall Length | Product Weight |
|----------|--------|----------------------|-----------------|--------------|----------------|----------------|
| CPK325A | Both | Drop Point | Aluminum | 3.25 in | 8 in | 0.345 lb |

Harpoon Blade Aluminum Handle Pocket Knife

- Heavy-duty D2 steel blade provides excellent strength, edge retention, and overall product durability
- Smooth action heavy-duty ball bearing system provides quick and easy blade deployment for the life of the tool
- Ergonomic handle optimizes hand and finger contact points to maximize fit, control. and user ergonomics
- Harpoon blade design provides overall blade durability and extra leverage for a variety of cutting applications
- Easy action flipper tab for easy blade deployment
- Liner lock mechanism provides secure locking of blade in open position and easy closing action
- Heavy-duty anodized aluminum handle provides excellent strength to weight ratio for optimal performance

| Cat. No. | Handed | Cutter Head / Blades | Handle Material | Blade Length | Product Weight |
|----------|--------|----------------------|-----------------|--------------|----------------|
| CPK350A | Both | Harpoon | Aluminum | 3.5 in | 0.451 lb |

POCKET

Drop Point Composite Handle Pocket Knife

- 5Cr15MoV steel blade features premium grade stainless steel and is precision-ground for excellent cutting performance
- Smooth action heavy-duty ball bearing system provides quick and easy blade deployment for the life of the tool
- Ergonomic handle optimizes hand and finger contact points to maximize fit. control, and user ergonomics
- Drop point blade design provides tip strength and overall blade durability for a variety of cutting applications
- Easy action flipper tab for easy blade deployment
- Liner lock mechanism provides secure locking of blade in open position and easy closing action
- Composite handle is ergonomically designed to optimize hand and finger contact points for enhanced fit and superior control

| Cat. No. | Handed | Cutter Head / Blades | Handle Material | Blade Length | Overall Length | Product Weight |
|----------|--------|----------------------|--------------------|--------------|----------------|----------------|
| CPK325C | Both | Drop Point | Glass Filled Nylon | 3.25 in | 8 in | 0.345 lb |

Harpoon Blade Composite Handle Pocket Knife

- 5Cr15MoV steel blade features premium grade stainless steel and is precision-ground for excellent cutting performance
- Smooth action heavy-duty ball bearing system provides quick and easy blade deployment for the life of the tool
- Ergonomic handle optimizes hand and finger contact points to maximize fit, control, and user ergonomics
- Harpoon blade design provides overall blade durability and extra leverage for a variety of cutting applications
- Easy action flipper tab for easy blade deployment
- Liner lock mechanism provides secure locking of blade in open position and easy closing action
- Composite handle is ergonomically designed to optimize hand and finger contact points for enhanced fit and superior control

| Cat. No. | Handed | Cutter Head / Blades | Handle Material | Blade Length | Overall Length | Product Weight |
|----------|--------|----------------------|--------------------|--------------|----------------|----------------|
| CPK350C | Both | Harpoon | Glass Filled Nylon | 3.5 in | 8.5 in | 0.451 lb |



Quick-Change Folding Blade Utility Knife

- Compact, ergonomic design
- Blade locks in the open position for secure cutting
- Blade safely folds into handle for compact size and easy storage
- Blades coated in black oxide for improved corrosion resistance
- Features quick-change latch for quick blade replacements
- Compatible with all standard utility knife blades
- Blade storage compartment in the handle holds additional blades
- Includes belt/pocket clip
- Includes bonus 10-pack of blades
- WARNING: Sharp blade included; use care when handling



| Cat. No. | Handle Material | Blades | Blade Length | Blade Material | Closed Length | Open Length | Product Weight |
|----------|-----------------|--------|--------------|----------------|---------------|-------------|----------------|
| WKF2 | Dual Material | 11 | 1.0625 in | Steel | 4.55 in | 7.4 in | 0.60 |

Auto-Retracting Utility Knife

- Blade retracts automatically the moment it loses contact with the material being cut – even if the user is still holding the blade slider forward in the 'open' position
- Helps reduce workplace injuries, lowering lost time and increasing productivity
- Quick and easy blade change
- Compatible with all standard utility knife blades
- Blade storage compartment in the handle holds additional blades
- Includes three black-coated blades
- WARNING: Sharp blade included; use care when handling



| Cat. No. | Handle Material | Blades | Blade Material | Overall Length | Product Weight |
|----------|-----------------|--------|----------------|----------------|----------------|
| WKAR2 | Dual Material | 3 | Steel | 7 in | 0.52 |

Retractable Utility Knife

- Popular all-purpose retractable knife
- Easy-run slide uses all standard replacement blades
- Metal case painted red for easy visibility
- Made in the USA
- WARNING: Sharp blade included; use care when handling



| Cat. No. | Handle Material | Number of Blades | Blade Material | Overall Length | Product Weight |
|----------|-----------------|------------------|----------------|----------------|----------------|
| WK8V | Steel | 3 | Steel | 8 in | 0.38 lb |

UTILIT)

Quick-Change Comfort Grip Utility Knife

- Retractable utility knife with 11 positions
- Comfort grip for ease of use and slip protection
- Safety string cutter with recessed blade
- Quick change blade release and reload
- Magazine blade storage holds 3 blades
- WARNING: Sharp blade included; use care when handling



| Cat. No. | Handle Material | Blades | Blade Material | Overall Length | Product Weight |
|----------|-----------------|--------|----------------|----------------|----------------|
| WK500V | Dual Material | 4 | Steel | 7 in | 0.35 lb |

Fixed Blade Knife

- Heavy-duty, fixed blade knife
- Uses standard utility knife blades
- Metal case painted red for easy visibility
- Includes three blades
- Made in the USA
- WARNING: Sharp blade included; use care when handling



| Cat. No. | Handle Material | Blades | Blade Material | Overall Length | Product Weight |
|----------|-----------------|--------|----------------|----------------|----------------|
| WK9V | Steel | 3 | Steel | 8.25 in | 0.36 lb |

Utility Blades

- High quality steel utility knife blades
- Replacement blades fit most utility knives
- Heavy-duty blades with sharp points
- Blade packaging is designed to fit in most vending machines for convenient access and purchasing



| Cat. No. | Point Style | Blades | Used On | Product Weight |
|----------|----------------|--------|-------------------------|----------------|
| RWK14D | Sharp | 100 | Standard Utility Knives | 0.97 lb |
| RWK14V | Sharp | 5 | Standard Utility Knives | 0.02 lb |
| RWK14VR | Rounded Safety | 5 | Standard Utility Knives | 0.090 lb |
| RWK16V | Hook | 5 | Standard Utility Knives | 0.06 lb |

PowerPivot™ Industrial Grade Center Cut Bolt Cutters

- PowerPivot[™] technology for superior cutting power
- Precision engineered induction hardened center cut blades
- Double compound cutting action
- Cuts materials up to Brinell 455 or Rockwell C48 hardness
- Heat treated for wear resistance and long cutting life
- Tubular steel handles for ultimate strength and cutting support
- Screw-type adjustment realigns edges
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Soft/Medium/Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | Max. Capacity | Reinforcing Rod and Bar | Replacement Cutterhead/ Jaws Cat. No. | Product Weight |
|----------|-------------------|--|--|------------------|----------------------------|--|-------------------|
| 1490MCP | 14 in | 5/16 in, 8 mm | 7/32 in, 5 mm | 1/4 in, 6 mm | 5/16 in, 8 mm | 0413C | 3.200 lb |
| 0090MCP | 18.55 in | 3/8 in, 10 mm | 9/32 in, 7 mm | 1/4 in, 6 mm | 3/8 in, 10 mm | 0013C | 5.000 lb |
| 0190MCP | 26.7 in | 7/16 in, 11 mm | 5/16 in, 8 mm | 5/16 in, 8 mm | 7/16 in, 11 mm | 0113C | 0.194 lb |
| 0290MCP | 30.95 in | 1/2 in, 13 mm | 3/8 in, 10 mm | 7/16 in, 11 mm | 1/2 in, 13 mm | 0213C | 10.435 lb |
| 0390MCP | 37.12 in | 9/16 in, 14 mm | 7/16 in, 11 mm | 1/2 in, 13 mm | 9/16 in, 14 mm | 0313C | 16.350 lb |

Industrial Grade, Center Cut Cutters

- Drop-forged precision ground, alloy tool steel jaws with center-cut blades
- Cut materials up to Brinell 455 or Rockwell C48 hardness
- Toggle joints turn 50 lbs of hand pressure into 4000 lbs of cutting pressure
- Screw-type adjustment realigns edges
- Lockplate keeps jaws from loosening
- Steel handles with rubber grips
- Designed, engineered, and manufactured in the USA
- Made in the USA
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Soft/Medium/Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | Max. Capacity | Reinforcing Rod and Bar | Replacement Cutterhead/ Jaws Cat. No. | Product Weight |
|----------|-------------------|--|--|------------------|----------------------------|--|-------------------|
| 1490MC | 14 in | 5/16 in, 8 mm | 3/16 in, 5 mm | 3/16 in, 5 mm | - | 1413C | 3.20 lb |
| 0090MC | 18 in | 3/8 in, 10 mm | 1/4 in, 6 mm | 1/4 in, 6 mm | 3/8 in, 10 mm | 0013C | 3.70 lb |
| 0190MC | 24 in | 7/16 in, 11 mm | 5/16 in, 8 mm | 5/16 in, 8 mm | 5/16 in, 8 mm | 0113C | 6.45 lb |
| 0290MC | 30 in | 1/2 in, 13 mm | 3/8 in, 10 mm | 3/8 in, 10 mm | #3 Bar 3/8 in, 10 mm | 0213C | 10.15 lb |
| 0390MC | 36 in | 9/16 in, 14 mm | 7/16 in, 11 mm | 7/16 in, 11 mm | 7/16 in, 11 mm | 0313C | 16.05 lb |
| 0590MC | 42 in | 11/16 in, 18 mm | 1/2 in, 13 mm | 1/2 in, 13 mm | 1/2 in, 13 mm | 0513C | 20.267 |

BOLT

Industrial Grade, Clipper Cut Cutters

- All-purpose jaws with clipper-cut blades for close or flush cutting
- Maximum hardness of material to be cut: Brinell 300/Rockwell C31
- Toggle joints turn 50 lbs of hand pressure into 4000 lbs of cutting pressure
- Screw-type adjustment realigns edges
- Lockplate keeps jaws from loosening
- Not for cutting hard materials
- Made in the USA
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Soft /Medium Hard Materials (Up to Brinell 300, Rockwell C31) | Max. Capacity | Replacement Cutterhead/ Jaws Cat. No. | Product Weight |
|----------|-------------------|--|----------------|--|-------------------|
| 0090MNE | 18 in | 5/16 in, 8 mm | 5/16 in, 8 mm | 0013NE | 3.75 lb |
| 0190MNE | 24 in | 7/16 in, 11 mm | 7/16 in, 11 mm | 0113NE | 5.25 lb |

General Purpose, Center Cut Cutters

- All-purpose jaws with center-cut blades
- Strong, lightweight fiberglass handles
- Toggle joints turn 50 lbs of hand pressure into 4000 lbs of cutting pressure
- Screw-type adjustment realigns edges
- Cuts soft, medium, and hard metals
- Cuts materials up to Brinell 455 or Rockwell C48 hardness
- Lockplate keeps jaws from loosening
- Designed, engineered, and manufactured in the USA
- Made in the US/
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Soft/Medium Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | Max. Capacity | Reinforcing Rod and Bar | Replacement Cutterhead/ Jaws Cat. No. | Product Weight |
|----------|-------------------|--|--|----------------|----------------------------|--|-------------------|
| 0090FC | 18.25 in | 3/8 in, 10 mm | 1/4 in, 6 mm | 1/4 in, 6 mm | 3/8 in, 10 mm | 0013C | 3.60 lb |
| 0190FC | 24.5 in | 7/16 in, 11 mm | 5/16 in, 8 mm | 5/16 in, 8 mm | 3/8 in, 10 mm | 0113C | 5.70 lb |
| 0290FC | 30.5 in | 1/2 in, 13 mm | 3/8 in, 10 mm | 3/8 in, 10 mm | 1/2 in, 13 mm | 0213C | 7.50 lb |
| 0390FC | 36.5 in | 9/16 in, 14 mm | 7/16 in, 11 mm | 7/16 in, 11 mm | 1/2 in, 13 mm | 0313C | 13.40 lb |

Heavy Duty Cutters - Steel Handles

- Recommended for the most demanding hand cutting applications
- Heavy-duty straps support the jaws
- Maximum hardness of material to be cut: Brinell 455/Rockwell C48
- Toggle joints turn 50 lbs of hand pressure into 4000 lbs of cutting pressure
- Screw-type adjustment realigns edges
- Lockplate keeps jaws from loosening
- Tubular steel handles
- Designed, engineered, and manufactured in the USA
- Made in the USA
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Soft/Medium Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | Max. Capacity | Reinforcing Rod and Bar | Replacement Cutterhead/ Jaws Cat. No. | Product Weight |
|----------|-------------------|--|--|----------------|----------------------------|--|-------------------|
| 0190MCX | 24 in | 7/16 in, 11 mm | 5/16 in, 8 mm | 5/16 in, 8 mm | 5/16 in, 8 mm | 0113CX | 6.40 lb |
| 0290MCX | 30 in | 1/2 in, 13 mm | 3/8 in, 10 mm | 3/8 in, 10 mm | #3 Bar 3/8 in, 10 mm | 0213CX | 9.25 lb |
| 0390MCX | 36 in | 9/16 in, 14 mm | 7/16 in, 11 mm | 7/16 in, 11 mm | 1/2 in, 13 mm | 0313CX | 17.50 lb |

Heavy Duty Cutters - Fiberglass Handles

- Recommended for the most demanding hand cutting applications
- Heavy-duty straps support the laws
- Maximum hardness of material to be cut: Brinell 455/Rockwell C48
- Toggle joints turn 50 lbs of hand pressure into 4000 lbs of cutting pressure
- Screw-type adjustment realigns edges
- Lockplate keeps jaws from loosening
- Designed, engineered, and manufactured in the USA
- Made in the USA
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Soft/Medium Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | Max. Capacity | Reinforcing Rod and Bar | Replacement Cutterhead/ Jaws Cat. No. | Product Weight |
|----------|-------------------|--|--|-----------------|----------------------------|--|-------------------|
| 0190FCX | 24 in | 7/16 in, 11 mm | 5/16 in, 8 mm | 5/16 in, 8mm in | 3/8 in, 6mm | 0113CX | 5.70 lb |

Bolt Cutter/Cable Cutter

- Cuts soft, medium hard, and hard materials
- Cuts metal rod up to 7/16" diameter
- Cuts wire rope to 1/4" diameter
- Maximum hardness of material to be cut: Brinell 455/Rockwell C48
- Toggle joints turn 50 lbs of hand pressure into 4000 lbs of cutting pressure
- Screw-type adjustment realigns edges
- Lockplate keeps jaws from loosening
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Soft/Medium Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | Max. Capacity | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|-------------------|--|--|----------------|--|-------------------|
| 0190MCS | 24 in | 7/16 in, 11 mm | 5/16 in, 8 mm | 7/16 in, 11 mm | 0113MCS | 6.40 lb |

Heavy Duty Cutters

- Short-nosed jaws with high-tempered, center-cut blades
- Heavy-duty straps support the jaws
- Maximum hardness of material to be cut: Brinell 455/Rockwell C48
- Cuts hard, non-alloy chain
- Toggle joints turn 50 lbs of hand pressure into 4000 lbs of cutting pressure
- Screw-type adjustment realigns edges
- Lockplate keeps jaws from loosening
- Designed, engineered, and manufactured in the USA
- Made in the USA
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Soft/Medium Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | Max. Capacity | Reinforcing Rod and Bar | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|-------------------|--|--|----------------|----------------------------|--|-------------------|
| 0190MHC | 24 in | 7/16 in, 11 mm | 5/16 in, 8 mm | 5/16 in, 8 mm | 5/16 in, 8 mm | 0113HC | 6.30 lb |
| 0390MHX | 36 in | 9/16 in, 14 mm | 7/16 in, 11 mm | 7/16 in, 11 mm | 7/16 in, 11 mm | 0313HCX | 16.90 lb |
| 0590MHX | 42 in | 11/16 in, 18 mm | 1/2 in, 13 mm | 1/2 in, 13 mm | 1/2 in, 13 mm | 0513HCX | 18.15 lb |

Compact Bolt Cutter with Plastic Dipped Handles

- Ideal for fencing work, exposed fasteners, or where near flush cut is required
- Induction hardened cutting edges for ultimate durability
- Recessed notch blade design holds cutting material close for extreme
- Easy-to-clean industrial plastic dipped handle grips
- Cuts mild steel (80,000 PSI) to 1/4", 6mm diameter

- Cuts very hard steel (285,000 PSI) to .14", 3.8mm diameter
- Angle cutter head and clipper cut blades create a near flush cut

| NEVER use any H.K. Porter cutters on energized circuits, wire, or cable! | | | | | | | | |
|--|-------------------|-------------------------|--|--|---------------|--|-------------------|--|
| Cat. No. | Overall Length | Cutter Head / Blades | Soft/Medium Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | Max. Capacity | Replacement Cutterhead /Jaws Cat. No. | Product Weight | |
| 0890MA | 8.5 in | Angle / Clipper | 3/16 in, 5 mm | 0.14 in, 3.8 mm | 3/16 in, 5 mm | None | 0.8 lb | |
| 0890MC | 8.5 in | Straight / Center | 3/16 in, 5 mm | 0.14 in, 3.8 mm | 3/16 in, 5 mm | None | 0.8 lb | |

Compact Bolt Cutter with Co-Molded Handles

Induction hardened center cut blades

- Recessed notch blade design holds cutting material close for extreme
- Heavy-duty spring creates a smooth cutting operation and is ideal for repetitive cutting
- Cuts mild steel (80,000 PSI) to 1/4", 6mm diameter
- Cuts very hard steel (285,000 PSI) to .14", 3.8mm diameter
- Co-mold handles for superior comfort with repetitive cutting
- User-friendly, robust locking device that is easy to use with gloves
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Soft/Medium Hard Materials (Up to Brinell 300, Rockwell C31) | Hard Materials (Up to Brinell 455, Rockwell C48) | | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|-------------------|--|---|---------------|---------------------------------------|-------------------|
| 0890SMC | 8.5 in | 3/16 in, 5 mm | 0.14 in, 3.8 mm | 3/16 in, 5 mm | None | 0.9 lb |

Shear Type Hand Operated Cable Cutters

- Shear-cut blades give clean, sharp cut with minimal distortion
- Cuts copper or aluminum, power and communications cable
- Lightweight, rugged cutter
- Drop-forged, alloy tool steel jaws with shear-cut blades
- Fiberglass handles for 2-handed control
- Made in the USA
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Copper and Aluminum Cable, Power/Comm. Cable | Max. Capacity | Cable Capacity | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|-------------------|---|-------------------|-------------------|--|-------------------|
| 0290FCS | 25.5 in | 1-3/8 in, 35 mm | 1-3/8 in, 35 mm | 1-3/8 in, 35 mm | 0213CSS | 4.90 lb |
| 0390FCS | 32 in | 1-3/4 in, 44.5 mm | 1-3/4 in, 44.5 mm | 1-3/4 in, 44.5 mm | 0313FCS | 8.00 lb |

Shear Type Cable Cutters

- Notched, shear-cut blades hold and lock cable in cutting position
- Cuts steel cable, coarse or fine stranded cable with minimal distortion
- Cuts wire rope with minimal distortion
- Toggle joints turn 50 lbs of hand pressure into 4000 lbs of cutting pressure
- Screw-type adjustment realigns edges
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Copper and Aluminum Cable, Power/Comm. Cable | Max. Capacity | Wire Rope | Cable Capacity | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|-------------------|---|---------------|---------------|----------------|--|-------------------|
| 1490MTN | 14 in | 1/4 in, 6 mm | 1/4 in, 6 mm | 1/4 in, 6 mm | 1/4 in, 6 mm | 1413TN | 2.80 lb |
| 0190MTN | 24 in | 3/8 in, 10 mm | 3/8 in, 10 mm | 3/8 in, 10 mm | 3/8 in, 10 mm | 0113TN | 5.60 lb |
| 0390MTN | 36 in | 5/8 in, 16 mm | 5/8 in, 16 mm | 5/8 in, 16 mm | 5/8 in, 16 mm | 0313TN | 13.00 lb |

Communications Cable Cutters

- Shear-cut blades give clean, sharp cut with minimal distortion
- Cuts lead and rubber-covered communications cable only
- Do not cut hard cable, ACSR, self-supporting strand, or steel
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Copper and Aluminum Cable, Power/Comm. Cable | Max. Capacity | Cable Capacity | Replacement Cutterhead/ Jaws Cat. No. | Product Weight |
|----------|-------------------|---|-----------------|-----------------|--|-------------------|
| 0390CSP | 37 in | 2-1/4 in, 57 mm | 2-1/4 in, 57 mm | 2-1/4 in, 57 mm | 0319CSS | 12.70 lb |

ACSR, Wire Rope and Cable Cutter

- Shear-cut blades
- Cuts soft and hard steel cable, wire rope, and small ACSR cable
- Cuts Up to 3/8 in wire rope or up to 7/16 in ACSR
- Notch holds cable in blades
- Cuts copper and aluminum wire up to 1 in in size
- Steel handle with rubber grips
- NEVER Use Any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Overall Length | Copper and Aluminum Cable, All Types | Wire Rope | ACSR | Cable Capacity | Copper, Aluminum | Product Weight |
|----------|-------------------|---|---------------|----------------|----------------|---------------------|-------------------|
| 0290FHJN | 28 in | 1 in, 25 mm | 3/8 in, 10 mm | 7/16 in, 11 mm | 3/8 in, 10 mm | 1 in, 25 mm | 8.000 lb |

Compact, Electric Cable Cutter

- High-leverage jaws with shear-cut blades
- Compact cutter fits into most tool pouches
- Do not cut steel or ACSR
- Industrial, non-slip grips
- NOT an insulated tool
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Copper and Aluminum Cable, Power/Comm. Cable | Max. Capacity | Replacement Cutterhead/Jaws Cat. No. | Product Weight |
|----------|----------------|---|---------------|--------------------------------------|----------------|
| 0890CSJ | 9.5 in | 4/0 - Aluminum only | 4/0 in | None | 0.85 lb |

Pocket Wire Rope and Cable Cutter

- Shear-cut blades give clean, sharp cut with minimal distortion
- Excellent cutter for 3/16 in thick hard wire rope or cable
- Cuts 1/4 in thick soft wire rope or cable, piano wire or aircraft cable
- Cuts cables up to 3/16 in (5 mm) in size
- Cuts rod up to 3/32 in (2.4 mm) in size
- Easy-to-clean industrial plastic dipped handle grips
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!




| Cat. No. | | Copper and Aluminum Cable, Power/Comm. Cable | Max. Capacity | Wire Rope | Cable Capacity | Rod Capacity | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|--------|---|------------------|---------------|-------------------|-----------------|--|-------------------|
| 0690TN | 7.5 in | 1/4 in, 6 mm | 1/4 in, 6 mm | 3/16 in, 5 mm | 1/4 in, 6 mm | 3/32 in, 2.4 mm | None | 0.80 lb |

Flip Joint Cable Cutter

- 3-in-1 electrician's tool that saves time and money
- Professional cutter designed to cut vinyl-coated or bare, multi-stranded wire up to size 10/3
- Induction-hardened cutting edges for superior cutting power
- Handle flips over, turning a cable cutter into a sheath knife
- Specially designed cutting knife ensures sharp, clean cut every time
- Smart contour handles for hand comfort when cutting cable and slip resistance for slicing vinyl cable sheath
- Sharp edges for slicing vinyl-coated cable
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!

| Cat. No. | Overall Length | Copper and Aluminum Cable, Power/Comm. Cable | Max. Capacity | Cable Capacity | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|----------------|---|---------------|----------------|--|----------------|
| 0890CSFW | 8.375 in | 10/3 | 1/4 in, 6 mm | 1/4 in, 6 mm | None | 1.45 lb |

Wire Cutter



| Cat. No. | Overall | Cutter Head / | Medium | Hard | Round Steel | Aircraft Cable, Hard | Replacement Cutterhead | Product |
|----------|---------|----------------|---------------|-----------------|----------------|-----------------------|------------------------|---------|
| | Length | Blades | Steel Dia. | Steel Dia. | Tie Wire | Stainless Steel Cable | /Jaws Cat. No. | Weight |
| PWC9 | 8.5 in | Hardened Steel | 5/32 in, 4 mm | 3/32 in, 2.4 mm | .093 Dia. Max. | .093 Dia. Max. | None | 0.72 lb |

Steel Strap Cutter, 3/4"

- Sheer-cut blades give clean, smooth, easy cuts
- Lower jaw slides under the tightest strapping or staples
- Workhead has black oxide rust-resistant finish
- Spring action handles with plastisol grips open jaws automatically before and after each cut
- Cushion grip handle type with drop forged interior
- Cuts steel strap up to 3/4 in wide
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Cutter Head / Blades | Flat Steel Strap | Round Steel Tie Wire | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|-------------------|-------------------------|--------------------------------|-------------------------|--|-------------------|
| 0990T | 9 in | Hardened Steel | 3/4 in x .035 in, 19 mm x 1 mm | 3/419.080 in, 2 mm | None | 1.25 lb |

Steel Strap Cutter, 1-1/4"

- Sheer-cut blades give clean, smooth, easy cuts
- Workhead has black oxide rust-resistant finish
- Cuts wide steel strap quickly and cleanly
- One-handed operation lets you make continuous cuts
- Cushion grip handles
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Cutter Head / Blades | Flat Steel Strap | Replacement Cutterhead/Jaws Cat. No. | Product Weight |
|----------|----------------|----------------------|-------------------------------------|--------------------------------------|----------------|
| 1290G | 12 in | Hardened Steel | 1 1/4 in x .050 in, 32 mm x 1 mm | None | 1.70 lb |

Heavy Duty, Steel Strap Cutter, 2"

- Sheer-cut blades give clean, smooth, easy cuts
- Excellent for cutting pallet straps when loading and unloading freight cars, trucks or ships
- Cuts 2 in. x 0.05 in flat steel straps
- Long-handled, goose neck, two-hand operated cutter
- Keep hands away from cutting area
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Cutter Head / Blades | Flat Steel Strap | Replacement Cutterhead/Jaws Cat. No. | Product Weight |
|----------|----------------|----------------------|---------------------------------|--------------------------------------|----------------|
| 2690GP | 24.2 in | Hardened Steel | 2 in x .050 in, 51 mm x 1 mm | None | 6.80 lb |

Compact Ratcheting Cable Cutter

- Compact, lightweight cutter for confined spaces
- Cutter has self-lubricating ratchet and only six moving parts
- Ratchet-type jaws with shear-cut blades
- Blades grip and hold while moderate pumping action cuts cable
- Fiberglass handles with non-slip, plastic grips
- MCM capacity measurement does not include cable insulation; conductor size only
- Cuts up to 500 MCM copper cable or up to 795 MCM aluminum cable
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!





Ratchet Type, Soft Cable Cutter

- Heavy-duty jaw design
- Jaw keeper prevents jaws from spreading while under heavy load
- Cuts copper and aluminum communications power cable up to 2 in thick
- Cuts all types of copper and aluminum cables up to 2500 MCM
- Ratchet provides up to 5X the mechanical advantage over manual cutters
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall | Cutter Head | Copper and Aluminum | Copper and Aluminum | Replacement Cutterhead/ | Product |
|----------|---------|----------------|---------------------|--------------------------|-------------------------|----------|
| | Length | / Blades | Cable, All Types | Cable, Power/Comm. Cable | Jaws Cat. No. | Weight |
| 8690FSK | 27.5 in | Hardened Steel | 2 in, 51 mm | 2 in, 51 mm | 8613FSK | 12.60 lb |

Ratchet Type, Soft Cable Cutter


- Sheer-cut blades give clean, smooth, easy cuts
- Ratchet and chain apply increased cutting pressure
- Provides increased mechanical advantage over manual cutters
- Cuts copper and aluminum
- Cuts rubber covered or lead covered power and communications cable up to 3"
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Cutter Head / Blades | Copper and Aluminum Cable, All Types | Copper and Aluminum Cable, Power/Comm. Cable | Replacement Cutterhead/ Jaws Cat. No. | Product Weight |
|----------|-------------------|-------------------------|---|---|--|-------------------|
| 8690CS | 29.75 in | Hardened Steel | 3 in, 73 mm | 3 in, 73 mm | 8613CS | 12.60 lb |

Ratchet-Type, Hard Cable Cutter

- Sheer-cut blades give clean, smooth, easy cuts
- Jaw keeper feature prevents jaws from spreading while under heavy load
- Ratchet and chain design increase cutting pressure as handles open and close
- Increased mechanical advantage over manual cutters
- Can be used effectively with short strokes in confined spaces
- Cuts ACSR, ACAR, ZEBRA, and self-supporting telephone cable up to 1-3/16 in thick
- Not recommended for cutting insulated copper or aluminum cable





Ratchet Type, Guy Strand Cutter

- Notched shear-cut blades hold material firmly in place
- Makes clean, square cuts with minimal distortion
- Ratchet and chain design produces easy, progressive cuts
- Cuts EHS guy strand up to 1/2 in. thick, mild steel rods and bolts, and similar materials
- Increased mechanical advantage over manual cutters
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Cutter Head/Blades | EHS Guy Strand | Common Guy Strand | Replacement Cutterhead /Jaws Cat. No. | Product Weight |
|----------|----------------|--------------------|----------------|-------------------|--|----------------|
| 8690CK | 28 in | Hardened Steel | 1/2 in, 13 mm | 1/2 in, 13 mm | 8613CK | 10.34 lb |

Ratchet Type, Wire Rope Cutter

- Ratchet-type jaws with notched shear-cut blades
- Blades hold and lock material in place during the cut
- Cuts aircraft cable, EHS guy strand, wire rope and stainless steel cable
- Cuts all strands with minimal crushing or distortion
- Increased mechanical advantage compared to manual cutters
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall | Cutter Head | EHS | Common Guy | Aircraft Cable, Hard | Replacement Cutterhead/ | Product |
|----------|---------|----------------|---------------|--------------|-----------------------|-------------------------|----------|
| | Length | / Blades | Guy Strand | Strand | Stainless Steel Cable | Jaws Cat. No. | Weight |
| 8690TN | 36 in | Hardened Steel | 5/8 in, 16 mm | 5/8 in;16 mm | 5/8 in, 16 mm | 8613TN | 11.00 lb |

Linkmaster® Heavy Duty Link Closer

- Heat-treated alloy steel jaws
- Opens and closes tire chain cross links
- Toggle joints turn 50 lbs hand pressure into 4000 lbs cutting pressure
- Makes repairs quickly and easily
- All steel handles
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Capacity Link Diameter | Replacement Cutterhead/Jaws Cat. No. | Product Weight |
|----------|----------------|------------------------|--------------------------------------|----------------|
| 0390MLN | 30 in | 3/8 in;10 mm | 0313LKN | 8.00 lb |

PNEUMATI

Net-Link Closer for Closing Chain Links

- Used on commercial fishing boats and draggers for net and mooring chains
- Designed to close heavy chain link
- Toggle joints turn 50 lbs hand pressure into 4000 lbs cutting pressure
- Screw-type adjustment realigns edges
- Replacement cutterhead: 0213LC
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Overall Length | Capacity Link Diameter | Replacement Cutterhead/Jaws Cat. No. | Product Weight |
|----------|----------------|------------------------|--------------------------------------|----------------|
| 0290MLC | 30 in | 3/8 in, 10 mm | 0213LC | 7.80 lb |

Heavy-Duty Pneumatic Cutters

- Heavy-duty model for 90-130 PSI
- Heavy-duty workhead has 5" bore (127mm) and 3" stroke (76mm)
- Used in the wire-shelving industry
- Cuts soft, medium, or hard materials
- Center cut jaws
- Cutting controlled by manual pressure
- Filter-lubricator units recommended in air supply line for longest tool life
- No exhaust shock
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Description | Α | В | С | Capacity | Product Weight | Shelf Pack Qty. |
|----------|------------------------|---------|-------|---------|---------------|----------------|-----------------|
| 9290C | Heavy Duty, Center Cut | 17.5 in | 10 in | 3.75 in | 1/2 in, 13 mm | 18.25 lb | 1 |

Light Duty Pneumatic Cutters

- Lightweight model for 80-120 PSI
- Light-duty workhead has 4" bore (102mm) and 2" stroke (51mm)
- Cuts soft, or medium materials
- Clipper cut jaws
- Cutting controlled by manual pressure
- Filter-lubricator units recommended in air supply line for longest tool life
- No exhaust shock
- Made in the USA
- NEVER use any H.K. Porter cutters on energized circuits, wire, or cable!



| Cat. No. | Cutter Head / Blades | Α | В | C | Capacity | Product Weight |
|----------|----------------------|-------|---------|----------|---------------|----------------|
| 9190NE | Clipper Cut | 15 in | 7.25 in | 3.125 in | 3/8 in, 10 mm | 14.80 lb |
| 9190C | Center Cut | 15 in | 7.25 in | 3.125 in | 3/8 in, 10 mm | 11.00 lb |

Rebar Cutter and Bender

- Shear-cut blades
- Cuts and bends to 90° or 180°
- Mounts on most flat surfaces to enhance leverage and increase safety
- Maximum rebar size capacity: 5/8 inches
- Steel construction for durability
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Jaw Capacity | Overall Length | Replacement Cutterhead/Jaws Cat. No. | Product Weight |
|----------|--------------|----------------|--------------------------------------|----------------|
| 0590RBJN | .625 in | 52 in | 0513RBJN | 44.00 lb |

3/8" (#3) and 1/2" (#4) Extendable Indexing Rebar Bender

- 14-position indexing head adjusts with center push-button to allow total access for maximum leverage
- Dual-use head allows bending of both #3 and #4 rebar
- Push-button extends bender to 35 inches for maximum leverage;
 collapses to just 21 inches for convenient storage and portability
- Extra-sturdy steel handles for the toughest conditions
- Super-strong indexing head grips rebar securely for accurate bends
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Number of Positions | Jaw Capacity | Cont. Length | Ext. Length | Product Weight |
|----------|---------------------|--------------|--------------|-------------|----------------|
| RB4 | 14 | .375 in | 22.75 in | 35 in | 4.70 lb |

Indexing Rebar Benders

- 14-position indexing head adjusts with center push-button to allow total access for maximum leverage
- Extra-sturdy steel handles for the toughest conditions
- Super-strong indexing head grips rebar securely for accurate bends
- NEVER use any H.K. Porter cutters on electrified circuits, wire, or cable!



| Cat. No. | Number of Positions | Jaw Capacity | Overall Length | Product Weight |
|----------|---------------------|--------------|----------------|----------------|
| RB5 | 14 | .625 in | 44.25 in | 8.75 lb |
| RB6 | 14 | .75 in | 44.25 in | 8.75 lb |

Curved Pruner

- General purpose pruner for fast cutting of small limbs
- Popular in citrus groves and vineyards
- Silver steel® constructed blade with polished finish
- Easy to grip knife type wood handle trimmed with aluminum screws
- Full cardboard sleeve protects the blade



| Cat. No. | Points Per Inch | Reverse Rip Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|--------------------------------|---------------------|--------------|-------------|----------------|----------------|
| 80263 | 6 | 6 | Standard Hard Point | 14 in | 0.25 | 14 in | 0.50 lb |

Coping Saws

- Popular with carpenters and home craftsman
- Used for cutting sharp angles and curves
- Spring steel, rounded edge frame with polished finish
- Adjustable angle blade
- Straight type wood handle



| Cat. No. | Points Per Inch | Reverse Rip Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|--------------------------------|---------------------|--------------|-------------|----------------|----------------|
| 80170 | 15 | 6 | Standard Hard Point | 4.25 in | 0.125 in | 12.5 in | 0.50 lb |
| 80176 | 15 | 8 | Standard Hard Point | 6.5 in | 0.125 in | 12.75 in | 0.50 lb |

Double Edge Pruner

- Lightweight economy dual-purpose pruner
- Special steel constructed blade
- Fine teeth on one edge for light trimming
- Teeth on opposite edge for heavier limbs
- Wood handle
- Plastic sleeve for blade protection



| Cat. No. | Points Per Inch | Reverse Rip Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|--------------------------------|---------------------|--------------|-------------|----------------|----------------|
| 80269 | 8 | 4 | Standard Hard Point | 16 in | 0.25 in | 16 in | 0.80 lb |

Silver Flash Pruner

- Preferred by utility crews and tree surgeons
- Silver steel® constructed blade, flat ground
- Concave cutting edge has precision set and bevel filed teeth
- Teeth cut fast on the pull stroke
- Extra large teeth and gullets for speed cutting large limbs
- Wood handle
- Full cardboard sleeve protects the blade



| Cat. No. | Points Per Inch | Reverse Rip Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|--------------------------------|---------------------|--------------|-------------|----------------|----------------|
| 80299 | 8 | 3 | Standard Hard Point | 26 in | 0.25 in | 26 in | 1.50 lb |

Quik-Cut Economy Handsaw

- Precision set teeth for smooth cuts
- Hardened and tempered polished steel blade
- Resharpenable teeth for long life
- Handle features 40/90 degree shape for long life



| Cat. No. | Points Per Inch | Reverse Rip Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|--------------------------------|------------|--------------|-------------|----------------|----------------|
| NS503N | 8 | 8 | Standard | 15 in | 0.03 in | 15 in | 0.95 lb |

Predator® Handsaws

- Ergonomic handle with rubber coated grip for comfort and control
- Razor sharp diamond ground teeth for easier cuts
- Induction hardened hard point (h.p.) teeth never need resharpening
- Handle features 45/90 degree shape for marking angles



| Cat. No. | Points Per Inch | Reverse Rip Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|--------------------------------|-----------------------|--------------|-------------|----------------|----------------|
| NSP1 | 8 | 4 | Standard Hard Point | 24 in | 5.4 in | 24 in | 1.17 lb |
| NSP2 | 10 | 5 | Standard Hard Point | 24 in | 5.4 in | 24 in | 1.17 lb |
| NSP5 | 8 | 4 | Aggressive Hard Point | 15 in | 0.15 in | 19.2 in | 0.82 lb |

Predator Compass/Keyhole Saw

- Ergonomic handle with rubber coated grip for comfort and control
- Razor sharp diamond ground teeth for easier cuts
- Induction hardened hard point (h.p.) teeth never need resharpening
- Blade tapered to a point for starting holes and cutting curves



| Cat. No. | Points Per Inch | Reverse Rip Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|--------------------------------|------------|--------------|-------------|----------------|----------------|
| NSP9 | 8 | 5 | Hard Point | 12 in | 0.25 in | 12 in | 0.40 lb |

General Purpose Hacksaw Frame

- Used on a wide variety of everyday jobs both at home and professionally
- Instantly adjustable for 10"/250mm to 12"/300mm blades
- Adjusts 90° for vertical or horizontal cuts
- Ergonomic handle ensures maximum control and comfort
- Precision engineered to provide maximum gram removal per stroke



| Cat. No. | Type of Frame | Blade Length | Blade Width | Points Per Inch | Tooth Type | Overall Length | Product Weight |
|----------|---------------|--------------|-------------|-----------------|------------|----------------|----------------|
| 80951 | Adjustable | 10 in, 12 in | 1 in | 18 | Standard | 15.5 in | 1.10 lb |

High Tension Hacksaw Frame

- High-tension hacksaw frame is perfect for professional trade workers
- Quick-changing blades to let you work more efficiently
- Adjustable crank handle provides the tension for up to 30,000 psi of torque
- Spare blades can be stored inside frame for protection and transport
- Blade can be positioned for a 45° or a 90° cutting angle



| Cat. No. | Type of Frame | Blade Length | Blade Width | Points Per Inch | Tooth Type | Overall Length | Product Weight |
|----------|-------------------------|--------------|-------------|-----------------|------------|----------------|----------------|
| 80956 | High Tension Adjustable | 12 in | 1 in | 18 | Standard | 16 in | 1.80 lb |

Cushion Grip Hacksaw Frame

- Rugged, lightweight frame built for professional tool users and trade workers
- High-tension reading and increased blade beam strength for heavy-duty work
- Compatible with high tensile strength Nicholson® Bi-Metaloy® hand
- Screw operated lever allows you to tighten the blade up to 30,000 psi
- of tension
- Position the blade in either a 45° or 90° angle for easier angle cutting
- Spare blades can be stored inside the frame for ease of transportation and improved safety

12 in

| Cat. No. | Type of Frame | Blade Length | Blade Width | Points Per Inch | Tooth Type | Overall Length | Product Weight |
|----------|---------------------------|--------------|-------------|-----------------|------------|----------------|----------------|
| 80965 | Cushion Grip High Tension | 12 in | 1 in | 18 | Standard | 17 in | 2.40 lb |

4-in-1 Pro Series Hacksaw Frame

- Standard 90 degree for general use
- 45 degree angle for flush cuts
- Low profile position for tight spaces
- Jab saw configuration for a variety of inside cuts
- High tension for tightening the blade up to 30,000 psi
 Cushion grip handle for better control and comfort

4-In-1 Pro Series Hacksaw



1 in

Heavy Duty Hacksaw Frame

- High-impact, contoured handle presents an ergonomic and strong grip
- Adjust to hold a variety of blades between 10" to 12" in total length
- Adjust the blade's cutting angle up to 45° from the centerline
- Made in the USA

80975



17 in

2.50 lb

Standard

| Cat. No. | Type of Frame | Blade Length | Blade Width | Points Per Inch | Tooth Type | Overall Length | Product Weight |
|----------|---------------|--------------|-------------|-----------------|------------|----------------|----------------|
| 80952 | Adjustable | 10 in, 12 in | 0.50 in | 18 | Coarse | 17.75 in | 1.80 lb |

HACKSAW

Little-Nic® Utility Hacksaw

- Used on a wide variety of everyday jobs both at home and professionally
- Gets into small places, makes difficult cutting jobs easy
- Overall length 10"
- Uses any standard size hacksaw blade
- Comes complete with high quality Nicholson® blade
- Blister packed on attractive cards with suggested uses on back



| Cat. No. | Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|------------|--------------|-------------|----------------|----------------|
| 80968 | 18 | Standard | 10 in | 1 in | 11 in | 0.30 lb |

Jab Saw

- Special saw always needed for the difficult jobs
- Designed for those hard to reach areas
- Jab saw will work with any standard size hacksaw blade
- Easily replace worn blades, simply untighten adjusting saw, remove worn blade and replace with a new Nicholson® blade, re-tighten the adjusting screw



| Cat. No. | Points Per Inch | Tooth Type | Blade Length | Blade Width | Overall Length | Product Weight |
|----------|-----------------|------------|--------------|-------------|----------------|----------------|
| 80969 | 18 | Standard | 10 in | 1 in | 11 in | 0.30 lb |

6 Pc. 12" High Carbon Steel Hacksaw Blade Set

- Flexible hacksaw blades, recommended for cutting mild steel
- Hardened teeth and a flexible back, make the blades virtually unbreakable

Product Weight

- Includes six 12" hacksaw blades:
- Two 18 teeth per inch blades
- Two 24 teeth per inch blades
- Two 32 teeth per inch blades
- Made of high carbon steel

Included Storage



| 03030 | None | 0.255 ID | |
|----------|-------------------|--|------|
| Cat. No. | Description | | Qty. |
| 63256 | Replacement Shatt | erproof Hacksaw Blade SS1218 12" x 18 TPI - Carded | 2 |
| 63268 | Replacement Shatt | erproof Hacksaw Blade SS1224 12" x 24 TPI - Carded | 2 |
| 63380 | Replacement Shatt | arnroof Hackeaw Blade SS1222 12" v 22 TDI - Carded | 2 |

Solid Flexible Carbon Steel Hacksaw Blades

- Solid high carbon steel
- Tempered to provide hard edge with flexible back
- Specially hardened to induce toughness
- Economy blade for sawing light to medium-hard materials
- Good balance of wear resistance, mechanical shock absorbing properties
- Virtually unbreakable
- 2 blades per card 10 cards per bag 40 bags per carton

| Cat. No. | Overall Length | Blade Type | TPI/PPI | Gauge | Number of Blades | Product Weight |
|----------|----------------|------------|---------|----------|------------------|----------------|
| 63103 | 10 in | Wavy | 18 | 0.025 in | 100 | 0.04 lb |
| 63220 | 10 in | Wavy | 24 | 0.025 in | 2 | 0.08 lb |
| 63112 | 10 in | Wavy | 24 | 0.025 in | 100 | 0.04 lb |
| 63256 | 12 in | Wavy | 18 | 0.025 in | 2 | 0.09 lb |
| 63145 | 12 in | Wavy | 18 | 0.025 in | 100 | 0.04 lb |
| 63268 | 12 in | Wavy | 24 | 0.025 in | 2 | 0.05 lb |
| 63158 | 12 in | Wavy | 24 | 0.025 in | 100 | 0.04 lb |
| 63280 | 12 in | Wavy | 32 | 0.025 in | 2 | 0.10 lb |

Bowsaw Replacement Blade

- Used for smooth cutting of paneling, plywood and laminates
- Flat ground
- Made from finest alloy saw steel
- Stays sharper longer, resists rust
- Easily resharpened
- Cuts smoother with less friction




| Cat. No. | Blade Type | TPI/PPI | Blade Length | Blade Width | Overall Length | Product Weight | Shelf Pack Qty. |
|----------|------------|---------|--------------|-------------|----------------|----------------|-----------------|
| 80814 | Wavv | 4 | 12 in | 0.79 in | 12 in | 0.75 lb | 10 |

(TCRESCENT NICHOLSON)

Bi-Metaloy[®] Hacksaw Blades

- Molybdenum alloy tool steel edge
- Tough flexible high carbon steel backing
- Lasts twice as long as high-speed steel
- Lasts up to ten times longer than carbon steel
- Operates 20% to 50% faster
- High tooth hardness and shock resistance
- 2 Blades per card 10 cards per bag 40 bags per carton

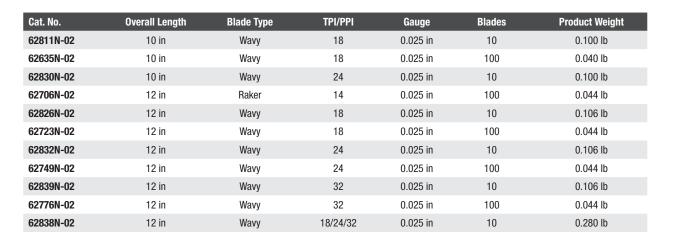





A1 YELLOW CLAD

- Black and red markings one side only
- Graduated feet and inches to 1/16ths top edge
- Graduated inches to 1/16ths bottom edge, first 12" to 1/32nds
- Instantaneous foot readings
- Stud marks every 16"



A3 YELLOW CLAD

- Graduated feet and inches to 1/16ths top and bottom edge
- Vertical numbering
- Fractional and decimal equivalent marking
- Stud marks every 16"



A2 YELLOW CLAD

- Black and red markings one side only
- Graduated feet and inches to 1/16ths top edge
- Graduated inches to 1/16ths bottom edge, first 12" to 1/32nds
- Instantaneous foot readings
- Stud marks every 16"



- Graduated feet, 1/10ths and 1/100ths top edge; feet, inches and 1/16ths on bottom edge
- Instantaneous foot readings
- Stud marks every 16"





A5 YELLOW CLAD AND BLACK

- Black and red markings one side only
- Consecutive inches to 16ths
- Stud marks every 16", Truss marks every 19.2"
- Instantaneous foot readings



- Chrome Clad[®] blade
- Black markings one side only
- Graduated to 1/10ths of inches on both edges





A7 YELLOW CLAD

- Black markings one side only
- Graduated to 1/10ths of inches on both edges

6 7 11

• First 6" on bottom edge graduated to 1/50ths

A8 CHROME CLAD®

- Chrome Clad® blade
- Black markings one side only
- Graduated consecutive inches and 1/16ths on top and bottom edges

95 96 97 98 99**100** 101 102 103


A9 YELLOW CLAD

- Black and red markings one side only
- Both edges graduated to millimeters; numbered consecutive centimeters with larger red numbers at each decimeter



A10 YELLOW CLAD

- Black and red markings one side only
- Top edge graduated and numbered inches
- Bottom edge to millimeters, numbered consecutive millimeters with red number at each decimeter



A11 YELLOW CLAD

- Black and red markings one side only
- Top edge graduated and numbered inches (no stud centers)
- Bottom edge graduated in millimeters, numbered consecutive millimeters with red number at each decimeter


Consecutive inches to 1/16ths bottom edge, first 12" to 1/32nds

Stud marks every 16" and 40cm

A13 YELLOW CLAD

Black markings one side only

Stud marks every 16" and 40cm



9|1 | 9|2 | 9|3 | 9|4 | 9|5 | 9|6 | 9|7 | 9|8 | 9|9 | ¹| m | 1| | ;

A12 YELLOW CLAD

marked in red

centimeters


Black and red markings one side only

A14 YELLOW CLAD

- Black markings one side only
- Top edge graduated in inches to 1/16ths
- Bottom edge graduated in millimeters, numbered in centimeters; 1 to 9 in each decimeter

Top edge to 1/16ths, continuous inches; feet and decimeters

Bottom edge graduated to millimeters, numbered consecutive



A15 YELLOW CLAD

- Black markings both sides
- Consecutive inches to 1/16ths, first 12" to 1/32nds on side 1
- Diameter inches to 1/64ths side 2: blank space ahead of zero

11 12 13 14 70,80,90,4 ,10,20,30,40,50

A16 YELLOW CLAD

- Markings both sides
- Consecutive inches to 1/16ths, first 12" to 1/32nds on side 1
- Diameter inches to 1/100ths side 2: blank space ahead of zero

29,30,31,32,33,34,35,36,37

A17 YELLOW CLAD

- Markings both sides
- Consecutive centimeters to millimeters on side 1
- Diameter to millimeters side 2. numbered in centimeters

46 47 48 49 50 51 52 53 54 55 56 57 58 59 84 86 88 90 92 94 96 98 100 104 108

A18 YELLOW CLAD

- Black markings both sides
- One side marked 1/4th scale (1 to 240), other side has 1/8th scale [1 - 480]



A19 YELLOW CLAD

- Black and red markings one side only
- Graduated millimeters on top edge and feet
- 1/10ths and 1/100ths on bottom edge



A20 YELLOW CLAD

- Markings one side only
- English top edge to 1/16ths, first 12" to 1/32nds, (continuous inches) plus consecutive inch marks within each foot from 1' mark)
- Truss marks every 19.2"
- Metric bottom edge graduated to millimeters, numbered consecutive centimeters

BLADE STYLES: SHORT (A)

A21 YELLOW CLAD Black and red markings one side only Graduated in feet, 1/10ths and 1/100ths of feet, numbered in feet and 10ths of feet

.1 *** 2 .2 25 .3 Lufkin .4



A23 YELLOW CLAD

- Black and red markings one side only
- Top edge graduated to 1/16ths, and numbered in consecutive inches and fractional equivalents to 1/8ths.
- Bottom edge with red print numbered at the mid-point of the measurement on the top edge



A25 YELLOW CLAD

- Two sided, extra-large black and red markings
- English top edge to 1/16ths; metric bottom edge graduated to millimeters, numbered consecutive centimeters
- Stud marks every 16" (40cm), Truss marks every 19.2"
- Instantaneous foot readings



A27 BLACK BLADE

- Two sided, extra-large, contrasting green markings on black blade
- English top edge to 1/16ths; metric bottom edge graduated to millimeters, numbered consecutive centimeters
- Stud marks every 16" (40cm), Truss marks every 19.2"
- Instantaneous foot readings



A29 YELLOW CLAD

- Black and red markings one side only
- Graduated feet and inches to 1/16ths, first 12" to 1/32nds
- Instantaneous foot readings
- Stud marks every 16", Truss marks every 19.2"



A22 YELLOW CLAD

- Black and red markings one side only
- Top edge numbered every 10 millimeters with red print for every 100cm increment and graduations every millimeter
- Bottom edge numbered in consecutive inches graduated in 1/10ths of an inch with first 12" graduated to 1/50ths and numbered in 10ths



A24 YELLOW CLAD

- Two sided, extra-large black and red markings
- Contrasting Color blocks extending from 1/2" prior to each foot mark to ½" after each foot mark
- Consecutive inches to 16ths
- Stud marks every 16", Truss marks every 19.2"
- Instantaneous foot readings



A26 BLACK BLADE

- Two sided, extra-large, contrasting green markings on black blade
- Contrasting Color blocks extending from 1/2" prior to each foot mark to ½" after each foot mark
- Consecutive inches to 16ths
- Stud marks every 16", Truss marks every 19.2"
- Instantaneous foot readings

11 **(15** 13 14 15 **(16** 17 ,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44

A28 YELLOW CLAD

- Single side, extra-large black and red markings
- English top edge to 1/16ths; metric bottom edge graduated to millimeters, numbered consecutive centimeters
- Stud marks every 16" (40cm), Truss marks every 19.2"
- Instantaneous foot readings



A30 YELLOW CLAD

- Black and red markings one side only
- English top edge to 1/16ths, first 12" to 1/32nds
- Bottom edge graduated to millimeters, numbered consecutive centimeters
- Stud marks every 16" (40cm), Truss marks every 19.2"
- Instantaneous foot readings



B1 YELLOW CLAD

- 3/8" width only
- Yellow clad blade
- Black and red markings one side only
- Graduated feet and inches to 1/8ths with instantaneous readings; 16" centers indicated by a diamond



- 3/8" width only
- Chrome Clad® blade
- Black markings one side only
- Graduated feet and inches to 1/16ths with instantaneous readings




B3 CHROME CLAD® & NUBIAN®

- 3/8" width only
- Chrome Clad® and Nubian® blade
- Black markings one side only
- Graduated consecutive inches to 1/16ths



B4 CHROME CLAD

- 3/8" width only
- Chrome Clad® blade
- Black markings one side only
- Graduated consecutive inches to 1/10ths




B5 CHROME CLAD® & YELLOW CLAD

- 3/8" width only
- Chrome Clad® and yellow clad blade
- Black markings one side only
- Graduations feet to 1/10ths and 1/100ths




B7 CHROME CLAD® & NICKEL CLAD®

- 3/8" width only
- Chrome Clad®, nickel clad and yellow clad blade
- Black markings one side only
- Graduated feet and inches to 1/8ths with instantaneous readings; 16" centers indicated by diamond



B8 YELLOW CLAD

- 3/8" width only
- Yellow clad blade
- Black and red markings both sides
- Bottom side graduated millimeters, numbered in centimeters and meters
- Top side graduated feet and inches to 1/8ths with instantaneous readings; 16" centers indicated by a diamond



B10 CHROME CLAD & NUBIAN

- 3/8" width only
- Nubian® and Chrome Clad® blade
- Markings both sides
- One side graduated 1/10ths and 1/100ths of feet; other side diameter feet and 1/10ths of inches



B9 YELLOW CLAD

- 3/8"/10mm width only
- Yellow clad blade
- Black and red markings both sides
- One side graduated feet and inches to 1/8ths with instantaneous readings; other side graduated in consecutive millimeters with instantaneous meter numbers at every 100mm



B11 NUBIAN

- 3/8" width only
- Nubian® blade
- Markings both sides
- Graduated feet, inches and 1/8ths one side; other side graduated diameter feet and inches with an extra diameter inch subdivided to 64ths left hand

BLADE STYLES LONG (B)

B12 YELLOW CLAD

- 3/8" width only
- Yellow clad blade
- Black and red markings one side only

0 900, 2 10 20 30 40 50 60 70 8

) 10 20 30

 Graduated feet and inches to 1/8ths with instantaneous readings; 16" centers indicated by a diamond



B14 CHROME CLAD

- 3/8" width only
- Chrome Clad® blade
- Black markings one side only
- Graduated feet and inches to 1/16ths with instantaneous readings



B15 CHROME CLAD® & NUBIAN®

- 3/8" width only
- Chrome Clad® and Nubian® blade
- Black markings one side only
- Graduated consecutive inches to 1/16ths

- C1 YELLOW CLAD
- 1/2" width only
- Yellow clad blade
- Black and red markings one side only
- Graduated feet and inches to 1/8ths; numbered with feet and i instantaneous foot markings in red and inches in black



C2 YELLOW CLAD

- 1/2" width only
- Yellow clad blade
- Black and red markings one side only
- Graduated feet to 1/10ths and 1/100ths; numbered with feet in red and 1/10ths of feet in black

C3 YELLOW CLAD

- 13mm width only
- Yellow clad blade
- Black and red markings one side only
- Graduated millimeters, numbered at each centimeter with red instantaneous meter number

C4 YELLOW CLAD

7 8 NON 9 METALLIC 10 4

0m | 3|9_4|0_4|1_4|2_4|3_4|4_4|5_4|6_4|7_4|8

- 1/2"/13mm width only
- Yellow clad blade
- Black and red markings on both sides
- Two-sided tapeline; top side in feet, inches, and 1/8ths, numbered at each foot with red instantaneous foot numbers; bottom side graduated in millimeters, numbered centimeters with red instantaneous meter number

C5 WHITE CLAD

- White clad blade
- 5/8" width
- Black and red markings one side only
- Graduated feet and inches to 1/8ths, red feet numbersand black inch



C6 WHITE CLAD

- White clad blade
- 5/8" width
- Black and red markings one side only

.8 .9 1F

• Graduated feet to 1/10ths and 1/100ths, red feet numbers and black tenths of feet numbers


C7 YELLOW CLAD

- 1/2"/13mm width only
- Yellow clad blade
- Black and red markings on both sides
- Two-sided tapeline; bottom side in metric, graduated in millimeters, numbered in centimeters, with red instantaneous meter number; top side graduated feet to 1/10ths and 1/100ths, numbered with feet in red and 10ths of feet in blade



C11 YELLOW CLAD & WHITE CLAD

- 3/4" width only
- White on top, vellow on bottom
- Black and red markings both sides
- Two-sided tapeline; top side feet and inches, graduated to 8ths; bottom decimal feet



C12 YELLOW CLAD & WHITE CLAD

- 3/4" width only
- White on top, vellow on bottom
- Black and red markings both sides
- Two-sided tapeline: top side graduated in millimeters, numbered centimeters with meters, bottom in feet and inches



D1 CHROME CLAD® & NUBIAN®

- 1/2" width only
- Markings one side only
- Graduated instantaneous feet and inches to 1/8ths



D2 CHROME CLAD® & NUBIAN®

- 1/2" width only
- Markings one side only
- Graduated in feet to 1/10ths and 1/100ths of an foot; reads right to left



D3 CHROME CLAD® & NUBIAN®

- 1/2"/13mm width only
- Markings both sides
- Graduated in millimeters on one side; other side instantaneous feet and inches to 1/8ths



D4 CHROME CLAD® & STAINLESS

STEEL

- 1/2" width only
- Markings one side only
- Graduated feet and inches to 1/8ths; instantaneous foot readings



0 45 0 44 0 43 0 42 0 41 0 40 0 39

Graduated in meters; numbered in millimeters

D5 NUBIAN⁶

- 1/2" width only
- Nubian® blade
- Markings one side only

D7 NUBIAN

■ 1/2" width only

Nubian® blade

Graduated feet and inches to 1/8ths; instantaneous foot readings



D6 CHROME CLAD


- 1/2"/13mm width
- Chrome Clad* blade
- Black and red markings on metric side
- Metric graduated meters to millimeters; numbered right to left in meters and millimeters
- English side graduated feet and inches to 1/8ths; numbered right to left

BLADE STYLES OIL GAUGE (D)



E1 CHROME CLAD® & YELLOW CLAD

- 1/4" and 3/8" widths
- Chrome Clad® and yellow clad blade
- Markings on one side only
- Graduated to feet, 1/10ths and 1/100ths with a blank space at last end



E2 CHROME CLAD®

- 1/4"/6mm width only
- Chrome Clad® blade
- Markings on both sides
- Graduated millimeters one side
- Graduated feet, inches and 1/8ths other side

E3 CHROME CLAD® & YELLOW CLAD

- 1/4" and 3/8" widths
- Chrome Clad® blade
- Yellow clad available in 1/4" only
- Black markings one side only
- Graduated feet and inches to 1/8ths with instantaneous readings
- 16" centers indicated by a diamond symbol on 3/8" width only

- 1/2" width only
- Nylon-clad yellow blade
- Black and red markings one side only
- Graduated feet to 1/10ths and 1/100ths
- Numbered with feet in red and 1/10ths in black

F4 155 E4 NY-CLAD® YELLOW

- 1/2" width only
- Nylon-clad yellow blade
- Black and red markings one side only
- black and red markings one side only
- Graduated feet and inches to 1/8ths with instantaneous readings
- Numbered with feet and instantaneous foot markings in red and inches in black



E11 CHROME CLAD

- 6mm width
- Black and red markings one side only
- Graduated meters to millimeters
- Red meter numbers and black millimeter numbers at each decimeter

0.200

E12 CHROME CLAD

- 1/4" widtl
- Black and red markings one side; black markings other side
- Graduated meters to millimeters one side
- Red meter numbers and black millimeter numbers at each decimeter
- ullet Graduated feet to 1/10ths and 1/100ths other side
- Numbered feet and 1/10ths black markings only



E13 CHROME CLAD

- 1/4" width
- Black and red markings both sides
- Graduated meters to millimeters one side
- Red meter numbers and black millimeter numbers at each decimeter
- Graduated feet and inches to 1/8ths other side with red feet numbers and black inch numbers

Crescent Lufkin Shockforce™ and Shockforce Nite Eye™ Measuring Tapes

Introducing the toughest tapes to ever hit a jobsite. Shockforce brings new meaning to the term high performance with a full 14 feet* of standout and the ability to survive a 100-foot drop. Add in a diamond coated 360-degree end hook that delivers 50% more gripping power, a two-sided blade with vertical markings on the back, and class-leading ergonomics and you have a tape that's destined to be the new standard for trade professionals.

But that's not all. There's also the Shockforce Nite Eye, with all the capabilities of the original Shockforce plus the Nite Eye high visibility green-on-matte black blade. Made for superior legibility in any light condition – from bright sun to dim interiors – Shockforce Nite Eye helps you measure even faster.



JUATINU



DLAUES



READY

Integrated Thru-Hole

protection

Can be used as a tether loop attachment point when working at height or as a pivot for scribing arcs

Superior Impact Protection

Dual metal guardrails on both sides

of the lock button provide superior

High Visibility No-Glare Blade
High-contrast green markings
and matte finish provide improved
legibility in all light conditions



Easier Inside Measurements

25-foot tapes have an even 3-inch adder, making inside measurement calculations fast and easy

*at maximum performance

save time when measuring

360-Degree End Hook
Diamond abrasive-coated, our

end hook grips surfaces better to



Shockforce Nite Eye™ Tape Measures

- Matte black nylon-coated blade provides extended product life and improved legibility in varied light conditions
- Diamond-coated end hook grabs material from every direction and prevents slippage
- Narrow blade technology offers reduced weight for carrying
- Optimized drum and spring design provides a compact case that fits comfortably in the palm of your hand
- Drop tested from 100 feet for real life, on the job durability
- Dual-sided blade printed with vertical quick read scale on underside for overhead and hard-to-reach measurements
- Full 14 feet of standout
- Steel tether point offers increased safety capability when working at height
- Tether point can also be used for scribing and drawing arcs during layout

| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
|----------|------------|-------------|--------------|-------------|----------|----------|----------------|
| L1116B | Black | 1-3/16 in | 16 ft | A26 | No | 14 ft | .93 lb |
| L1125B | Black | 1-3/16 in | 25 ft | A26 | No | 14 ft | 1.21 lb |
| L1135B | Black | 1-3/16 in | 35 ft | A26 | No | 14 ft | 1.56 lb |

Shockforce[™] **Tape Measures**

- Matte nylon-coated blade provides extended product life and glare reduction
- Diamond-coated end hook grabs material from every direction and prevents slippage
- Narrow blade technology offers reduced weight for carrying
- Optimized drum and spring design provides a compact case that fits comfortably in the palm of your hand
- Drop tested from 100 feet for real life, on the job durability
- Dual-sided blade printed with vertical quick read scale on underside for overhead and hard-to-reach measurements
- Full 14 feet of standout
- Steel tether point offers increased safety capability when working at height
- Tether point can also be used for scribing and drawing arcs during layout



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
|----------|----------------|------------------|--------------|-------------|----------|----------|----------------|
| L1116 | Rawhide Orange | 1-3/16 in | 16 ft | A24 | No | 14 ft | .93 lb |
| L1125 | Rawhide Orange | 1-3/16 in | 25 ft | A24 | No | 14 ft | 1.21 lb |
| L1135 | Rawhide Orange | 1-3/16 in | 35 ft | A24 | No | 14 ft | 1.56 lb |
| L1116CME | Rawhide Orange | 30 mm, 1-3/16 in | 5 m, 16 ft | A25 | No | 14 ft | .93 lb |
| L1125CME | Rawhide Orange | 30 mm, 1-3/16 in | 8 m, 26 ft | A25 | No | 14 ft | 1.21 lb |
| L1135CME | Rawhide Orange | 30 mm, 1-3/16 in | 10 m, 33 ft | A25 | No | 14 ft | 1.56 lb |


Shockforce Nite Eye™ Tape Measure Keychain

- Innovative blade synonymous with Crescent Lufkin Nite Eye family
- 360-degree, 8' matte black blade with green markings for increased legibility
- 360° mini endhook with wide base makes grabbing surfaces easier
- Full loop keychain for securing tape



Tape Measure Keychains

- Compact case fits easily in bags or pockets
- Integrated D-ring with keychain attachment for carrying or storing
- Protective clear coat over the blade and markings extends tape life
- Blade graduations printed in inches and 1/8ths
- Extra wide end hook stays in place better for easier marking
- Over 3 feet of blade standout



Command Control Series™ **Tape Measures**

- Anti-pinch, finger tip control feature for increased control when retracting
- Protected lock button and 6-point dual material case for increased durability
 Matte clear protective blade coating for better visibility and durability
- 360-degree end hook and 12-foot standout make one-person use easier
- Tether hole for safely working at heights



| Cat. No. | Blade Description | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
|----------|-------------------|------------|------------------|--------------|-------------|----------|----------|----------------|
| L1016C | Standard | Black | 1-3/16 in | 16 ft | A5 | No | 12 ft | 0.940 lb |
| L1025C | Standard | Black | 1-3/16 in | 25 ft | A5 | No | 12 ft | 1.280 lb |
| L1030C | Standard | Black | 1-3/16 in | 30 ft | A5 | No | 12 ft | 1.600 lb |
| L1035C | Standard | Black | 1-3/16 in | 35 ft | A5 | No | 12 ft | 1.700 lb |
| L1025CB | Standard Black | Black | 1-3/16 in | 25 ft | A5 | No | 12 ft | 1.280 lb |
| L1025CME | Metric English | Black | 30 mm, 1-3/16 in | 8 m, 26 ft | A28 | No | 12 ft | 1.320 lb |
| L1035CME | Metric English | Black | 30 mm, 1-3/16 in | 10 m, 33 ft | A28 | No | 12 ft | 1.700 lb |
| L1025CD | Engineer's Scale | Black | 1-3/16 in | 25 ft | A4 | No | 12 ft | 1.280 lb |

Experience Control for Yourself: Control Series Tape Measures

The Crescent Lufkin Control Series is right at home in the hands of professionals who want a tape measure that works as hard as they do. The 1-3/16" wide tape with extra-large print has 12 feet of true standout to tackle any job, and the matte finish both reduces glare and protects the blade, ensuring that it holds up through heavy use. The finger brake beneath the tape's feed allows the user to control the blade without risk of pinching, and the blade can be locked in place with the wide lock button protected by overmold rails.

Of course, the best-in-class durability of the Control Series doesn't stop at the lock button rails — the ergonomic case survived 50+ 1-story drops in real life strength testing. The Control Series excels, from the integrated tether point to the 360° grip end hook. See for yourself why Crescent is Trusted by the Trades; try the new Crescent Lufkin Control Series for yourself today.

Ergonomic Case

Professionally designed for easier use and more comfortable handling with touch point texture for increased grip



Lock Button Rails

Over-mold rails protect the lock button during drops for improved durability and product life



360-Degree Endhook

Grips material from all sides for more efficient measuring

Tether Point

Integrated slot for tethering tape when working at height



Allows user to safely control blade retraction without pinching fingers



L9000 Legacy Series Power Tapes

- Extra-wide lock button for easy thumb actuation
- Matte finish, nylon coated blade for glare reduction and extra blade protection
- Reinforced quad-rivet end hook prevents end hook from ripping off of blade
- Over 8 feet of blade standout
- Blade graduated in 32nds for first 12 inches



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
|----------|------------|-------------|--------------|-------------|----------|----------|----------------|
| L912 | Chrome | 3/4 in | 12 ft | A29 | No | 8 ft | 0.395 lb |
| L916L | Chrome | 1 in | 16 ft | A29 | No | 8 ft | 0.620 lb |
| L925L | Chrome | 1 in | 25 ft | A29 | No | 8 ft | 0.910 lb |
| L930L | Chrome | 1 in | 30 ft | A29 | No | 8 ft | 0.990 lb |
| L935L | Chrome | 1 in | 35 ft | A29 | No | 8 ft | 1.270 lb |

700 Series Auto-Lock Tape Measures

- Tape stays locked when pulled out until the user depresses the release button
- Ideal for layout and trim work
- Vertical quick read scale on blade
- Case designed to fit comfortably in your hand
- Distinct Crescent rawhide orange case with overmold strip helps identify tape on crowded jobsite



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
|-----------|----------------|-------------|--------------|-------------|----------|----------|----------------|
| AL725N | Rawhide Orange | 1 in | 25 ft | A3 | No | 8 ft | 0.860 lb |
| AL725MAGN | Rawhide Orange | 1 in | 25 ft | A3 | Yes | 8 ft | 0.880 lb |
| AL748CMEN | Rawhide Orange | 25 mm, 1 in | 8 m, 26 ft | A12 | No | 8 ft | 0.900 lb |

700 Series Magnetic End Hook Tape Measures

- Use for one-man measurements of steel framing and drop ceiling grids
- Magnetic end hook for grasping metal surfaces
- Powerful dual magnets can also serve as a pick-up tool
- Protective overmold layer improves case strength when dropped
 - Distinct Crescent rawhide orange case with overmold strip helps identify tape on crowded jobsite



| | Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
|--|----------|----------------|-------------|--------------|-------------|----------|----------|----------------|
| | L725MAG | Rawhide Orange | 1 in | 25 ft | A5 | Yes | 8 ft | 0.80 lb |
| L748MAG Rawhide Orange 25 mm, 1 in 8 m, 26 ft A20 Yes 8 ft 0.80 | L748MAG | Rawhide Orange | 25 mm, 1 in | 8 m, 26 ft | A20 | Yes | 8 ft | 0.80 lb |













700 Series Self-Centering Tape Measure

- Self-centering tape blade identifies the center of a measurement
- Improved design and ergonomics for a modern look and feel
- Clear coating extends life of blade and blade markings
- Reinforced quad-rivet end hook prevents end hook from ripping off of blade



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Replacement Blade No. | Magnetic | Product Weight |
|------------|----------------|-------------|--------------|-------------|-----------------------|----------|----------------|
| L725SCTMPN | Rawhide Orange | 1 in | 25 ft | A23 | None | No | 0.830 lb |

L600N Series Power Tapes

- Textured case for easier grip and increased user comfort
- Compact case size fits nicely into a tape holder or pocket
- Matte blade finish reduces glare and improves legibility of blade markings
- Clear coating extends life of blade and blade markings
- Serrated end hook tips allow users to mark measurements without a writing utensil



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Product Weight |
|----------|----------------|---------------|--------------|-------------|----------|----------------|
| L610N | Rawhide Orange | 1/2 in | 10 ft | A5 | No | 0.240 lb |
| L616N | Rawhide Orange | 3/4 in | 16 ft | A5 | No | 0.460 lb |
| L625N | Rawhide Orange | 1 in | 25 ft | A 5 | No | 0.780 lb |
| L610CMEN | Rawhide Orange | 13 mm, 1/2 in | 3 m, 10 ft | A12 | No | 0.240 lb |
| L616CMEN | Rawhide Orange | 19 mm, 3/4 in | 5 m, 16 ft | A12 | No | 0.460 lb |
| L625CMEN | Rawhide Orange | 25 mm, 1 in | 8 m, 26 ft | A12 | No | 0.780 lb |

Quickread® Tape Measures

- Ergonomic case design for better fit in-hand during measuring
- \blacksquare Overmold case protects the tape from impact and makes it easier to grip
- Toggle lock positioned on top of the tape doesn't require sliding to lock
- Graduations printed in fractions and decimal equivalents, then vertically oriented for quicker measurement reading



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
|----------|----------------|-------------|--------------|-------------|----------|----------|----------------|
| PQR1312N | Rawhide Orange | 3/4 in | 12 ft | A3 | No | - | 0.60 lb |
| PQR1316N | Rawhide Orange | 3/4 in | 16 ft | A3 | No | - | 0.62 lb |
| PQR1425N | Rawhide Orange | 1 in | 25 ft | A3 | No | 8 ft | 1.07 lb |
| QRL625MP | Blue | 1 in | 25 ft | A3 | No | - | 0.80 lb |

PHV Series Tape Measures

- Ergonomic case design for better fit in-hand during measuring
- Overmold case protects the tape from impact and makes it easier to grip
- Toggle lock positioned on top of the tape doesn't require sliding to lock
- Reinforced quad-rivet end hook prevents end hook from ripping off of blade



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
|-------------|----------------|---------------|--------------|-------------|----------|----------|----------------|
| PHV1010N | Rawhide Orange | 1/2 in | 10 ft | A1 | No | - | 0.29 lb |
| PHV1012N | Rawhide Orange | 1/2 in | 12 ft | A1 | No | - | 0.32 lb |
| PHV1023CMEN | Rawhide Orange | 13 mm, 1/2 in | 3 m, 10 ft | A20 | No | - | 0.29 lb |
| PHV1023CMN | Rawhide Orange | 13 mm, 1/2 in | 3 m, 10 ft | A9 | No | - | 0.29 lb |
| PHV1024CMEN | Rawhide Orange | 13 mm, 1/2 in | 4 m, 13 ft | A20 | No | - | 0.32 lb |
| PHV1034CMEN | Rawhide Orange | 19 mm, 3/4 in | 4 m, 13 ft | A20 | No | - | 0.60 lb |
| PHV1034DMN | Rawhide Orange | 19 mm, 3/4 in | 3.7 m, 12 ft | A19 | No | - | 0.60 lb |
| PHV1035CMEN | Rawhide Orange | 19 mm, 3/4 in | 5 m, 16 ft | A20 | No | 8 ft | 0.62 lb |
| PHV1035CMN | Rawhide Orange | 19 mm, 3/4 in | 5 m, 16 ft | A9 | No | - | 0.62 lb |
| PHV1048CMEN | Rawhide Orange | 25 mm, 1 in | 8 m, 26 ft | A20 | No | 8 ft | 1.07 lb |
| PHV1048CMN | Rawhide Orange | 25 mm, 1 in | 8 m, 26 ft | A9 | No | 8 ft | 1.07 lb |
| PHV1048DMN | Rawhide Orange | 25 mm, 1 in | 7.6 m, 25 ft | A19 | No | 8 ft | 1.07 lb |
| PHV1049CMEN | Rawhide Orange | 25 mm, 1 in | 9 m, 30 ft | A20 | No | 8 ft | 0.76 lb |
| PHV1312DN | Rawhide Orange | 3/4 in | 12 ft | A4 | No | - | 0.60 lb |
| PHV1312N | Rawhide Orange | 3/4 in | 12 ft | A2 | No | - | 0.60 lb |
| PHV1316N | Rawhide Orange | 3/4 in | 16 ft | A2 | No | - | 0.62 lb |
| PHV1410CMEN | Rawhide Orange | 25 mm, 1 in | 10 m, 33 ft | A20 | No | 8 ft | 1.34 lb |
| PHV1425DN | Rawhide Orange | 1 in | 25 ft | A4 | No | 8 ft | 1.07 lb |
| PHV1425EDN | Rawhide Orange | 1 in | 25 ft | A21 | No | 8 ft | 1.07 lb |
| PHV1425N | Rawhide Orange | 1 in | 25 ft | A5 | No | 8 ft | 1.07 lb |
| PHV1430N | Rawhide Orange | 1 in | 30 ft | A5 | No | 8 ft | 0.76 lb |
| PHV1433DMN | Rawhide Orange | 25 mm, 1 in | 10 m, 33 ft | A19 | No | 8 ft | 1.34 lb |
| PHV1433N | Rawhide Orange | 1 in | 33 ft | A5 | No | 8 ft | 1.34 lb |

P Series Tape Measure

- Ergonomic case design for better fit in-hand during measuring
- Toggle lock positioned on top of the tape doesn't require sliding to lock
- Multi-riveted end hook for added durability

Case Color

Chrome

Chrome

Chrome

Chrome

Compact chrome-finished case

Cat. No.

P2212XN

P2210MEXN

P2335MEN

P2133DN

| | | | | | - |
|------------|--------------|-------------|----------|----------|----------------|
| lade Width | Blade Length | Blade Style | Magnetic | Standout | Product Weight |
| 1/2 in | 12 ft | A7 | No | - | 0.32 lb |
| mm, 1/2 in | 3 m, 10 ft | A22 | No | - | 0.29 lb |
| mm, 3/4 in | 5 m, 16 ft | A12 | No | - | 0.62 lb |



210

1.72 lb

POWER TAPES



Mezurall™

- Square case design lets you include the case in the measurement for easy inside measures
- Dual rivet end hook for added durability
- Metal belt clip for easily attaching to belt or pants pocket



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|---------------|--------------|-------------|----------------|
| W928 | Chrome | 1/2 in | 8 ft | A1 | 0.20 lb |
| W9210 | Chrome | 1/2 in | 10 ft | A1 | 0.30 lb |
| W9212 | Chrome | 1/2 in | 12 ft | A1 | 0.26 lb |
| W9210ME | Chrome | 13 mm, 1/2 in | 3 m, 10 ft | A10 | 0.24 lb |
| W9312 | Chrome | 3/4 in | 12 ft | A2 | 0.40 lb |
| W9312D | Chrome | 3/4 in | 12 ft | A4 | 0.38 lb |
| Y8210 | Black | 1/2 in | 10 ft | A1 | 0.20 lb |
| Y8212 | Black | 1/2 in | 12 ft | A1 | 0.24 lb |

Mezurall™ Chrome Clad®

- Chrome plated case
- Ideal for industrial use
- Hard chrome plated blade is tough and accurate
- 1/2" X 12' Chrome Clad® blade



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|-------------|--------------|-------------|----------------|
| C9212X | Chrome | 1/2 in | 12 ft | A6 | 0.30 lb |
| C9212 | Chrome | 1/2 in | 12 ft | A8 | 0.30 lb |

Pee Wee[™]

- Pocket size ideal for office or home
- High strength case
- Yellow clad blac
- 1/4"/ 6mm wide blade is flexible; bold graduations on yellow background



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|--------------|--------------|-------------|----------------|
| W616 | Black | 1/4 in | 6 ft | A13 | 0.10 lb |
| W6110 | Black | 1/4 in | 10 ft | A13 | 0.12 lb |
| Y613ME | Black | 6 mm, 1/4 in | 3 m, 10 ft | A14 | 0.05 kg |
| W616B0 | Orange | 1/4 in | 6 ft | A13 | 0.00 lb |

Executive ThinLine

- Convenient for office, briefcase, or pocket
- 6' easy-to-read blade
- Power retraction



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|--------------|--------------|-------------|----------------|
| W606 | Chrome | 1/4 in | 6 ft | A13 | 0.09 lb |
| W608 | Chrome | 1/4 in | 8 ft | A13 | 0.10 lb |
| W606ME | Chrome | 6 mm, 1/4 in | 2 m, 6 ft | A14 | 0.09 lb |

Executive Diameter

- Durable metal case
- Compact size for easy storage and transport
- Designed for measuring diameters
- Double-sided blade print simply turn the blade over for a conversion from diameter to circumference
- Easy-to-read bold graduations



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|--------------|--------------|-------------|----------------|
| W606P | Chrome | 1/4 in | 6 ft | A15 | 0.09 lb |
| W606PD | Chrome | 1/4 in | 6 ft | A16 | 0.08 lb |
| W606PM | Chrome | 6 mm, 1/4 in | 2 m, 6.5 ft | A17 | 0.09 kg |

Architect's Pocket Scale

- Yellow clad blade
- 1/4"/6mm yellow steel blade has jet black markings
- Automatic blade return



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|-------------|--------------|-------------|----------------|
| W393 | Chrome | 1/4 in | 5 ft | A18 | 0.20 lb |

VSUKING HEFIS

Professional Measuring Wheels

- Gear-based counter drive is more accurate and durable than the traditional belt drive
- Bolstered folding joint allows for compact storage and longer product life
- Glare-resistant counter display is easy to read
- Overmold pistol grip handle for increased user comfort
- Aggressive treaded wheel for improved traction
- Built in kickstand supports wheel for simple measurement recording



| Cat. No. | Ext. Length | Folded Length | Wheel Diameter | Graduation | Maximum Distance | Product Weight |
|----------|-------------|---------------|----------------|-----------------|------------------|----------------|
| PSMW48N | 23.6 in | 23 in | 12 in | Feet and Inches | 9999 Ft | 2.915 lb |
| PSMW48NM | 23.6 in | 23 in | 12 in | Meters | 9999 m | 2.915 lb |

Professional Centerline Measuring Wheels

- Centerline wheel for increased balance and more accurate measurements
- Gear-based counter drive is more accurate and durable than the traditional belt drive
- Bolstered folding joint allows for compact storage and longer product life
- Heavy-duty wheel wiper prevents debris buildup
- Glare-resistant counter display is easy to read
- Analog counter dial resets at 10,000 ft.
- Ergonomic dual material pistol grip handle
- Built in kickstand supports wheel for simple measurement recording



| Cat. No. | Folded Length | Ext. Length | Wheel Diameter | Graduation | Maximum Distance | Product Weight |
|----------|---------------|-------------|----------------|-----------------|------------------|----------------|
| PSMW18N | 24 in | 20.7 in | 4 in | Feet and Inches | 9999 Ft | 1.240 lb |
| PSMW48CL | 20 in | 38.5 in | 12 in | Feet and Inches | 9999 Ft | 4.01 |

Compact Measuring Wheel

- Dual wheel design for increased balance and more accurate measurements
- Gear-based counter drive is more accurate and durable than the traditional belt drive
- Telescoping handle allows for compact storage
- Glare-resistant counter display is easy to read
- Analog counter dial resets at 10,000 ft.
- Overmold pistol grip handle for increased user comfort
- Built in kickstand supports wheel for simple measurement recording



| Cat. No. | Folded Length | Ext. Length | Wheel Diameter | Graduation | Maximum Distance | Product Weight |
|----------|---------------|-------------|----------------|-----------------|------------------|----------------|
| PSMW28CL | 19.5 in | 43 in | 4 in | Feet and Inches | 9999 Ft | 1.32 |

Speedwinder[®]

- Impact-resistant, self-standing case
- Extends and rewinds in less time than conventional long steel tapes
- Heavy-duty yellow clad blade protected by an abrasion resistant coating
- Easy-to-read bold black markings



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|----------------|---------------|--------------|-------------|----------------|
| HYT50 | Rawhide Orange | 3/8 in | 50 ft | B1 | 0.85 lb |
| HYT100 | Rawhide Orange | 3/8 in | 100 ft | B1 | 1.50 lb |
| HYT100D | Rawhide Orange | 3/8 in | 100 ft | B5 | 1.50 lb |
| HYT15CME | Rawhide Orange | 10 mm, 3/8 in | 15 m, 50 ft | B14 | 0.90 lb |
| HYT30CME | Rawhide Orange | 10 mm, 3/8 in | 30 m, 100 ft | B14 | 1.20 lb |
| HYT50CME | Rawhide Orange | 10 mm, 3/8 in | 50 m, 164 ft | B14 | 1.50 lb |

Pro Series Fiberglass Tapes

- Three interchangeable end hooks for user convenience
- Ring end hook snaps onto stake for one-person measurements
- Standard folding end hook for general measuring needs
- Appraiser's hook attaches to oversized objects such as downspouts
- 3-to-1 rewind for fast blade retraction
- 3/4" blade is more durable; large numbers are easy to read
- **2**-sided blade, feet and inches on top, metric on the bottom
- \blacksquare $\,$ 62 fiberglass strands and double-PVC coating for durability and strength
- Cushion grips on handle and frame arms for comfort



| Cat. No. Case Color Blade Width Blade Length Blade Style Product Weign PSFE100 Rawhide Orange 3/4 in 100 ft C11 2.55 lb PSFE200 Rawhide Orange 3/4 in 200 ft C11 3.79 lb PSFE300 Rawhide Orange 3/4 in 300 ft C11 4.77 lb PSFM030CME Rawhide Orange 19 mm, 3/4 in 30 m, 100 ft C12 2.2 kg PSFM060CME Rawhide Orange 19 mm, 3/4 in 60 m, 200 ft C12 1.72 kg PSFM100CME Rawhide Orange 19 mm, 3/4 in 100 m, 328 ft C12 1.15 kg | | | | | | |
|--|------------|----------------|---------------|---------------|-------------|----------------|
| PSFE200 Rawhide Orange 3/4 in 200 ft C11 3.79 lb PSFE300 Rawhide Orange 3/4 in 300 ft C11 4.77 lb PSFM030CME Rawhide Orange 19 mm, 3/4 in 30 m, 100 ft C12 2.2 kg PSFM060CME Rawhide Orange 19 mm, 3/4 in 60 m, 200 ft C12 1.72 kg | Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
| PSFE300 Rawhide Orange 3/4 in 300 ft C11 4.77 lb PSFM030CME Rawhide Orange 19 mm, 3/4 in 30 m, 100 ft C12 2.2 kg PSFM060CME Rawhide Orange 19 mm, 3/4 in 60 m, 200 ft C12 1.72 kg | PSFE100 | Rawhide Orange | 3/4 in | 100 ft | C11 | 2.55 lb |
| PSFM030CME Rawhide Orange 19 mm, 3/4 in 30 m, 100 ft C12 2.2 kg PSFM060CME Rawhide Orange 19 mm, 3/4 in 60 m, 200 ft C12 1.72 kg | PSFE200 | Rawhide Orange | 3/4 in | 200 ft | C11 | 3.79 lb |
| PSFM060CME Rawhide Orange 19 mm, 3/4 in 60 m, 200 ft C12 1.72 kg | PSFE300 | Rawhide Orange | 3/4 in | 300 ft | C11 | 4.77 lb |
| g | PSFM030CME | Rawhide Orange | 19 mm, 3/4 in | 30 m, 100 ft | C12 | 2.2 kg |
| PSFM100CME Rawhide Orange 19 mm, 3/4 in 100 m, 328 ft C12 1.15 kg | PSFM060CME | Rawhide Orange | 19 mm, 3/4 in | 60 m, 200 ft | C12 | 1.72 kg |
| | PSFM100CME | Rawhide Orange | 19 mm, 3/4 in | 100 m, 328 ft | C12 | 1.15 kg |

214 | 215



Fiberglass Tapes

- Open four-arm frame design protects the blade and does not trap dirt in the case
- Lightweight case for easy handling and transport
- Dual-material grip elevated above the reel prevents contact between reel and knuckles
- Versatile folding end hook for use in multiple applications
- Rewind reel tucks away for protection during storage



| | | | | | " |
|----------|----------------|---------------|---------------|-------------|----------------|
| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
| FE050D | Rawhide Orange | 1/2 in | 50 ft | C2 | 1.38 lb |
| FE050 | Rawhide Orange | 1/2 in | 50 ft | C1 | 1.38 lb |
| FE100 | Rawhide Orange | 1/2 in | 100 ft | C1 | 1.65 lb |
| FE100D | Rawhide Orange | 1/2 in | 100 ft | C2 | 1.65 lb |
| FE150 | Rawhide Orange | 1/2 in | 150 ft | C1 | 1.82 lb |
| FE150D | Rawhide Orange | 1/2 in | 150 ft | C2 | 1.82 lb |
| FE200 | Rawhide Orange | 1/2 in | 200 ft | C1 | 2.00 lb |
| FE200D | Rawhide Orange | 1/2 in | 200 ft | C2 | 2.00 lb |
| FE300 | Rawhide Orange | 1/2 in | 300 ft | C1 | 2.80 lb |
| FE300D | Rawhide Orange | 1/2 in | 300 ft | C2 | 3.00 lb |
| FM015CME | Rawhide Orange | 13 mm, 1/2 in | 15 m, 50 ft | C4 | 1.30 lb |
| FM030CME | Rawhide Orange | 13 mm, 1/2 in | 30 m, 100 ft | C4 | 1.47 kg |
| FM030DM | Rawhide Orange | 13 mm, 1/2 in | 30 m, 100 ft | C7 | 1.58 lb |
| FM030CM | Rawhide Orange | 13 mm, 1/2 in | 30 m, 100 ft | C3 | 1.56 lb |
| FM050CME | Rawhide Orange | 13 mm, 1/2 in | 50 m, 164 ft | C4 | 1.75 lb |
| FM050CM | Rawhide Orange | 13 mm, 1/2 in | 50 m, 164 ft | C3 | 1.75 lb |
| FM060CME | Rawhide Orange | 13 mm, 1/2 in | 60 m, 200 ft | C4 | 0.91 kg |
| FM100CME | Rawhide Orange | 13 mm, 1/2 in | 100 m, 328 ft | C4 | 0.72 kg |

Pro Series Ny-Clad® Steel Tapes

- Fast 3-to-1 blade retraction saves time in the field
- Durable nylon coating on blade resists wear under extreme conditions
- Steel blade will not stretch under normal use



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|--------------------|-------------|--------------|-------------|----------------|
| PS1806N | Chrome Clad® blade | 1/2 in | 100 ft | E4 | 2.02 lb |
| PS1806DN | Chrome Clad® blade | 1/2 in | 100 ft | E5 | 1.98 lb |
| PS1808N | Chrome Clad® blade | 1/2 in | 200 ft | E4 | 3.04 lb |
| PS1808DN | Chrome Clad® blade | 1/2 in | 200 ft | E5 | 3.14 lb |
| PS1809DN | Chrome Clad® blade | 1/2 in | 300 ft | E5 | 4.11 lb |

Linear

- Lightweight high impact ABS winding drum for smooth tape recovery
- Non-conductive easy-to-read black and red markings on a yellow background
- Durable 1/2"-wide fiberglass tape with protective coating



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|----------------|-------------|--------------|-------------|----------------|
| T703 | Rawhide Orange | 1/2 in | 50 ft | C1 | 0.90 lb |
| 703D | Rawhide Orange | 1/2 in | 50 ft | C2 | 0.80 lb |
| 706L | Rawhide Orange | 1/2 in | 100 ft | C1 | 1.20 lb |
| 706D | Rawhide Orange | 1/2 in | 100 ft | C2 | 1.30 lb |

Closed Reel Steel Long Tape

- 3:1 gear ratio for fast winding
- Dual material case for added durability; overmold surround allows for better grip with either hand
- Handle tucks away for convenient storage and transport; won't snag
- Dual-sided printed blade with nylon coating for product longevity and versatility – top side SAE, bottom side metric
- End hook clips into housing to prevent it from catching on items while in storage



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|---------------------|----------------|--------------|-------------|----------------|
| ST100 | Gray/Rawhide Orange | 3/8 in, 9.5 mm | 30 m, 100 ft | C4 | 1.100 lb |

Hi Line[®] Tapes

- Rugged, vinyl-covered steel case
- Synthetic fiber blade is non-conductive
- Ring attached on end



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|-------------|--------------|-------------|----------------|
| HD403N | Black | 5/8 in | 50 ft | C5 | 1.00 lb |
| HD403DN | Black | 5/8 in | 50 ft | C6 | 1.00 lb |
| HD406N | Black | 5/8 in | 100 ft | C5 | 1.40 lb |
| HDH406N | Black | 5/8 in | 100 ft | C5 | 1.40 lb |
| HDH406DN | Black | 5/8 in | 100 ft | C6 | 1.40 lb |
| HD406DN | Black | 5/8 in | 100 ft | C6 | 1.40 lb |

LONG TAPES

(CRESCENT Lufkin

Anchor[®]

- Rugged, vinyl-covered steel case
- Large easy-action winding drum and friction washers
- Nylon roller guides the tape smoothly in and out of case
- Chrome Clad® blade



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|--------------|------------|-------------|--------------|-------------|----------------|
| C213CN | Brown | 3/8 in | 50 ft | В3 | 0.93 lb |
| C213CXN | Brown | 3/8 in | 50 ft | B4 | 1.00 lb |
| C213DN | Brown | 3/8 in | 50 ft | B5 | 0.90 lb |
| TC213N | Brown | 3/8 in | 50 ft | В7 | 1.00 lb |
| C21616THBLKN | Brown | 3/8 in | 100 ft | B2 | 1.60 lb |
| C216DN | Brown | 3/8 in | 100 ft | B5 | 1.55 lb |

Leader®

- Rugged, vinyl-covered steel case
- Large easy action winding drum and friction washers
- Nylon roller guides the tape smoothly in and out of case
- Chrome Clad® blade
- Folding end hook ring



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|-------------|--------------|-------------|----------------|
| HC253N | Black | 3/8 in | 50 ft | B7 | 1.00 lb |
| HC256N | Black | 3/8 in | 100 ft | В7 | 1.70 lb |

Challenge™

- Rugged, vinyl-covered steel case
- Easy action winding drum and friction washers
- Nylon rollers guide the tape smoothly in and out of case
- Chrome Clad® blade



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|-------------|--------------|-------------|----------------|
| 261PTHN | Brown | 3/8 in | 33 ft | B11 | 0.70 lb |
| 263PN | Brown | 3/8 in | 50 ft | B11 | 0.80 lb |
| 263PCALN | Brown | 3/8 in | 50 ft | B11 | 0.80 lb |

Artisan[®] Diameter and Tree Tapes

- Rugged, vinyl-covered steel case
- Chrome Clad® and Nubian® blade
- Ergonomic easy-winding drum with nylon rollers to guide the tape smoothly in and out of case



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|---------------|--------------|-------------|----------------|
| 120TPN | Brown | 3/8 in | 20 ft | B10 | 0.610 lb |
| C120TPN | Brown | 3/8 in | 20 ft | B10 | 0.550 lb |
| 120PN | Brown | 3/8 in | 20 ft | B12 | 0.470 lb |
| C106PMN | Brown | 10 mm, 3/8 in | 6.5 m, 21 ft | B15 | 0.505 lb |
| C106TPMN | Brown | 10 mm, 3/8 in | 6.5 m, 21 ft | B15 | 0.550 lb |

Banner™

- Rugged, vinyl-covered steel case
- Large easy action winding drum and friction washers
- Nylon rollers guide the tape smoothly in and out of case
- Yellow clad tape; 3/8"/10mm wide and .008"/0.2mm thick
- Bold graduations with black and red numbers for accurate measuring
- Folding end hook ring



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Product Weight |
|----------|------------|---------------|--------------|-------------|----------------|
| HW223 | Brown | 3/8 in | 50 ft | B1 | 1.00 lb |
| HW223D | Brown | 3/8 in | 50 ft | B5 | 0.90 lb |
| HW226 | Brown | 3/8 in | 100 ft | B1 | 1.60 lb |
| HW226D | Brown | 3/8 in | 100 ft | B5 | 1.60 lb |
| HW223ME | Brown | 10 mm, 3/8 in | 15 m, 50 ft | В9 | 0.90 lb |
| HW226ME | Brown | 10 mm, 3/8 in | 30 m, 100 ft | В9 | 1.60 lb |
| HW227CME | Brown | 10 mm, 3/8 in | 50 m, 164 ft | B8 | 2.50 lb |

(CRESCENT Lufkin

Home Shop

- Rugged, vinyl-covered steel case
- Large easy action winding drum with friction washers
- Yellow clad blade
- .005" thick blade
- Folding end hook ring



| Cat. No. | Case Color | Blade Width | Blade Length | Blade Style | Replacement Blade No. | Product Weight |
|----------|------------|-------------|--------------|-------------|-----------------------|----------------|
| HW50 | Brown | 3/8 in | 50 ft | B1 | 0Y50 | 0.70 lb |
| HW100 | Brown | 3/8 in | 100 ft | B1 | 0Y100 | 1.25 lb |

Peerless

- Designed for engineers and surveyors who prefer a 4-arm reel
- Reel is nickel plated, 4-arm, with rollers in each arm for smooth winding
- Open design construction aids in drying line and clearing out dirt
- Long, easy-action winding handle locks line in any position
- Chrome Clad® and yellow clad blade
- Blade 1/4"/6mm wide and 0.016"/0.4mm thick
- Pair of 580 finger rings and a 579 engineer's conversion rule are furnished with tape or replacement line
- Reel available separately



| Cat. No. | Arms | Blade Width | Blade Length | Blade Style | Replacement Blade No. | Product Weight |
|--------------|------|--------------|--------------|-------------|--------------------------|----------------|
| C1276N | 4 | 1/4 in | 100 ft | E3 | 0C1276 | 2.40 lb |
| C1276DN | 4 | 1/4 in | 100 ft | E1 | 0C1276D | 2.40 lb |
| Y1276DN | 4 | 1/4 in | 100 ft | E1 | RY1276D | 2.10 lb |
| C1278N | 4 | 1/4 in | 200 ft | E3 | 0C1278 | 3.70 lb |
| C1278DN | 4 | 1/4 in | 200 ft | E1 | 0C1278D | 3.70 lb |
| C2730MMEN | 4 | 6 mm, 1/4 in | 30 m, 100 ft | E13 | 0C2730MME | 2.40 lb |
| C2750DMMN | 4 | 6 mm, 1/4 in | 50 m, 164 ft | E12 | 0C2750DMM | 3.44 lb |
| C2750MMEN | 4 | 6 mm, 1/4 in | 50 m, 164 ft | E13 | None | 3.36 lb |
| C2750MMECALN | 4 | 6 mm, 1/4 in | 50 m, 164 ft | E13 | None | 3.36 lb |
| C2730MMN | 4 | 6 mm, 1/4 in | 30 m, 100 ft | E11 | 0C2730MM | 2.40 lb |

Derrick

- Extra large winding drum provides rapid line recovery
- Chrome Clad® blade
- Nominal blade thickness 0.019"
- Special hook ring with ribbed face at zero
- Leather tether strap is provided to use through eye at base of handle



| Cat. No. | Blade Width | Blade Length | Blade Style | Replacement Blade No. | Product Weight |
|------------|--------------|--------------|-------------|-----------------------|----------------|
| C2276DN | 1/4 in | 100 ft | E1 | 0C2276D | 2.90 lb |
| CD2750MMEN | 6 mm, 1/4 in | 50 m, 164 ft | E13 | OCD2750MME | 3.60 lb |
| CD2730DMMN | 6 mm, 1/4 in | 30 m, 100 ft | E12 | OCD2730DMM | 2.75 lb |
| C2276MEN | 6 mm, 1/4 in | 30 m, 100 ft | E2 | 0C2276ME | 3.00 lb |

Western®

- Reel is nickel-plated, 4-arm, with rollers in each arm for smooth winding
- Oversize drum with long, one-piece winding handle for fast line recovery
- Turning handle locks line at any position
- Riveted clips for holding thongs
- Blank space at each end
- Reel available separately



| Cat. No. | Arms | Blade Width | Blade Length | Blade Style | Replacement Blade No. | Product Weight |
|----------|------|-------------|--------------|-------------|-----------------------|----------------|
| C1676DN | 4 | 1/4 in | 100 ft | E1 | OC1676D | 3.00 lb |

Chrome Clad®

- Reel is nickel plated, 4-arm, with rollers in each arm for smooth winding
- Long, easy-action winding handle locks line in any position
- 3/8"/10mm wide and 0.008" thick
- Reel available separately



| Cat. No. | Arms | Blade Width | Blade Length | Blade Style | Replacement Blade No. | Product Weight |
|-----------|------|-------------|--------------|-------------|-----------------------|----------------|
| C1286DN | 4 | 3/8 in | 100 ft | E1 | 0C1286D | 2.20 lb |
| C1286N | 4 | 3/8 in | 100 ft | E3 | None | 2.20 lb |
| C1288BLKN | 4 | 3/8 in | 200 ft | E3 | None | 3.19 lb |


220 | 221



Innovation that Delivers: Introducing the Ex6

An original in its category, Crescent's Ex6 layout square delivers 2-in-1 capabilities, making woodworking and framing simpler. The Ex6 eliminates the need to carry a 7-in and 12-in square and acts as a continuous edge for scribing and marking large scale lumber.

Laser-etched markings add another level of efficiency, increasing visibility and significantly reducing signs of wear and tear. When you've finished a task, the tool conveniently folds to fit comfortably in a pocket or work pouch. A practical locking mechanism holds the foldout extension securely for transport. With all the elements of a standard layout square and high-performing additions, the Ex6 is sure to be an essential tool that trades professionals take wherever they go.

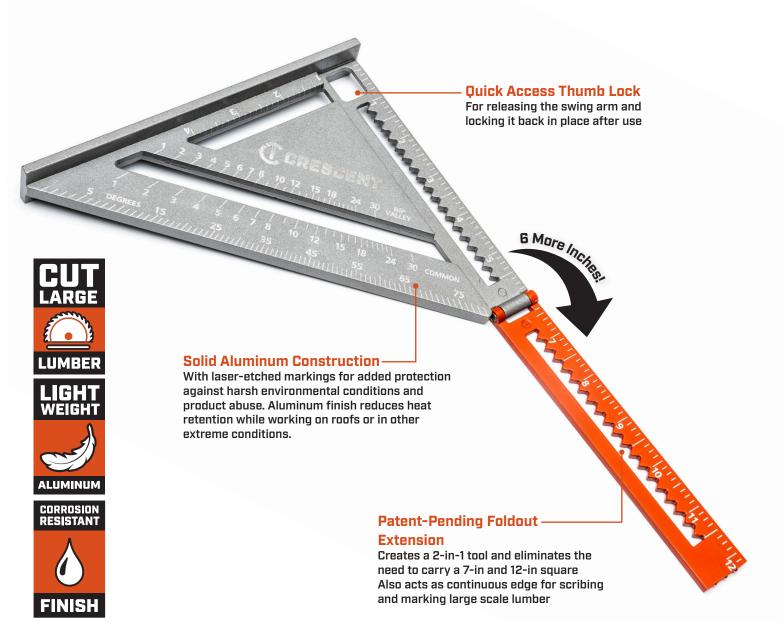

Drywall Square

- Commonly used to mark and cut drywall, plywood and plasterboard
- Bolstered joint between the blade and head for prolonged accuracy and durability
- Lightweight aluminum construction
- High contrast numbers for increased legibility
- Corrosion resistant finish



| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------|-------------|--------------|----------------|
| L48DS | 1/8 in | 22 in | 49.5 in | 2.380 lb |

2-in-1 Extendable Layout Tool

- 6-inch fold-out extension arm eliminates the need for carrying both a
 7-inch and 12-inch square
- Quick access thumb lock releases the fold-out extension and locks it back into place after use
- Solid aluminum construction and corrosion resistant finish for durability
- Laser-etched markings for visibility and durability
- Lightweight and easy to store in your work pouch or pocket



| Cat. No. | Graduation | Folded Length | Ext. Length | Overall Width | Overall Height | Product Weight |
|----------|------------|---------------|-------------|---------------|----------------|----------------|
| LSSP6-07 | 1/16 in | 6.5 in | 12.52 in | 7.25 in | 1.2 in | 0.730 lb |

Combination Squares

- Extruded square head with integrated level for increased drop durability and accuracy
- Knurled nut easily adjusts ruler to align measurements
- Laser etched numbers increase legibility and protect against wear
- Markings in inches and centimeters
- Brass scribe stores in handle for quick and easy marking



| Cat. No. | Graduation | Blade Thickness | Blade Width | Blade Length | Product Weight |
|----------|-----------------|-----------------|-------------|--------------|----------------|
| L06CS | 1/32 in & 0.1cm | 1/2 in | 3-3/8 in | 6 in | 0.240 lb |
| L12CS | 1/32 in & 0.1cm | 3/4 in | 4-3/4 in | 12 in | 0.670 lb |

222 | 223



Framing and Carpenter Squares

- Steel construction with high contrast numbers for increased legibility
- Dual-sided print with increments from inches to 1/16th
- Protective coating to maintain print legibility
- Corrosion resistant finish



| Cat. No. | Туре | Material | Graduation | Blade Thickness | Blade Width | Blade Length | Product Weight |
|----------|-----------|----------|------------|-----------------|-------------|--------------|----------------|
| L0812US | Carpenter | Steel | 1/16 in | 3/32 in | 8 in | 12 in | 0.650 lb |
| L1624CS | Carpenter | Steel | 1/16 in | 3/32 in | 16 in | 24 in | 1.650 lb |
| L1624RS | Framing | Aluminum | 1/16 in | 3/32 in | 16 in | 24 in | 0.780 lb |

Aluminum Yardstick

- Lightweight, flexible, rustproof, and sharply defined yardstick
- Lies flat and has a hang-up hole for storage
- Easy-to-read markings on straight parallel edges
- Fine graduations one side only, both edges in inches to 1/16ths
- Hole in one end for hanging



| Cat. No. | Graduation | Blade Thickness | Blade Width | Blade Length | Product Weight |
|----------|------------|-----------------|-------------|--------------|----------------|
| T1260N | 1/16 in | 1/32 in | 15/64 in | 36 in | 0.30 lb |

Metric English Aluminum Meter Stick

- Useful for making the transition to the metric system
- Graduated on front side in inches to 1/16ths on upper edge
- Graduated decimeters, centimeters and millimeters lower edge
- Reverse side shows table of equivalents and conversions
- 1" x 1m aluminum rule
- Hole in one end for hanging



| Cat. No. | Graduation | Blade Thickness | Blade Width | Blade Length | Product Weight |
|----------|------------|-----------------|-------------|--------------|----------------|
| 1261MEN | 1/16 in | 1/32 in | 27 mm, 1 in | 1 m, 3 ft | 0.40 lb |

One-Piece Steel Rules

- Markings are heavier than on machine-divided rules
- Bold, permanent markings are deeply etched and black-filled
- Large graduations marked on both sides and both edges
- Upper edge graduated in 1/8ths, lower edge in 1/16ths
- Opposite sides measure from opposite ends
- Hole in one end for hanging



| Cat. No. | Graduation | Blade Thickness | Blade Width | Blade Length | Product Weight |
|----------|------------------|-----------------|-------------|--------------|----------------|
| 621FTN | 1/8 in & 1/16 in | 1/16 in | 1-1/4 in | 1 ft | 0.30 lb |
| 622FTN | 1/8 in & 1/16 in | 1/16 in | 1-1/4 in | 2 ft | 0.50 lb |
| 623FTN | 1/8 in & 1/16 in | 1/16 in | 1-1/4 in | 3 ft | 0.80 lb |
| 624FTN | 1/8 in & 1/16 in | 1/16 in | 1-1/4 in | 4 ft | 1.00 lb |
| 626FTN | 1/8 in & 1/16 in | 1/16 in | 1-1/4 in | 6 ft | 1.50 lb |

School Shop Steel Rule

- Used in school shops and industrial plants
- Medium weight tempered steel rule
- Deeply-etched permanent markings are black-filled for easy reading
- Large graduations, marked upper edge both sides
- One side 1/8ths; other side 1/16ths
- Opposite sides measure from opposite ends
- Hole in one end for hanging



| Cat. No. | Graduation | Blade Thickness | Blade Width | Blade Length | Product Weight |
|----------|------------------|-----------------|-------------|--------------|----------------|
| 6012INN | 1/8 in & 1/16 in | 1/32 in | 3/4 in | 12 in | 0.07 lb |

Tinner's Steel Circumference Rules

- Standard rule for tinners and other sheetmetal workers
- Tempered medium-weight steel
- Black markings for easy reading
- One side upper edge marked inches to 1/16ths
- Reverse side has formulas for calculating circumference, diameter, area
- Hole in one end for hanging



31 32 33 34 35 96 97 98 99 100 100 102 103 104 105 106 107 108 109 110 111 112

| Cat. No. | Graduation | Blade Thickness | Blade Width | Blade Length | Product Weight |
|----------|------------------|-----------------|-------------|--------------|----------------|
| 953FTN | 1/8 in & 1/16 in | 1/16 in | 1-1/4 in | 3 ft | 0.80 lb |
| 954FTN | 1/8 in & 1/16 in | 1/16 in | 1-1/4 in | 4 ft | 1.00 lb |

Steel Blacksmith's Rule

- Used for converting diameters directly to circumference measurements
- Built-in catch brings rule to a firm stop when opened straight
- Legible, permanent, deeply etched black markings
- Lower edge graduated to 1/16ths of an inch, upper edge to 1/8ths



| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------------|-------------|--------------|----------------|
| 86N | 1/8 in & 1/16 in | 3/4 in | 2 ft | 0.14 lb |

Doyle Log Scale

- Designed for estimating board feet in a cut log
- Graduated inches to 1/16ths lower edge
- Outside markings for 10' and 18' logs
- Inside markings for 12', 14' and 16' logs

| 10 . | No 524 | [UFK | .w e | LOG SCAL | £ 18 | 5 |
|----------|------------------|----------|------------|--------------|------|---|
| անևևն | htdddddfd | ildidddd | uminidalis | r Chilipping | | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, |
| Konomer | and deliberation | Samor & | 200 | | | |
| A COUNTY | Als. F. | 1 | 1000 | 1.00 | - | 1220 |

| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------|-------------|--------------|----------------|
| TT524N | 1/16 in | 5/8 in | 4 ft | 0.24 lb |

Red End® Brick Mason's Folding Wood Rule

- For use in brick laying applications
- Durable construction with brass plated joints and brass end caps that prevent the ends from splintering
- Featuring brick spacing rule on the inside surface
- Outside markings are graduated from feet and inches to 1/16th along both top and bottom edges
- 6 ft. length and 5/8 in. width



| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------|-------------|--------------|----------------|
| T636N | 1/16 in | 5/8 in | 6 ft | 0.30 lb |

Red End® Oversized Brick Mason's Folding Wood Rule

- Used by bricklayers for oversized brick
- Graduated vertical markings go from inches to 16ths along both edges
- Brick mason scale on inside, red course counters numbered consecutively
- Regular outside markings in black
- 6 Foot Length



| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------|-------------|--------------|----------------|
| T656N | 1/16 in | 5/8 in | 6 ft | 0.35 lb |

Red End® Engineer's Folding Wood Rules

- Joints are brass-plated for durability; brass end caps prevent ends from splitting
- Red foot figures for clear visibility and identification
- Graduated in feet, tenths of feet, and hundredths of feet
- Regular outside markings in feet, inches and 1/16ths



| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------|---------------|--------------|----------------|
| 1066DMN | 1/16 in | 16 mm, 5/8 in | 2 m, 6 ft | 0.36 lb |
| 1066DN | 1/16 in | 5/8 in | 6 ft | 0.35 lb |

Red End® Extension Folding Wood Rules

- Graduated slide rule extends up to 6 additional inches
- Stops at each end to prevent slide from falling out
- Marked along both sides and both edges
- Graduated to 1/16ths of an inch



| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------|-------------|--------------|----------------|
| TX46N | 1/16 in | 5/8 in | 6 ft | 0.35 lb |
| HX46N | 1/16 in | 5/8 in | 6 ft | 0.39 lb |
| X48N | 1/16 in | 5/8 in | 8 ft | 0.50 lb |
| X46FN | 1/16 in | 5/8 in | 6 ft | 0.35 lb |

Red End® Folding Wood Rules

- Durable construction with brass-plated joints and brass end caps which prevent the ends from splitting
- Embossed numbers and graduations prevent print corrosion
- Marked on both sides for versatile use



| Cat. No. | Blade Width | Blade Length | Product Weight |
|----------|-------------|--------------|----------------|
| T066N | 5/8 in | 6 ft | 0.34 lb |
| 066FN | 5/8 in | 6 ft | 0.34 lb |
| 062CMEN | 5/8 in | 2 m, 6 ft | 0.39 lb |

Red End® Modular Spacing Folding Wood Rule

- Durable construction with brass-plated joints and brass end caps which prevent the ends from splitting
- Outside is graduated along both edges to 1/16ths of an inch
- Inside marked with 6 scales in 16" modules



| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------|-------------|--------------|----------------|
| 646LN | 1/16 in | 5/8 in | 6 ft | 0.35 lb |

Red End® Two Way Folding Wood Rule

- Flat inside markings lie close to the work
- For measuring left to right and right to left
- Marked on both sides for versatile use
- Graduations in feet, inches and 1/16ths on both edges of both sides



| Cat. No. | Graduation | Blade Width | Blade Length | Product Weight |
|----------|------------|-------------|--------------|----------------|
| 966N | 1/16 in | 5/8 in | 6 ft | 0.34 lb |

A Perfect Snap Every Time.

The new Crescent Lufkin line of chalk reels offers the professional tradesperson the ultimate in ease of use and dependability. Add to that our offering of genuine Crescent Lufkin chalk — including our new ultra high-visibility Hard Mark Blue — and you have an unbeatable chalk reel and chalk performance combination.



SOUARES

of the light conditions or surface.

CB25BA, CB08BA

Professional Aluminum Chalk & Reels

- 6:1 gear ratio, fold-away, rotating hub for faster rewind and reel protection during storage
- Single hand hub lock allows user to stop line in place and snap lines with only
- Nesting end hook retracts into a nested position, protecting the hook from unwanted snags
- Reinforced string perfectly braided for the best balance between chalk retention and reduced overspray
- One-way chalk refill valve designed for quick refills without the mess
- Quarter-turn release for secondary access to the chalk box



| Cat. No. | Chalk Color | Line Material | Line Length | Case Material | Rewind Ratio | Product Weight |
|----------|--------------|----------------|-------------|---------------|--------------|----------------|
| CLA100 | Not Included | Braided String | 100 ft | Aluminum | 6:1 | 0.074 lb |
| CLA100B | Blue | Braided String | 100 ft | Aluminum | 6:1 | 0.099 lb |
| CLA100R | Red | Braided String | 100 ft | Aluminum | 6:1 | 0.099 lb |

Aluminum Chalk & Reels


- Sliding door for quick and easy chalk refilling
- Cast aluminum body for increased durability
- Centerline marker for use as a plumb bob
- Built-in storage dock protects end hook when not in use



| Cat. No. | Chalk Color | Line Material | Line Length | Case Material | Rewind Ratio | Product Weight |
|----------|--------------|----------------|-------------|---------------|--------------|----------------|
| CLA100A | Not Included | Braided String | 100 ft | Aluminum | 1:1 | 0.400 lb |
| CLA100AB | Blue | Braided String | 100 ft | Aluminum | 1:1 | 0.650 lb |

Compact Chalk & Reel

- Fold-away handle locks the retrieval arm in place to prevent breaking
- Release button disengages crank so line can be pulled out faster
- End hook storage on reverse side of reel protects end hook and
- Reinforced string perfectly braided for the best balance between chalk
- Easy fill side refill door with large opening capacity for quick and effortless refills

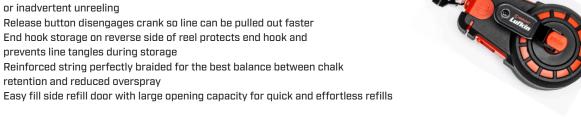

| Cat. No. | Chalk Color | Line Material | Line Length | Case Material | Rewind Ratio | Product Weight |
|----------|-------------|----------------|-------------|---------------|--------------|----------------|
| CL50 | Blue | Braided String | 50 ft | Plastic | 3:1 | 0.052 lb |

Construction Chalk & Reel

- 6:1 gear ratio, fold-away, rotating hub for faster rewind and reel protection
- End hook storage on the backside that protects the end hook and prevents tangles
- Combo hook and ring end hook for use in all construction environments
- Reinforced string perfectly braided for the best balance between chalk retention and reduced overspray
- One-way chalk refill valve designed for quick chalk refills without the mess



| Cat. No. | Chalk Color | Line Material | Line Length | Case Material | Rewind Ratio | Product Weight |
|----------|--------------|----------------|-------------|---------------|--------------|----------------|
| CL150 | Not Included | Braided String | 150 ft | Plastic | 6:1 | 0.033 lb |

Contractor Chalk & Reels

- 6:1 gear ratio, fold-away, rotating hub for faster rewind and reel protection
- Single hand hub lock allows user to stop line in place and snap lines with only one hand
- Nesting end hook retracts into a nested position, protecting the hook from unwanted snags
- Reinforced string perfectly braided for the best balance between chalk retention and reduced overspray
- One-way chalk refill valve designed for quick refills without the mess
- Quarter-turn release for secondary access to the chalk box




| Cat. No. | Chalk Color | Line Material | Line Length | Case Material | Rewind Ratio | Product Weight |
|----------|--------------|-----------------------|-------------|---------------|--------------|----------------|
| CL0100 | Not Included | Braided String | 100 ft | Plastic | 6:1 | 0.050 lb |
| CL100B | Blue | Braided String | 100 ft | Plastic | 6:1 | 0.074 lb |
| CL100R | Red | Braided String | 100 ft | Plastic | 6:1 | 0.074 lb |

Chalk & Reels

- 3:1 gear crank ratio for faster rewind
- Sliding door for quick and easy chalk refilling
- Centerline marker for use as a plumb bob
- Built-in storage dock protects end hook when not in use
- Release button disengages crank so line can be pulled out faster

| Cat. No. | Chalk Color | Line Material | Line Length | Case Material | Rewind Ratio | Product Weight |
|----------|--------------|----------------|-------------|---------------|--------------|----------------|
| CLP100 | Not Included | Braided String | 100 ft | Plastic | 3:1 | 0.308 lb |
| CLP100B | Blue | Braided String | 100 ft | Plastic | 3:1 | 0.558 lb |
| CLP100R | Red | Braided String | 100 ft | Plastic | 3:1 | 0.558 lb |





HardMark Blue Chalk Refill

- HardMark Blue is a Crescent Lufkin proprietary marking chalk designed to be a brighter blue for increased line visibility regardless of the light condition or surface
- High visibility blue chalk designed to be three times more visible than standard chalks
- Unique bottle geometry prevents the bottle from rolling on sloped surfaces
- Easy fill bottle top design allows chalk to flow faster for quick refills



| Cat. No. | Chalk Color | Chalk Volume | Product Weight |
|----------|---------------|--------------|----------------|
| CB08BA | HardMark Blue | 8 oz | 0.572 lb |
| CB25BA | HardMark Blue | 2.5 lbs | 2.750 lb |

8 oz Chalk Refill

- Marking chalk for use with chalk reels
- Unique bottle geometry prevents the bottle from rolling on sloped surfaces
- Easy fill bottle top design allows chalk to flow faster for quick refills



| Cat. No. | Chalk Color | Chalk Volume | Product Weight |
|----------|-------------|--------------|----------------|
| CB08B | Blue | 8 oz | 0.572 lb |
| CB08BL | Black | 8 oz | 0.572 lb |
| CB08R | Red | 8 oz | 0.572 lb |
| CB08Y | Yellow | 8 oz | 0.572 lb |

2.5 Lbs Chalk Refill

- Marking chalk for use with chalk reels
- Unique bottle geometry prevents the bottle from rolling on sloped surfaces
- Easy fill bottle top design allows chalk to flow faster for quick refills



| Cat. No. | Chalk Color | Chalk Volume | Product Weight |
|----------|-------------|--------------|----------------|
| CB25B | Blue | 2.5 lbs | 2.750 lb |
| CB25R | Red | 2.5 lbs | 2.750 lb |

Atlas[®] Chrome Clad[®] / Nubian[®] Double Duty

- Heavy-duty frame designed for years of rugged use
- All frames include a grounding strap
- Plumb bob must be ordered separately



| Cat. No. | Bob Cut | Blade Width | Blade Length | Blade Style | Product Weight |
|---------------|---------|---------------|--------------|-------------|----------------|
| CN129012SF5N | 590 | 1/2 in | 18 ft | D1 | 1.60 lb |
| CN1290SF590N | 590 | 1/2 in | 25 ft | D1 | 1.60 lb |
| CN1291SF590N | 590 | 1/2 in | 33 ft | D1 | 1.90 lb |
| CN1293SDF590N | 590 | 1/2 in | 50 ft | D2 | 2.20 lb |
| CN1293SF5871N | 5871/2 | 1/2 in | 50 ft | D1 | 2.30 lb |
| CN1293SF590N | 590 | 1/2 in | 50 ft | D1 | 2.20 lb |
| CN1294SF5871N | 5871/2 | 1/2 in | 66 ft | D1 | 2.70 lb |
| CN1294SF590N | 590 | 1/2 in | 66 ft | D1 | 2.60 lb |
| CN1295SF590N | 590 | 1/2 in | 75 ft | D1 | 2.90 lb |
| CN1296SF590N | 590 | 1/2 in | 100 ft | D1 | 3.56 lb |
| CN1290SMEN | 590 | 13 mm, 1/2 in | 8 m, 26 ft | D3 | 1.80 lb |
| CN1293SMEF59N | 590 | 13 mm, 1/2 in | 15 m, 50 ft | D3 | 2.30 lb |
| CN1294SMEF59N | 590 | 13 mm, 1/2 in | 20 m, 66 ft | D3 | 2.60 lb |
| CN1295SME590N | 590 | 13 mm, 1/2 in | 23 m, 75 ft | D3 | 2.88 lb |
| CN1295SMEN | 5871/2 | 13 mm, 1/2 in | 23 m, 75 ft | D3 | 2.70 lb |
| CN1296SMEF59N | 590 | 13 mm, 1/2 in | 30 m, 100 ft | D3 | 3.980 lb |
| CN1298SME590N | 590 | 13 mm, 1/2 in | 38 m, 125 ft | D3 | 4.20 lb |
| | | | | | |

Atlas® Chrome Clad®

- Heavy-duty frame designed for years of rugged use
- All frames include a grounding strap
- Blade counts graduated feet down to 1/8th inches, for instantaneous foot readings
- Plumb bob must be ordered separately



| Cat. No. | Bob Cut | Blade Width | Blade Length | Blade Style | Product Weight |
|---------------|---------|---------------|--------------|-------------|----------------|
| C129012SFN | 590 | 1/2 in | 18 ft | D4 | 1.60 lb |
| C1290SF590N | 590 | 1/2 in | 25 ft | D4 | 1.80 lb |
| C1291SF590N | 590 | 1/2 in | 33 ft | D4 | 1.90 lb |
| C1293SF590N | 590 | 1/2 in | 50 ft | D4 | 2.30 lb |
| C2910MME590N | 590GM | 13 mm, 1/2 in | 10 m, 33 ft | D6 | 1.95 lb |
| C2915MME590N | 590GM | 13 mm, 1/2 in | 15 m, 50 ft | D6 | 2.35 lb |
| C2920MME150MN | 150 mm | 13 mm, 1/2 in | 20 m, 66 ft | D6 | 2.50 lb |
| C2920MME590N | 590GM | 13 mm, 1/2 in | 20 m, 66 ft | D6 | 2.70 lb |
| C2930MME590N | 590GME | 13 mm, 1/2 in | 30 m, 98 ft | D6 | 3.95 lb |

Atlas[®] Nubian[®]

- Heavy-duty frame designed for years of rugged use
- All frames include a grounding strap
- Blade protected by flowed-on epoxy coating
- Ideal for gauging clear oils
- Plumb bob must be ordered separately



| Cat. No. | Bob Cut | Blade Width | Blade Length | Blade Style | Product Weight |
|------------|---------|---------------|--------------|-------------|----------------|
| 1290SF590N | 590 | 1/2 in | 25 ft | D5 | 1.70 lb |
| 1293SF590N | 590 | 1/2 in | 50 ft | D5 | 2.30 lb |
| 1293SM590N | 590 | 13 mm, 1/2 in | 15 m, 49 ft | D7 | 1.90 lb |

Atlas[®] Stainless Steel[®]

- Heavy-duty frame designed for years of rugged use
- All frames include a grounding strap
- Designed for use in highly corrosive solutions
- Stainless steel blade resists corrosion
- Plumb bob must be ordered separately
- Recommended plumb bob: S590N



| Cat. No. | Bob Cut | Blade Width | Blade Length | Blade Style | Product Weight |
|------------|---------|-------------|--------------|-------------|----------------|
| S1291F590N | 590 | 1/2 in | 33 ft | D4 | 1.50 lb |
| S1293F590N | 590 | 1/2 in | 50 ft | D4 | 2.00 lb |

Inage Oil Gauging Plumb Bobs


- For use in heavy oils
- Cylindrical shaped



| Cat. No. | Weight | Description | SAE/Metric | Measuring Range | Material | Length |
|----------|--------|-----------------------|-------------|-------------------------|-----------------|---------|
| 590GN | 20 oz | Cylindrical, Reads Up | SAE | 0 in - 6 in | Brass | 6.75 in |
| 590GMN | 20 oz | Cylindrical, Reads Up | Metric | 0mm - 150mm | Brass | 6.75 in |
| 590GMEN | 20 oz | Cylindrical, Reads Up | SAE/Metric | 0 in - 6 in 0mm - 150mm | Brass | 6.75 in |
| TT590N | 20 oz | Cylindrical | No Markings | No Markings | Brass | 6.75 in |
| S590N | 20 oz | Cylindrical | No Markings | No Markings | Stainless Steel | 6.75 in |

Outage Oil Gauging Plumb Bobs

- Square-shaped solid brass bob
- Eye milled from solid brass block (not removable)
- Zero falls inside top of hook eye
- 3/4"/19mm square, 6"/152mm overall length



| Cat. No. | Weight | Description | SAE/Metric | Measuring Range | Material | Length |
|----------|--------|-------------|------------|-------------------------|----------|--------|
| 58712N | 20 oz | Square | SAE/Metric | 0 in - 6 in 0mm - 150mm | Brass | 6 in |
| T150MMN | 20 oz | Square | Metric | 0mm - 150mm | Brass | 6 in |

Anchor® Replacement Blade

■ Anchor® replacement blade for C213DN



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|----------|-------------|---------------------|-------------|--------------|----------------|
| OC213DN | B5 | C213DN | 3/8 in | 50 ft | 0.60 lb |

Artisan® Replacement Blade

■ Artisan® replacement blade for 120PN



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|----------|-------------|---------------------|-------------|--------------|----------------|
| 0120PN | B12 | 120PN | 3/8 in | 20 ft | 0.30 lb |

■ Atlas® rep

Atlas[®] Stainless Steel Replacement Blades

■ Atlas® replacement blade



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|-------------|-------------|---------------------|-------------|--------------|----------------|
| OS1291F590N | D4 | 1291F590N | 1/2 in | 33 ft | 0.70 lb |
| OS1293F590N | D4 | 1293F590N | 1/2 in | 50 ft | 0.90 lb |

Atlas Chrome Clad® / Nubian® Double Duty Replacement Blades

■ Atlas Chrome Clad® / Nubian® Double Duty replacement blade



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|---------------|-------------|---------------------|---------------|--------------|----------------|
| 0C129012SF59N | D4 | C129012SFN | 1/2 in | 18 ft | 0.50 lb |
| OCN129012SF5N | D1 | CN129012SF5N | 1/2 in | 18 ft | 0.50 lb |
| OCN1290SF590N | D1 | CN1290SF590N | 1/2 in | 25 ft | 0.60 lb |
| OCN1291SF590N | D1 | CN1291SF590N | 1/2 in | 33 ft | 0.80 lb |
| OCN1293SF590N | D1 | CN1293SF590N | 1/2 in | 50 ft | 1.10 lb |
| OCN1294SF590N | D1 | CN1294SF590N | 1/2 in | 66 ft | 1.50 lb |
| OCN1295SF590N | D1 | CN1295SF590N | 1/2 in | 75 ft | 1.70 lb |
| OCN1296SF590N | D1 | CN1296SF590N | 1/2 in | 100 ft | 2.20 lb |
| OCN1293SMEF5N | D3 | CN1293SMEF59N | 13 mm, 1/2 in | 15 m, 50 ft | 1.20 lb |
| OCN1294SMEF5N | D3 | CN1294SMEF5N | 13 mm, 1/2 in | 20 m, 66 ft | 1.60 lb |
| OCN1296SMEF5N | D3 | CN1296SMEF59N | 13 mm, 1/2 in | 38 m, 100 ft | 2.65 lb |

Atlas Chrome Clad® Replacement Blades

■ Atlas Chrome Clad® replacement blade



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|---------------|-------------|---------------------|---------------|--------------|----------------|
| OC1290SF590N | D4 | C1290SF590N | 1/2 in | 25 ft | 0.65 lb |
| OC1291SF590N | D4 | C1291SF590N | 1/2 in | 33 ft | 0.80 lb |
| OC2910MME590N | D6 | C2910MME590N | 13 mm, 1/2 in | 10 m, 33 ft | 0.80 lb |

Atlas Nubian® Replacement Blades

■ Atlas Nubian® replacement blade



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|-------------|-------------|---------------------|-------------|--------------|----------------|
| 01290SF590N | D4 | 1290SF590N | 1/2 in | 25 ft | 0.60 lb |
| 01293SF590N | D4 | 1293SF590N | 1/2 in | 50 ft | 1.00 lb |

Challenge[™] **Replacement Blade**

Challenge™ replacement blade for 261PTH



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|----------|-------------|---------------------|-------------|--------------|----------------|
| 0261PTHN | B11 | 261PTHN | 3/8 in | 33 ft | 0.40 lb |

Super Hi-Way® Nubian® Replacement Blades

- Nominal thickness 0.017"
- Lines have a blank space at each end
- Extra foot before zero graduated right to left to 1/10ths and 1/100ths
- Balance marked every foot except last foot of each 100' length, 100ths

| <u> </u> |
|-------------------------------------|
| < 0 1 2 ₹ 8 9 |
| 4 F |

| Cat. No. | Fits Product Number | Blade Width | Blade Length | Product Weight |
|----------|------------------------------------|-------------|--------------|----------------|
| 09100BN | Super Hi-Way® Nubian® 5/16" x 100' | 5/16 in | 100 ft | 2.20 lb |
| 09200BN | Super Hi-Way® Nubian® 5/16" x 200' | 5/16 in | 200 ft | 3.60 lb |
| 09300BN | Super Hi-Way® Nubian® 5/16" x 300' | 5/16 in | 300 ft | 5.90 lb |
| | | | | |

VLUESSURIES

ACCESSORIES

Derrick Replacement Blades

■ Derrick replacement blade



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|-----------|-------------|---------------------|--------------|--------------|----------------|
| 0C2276DN | E1 | C2276DN | 1/4 in | 100 ft | 1.60 lb |
| OC2276MEN | E2 | C2276MEN | 6 mm, 1/4 in | 30 m, 100 ft | 0.700 |

Home Shop Replacement Blades

Replacement blade



| Cat. No. | Blade Style | Fits Product Number | Blade Width | Blade Length | Product Weight |
|----------|-------------|---------------------|-------------|--------------|----------------|
| 0Y50 | B1 | HW50, 50 | 3/8 in | 50 ft | 0.40 lb |
| 0Y100 | B1 | HW100 | 3/8 in | 100 ft | 0.80 lb |

Western® Replacement Reel

- For 1/4" or 5/16" X 100' lengths of steel tapes only
- \blacksquare Reel is nickel-plated, 2-arm with rollers in each arm for smooth winding
- Oversize drum with long, one-piece winding handle, quick return of line
- 2 arm reel



| Cat. No. | Fits Product Number | Blade Width | Blade Length | Style of Case or Reel | Product Weight |
|----------|------------------------|-------------|--------------|-----------------------|----------------|
| T31100N | Fits 100 ft Tapes Only | 1/4 in | 100 ft | 2 Arm | 1.40 lb |

Engineering and Surveying Replacement Reel

- For 1/2" X 75' Chrome Clad® and gauging tapes
- Reel is nickel-plated, 4-Arm with rollers in each arm for smooth winding
- Oversize drum with long, one-piece winding handle, quick return of line
- 4 arm reel

| Cat. No. | Arms | Fits Product Number | Blade Width | Blade Length | Product Weight |
|----------|------|-------------------------------|-------------|--------------|----------------|
| 9175N | 4 | Chrome Clad and Gauging Tapes | 1/2 in | 75 ft | 1.30 lb |

31 Series Over 100' Length Replacement Reels

- For over 100' lengths
- Chrome 4 arm frame
- Not all replacement parts are sold separately

| Cat. No. | Arms | Blade Width | Blade Length | Product Weight |
|----------|------|-------------|--------------|----------------|
| 31300N | 4 | 1/4 in | 100 ft | 3.10 lb |
| T31200N | 4 | 5/16 in | 200 ft | 3.00 lb |

81 and 91 Series Chrome Clad® and Gauging Tape Replacement Reel

- For 3/8" 10mm and 1/2"/13mm widths Chrome Clad® and gauging tapes
- Chrome 2 arm frame
- Not all replacement parts are sold separately





(TCRESCENT Lufkin

Detachable Hook

- Easily attaches and detaches from standard ring tape line
- Heavily nickel plated, zinc hook
- Serrated face grips firmly and releases easily
- On tapes measuring from outer end of ring, zero falls at inside of hook
- Can be used on lines 3/8 inch/10mm or wider



| Cat. No. | Product Weight |
|----------|----------------|
| 552N | 0.04 lb |

Tape Clamps Handle

- Used for quickly gripping a steel tape at any point
- Applies light or heavy tension
- Clamp is applied and removed by simply operating the handle
- Used properly, it will not damage a tape in any way
- Made of chrome-plated zinc alloy



| Cat. No. | Product Weight | |
|----------|----------------|--|
| T584N | 0.20 lb | |

Tape Tension Handle

- Use with steel tapes for extremely accurate measurements
- Rustproof brass construction with black-filled etched graduations
- Graduations begin at snap end, easy-to-read when tension is applied
- Capacity of 30 lb x 1/2 lb and 25kg x 25kg



| Cat. No. | Product Weight |
|----------|----------------|
| 586N | 0.60 lb |



(T CRESCENT **NICHOLSON**

File Terminology

COARSENESS




















- Work to be accomplished, roughing or finishing, will determine type of teeth and coarseness for each application
- Most American pattern files are available with 3 grades of cut: bastard-cut, second-cut and smooth-cut
- Swiss pattern files are available in seven cuts: No. 00, 0,1, 2, 3, 4, and 6
- The degree of coarseness is greater in longer files, but differences between bastard, second and smooth are proportionate

LENGTH



- Length is measured exclusive of tang, from point to heel, unless specified otherwise
- Desired stroke length, type of material and size will determine lenath reauired


SHAPE

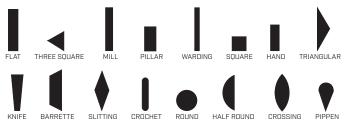


• Area to be filed will determine specific cross-section (round, square, flat, etc.) to be used

Kinds of Teeth


SINGLE-CUT



- Single set of parallel, diagonal rows of teeth
- Single-cut files are often used with light pressure to produce a smooth surface finish or to put a keen edge on knives, shears or saws



DOUBLE-CUT




- 2 sets of diagonal rows of teeth
- Second set of teeth cut in opposite diagonal direction and on top of the first set
- First set of teeth is known as the overcut, second is upcut
- Upcut is finer than overcut
- Double-cut file is used with heavier pressure than the single-cut and removes material faster from the workpiece

RASP-CUT




- Series of individual teeth formed by a single-pointed tool
- Produces a rough cut that is used primarily on wood, hooves. aluminum and lead

MAGICUT®



 Single cut teeth divided by angular serrations into shorter cutting edges, which free themselves readily from chips and perform roughing and smoothing at the same time


CURVED-CUT



- Teeth arranged in curved contours across the file face
- Curved-cut file is normally used in automotive body shops for smoothing body panels

Fit and Finish in a Single Tool

These American pattern flat files have a bastard cut on one side for aggressive material removal and a smooth cut on the other for more precise finishing. Rough fitting and fine finishing capabilities are combined in a single file to help get jobs done faster.

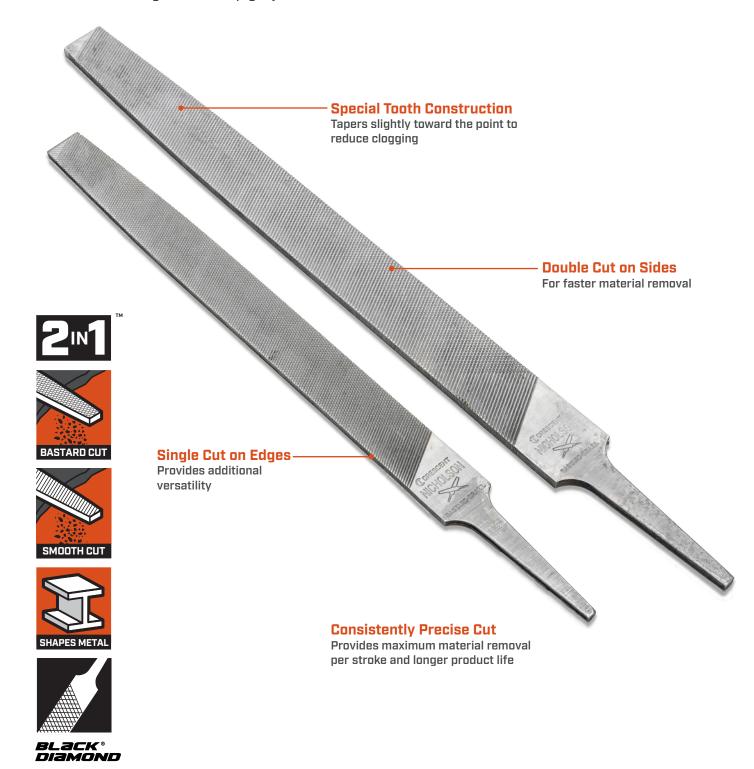

(T CRESCENT NICHOLSON°

2 Pc. 2-in-1 Bastard & Smooth Cut

- American pattern flat file with bastard cut on one side and smooth cut on the other side, providing aggressive material removal and precise finishing capability in one file
- Rectangular cross-section with slight taper towards point
- Double cut on sides and single cut on edges
- Precision engineered to provide maximum material removal per stroke and long product life
- Special tooth construction reduces clogging



| Included Storage | Product Weight |
|------------------------|---|
| None | 0.640 lb |
| Description | |
| 8" 2-in-1 Bastard and | Smooth Cut File |
| 10" 2-in-1 Bastard and | d Smooth Cut File |
| | None Description 8" 2-in-1 Bastard and |

2-in-1 Bastard and Smooth Cut Files

- American pattern flat file with bastard cut on one side and smooth cut on the other, providing aggressive material removal and precise finishing capability in one file
- Rectangular in cross section and tapers slightly towards the point
- Double cut on sides and single cut on edges
- Precision engineered to provide maximum material removal per stroke and long product life
- Special tooth construction reduces clogging



9 Pc. Ergonomic File Set

Set includes must-have files, which cover a wide range of usage scenarios

Product Weight

- Includes four 10" bastard cut files
- Two 6" tapered files
- Two 8" bastard cut files
- One 12" mill bastard cut file
- Rubber-coated ergonomic handles for better comfort and control
- Includes pouch for storage and organization

Included Storage



| 22030HNNN | Pouch | 4.35 lb | | -(•) |
|-----------|------------------------|-----------------------------------|----------|---|
| Cat. No. | Description | | Cat. No. | Description |
| 21701HNN | 10" Mill Bastard Cut I | File with Ergonomic Handle | 21868HNN | 10" Flat Bastard Cut File with Ergonomic Handle |
| 21842HNN | 12" Mill Bastard Cut I | File with Ergonomic Handle | 21729HNN | 6" Slim Taper File with Ergonomic Handle |
| - | 8" Half Round Bastar | d Cut File with Ergonomic Handle | - | 6" Doubel Extra Slim Taper File with Ergonomic Handle |
| - | 10" Half Round Basta | rd Cut File with Ergonomic Handle | - | 10" Round Bastard Cut File with Ergonomic Handle |
| 21748HNN | 8" Flat Bastard Cut Fi | le with Ergonomic Handle | | |

3 Pc. 6" Ergonomic File Set

- Set includes half round bastard, mill bastard, round bastard files
- Rubber-coated ergonomic handles for better comfort and control
- Bastard coarseness grade for a rough finish
- Basic selection for home and professional use
- Includes pouch for storage and organization

Cat. No.

Cat. No.

22015HNNN

21687HNN

| poucirior storage and | organizacion | |
|----------------------------|-------------------------------|------------|
| Included Storage | Product Weight | */ |
| Pouch | 0.70 lb | -(• |
| Description | | |
| 6" Half Round Bastard Co | ut File with Ergonomic Handle | |
| 6" Round Bastard Cut wi | th Ergonomic Handle | |
| 6" Mill Bastard Cut File v | vith Ergonomic Handle | |

(TCRESCENT NICHOLSON)

5 Pc. Crescent Nicholson Anniversary Set

- Industrial assortment includes 6-in. slim taper, 8-in. round, 8-in. single-cut mill, 8-in. half-round, and 10-in. double-cut flat flies
- Ergonomic co-molded handles with anniversary design provide a comfortable grip, enhancing productivity and reducing hand fatigue
- Tempered steel construction offers strength and durability for long-lasting performance
- Must-have files to cover a broad range of uses
- Includes pouch for storage and organization





9 Pc. Maintenance File Set

- An all-encompassing 9-piece maintenance file set
- Includes five different 10" files
- Includes three 8" files and rasps
- Includes one 6" slim taper file
- For home and professional use
- Includes pouch for storage and organization

| Cat. No. | Included Storage | Product Weight | | | |
|----------|-------------------------|----------------|----------|-----------------------------|--------|
| 22030NNN | Pouch | 3.45 lb | | _ | -(•) |
| Cat. No. | Description | | Cat. No. | Description | |
| 03633NN | 8" Flat Smooth Cut File | е | 21854 | 10" Round Bastard Cut File | |
| 03732NN | 10" Flat Smooth Cut Fi | ile | 21842NN | 12" Mill Bastard Cut File | |
| 21868NN | 10" Flat Bastard Cut Fi | ile | 21866NN | 6" Slim Taper File | |
| 21857LN | 8" Half Round Bastard | Cut File | 21860NNN | 8" 4-in-Hand® Rasp and File | |
| 21858N | 10" Half Round Bastar | d Cut File | | | |
| | | | | | |



- File shapes and coarseness grades offer a range of shop uses for added versatility
- Complete set conveniently fits into rugged compact pouch for easy transport and storage
- Bastard-cut files are perfect for rough work and aggressive material removal
- Must-have file set for every machinist
- Includes pouch for storage and organization

| 100 |
|-----|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| 4 |

| 22025NNN | Pouch 3.35 I | | -() | |
|----------|---------------------------------|----------|-----------------------------|--|
| Cat. No. | Description | Cat. No. | Description | |
| 21868NN | 10" Flat Bastard Cut File | 21854 | 10" Round Bastard Cut File | |
| 03732NN | 10" Flat Smooth Cut File | T21455 | 8" Flie Cleaner | |
| 21858N | 10" Half Round Bastard Cut File | 14255MN | 7" Slim Taper File | |
| 21839NN | 10" Mill Bastard Cut File | T13196 | 10" Square Bastard Cut File | |

5 Pc. General Purpose Set

- Set includes 10" half round bastard, 8" mill bastard, 8" mill smooth, 10" mill bastard, 6" slim taper files
- General-purpose files for a range of home and professional uses
- Bastard-cut files are perfect for rough work and aggressive material removal
- Slim taper files are excellent for precision work

Included Storage

Includes pouch for storage and organization




| 22040NNN | Pouch | 1.80 lb | | -(► |
|----------|---------------------------|---------|----------|---------------------------|
| Cat. No. | Description | | Cat. No. | Description |
| 21858N | 10" Half Round Bastard Cu | ut File | 21839NN | 10" Mill Bastard Cut File |
| 21832NN | 8" Mill Bastard Cut File | | 21866NN | 6" Slim Taper File |
| - | 8" Mill Smooth Cut File | | | |

(TCRESCENT NICHOLSON)

3 Pc. File Pack

- For home and professional use
- Pack contains files for every purpose
- 6"/150mm slim taper file
- 6"/150mm round file
- 6"/150mm mill bastard file
- Includes pouch for storage and organization

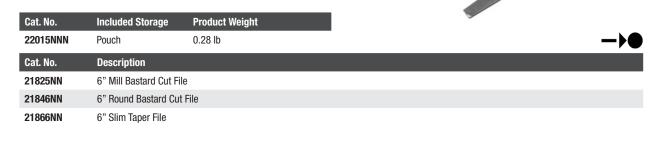

6 Pc. American Pattern File Assortment

- 4" file set includes warding, half round, round, hand, square, and slim taper files
- Must-have files to cover a broad range of uses
- All files come with handles
- Kit comes in bastard-cut only
- Includes pouch for storage and organization

| Cat. No. | Included Storage | Product Weight | | |
|----------|--------------------------|--------------------------|----------|---|
| 22062NNN | Pouch | 0.40 lb | | -(•) |
| Cat. No. | Description | | Cat. No. | Description |
| - | 4" Warding Bastard Cut I | File with Wood Handle | - | 4" Hand Bastard Cut File with Wood Handle |
| - | 4" Half Round Bastard C | ut File with Wood Handle | - | 4" Square Bastard Cut File with Wood Handle |
| - | 4" Round Bastard Cut Fil | le with Wood Handle | - | 4" Slim Taper Bastard Cut File with Wood Handle |
| | | | | |

10" General Purpose Laminate File with Handle

- American pattern, bastard file
- Single-cut

248

- For use on plastic, aluminum, or laminate
- Rapid metal removal
- Results in fine to medium finish



| Cat. No. | File Length | File Cut | Handled | Handle No. | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|------------|----------------|-----------------|
| 21690NN | 10 in | Bastard | Yes | #5 | 0.650 lb | 6 |

Flat Files

- American pattern files available in bastard, second, and smooth cut in a variety of the most common lengths
- Ideal for machinists, machinery builders, ship and engine builders
- Can be used effectively by repairmen and others who require rapid removal of metal
- Rectangular cross section allows you to smooth and sharpen straight surfaces,
 while slight taper in width towards the file's point creates ease of access in slots
- Double-cut on the sides for rough filing and single-cut on the edges for a smooth finish

| | | | | | | _ |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
| 03367NN | 4 in | Bastard | No | Boxed | 0.03 lb | 12 |
| 21867NN | 6 in | Bastard | No | Carded | 0.15 lb | 3 |
| 03467NN | 6 in | Bastard | No | Boxed | 0.10 lb | 12 |
| 21862NN | 8 in | Bastard | No | Carded | 0.20 lb | 3 |
| 03566NN | 8 in | Bastard | No | Boxed | 0.25 lb | 12 |
| 21748HNN | 8 in | Bastard | Yes | Carded | 0.35 lb | 6 |
| 21868NN | 10 in | Bastard | No | Carded | 0.48 lb | 3 |
| 03665NN | 10 in | Bastard | No | Boxed | 0.45 lb | 6 |
| 21868HNN | 10 in | Bastard | Yes | Carded | 0.60 lb | 3 |
| 03762NN | 12 in | Bastard | No | Carded | 0.75 lb | 6 |
| 03764NN | 12 in | Bastard | No | Boxed | 0.352 | 6 |
| 03863NN | 14 in | Bastard | No | Boxed | 0.545 | 6 |
| 03980NN | 16 in | Bastard | No | Boxed | 2.00 lb | 6 |
| 03500NN | 6 in | Second | No | Boxed | 0.10 lb | 12 |
| 03599NN | 8 in | Second | No | Boxed | 0.25 lb | 12 |
| 03698NN | 10 in | Second | No | Boxed | 0.45 lb | 6 |
| 03797NN | 12 in | Second | No | Boxed | 0.80 lb | 6 |
| 03434NN | 4 in | Smooth | No | Boxed | 0.03 lb | 12 |
| 03534NN | 6 in | Smooth | No | Carded | 0.15 lb | 6 |
| 03533NN | 6 in | Smooth | No | Boxed | 0.10 lb | 12 |
| 03633NN | 8 in | Smooth | No | Carded | 0.25 lb | 6 |
| 03632NN | 8 in | Smooth | No | Boxed | 0.25 lb | 12 |
| 03732NN | 10 in | Smooth | No | Carded | 0.60 lb | 6 |
| 03731NN | 10 in | Smooth | No | Boxed | 0.45 lb | 6 |
| 03830NN | 12 in | Smooth | No | Boxed | 0.80 lb | 6 |
| 03929NN | 14 in | Smooth | No | Boxed | 0.545 | 6 |

(T CRESCENT NICHOLSON°

Type "A" Flat Aluminum Files

- American pattern flat file specifically designed to file aluminum
- Special tooth construction eliminates clinging and clogging when filing aluminum
- Flat shape fits into restricted areas and removes material quickly
- All sizes have same number of teeth per inch
- Obtain a smooth finish by using a shearing cut in a leftward motion



Half Round Files

- American pattern files available in bastard, second, and smooth cut in a variety of the most common lengths
- Perfect for use on concave, convex, and flat surfaces
- Two-sided file is rounded on 1 side and flat on the other, so you can round out holes with ease
- Rounded sides of pipeliner files are single-cut, allowing you to quickly remove material from the work piece
- This pipeliner file from Crescent Nicholson features single-cut sides

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 04695N | 4 in | Bastard | No | Boxed | 0.06 lb | 12 |
| 21881N | 6 in | Bastard | No | Carded | 0.15 lb | 6 |
| 04795N | 6 in | Bastard | No | Boxed | 0.13 lb | 12 |
| 21857LN | 8 in | Bastard | No | Carded | 0.31 lb | 3 |
| 21745N | 8 in | Bastard | Yes | Carded | 0.40 lb | 6 |
| 04896N | 8 in | Bastard | No | Boxed | 0.27 lb | 12 |
| 21858N | 10 in | Bastard | No | Carded | 0.56 lb | 6 |
| 21746HN | 10 in | Bastard | Yes | Carded | 0.69 lb | 6 |
| 04995N | 10 in | Bastard | No | Boxed | 0.55 lb | 6 |
| 05090N | 12 in | Bastard | No | Carded | 0.90 lb | 6 |
| 05094N | 12 in | Bastard | No | Boxed | 0.85 lb | 6 |
| 05190N | 14 in | Bastard | No | Boxed | 1.50 lb | 6 |
| 05194N | 14 in | Bastard | No | Boxed | 1.25 lb | 6 |
| 05307N | 16 in | Bastard | No | Boxed | 1.99 lb | 6 |
| 04729N | 4 in | Second | No | Boxed | 0.06 lb | 12 |
| 04828N | 6 in | Second | No | Boxed | 0.10 lb | 12 |
| 04927N | 8 in | Second | No | Boxed | 0.25 lb | 12 |
| 05026N | 10 in | Second | No | Boxed | 0.49 lb | 6 |
| 05125N | 12 in | Second | No | Boxed | 0.90 lb | 6 |
| 04762N | 4 in | Smooth | No | Boxed | 0.06 lb | 12 |
| 04861N | 6 in | Smooth | No | Boxed | 0.10 lb | 12 |
| | | | | | | |

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 04960N | 8 in | Smooth | No | Boxed | 0.25 lb | 12 |
| 05059N | 10 in | Smooth | No | Boxed | 0.53 lb | 6 |
| 05158N | 12 in | Smooth | No | Boxed | 0.95 lb | 6 |
| 05258N | 14 in | Smooth | No | Boxed | 1.28 lb | 6 |

Hand Files

- American pattern files available in bastard, second, and smooth cut in a variety of the most common lengths
- Rectangular shape for efficient filing across a large surface
- Double-cut abrasive surfaces perfect for widening holes or smoothing a plane
- One safe edge to protect finished surfaces or your hands during use
- Coarseness matches flat files of the same length

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 05738N | 6 in | Bastard | No | Boxed | 0.15 lb | 12 |
| 05853N | 8 in | Bastard | No | Boxed | 0.30 lb | 12 |
| 05968N | 10 in | Bastard | No | Boxed | 0.50 lb | 6 |
| 06084N | 12 in | Bastard | No | Boxed | 0.95 lb | 6 |
| 05771N | 6 in | Second | No | Boxed | 0.15 lb | 12 |
| 05886N | 8 in | Second | No | Boxed | 0.30 lb | 12 |
| 06001NN | 10 in | Second | No | Boxed | 0.50 lb | 6 |
| 06117N | 12 in | Second | No | Boxed | 0.95 lb | 6 |
| 05804N | 6 in | Smooth | No | Boxed | 0.15 lb | 12 |
| 05919N | 8 in | Smooth | No | Boxed | 0.30 lb | 12 |
| 06034N | 10 in | Smooth | No | Boxed | 0.50 lb | 6 |
| 06150N | 12 in | Smooth | No | Boxed | 0.95 lb | 6 |

Handy Files

- American pattern handy file
- Single cut on one side allows you to sharpen and smooth metal surfaces
- Double cut on the reverse side can be used for general filing and rapid stock removal
- Rectangular shape lets you smooth and sharpen straight surfaces
- File features one cut edge and one safe edge to let you work in tight spaces

| Cat. No. | File Length | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|---------|-----------|----------------|-----------------|
| 06601NN | 8 in | No | Carded | 0.37 lb | 6 |
| 06602NN | 8 in | No | Boxed | 0.60 lb | 12 |
| 06686NN | 12 in | No | Boxed | 0.90 lb | 6 |





(TCRESCENT NICHOLSON

Knife Files

- American pattern files available in bastard, second, and smooth cut in a variety of the most common lengths
- Used primarily by tool and diemakers who need to file acute angles
- Triangular shape is perfect for trade work and filing interior angles
- Double-cut on sides for faster material removal; single-cut on the sharp edge
- All Crescent Nicholson knife-shape files are supplied with safe backs

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 06711N | 4 in | Bastard | No | Boxed | 0.03 lb | 12 |
| 06804N | 6 in | Bastard | No | Boxed | 0.10 lb | 12 |
| 06898N | 8 in | Bastard | No | Boxed | 0.15 lb | 12 |
| 06992N | 10 in | Bastard | No | Boxed | 0.35 lb | 6 |
| 07085N | 12 in | Bastard | No | Boxed | 0.70 lb | 6 |
| 06836N | 6 in | Second | No | Boxed | 0.10 lb | 12 |
| 06930N | 8 in | Second | No | Boxed | 0.15 lb | 12 |
| 06773N | 4 in | Smooth | No | Boxed | 0.03 lb | 12 |
| 06867N | 6 in | Smooth | No | Boxed | 0.10 lb | 12 |
| 06961N | 8 in | Smooth | No | Boxed | 0.15 lb | 12 |
| 07054N | 10 in | Smooth | No | Boxed | 0.35 lb | 12 |

Long Angle Lathe Files

- American pattern flat long-angle lathe file
- Rapid, free-cutting files designed for lathe filing on wood or soft metals
- Rectangular shape is reliably strong and has a wide surface for faster filing
- Single-cut pattern is perfect for smoothing edges or precision work
- Safe edges designed to protect lathe and file when working close to the edges of a work piece
- Made on flat file blanks with a bastard-cut style that is coarser to the touch
- Cuts faster than regular mill files and leaves a smoother finish

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 07835N | 8 in | Fine | No | Boxed | 0.30 lb | 12 |
| 07842N | 10 in | Fine | No | Boxed | 0.50 lb | 6 |
| 07851N | 12 in | Fine | No | Boxed | 0.93 lb | 6 |
| 07863N | 14 in | Fine | No | Boxed | 1.40 lb | 6 |
| 07657NN | 10 in | Bastard | No | Boxed | 0.45 lb | 6 |
| 07688NN | 12 in | Bastard | No | Boxed | 0.80 lb | 6 |
| 07719NN | 14 in | Bastard | No | Boxed | 1.10 lb | 6 |



- American pattern flat Magicut® file
- All-purpose file is ideal for machinists and removes stock rapidly for a fast and efficient application
- Rectangular shape allows you to smooth and sharpen straight surfaces
- Narrow chip breaker pattern created by steep, angled serrations helps quickly remove material and provides a smoother finish
- Slight taper in width towards the file's point creates ease of access in slots



| Cat. No. | File Length | File Cut | Handled | Product Weight | Shelf Pack Qty. |
|----------|-------------|------------|---------|----------------|-----------------|
| 07894NN | 8 in | Single Cut | No | 0.25 lb | 12 |
| 07917NN | 10 in | Single Cut | No | 0.45 lb | 6 |
| 07941NN | 12 in | Single Cut | No | 0.80 lb | 6 |

Mill Files

- American pattern files available in bastard, second, and smooth cut in a variety of the most common lengths
- Sharpens mill or circular saws
- Great for draw filing and finishing metals
- Rectangular shape lets you smooth and sharpen straight surfaces
- Single-cut texture on the sides and edges for applying a smooth finish
- Two square edges allow you to make grooves fixed at the same width as the file
- All sizes taper slightly in width to improve access in slots



| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|-----------|-----------|----------------|-----------------|
| 08243NN | 4 in | Bastard | No | Boxed | 0.03 lb | 12 |
| 21825NN | 6 in | Bastard | No | Carded | 0.18 lb | 6 |
| 08354NN | 6 in | Bastard | No | Boxed | 0.10 lb | 12 |
| 21687HNN | 6 in | Bastard | Ergonomic | Carded | 0.25 lb | 6 |
| 21687NN | 6 in | Bastard | Yes | Carded | 0.25 lb | 6 |
| 21832NN | 8 in | Bastard | No | Carded | 0.25 lb | 6 |
| 08497NN | 8 in | Bastard | No | Boxed | 0.25 lb | 12 |
| 21694HNN | 8 in | Bastard | Ergonomic | Carded | 0.35 lb | 6 |
| 21694NN | 8 in | Bastard | Yes | Carded | 0.35 lb | 6 |
| 21839NN | 10 in | Bastard | No | Carded | 0.60 lb | 6 |
| 08642NN | 10 in | Bastard | No | Boxed | 0.45 lb | 6 |
| 21701HNN | 10 in | Bastard | Ergonomic | Carded | 0.60 lb | 6 |
| 21701NN | 10 in | Bastard | Yes | Carded | 0.60 lb | 6 |
| 21842NN | 12 in | Bastard | No | Carded | 0.72 lb | 3 |
| 08737NN | 12 in | Bastard | No | Boxed | 0.80 lb | 6 |
| 21842HNN | 12 in | Bastard | Ergonomic | Boxed | 0.80 lb | - |
| 08832NN | 14 in | Bastard | No | Boxed | 1.10 lb | 6 |
| | | | | | | |

Continued on next page

(T CRESCENT **NICHOLSON**

Mill Files Continued from previous page

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 08385NN | 6 in | Second | No | Boxed | 0.10 lb | 12 |
| 08529NN | 8 in | Second | No | Boxed | 0.25 lb | 12 |
| 08673NN | 10 in | Second | No | Boxed | 0.45 lb | 12 |
| 08768NN | 12 in | Second | No | Boxed | 0.80 lb | 6 |
| 08306NN | 4 in | Smooth | No | Boxed | 0.03 lb | 12 |
| 08416NN | 6 in | Smooth | No | Boxed | 0.10 lb | 12 |
| 08560NN | 8 in | Smooth | No | Boxed | 0.25 lb | 12 |
| 08704NN | 10 in | Smooth | No | Boxed | 0.45 lb | 12 |
| 08799NN | 12 in | Smooth | No | Boxed | 0.80 lb | 6 |
| 08894NN | 14 in | Smooth | No | Boxed | 1.10 lb | 6 |

1 and 2 Round Edge Mill Files

- Round edges are used where rounding gullets are preferred compared to sharp corners or squared gullets
- Rectangular shape
- Single cut on sides and edges

254

Same as regular mill file except it has one round edge



| Cat. No. | File Length | File Cut | Handled | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|----------------|-----------------|
| 09179N | 10 in | Bastard | No | 0.45 lb | 12 |


Axe Sharpening Files

- American pattern axe sharpening file
- Ideal file for sharpening axes and miscellaneous garden tools
- Rectangular shape has a large surface area for faster filing work
- Double-cut on one side for rough filing and single-cut on the opposite for finishing
- This file has two safe edges to work easily in restricted confines without damage

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|-----------------|---------|-----------|----------------|-----------------|
| 06706NN | 8 in | Double / Single | No | Carded | 0.50 lb | 6 |
| 06704NN | 8 in | Double / Single | No | Boxed | 0.45 lb | 12 |

Square Files

- Used on slots, keyways and general surface filing
- Double cut for faster material removal
- Tapered slightly towards point
- Larger sizes frequently preferred to corresponding flat files due to a heavier section and four filing surfaces

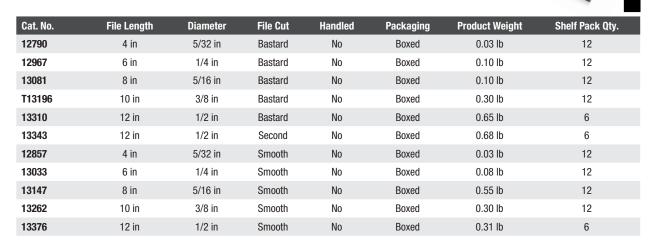

Round Files

- American pattern files available in bastard, second, and smooth cut in a variety of the most common lengths
- Can be used to file circular openings or concave surfaces
- Single cut construction provides light removal of material and slightly
- Slight taper in width towards the file's point creates ease of access in slots
- Round file can work in areas that a rectangular file cannot
- Safe point on round files helps reduce the risk of injury

| Ook No | File Length | Diameter | File Out | Hamillad | Dookowina | Dundrigh Waimbi | Chalf Book Ohy |
|----------|-------------|----------|----------|----------|-----------|-----------------|-----------------|
| Cat. No. | File Length | Diameter | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
| 11526NN | 4 in | 1/8 in | Bastard | No | Boxed | 0.02 lb | 12 |
| 21846NN | 6 in | 1/4 in | Bastard | No | Carded | 0.12 lb | 3 |
| 21708NN | 6 in | 1/4 in | Bastard | Yes | Carded | 0.21 lb | 6 |
| 21853 | 8 in | 5/16 in | Bastard | No | Carded | 0.16 lb | 6 |
| 11904 | 8 in | 5/16 in | Bastard | No | Boxed | 0.14 lb | 12 |
| 21715 | 8 in | 5/16 in | Bastard | Yes | Carded | 0.26 lb | 6 |
| 21854 | 10 in | 3/8 in | Bastard | No | Carded | 0.30 lb | 6 |
| 12019 | 10 in | 3/8 in | Bastard | No | Boxed | 0.25 lb | 12 |
| 12131 | 12 in | 1/2 in | Bastard | No | Carded | 0.60 lb | 6 |
| 12134 | 12 in | 1/2 in | Bastard | No | Boxed | 0.55 lb | 6 |
| 12248 | 14 in | 5/8 in | Bastard | No | Boxed | 1.00 lb | 6 |

Continued on next page

Round Files Continued from previous page

CRESCENT NICHOLSON°

| Cat. No. | File Length | Diameter | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. | |
|----------|-------------|----------|----------|---------|-----------|----------------|-----------------|--|
| 11748NN | 6 in | 1/4 in | Second | No | Boxed | 0.05 lb | 12 | |
| 11936 | 8 in | 5/16 in | Second | No | Boxed | 0.10 lb | 12 | |
| 12051 | 10 in | 3/8 in | Second | No | Boxed | 0.25 lb | 12 | |
| 12166 | 12 in | 1/2 in | Second | No | Boxed | 0.55 lb | 6 | |
| 11592NNN | 4 in | 1/8 in | Smooth | No | Boxed | 0.02 lb | 12 | |
| 11969 | 8 in | 5/16 in | Smooth | No | Boxed | 0.20 lb | 12 | |
| 12084 | 10 in | 3/8 in | Smooth | No | Boxed | 0.30 lb | 12 | |
| 12199 | 12 in | 1/2 in | Smooth | No | Boxed | 0.55 lb | 6 | |
| | | | | | | | | |

Round Chain Saw Files

- American pattern file with knurl cut
- Tighten tension on chain to firmly support cutters when filing
- Place file against beveled cutting surface of teeth 20° to 45° with saw
- File from inside to outside of cutter
- Sharpen all left-hand cutters on one side of chain and move to the other side and file all the right-hand cutters
- Check depth gauge height every 2 or 3 sharpenings
- Height between cutting teeth and depth gauge is between .020" to .030"
- Follow the manufacturer's specifications for safe usage



| | | | | | | | • |
|----------|-------------|----------|-----------|---------|-----------|----------------|-----------------|
| Cat. No. | File Length | Diameter | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
| T01590 | 6 in | 1/8 in | Knurl Cut | No | Carded | 0.08 lb | 6 |
| 02144N | 6 in | 1/8 in | Knurl Cut | No | Boxed | 0.02 lb | 6 |
| T01630 | 6 in | 5/32 in | Knurl Cut | No | Carded | 0.08 lb | 3 |
| T01891 | 8 in | 5/32 in | Knurl Cut | No | Carded | 0.09 lb | 6 |
| T01765 | 8 in | 3/16 in | Knurl Cut | No | Carded | 0.09 lb | 6 |
| 23861 | 8 in | 13/64 in | Knurl Cut | No | Carded | 0.18 lb | 6 |
| T01888 | 8 in | 7/32 in | Knurl Cut | No | Carded | 0.10 lb | 3 |
| 02230B | 8 in | 7/32 in | Knurl Cut | No | Bagged | 0.10 lb | 4 |
| T01974 | 8 in | 1/4 in | Knurl Cut | No | Carded | 0.14 lb | 6 |
| 02147N | 8 in | 1/4 in | Knurl Cut | No | Boxed | 0.10 lb | 1 |

Depth Gauge Chain Saw File

- American pattern depth gauge chain saw file
- Rectangular shape
- Single cut, safe edges
- Used for filing and maintaining proper depth gauge clearance

| Product Weight | Shelf Pack Qty. |
|----------------|-----------------|

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 02244NN | 8 in | Single | No | Boxed | 0.08 lb | 12 |

Taper Files

- American pattern taper file
- Expertly made to effectively file saws with 60° angle teeth
- Triangular shape makes accessing tight internal angles and squaring corners easy
- Single cut construction is ideal for sharpening tools, finish filing, and draw filing
- Edges set and cut for filing gullets between saw teeth
- Tapers slightly towards the point
- Select the right file when filing handsaws for long-lasting performance

| Cat. No. | File Length | Style | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|-------------------|----------|-----------|-----------|----------------|-----------------|
| 13807MN | 6 in | Regular | Single | No | Boxed | 0.15 lb | 12 |
| 13875MN | 8 in | Regular | Single | No | Boxed | 0.35 lb | 12 |
| 13930NN | 10 in | Regular | Single | No | Boxed | 0.60 lb | 12 |
| 14106MN | 4 in | Slim | Single | No | Boxed | 0.03 lb | 12 |
| 14162MN | 5 in | Slim | Single | No | Boxed | 0.05 lb | 12 |
| 21866NN | 6 in | Slim | Single | No | Carded | 0.11 lb | 6 |
| 14224MN | 6 in | Slim | Single | No | Boxed | 0.09 lb | 12 |
| 21729NN | 6 in | Slim | Single | Yes | Carded | 0.20 lb | 6 |
| 21729HNN | 6 in | Slim | Single | Ergonomic | Carded | 1.00 lb | 6 |
| 14255MN | 7 in | Slim | Single | No | Boxed | 0.14 lb | 12 |
| 14290MN | 8 in | Slim | Single | No | Boxed | 0.30 lb | 12 |
| 14341NNN | 10 in | Slim | Single | No | Boxed | 0.410 lb | 12 |
| 14547MN | 4 in | Extra Slim | Single | No | Boxed | 0.02 lb | 12 |
| 14599MN | 5 in | Extra Slim | Single | No | Boxed | 0.03 lb | 12 |
| 21873NN | 6 in | Extra Slim | Single | No | Carded | 0.05 lb | 6 |
| 14665MN | 6 in | Extra Slim | Single | No | Boxed | 0.05 lb | 12 |
| 21736NN | 6 in | Extra Slim | Single | Yes | Carded | 0.19 lb | 6 |
| 14729NN | 8 in | Extra Slim | Single | No | Boxed | 0.20 lb | 12 |
| 14942MN | 4 in | Double Extra Slim | Single | No | Boxed | 0.02 lb | 12 |
| 14992MN | 5 in | Double Extra Slim | Single | No | Boxed | 0.03 lb | 12 |
| 21874NN | 6 in | Double Extra Slim | Single | No | Carded | 0.05 lb | 6 |
| 15024NN | 6 in | Double Extra Slim | Single | No | Boxed | 0.05 lb | 12 |
| 21743NN | 6 in | Double Extra Slim | Single | Yes | Carded | 0.20 lb | 6 |
| 15056NN | 7 in | Double Extra Slim | Single | No | Boxed | 0.04 lb | 12 |

(T CRESCENT NICHOLSON°

Tungsten Point Files

- American pattern file with tungsten-tipped teeth
- Ideal for dressing distributor points that are tipped with tungsten or iridium
- Thin rectangular shape fits into restricted areas without compromising on strength
- Double-cut pattern is perfect for rougher work or removing material quickly
- Chisel-shaped teeth enter slots or gaps easily
- Handle-shaped tang can fit into larger cushioned handles or be a handle by itself

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 02375NN | 5.25 in | Double | No | Carded | 0.03 lb | 6 |
| 02373NN | 5.25 in | Double | No | Boxed | 0.05 lb | 12 |

Warding Files

- American pattern files available in bastard, second, and smooth cut in a variety of the most common lengths
- Used primarily by locksmiths in repairing and filing the ward notches in keys
- Thin rectangular shape lets you work on fine objects or in small areas
- Double-cut on sides and single-cut on edges for more versatile performance
- Also suited for use in narrow spaces where other files won't fit

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 16507NN | 4 in | Bastard | No | Boxed | 0.03 lb | 12 |
| 16663NN | 6 in | Bastard | No | Boxed | 0.10 lb | 12 |
| 16761NN | 8 in | Bastard | No | Boxed | 0.15 lb | 12 |
| 16540N | 4 in | Second | No | Boxed | 0.03 lb | 12 |
| 16573NN | 4 in | Smooth | No | Boxed | 0.03 lb | 12 |
| 16729NN | 6 in | Smooth | No | Boxed | 0.10 lb | 6 |
| 16827NN | 8 in | Smooth | No | Boxed | 0.15 lb | 12 |

Coarse Half Round Wood File

American pattern wood file

258

- Half round shape for use on concave, convex, and flat surfaces
- Used primarily in woodworking
- Specially coarse teeth for use on wood
- Made in same section and size as half round file

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 17505N | 10 in | Coarse | No | Boxed | 0.50 lb | 6 |

Three Square Files

- American pattern triangle file available in bastard and smooth cut styles
- Double-cut pattern is perfect for rougher work or removing material quickly
- For use by machinists for filing internal angles
- Filing taps and gutters
- More acute than right angles, clearing out square corners
- Sharp corners are slightly set and cut
- Cut to the point




| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 15925NNN | 6 in | Bastard | No | Boxed | 0.17 lb | 12 |
| 16036NNN | 8 in | Bastard | No | Boxed | 0.40 lb | 12 |
| 16147NNN | 10 in | Bastard | No | Boxed | 0.55 lb | 12 |
| 15991NNN | 6 in | Smooth | No | Boxed | 0.17 lb | 12 |
| 16102NNN | 8 in | Smooth | No | Boxed | 0.35 lb | 12 |

3 Pc. 4-in-1 Combination Chisel and **Wood Rasp Set**

- Half round wood rasp for enlarging round surfaces
- Flat wood rasp for rapid stock removal
- Edge teeth for removal of materials in confined areas
- High quality steel chisel for cutting and scraping
- Co-molded handle for comfort and grip
- Striking cap

| Cat. No. | Included Storage | Product Weight | |
|-------------|------------------|----------------|--|
| WCSET3CMNNN | None | 1.8 lb | |
| Cat. No. | Description | | |
| | | | |







AMERICAN PATTERN RASPS

4-in-1 Hand Rasps

- 4-in-1 combination file and wood rasp
- Includes two types of rasps and two files
- Half-round wood rasp for enlarging round surfaces
- Flat wood rasp for rapid stock removal
- Both half-round and flat files for smoothing curved surfaces
- Precision engineered to provide maximum material removal per stroke and long product life
- Machine milled for precise material removal
- Reduces the number of files needed on a job

| Cat. No. | Rasp Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|--------------------|---------|-----------|----------------|-----------------|
| 18924NNN | 8 in | Rasp/Single/Double | No | Boxed | 0.35 lb | 6 |
| 21860NNN | 8 in | Rasp/Single/Double | No | Carded | 0.36 lb | 6 |
| 21870NNN | 9 in | Rasp/Single/Double | No | Carded | 0.40 lb | 6 |

Pattern Maker's Cabinet Rasps

- American pattern rasp
- Used primarily by cabinetmakers and other woodworking trade professionals
- Versatile half-round shape lets you work on a variety of projects
- Narrow-pattern cut edges let you file material in narrow, restricted areas
- Used when a smooth wood finish is required
- Tanged design integrates with any Crescent Nicholson adjustable handle

| Cat. No. | Rasp Length | File Cut | Code No. | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|----------|---------|-----------|----------------|-----------------|
| 18846N | 10 in | Second | 49 | No | Boxed | 0.25 lb | 6 |
| 18861N | 10 in | Smooth | 50 | No | Boxed | 0.25 lb | 6 |

Cabinet Rasps

- American pattern rasp
- Used by cabinetmakers and woodworkers
- Half-round shape for use on concave, convex, and flat surfaces
- Single cut on edges for applying a smooth finish
- Curved side of rasps similar to half-round rasps but has larger radius
- Tanged design integrates with any Crescent Nicholson adjustable handle

| Cat. No. | Rasp Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------------|---------|-----------|----------------|-----------------|
| 17615N | 8 in | Regular Second | No | Boxed | 0.23 lb | 12 |
| 17683N | 10 in | Regular Second | No | Boxed | 0.40 lb | 6 |
| 17751N | 12 in | Regular Second | No | Boxed | 0.80 lb | 6 |

Wood Rasps

- American pattern rasp with a bastard cut
- Used by woodworkers, hobbyists and plumbers
- I Ideal for use removing stock from wood or soft metal materials
- Used in places for which their shapes make them particularly effective
- Tanged design integrates with any Crescent Nicholson adjustable handle



| Cat. No. | Rasp Length | File Shape | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|------------|----------|---------|-----------|----------------|-----------------|
| 19136N | 10 in | Flat | Bastard | No | Boxed | 0.65 lb | 6 |
| 21878N | 8 in | Half Round | Bastard | No | Carded | 0.30 lb | 6 |
| 19394N | 8 in | Half Round | Bastard | No | Boxed | 0.25 lb | 12 |
| 19427N | 10 in | Half Round | Bastard | No | Boxed | 0.65 lb | 6 |
| 19460N | 12 in | Half Round | Bastard | No | Boxed | 0.90 lb | 6 |
| 19493N | 14 in | Half Round | Bastard | No | Boxed | 1.40 lb | 6 |
| 19875 | 10 in | Round | Bastard | No | Boxed | 0.26 lb | 12 |

Farrier's Handy Rasp

- Farrier's American pattern rasp
- Rectangular shape
- Single cut on edges
- Comfortable cushion grip at point and handle
- Rasp teeth on one side, file teeth on other
- Has 6 teeth per row vs. 5 teeth per row on standard horse rasps



| Cat. No. | Rasp Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|-------------|---------|-----------|----------------|-----------------|
| 18155N | 14 in | Rasp/Double | Yes | Boxed | 1.45 lb | 5 |

Magicut® Plater's Special Horse Rasp

- American pattern rasp
- Maximum cutting surface design gives rapid removal and smoother finish
- Single cut on edges for applying a smooth finish
- Opposite side has the unique Crescent Nicholson Magicut® file pattern
- Narrow chip breakers created by steep angled serrations reduce clogging
- Rectangular shape lets you smooth and sharpen straight surfaces
- Faster cutting than conventional horse rasps
- Has 6 teeth per row vs. 5 teeth per row on standard horse rasps
- Tanged design integrates with any Crescent Nicholson adjustable handle



| Cat. No. | Rasp Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|---------------|---------|-----------|----------------|-----------------|
| 18130N | 14 in | Rasp/Magicut® | No | Boxed | 1.35 lb | 6 |

(T CRESCENT NICHOLSON®

Horse Rasp

- American pattern rasp
- Rectangular shape provides maximum surface area for faster filing
- Single cut on edges for applying a smooth finish
- Tanged design integrates with any Crescent Nicholson adjustable handle
- Features rasp teeth down one side and file teeth down the other side
- Heavy-duty design is thicker than Plater's Special and is ideal for hot rasping

| Cat. No. | Rasp Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|-------------|---------|-----------|----------------|-----------------|
| 18057N | 14 in | Rasp/Double | No | Boxed | 2.15 lb | 6 |

Horse Rasps with Plain 1/2 File

- American pattern rasp and plain 1/2 file on opposite ends of the same tool
- Designed for shoeing racehorses, riding horses, and ponies
- Double-ended with rasp teeth on one side and file teeth on the other
- Teeth on both sides of the body for variable use
- Rectangular shape is easy to transport and provides maximum filing surface



| Cat. No. | Rasp Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|-------------------|---------|-----------|----------------|-----------------|
| 17873N | 12 in | Rasp Punch/Coarse | No | Boxed | 1.10 lb | 6 |
| 17903N | 14 in | Rasp Punch/Coarse | No | Boxed | 1.60 lb | 6 |
| 17910N | 14 in | Rasp Punch/Coarse | No | Pouch | 1.60 lb | 6 |

6 Pc. Hobby File Set

- 5-1/2" Swiss pattern files
- Selection of six miniature files with a fine cut for intricate work
- One each of equaling, half round, flat, round, three square, square files
- Ideal for handicrafts and hobbies
- Double-cut teeth for rapid removal of material
- Includes pouch for storage and organization



| out no | moladou otorago | . roudot troigint | |
|----------|-----------------|-------------------|----------|
| 42030L | Pouch | 0.010 lb | |
| 0.1.11 | December 1 | | 0-4 N- |
| Cat. No. | Description | | Cat. No. |

| 2030L | Pouch | 0.010 lb | | | (= |
|----------|-----------------------------|----------|----------|-----------------------------------|-----------|
| Cat. No. | Description | | Cat. No. | Description | |
| | 5-1/2" Fine Cut Equaling Fi | le | - | 5-1/2" Fine Cut Round File | |
| | 5-1/2" Fine Cut Half Round | File | - | 5-1/2" Fine Cut Three Square File | |
| | 5-1/2" Fine Cut Flat File | | - | 5-1/2" Fine Cut Square File | |

X.F. Swiss Pattern Needle File **Assortment Sets**

- Swiss pattern files, made to more exacting measurements than American pattern files
- Used primarily by jewelers, diemakers, watchmakers, fine toolmakers, and other trades professionals
- Knurled handles give you an easy and secure grip on the files
- Excellent for precise and intricate work
- Assortment of 12 file shapes with different cuts
- Assortment also includes files for smoothing joints or making markings

Product Weight

Includes pouch for storage and organization

Included Storage

4" 0 Cut Flat File

4" 0 Cut Knife File

| 37029 | Pouch | 0.10 lb | | | Crossing |
|----------|------------------------|---------|----------|--------------------------|----------|
| Cat. No. | Description | | Cat. No. | Description | |
| - | Joint File | | - | 4" 0 Cut Half Round File | |
| - | Marking File | | - | 4" 0 Cut Round File | |
| - | 4" 0 Cut Barrette File | | - | 4" 0 Cut Slitting File | |
| - | 4" 0 Cut Equaling File | | - | 4" 0 Cut Square File | |
| | | | | | |

4" 0 Cut Three Square File

4" 0 Cut Crossing File

| Cat. No. | Included Storage | Product Weight | | | |
|----------|----------------------------|----------------|----------|--------------------------------|--|
| 37392 | Pouch | 0.20 lb | | | |
| Cat. No. | Description | | Cat. No. | Description | |
| - | Joint File | | - | 5-1/2" 0 Cut Half Round File | |
| - | Marking File | | - | 5-1/2" 0 Cut Round File | |
| - | 5-1/2" 0 Cut Barrette File | | - | 5-1/2" 0 Cut Slitting File | |
| - | 5-1/2" 0 Cut Equaling File | | - | 5-1/2" 0 Cut Square File | |
| - | 5-1/2" 0 Cut Flat File | | - | 5-1/2" 0 Cut Three Square File | |
| - | 5-1/2" 0 Cut Knife File | | - | 5-1/2" O Cut Crossing File | |

| 37398 | Pouch | 0.20 lb | _ | |
|----------|----------------------------|---------|----------|--------------------------------|
| Cat. No. | Description | | Cat. No. | Description |
| - | Joint File | | - | 5-1/2" 2 Cut Half Round File |
| - | Marking File | | - | 5-1/2" 2 Cut Round File |
| - | 5-1/2" 2 Cut Barrette File | | - | 5-1/2" 2 Cut Slitting File |
| - | 5-1/2" 2 Cut Equaling File | | - | 5-1/2" 2 Cut Square File |
| - | 5-1/2" 2 Cut Flat File | | - | 5-1/2" 2 Cut Three Square File |
| - | 5-1/2" 2 Cut Knife File | | - | 5-1/2" 2 Cut Crossing File |

| Cat. No. | Included Storage | Product Weight | | |
|----------|------------------|----------------|----------|------------------------------|
| 37404 | Pouch | 0.20 lb | | |
| Cat. No. | Description | | Cat. No. | Description |
| - | Joint File | | - | 5-1/2" 4 Cut Half Round File |
| - | Marking File | | - | 5-1/2" 4 Cut Round File |
| | | | | |

Continued on next page

CRESCENT NICHOLSON°

X.F.® Swiss Pattern Needle File Assortment Sets Continued from previous page

| Cat. No. | Description | Cat. No. | Description |
|----------|----------------------------|----------|--------------------------------|
| - | 5-1/2" 4 Cut Barrette File | - | 5-1/2" 4 Cut Slitting File |
| - | 5-1/2" 4 Cut Equaling File | - | 5-1/2" 4 Cut Square File |
| - | 5-1/2" 4 Cut Flat File | - | 5-1/2" 4 Cut Three Square File |
| - | 5-1/2" 4 Cut Knife File | - | 5-1/2" 4 Cut Crossing File |

| Cat. No. | Included Storage | Product Weight | |
|----------|------------------|----------------|--|
| 37767 | Pouch | 0.25 lb | |
| | | | |

| Cat. No. | Description | Cat. No. | Description |
|----------|----------------------------|----------|--------------------------------|
| - | Joint File | - | 6-1/4" 4 Cut Half Round File |
| - | Marking File | - | 6-1/4" 4 Cut Round File |
| - | 6-1/4" 4 Cut Barrette File | - | 6-1/4" 4 Cut Slitting File |
| - | 6-1/4" 4 Cut Equaling File | - | 6-1/4" 4 Cut Square File |
| - | 6-1/4" 4 Cut Flat File | - | 6-1/4" 4 Cut Three Square File |
| - | 6-1/4" 4 Cut Knife File | - | 6-1/4" 4 Cut Crossing File |

| Cat. No. | Included Storage | Product Weight | | | |
|----------|------------------------|----------------|----------|----------------------------|--|
| T37035 | Pouch | 0.13 lb | | | |
| Cat. No. | Description | | Cat. No. | Description | |
| - | Joint File | | - | 4" 2 Cut Half Round File | |
| - | Marking File | | - | 4" 2 Cut Round File | |
| - | 4" 2 Cut Barrette File | | - | 4" 2 Cut Slitting File | |
| - | 4" 2 Cut Equaling File | | - | 4" 2 Cut Square File | |
| - | 4" 2 Cut Flat File | | - | 4" 2 Cut Three Square File | |
| _ | 4" 2 Cut Knife File | | _ | 4" 2 Cut Crossing File | |


| Cat. No. | Included Storage | Product Weight |
|----------|------------------|----------------|
| T37755 | Pouch | 0.25 lb |

| Cat. No. | Description | Cat. No. | Description | |
|----------|----------------------------|----------|--------------------------------|--|
| - | Joint File | - | 6-1/4" 0 Cut Half Round File | |
| - | Marking File | - | 6-1/4" 0 Cut Round File | |
| - | 6-1/4" 0 Cut Barrette File | - | 6-1/4" 0 Cut Slitting File | |
| - | 6-1/4" 0 Cut Equaling File | - | 6-1/4" 0 Cut Square File | |
| - | 6-1/4" 0 Cut Flat File | - | 6-1/4" 0 Cut Three Square File | |
| - | 6-1/4" 0 Cut Knife File | - | 6-1/4" 0 Cut Crossing File | |
| | | | | |

| Cat. No. | Included Storage | Product Weight | | |
|----------|----------------------------|----------------|----------|--------------------------------|
| T37761 | Pouch | 0.25 lb | | |
| Cat. No. | Description | | Cat. No. | Description |
| - | Joint File | | - | 6-1/4" 2 Cut Half Round File |
| - | Marking File | | - | 6-1/4" 2 Cut Round File |
| - | 6-1/4" 2 Cut Barrette File | | - | 6-1/4" 2 Cut Slitting File |
| - | 6-1/4" 2 Cut Equaling File | | - | 6-1/4" 2 Cut Square File |
| - | 6-1/4" 2 Cut Flat File | | - | 6-1/4" 2 Cut Three Square File |
| - | 6-1/4" 2 Cut Knife File | | - | 6-1/4" 2 Cut Crossing File |

Needle Files

- Swiss pattern files, made to more exacting measurements than American pattern files
- Used primarily by jewelers, diemakers, watchmakers, and other fine toolmakers
- Knurled handle for a better grip in hand or in a handle
- Excellent for precise and intricate work

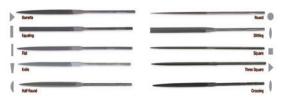



| Cat. No. | File Length | Style | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|------------|----------|---------|-----------|----------------|-----------------|
| T37277 | 4 in | Barrette | 0 | No | Boxed | 0.01 lb | 12 |
| 37640 | 5.5 in | Barrette | 0 | No | Boxed | 0.01 lb | 12 |
| 37752 | 5.5 in | Barrette | 0 | No | Boxed | 0.01 lb | 12 |
| T38003 | 6.25 in | Barrette | 0 | No | Boxed | 0.02 lb | 12 |
| T38115 | 6.25 in | Barrette | 0 | No | Boxed | 0.02 lb | 12 |
| T37647 | 5.5 in | Barrette | 2 | No | Boxed | 0.01 lb | 12 |
| T38010 | 6.25 in | Barrette | 2 | No | Boxed | 0.02 lb | 12 |
| 37500 | 5.5 in | Crossing | 0 | No | Boxed | 0.01 lb | 12 |
| 37863 | 6.25 in | Crossing | 0 | No | Boxed | 0.02 lb | 12 |
| T37870 | 6.25 in | Crossing | 2 | No | Boxed | 0.03 lb | 12 |
| 37612 | 5.5 in | Equaling | 0 | No | Boxed | 0.01 lb | 12 |
| T37249 | 4 in | Equaling | 0 | No | Boxed | 0.01 lb | 12 |
| T37975 | 6.25 in | Equaling | 0 | No | Boxed | 0.02 lb | 12 |
| 37256 | 4 in | Equaling | 2 | No | Boxed | 0.01 lb | 12 |
| 37619 | 5.5 in | Equaling | 2 | No | Boxed | 0.01 lb | 12 |
| T37982 | 6.25 in | Equaling | 2 | No | Boxed | 0.02 lb | 12 |
| T37626 | 5.5 in | Equaling | 4 | No | Boxed | 0.01 lb | 12 |
| T37989 | 6.25 in | Equaling | 4 | No | Boxed | 0.02 lb | 12 |
| T37996 | 6.25 in | Equaling | 6 | No | Boxed | 0.02 lb | 12 |
| T37109 | 4 in | Flat | 0 | No | Boxed | 0.02 lb | 12 |
| T37472 | 5.5 in | Flat | 0 | No | Boxed | 0.01 lb | 12 |
| T37835 | 6.25 in | Flat | 0 | No | Boxed | 0.02 lb | 12 |
| 37116 | 4 in | Flat | 2 | No | Boxed | 0.02 lb | 12 |
| 37842 | 6.25 in | Flat | 2 | No | Boxed | 0.02 lb | 12 |
| T37479 | 5.5 in | Flat | 2 | No | Boxed | 0.01 lb | 12 |
| 37486 | 5.5 in | Flat | 4 | No | Boxed | 0.01 lb | 12 |
| 37849 | 6.25 in | Flat | 4 | No | Boxed | 0.02 lb | 12 |
| 37081 | 4 in | Half Round | 0 | No | Boxed | 0.10 lb | 12 |
| T37444 | 5.5 in | Half Round | 0 | No | Boxed | 0.01 lb | 12 |
| T37807 | 6.25 in | Half Round | 0 | No | Boxed | 0.02 lb | 12 |
| T37088 | 4 in | Half Round | 2 | No | Boxed | 0.02 lb | 12 |
| T37451 | 5.5 in | Half Round | 2 | No | Boxed | 0.02 lb | 12 |
| T37814 | 6.25 in | Half Round | 2 | No | Boxed | 0.02 lb | 12 |
| T37458 | 5.5 in | Half Round | 4 | No | Boxed | 0.01 lb | 12 |
| T37821 | 6.25 in | Half Round | 4 | No | Boxed | 0.02 lb | 12 |
| 37828 | 6.25 in | Half Round | 6 | No | Boxed | 0.02 lb | 12 |
| 37891 | 6.25 in | Knife | 0 | No | Boxed | 0.02 lb | 12 |
| | | | | | | | |

Needle Files Continued from previous page

| Cat. No. | File Length | Style | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|--------------|----------|---------|-----------|----------------|-----------------|
| T37165 | 4 in | Knife | 0 | No | Boxed | 0.01 lb | 12 |
| 37898 | 6.25 in | Knife | 2 | No | Boxed | 0.02 lb | 12 |
| T37172 | 4 in | Knife | 2 | No | Boxed | 0.01 lb | 12 |
| 37416 | 5.5 in | Round | 0 | No | Boxed | 0.01 lb | 12 |
| 37779 | 6.25 in | Round | 0 | No | Boxed | 0.01 lb | 12 |
| T37053 | 4 in | Round | 0 | No | Boxed | 0.02 lb | 12 |
| 37060 | 4 in | Round | 2 | No | Boxed | 0.02 lb | 12 |
| T37423 | 5.5 in | Round | 2 | No | Boxed | 0.01 lb | 12 |
| T37786 | 6.25 in | Round | 2 | No | Boxed | 0.02 lb | 12 |
| 37430 | 5.5 in | Round | 4 | No | Boxed | 0.01 lb | 12 |
| 37793 | 6.25 in | Round | 4 | No | Boxed | 0.02 lb | 12 |
| T37800 | 6.25 in | Round | 6 | No | Boxed | 0.02 lb | 12 |
| 38059 | 6.25 in | Slitting | 0 | No | Boxed | 0.02 lb | 12 |
| T37703 | 5.5 in | Slitting | 2 | No | Boxed | 0.02 lb | 12 |
| T37193 | 4 in | Square | 0 | No | Boxed | 0.01 lb | 12 |
| T37556 | 5.5 in | Square | 0 | No | Boxed | 0.01 lb | 12 |
| T37919 | 6.25 in | Square | 0 | No | Boxed | 0.02 lb | 12 |
| 37200 | 4 in | Square | 2 | No | Boxed | 0.01 lb | 12 |
| 37926 | 6.25 in | Square | 2 | No | Boxed | 0.02 lb | 12 |
| T37563 | 5.5 in | Square | 2 | No | Boxed | 0.01 lb | 12 |
| 37947 | 6.25 in | Three Square | 0 | No | Boxed | 0.02 lb | 12 |
| T37221 | 4 in | Three Square | 0 | No | Boxed | 0.01 lb | 12 |
| T37584 | 5.5 in | Three Square | 0 | No | Boxed | 0.01 lb | 12 |
| 37228 | 4 in | Three Square | 2 | No | Boxed | 0.01 lb | 12 |
| 37591 | 5.5 in | Three Square | 2 | No | Boxed | 0.01 lb | 12 |
| T37954 | 6.25 in | Three Square | 2 | No | Boxed | 0.02 lb | 12 |
| T37598 | 5.5 in | Three Square | 4 | No | Boxed | 0.02 lb | 12 |
| T37961 | 6.25 in | Three Square | 4 | No | Boxed | 0.02 lb | 12 |

Silversmith's Rifflers

- 7-1/2" silversmith's riffler
- Made to more exacting measurements than American pattern files
- Made in approximately 7 1/8"/180mm lengths only
- Most often used for deburring, wood working, and sculpting
- Ideal for fine work



| | | | | | | | • |
|----------|-------------|-------|----------|---------|-----------|----------------|-----------------|
| Cat. No. | File Length | Style | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
| 41018 | 7.5 in | 3 | 2 | No | Boxed | 0.07 lb | 12 |
| T41096 | 7.5 in | 10 | 0 | No | Boxed | 0.05 lb | 12 |
| 41102 | 7.5 in | 10 | 2 | No | Boxed | 0.06 lb | 12 |

Die Sinker's Rifflers

- Made to more exacting measurements than American pattern files
- Used by tool and die makers, jewelers, model makers and home craftsman
- Made in approximately 6-1/2" length
- Each riffler identified by number



| | | | | | | | | 110 |
|----------|-------------|------------|-------|----------|---------|-----------|----------------|-----------------|
| Cat. No. | File Length | File Shape | Style | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
| 36018N | 6.5 in | Knife | 5 | 2 | No | Boxed | 0.02 lb | 12 |
| T35976 | 6.5 in | Round | 1 | 0 | No | Boxed | 0.02 lb | 12 |
| T35982 | 6.5 in | Round | 1 | 2 | No | Boxed | 0.02 lb | 12 |
| T36054 | 6.5 in | Half Round | 7 | 2 | No | Boxed | 0.02 lb | 12 |

Pillar Files

- Made to more exacting measurements than American pattern files
- Rectangular shape
- Double cut on two sides only
- Safe edges
- Tapered in thickness



| State No. File Early Style File Early Halded Packaging Product Weight Stell Pack Qty. 39855N 4 in Regular 0 No Boxed 0.04 lb 12 39861N 4 in Regular 2 No Boxed 0.04 lb 12 39881N 4 in Regular 4 No Boxed 0.04 lb 12 39893N 6 in Regular 0 No Boxed 0.10 lb 12 39999N 6 in Regular 0 No Boxed 0.10 lb 12 3991N 6 in Regular 1 No Boxed 0.10 lb 12 3991N 6 in Regular 2 No Boxed 0.10 lb 12 3992N 6 in Regular 4 No Boxed 0.10 lb 12 3992N 6 in Regular 0 No Boxed 0.23 lb 12 3992N | Cat No. | File Length | Chulo | File Cut | Handlad | Dookoging | Droduct Weight | Chalf Dook Ohy |
|--|----------|-------------|--------------|----------|---------|-----------|----------------|-----------------|
| 39861N 4 in Regular 0 No Boxed 0.04 lb 12 39873N 4 in Regular 2 No Boxed 0.04 lb 12 39881N 4 in Regular 4 No Boxed 0.04 lb 12 39893N 6 in Regular 0 No Boxed 0.10 lb 12 39995N 6 in Regular 1 No Boxed 0.10 lb 12 3991N 6 in Regular 2 No Boxed 0.10 lb 12 3991N 6 in Regular 4 No Boxed 0.10 lb 12 3992N 6 in Regular 0 No Boxed 0.23 lb 12 3993N 8 in Regular 0 No Boxed 0.23 lb 12 3994N 8 in Regular 0 No Boxed 0.45 lb 6 39971N 10 in Regular | Cat. No. | File Length | Style | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
| 39873N 4 in Regular 2 No Boxed 0.04 lb 12 39881N 4 in Regular 4 No Boxed 0.04 lb 12 39893N 6 in Regular 00 No Boxed 0.10 lb 12 39989N 6 in Regular 0 No Boxed 0.10 lb 12 3991N 6 in Regular 1 No Boxed 0.10 lb 12 3992N 6 in Regular 2 No Boxed 0.10 lb 12 3992N 6 in Regular 0 No Boxed 0.23 lb 12 3993SN 8 in Regular 0 No Boxed 0.23 lb 12 3994TN 8 in Regular 0 No Boxed 0.45 lb 6 3997IN 10 in Regular 0 No Boxed 0.45 lb 6 40076N 6 in Narrow <th>39855N</th> <th>4 in</th> <th>Regular</th> <th>00</th> <th>No</th> <th>Boxed</th> <th>0.04 lb</th> <th>12</th> | 39855N | 4 in | Regular | 00 | No | Boxed | 0.04 lb | 12 |
| 39881N 4 in Regular 4 No Boxed 0.04 lb 12 39893N 6 in Regular 00 No Boxed 0.10 lb 12 39899N 6 in Regular 0 No Boxed 0.10 lb 12 39905N 6 in Regular 1 No Boxed 0.10 lb 12 39911N 6 in Regular 2 No Boxed 0.10 lb 12 3992N 6 in Regular 4 No Boxed 0.10 lb 12 3992N 6 in Regular 00 No Boxed 0.23 lb 12 39935N 8 in Regular 0 No Boxed 0.23 lb 12 39947N 8 in Regular 0 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.45 lb 6 39992N 12 in Regular | 39861N | 4 in | Regular | 0 | No | Boxed | 0.04 lb | 12 |
| 39893N 6 in Regular 00 No Boxed 0.10 lb 12 39899N 6 in Regular 0 No Boxed 0.10 lb 12 39905N 6 in Regular 1 No Boxed 0.10 lb 12 39911N 6 in Regular 2 No Boxed 0.10 lb 12 39923N 6 in Regular 4 No Boxed 0.10 lb 12 39929N 6 in Regular 00 No Boxed 0.23 lb 12 39935N 8 in Regular 0 No Boxed 0.23 lb 12 39947N 8 in Regular 2 No Boxed 0.23 lb 12 39965N 10 in Regular 0 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.74 lb 6 39992N 12 in Regu | 39873N | 4 in | Regular | 2 | No | Boxed | 0.04 lb | 12 |
| 39899N 6 in Regular 0 No Boxed 0.10 lb 12 39905N 6 in Regular 1 No Boxed 0.10 lb 12 39911N 6 in Regular 2 No Boxed 0.10 lb 12 39923N 6 in Regular 4 No Boxed 0.10 lb 12 39929N 6 in Regular 00 No Boxed 0.23 lb 12 39935N 8 in Regular 0 No Boxed 0.23 lb 12 39947N 8 in Regular 0 No Boxed 0.23 lb 12 39965N 10 in Regular 0 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow< | 39881N | 4 in | Regular | 4 | No | Boxed | 0.04 lb | 12 |
| 39905N 6 in Regular 1 No Boxed 0.10 lb 12 39911N 6 in Regular 2 No Boxed 0.10 lb 12 39923N 6 in Regular 4 No Boxed 0.10 lb 12 39929N 6 in Regular 00 No Boxed 0.23 lb 12 39935N 8 in Regular 0 No Boxed 0.23 lb 12 39947N 8 in Regular 2 No Boxed 0.23 lb 12 39965N 10 in Regular 0 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.45 lb 6 39992N 12 in Regular 00 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow | 39893N | 6 in | Regular | 00 | No | Boxed | 0.10 lb | 12 |
| 39911N 6 in Regular 2 No Boxed 0.10 lb 12 39923N 6 in Regular 4 No Boxed 0.10 lb 12 39929N 6 in Regular 00 No Boxed 0.23 lb 12 39935N 8 in Regular 0 No Boxed 0.23 lb 12 39947N 8 in Regular 2 No Boxed 0.23 lb 12 39947N 10 in Regular 0 No Boxed 0.23 lb 12 39965N 10 in Regular 0 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.74 lb 6 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40082N 6 in Narrow </th <th>39899N</th> <th>6 in</th> <th>Regular</th> <th>0</th> <th>No</th> <th>Boxed</th> <th>0.10 lb</th> <th>12</th> | 39899N | 6 in | Regular | 0 | No | Boxed | 0.10 lb | 12 |
| 39923N 6 in Regular 4 No Boxed 0.10 lb 12 39929N 6 in Regular 00 No Boxed 0.23 lb 12 39935N 8 in Regular 0 No Boxed 0.23 lb 12 39947N 8 in Regular 2 No Boxed 0.23 lb 12 39965N 10 in Regular 0 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.45 lb 6 39992N 12 in Regular 00 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40222N 4 in Extra Narrow 2 No Boxed 0.05 lb 12 40248N 6 in Ex | 39905N | 6 in | Regular | 1 | No | Boxed | 0.10 lb | 12 |
| 39929N 6 in Regular 00 No Boxed 0.23 lb 12 39935N 8 in Regular 0 No Boxed 0.23 lb 12 39947N 8 in Regular 2 No Boxed 0.23 lb 12 39965N 10 in Regular 00 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.45 lb 6 39992N 12 in Regular 00 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40088N 6 in Narrow 2 No Boxed 0.02 lb 12 40242N 4 in Extra Narrow 2 No Boxed 0.05 lb 12 40248N 6 in Ex | 39911N | 6 in | Regular | 2 | No | Boxed | 0.10 lb | 12 |
| 39935N 8 in Regular 0 No Boxed 0.23 lb 12 39947N 8 in Regular 2 No Boxed 0.23 lb 12 39965N 10 in Regular 00 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.45 lb 6 39992N 12 in Regular 00 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40088N 6 in Narrow 2 No Boxed 0.02 lb 12 40222N 4 in Extra Narrow 2 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 39923N | 6 in | Regular | 4 | No | Boxed | 0.10 lb | 12 |
| 39947N 8 in Regular 2 No Boxed 0.23 lb 12 39965N 10 in Regular 00 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.45 lb 6 39992N 12 in Regular 00 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow 2 No Boxed 0.08 lb 12 40222N 4 in Extra Narrow 2 No Boxed 0.02 lb 12 40242N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 39929N | 6 in | Regular | 00 | No | Boxed | 0.23 lb | 12 |
| 39965N 10 in Regular 00 No Boxed 0.45 lb 6 39971N 10 in Regular 0 No Boxed 0.45 lb 6 39992N 12 in Regular 00 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40088N 6 in Narrow 2 No Boxed 0.02 lb 12 40242N 4 in Extra Narrow 2 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 39935N | 8 in | Regular | 0 | No | Boxed | 0.23 lb | 12 |
| 39971N 10 in Regular 0 No Boxed 0.45 lb 6 39992N 12 in Regular 00 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40088N 6 in Narrow 2 No Boxed 0.08 lb 12 40222N 4 in Extra Narrow 2 No Boxed 0.05 lb 12 40242N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 39947N | 8 in | Regular | 2 | No | Boxed | 0.23 lb | 12 |
| 39992N 12 in Regular 00 No Boxed 0.74 lb 6 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40088N 6 in Narrow 2 No Boxed 0.08 lb 12 40222N 4 in Extra Narrow 2 No Boxed 0.02 lb 12 40242N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 39965N | 10 in | Regular | 00 | No | Boxed | 0.45 lb | 6 |
| 40076N 6 in Narrow 0 No Boxed 0.08 lb 12 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40088N 6 in Narrow 2 No Boxed 0.08 lb 12 40222N 4 in Extra Narrow 2 No Boxed 0.02 lb 12 40242N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 39971N | 10 in | Regular | 0 | No | Boxed | 0.45 lb | 6 |
| 40082N 6 in Narrow 1 No Boxed 0.08 lb 12 40088N 6 in Narrow 2 No Boxed 0.08 lb 12 40222N 4 in Extra Narrow 2 No Boxed 0.02 lb 12 40242N 6 in Extra Narrow 00 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 39992N | 12 in | Regular | 00 | No | Boxed | 0.74 lb | 6 |
| 40088N 6 in Narrow 2 No Boxed 0.08 lb 12 40222N 4 in Extra Narrow 2 No Boxed 0.02 lb 12 40242N 6 in Extra Narrow 00 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 40076N | 6 in | Narrow | 0 | No | Boxed | 0.08 lb | 12 |
| 40222N 4 in Extra Narrow 2 No Boxed 0.02 lb 12 40242N 6 in Extra Narrow 00 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 40082N | 6 in | Narrow | 1 | No | Boxed | 0.08 lb | 12 |
| 40242N 6 in Extra Narrow 00 No Boxed 0.05 lb 12 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 40088N | 6 in | Narrow | 2 | No | Boxed | 0.08 lb | 12 |
| 40248N 6 in Extra Narrow 0 No Boxed 0.05 lb 12 | 40222N | 4 in | Extra Narrow | 2 | No | Boxed | 0.02 lb | 12 |
| | 40242N | 6 in | Extra Narrow | 00 | No | Boxed | 0.05 lb | 12 |
| 40254N 6 in Extra Narrow 1 No Boxed 0.05 lb 12 | 40248N | 6 in | Extra Narrow | 0 | No | Boxed | 0.05 lb | 12 |
| | 40254N | 6 in | Extra Narrow | 1 | No | Boxed | 0.05 lb | 12 |

Continued on next page

269

NICHOLSON®

Pillar Files ■ Continued from previous page

| Cat. No. | File Length | Style | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|--------------|----------|---------|-----------|----------------|-----------------|
| 40260N | 6 in | Extra Narrow | 2 | No | Boxed | 0.05 lb | 12 |
| 40281N | 8 in | Extra Narrow | 00 | No | Boxed | 0.11 lb | 12 |
| 40287N | 8 in | Extra Narrow | 0 | No | Boxed | 0.11 lb | 12 |

Equaling Files

- Made to more exacting measurements than American pattern files
- Used by tool and die makers, jewelers, model makers and home craftsman
- Rectangular shape
- Double-cut on sides; single-cut on edges
- Parallel in both width and thickness for their entire length

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 36219N | 4 in | 0 | No | Boxed | 0.05 lb | 12 |
| 36227N | 4 in | 2 | No | Boxed | 0.05 lb | 12 |
| 36253N | 6 in | 2 | No | Boxed | 0.10 lb | 12 |
| 36281N | Q in | 2 | No | Royad | 0.25 lb | 10 |

Warding Files

268

- Made to more exacting measurements than American pattern files
- Used by locksmiths and anywhere a thin file is required
- Width tapers slightly to point
- Thin rectangular shape with a 1:8 thickness-to-width ratio
- Made in much finer cuts, which vary from No. O (coarse) to No. 2 (less coarse)

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 41612N | 6 in | 0 | No | Boxed | 0.10 lb | 12 |
| 41618N | 6 in | 2 | No | Boxed | 0.10 lb | 12 |
| 41636N | 8 in | 0 | No | Boxed | 0.15 lb | 12 |

Barrette Files

- Made to more exacting measurements than American pattern files
- Used by tool and die makers, jewelers, model makers and home craftsman
- Recommended for those who do superfine precision filing
- Double cut, wide flat sides
- Flat on one side, backs are beveled on edges as indicated by cross section
- Back and beveled edges are safe
- 33° angle

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 35025N | 4 in | 00 | No | Boxed | 0.05 lb | 12 |
| 35031N | 4 in | 0 | No | Boxed | 0.05 lb | 12 |
| 35061N | 6 in | 0 | No | Boxed | 0.10 lb | 12 |
| 35073N | 6 in | 2 | No | Boxed | 0.10 lb | 12 |

Hot Die Barrette Files

- X.F.® files, Swiss pattern Barrette file, hot die, cut no. 00
- Made to more exacting measurements than American pattern files
- Used by tool and die makers, jewelers, model makers and home craftsman
- Recommended for superfine precision filing
- Double cut, wide flat sides
- Flat on one side; backs are beveled on edges as indicated by cross-section
- Back and beveled edges are safe
- Approximate point thickness is .040"/1.10mm
- Thinner point than standard Barrette files

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 35108N | 3 in | 00 | No | Boxed | 0.02 lb | 12 |
| 35114N | 4 in | 00 | No | Boxed | 0.03 lb | 12 |

Pippin File

- X.F.® files, Swiss pattern Pippin file, cut no. 2
- Made to more exacting measurements than American pattern files
- Rounded back tapers to sharp edge
- Tapers to point in both width and thickness
- Sometimes called "appleseed" files

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| TT40506 | 6 in | 2 | No | Boxed | 0.08 lb | 12 |

(TCRESCENT NICHOLSON)

Half Round Files

- Made to more exacting measurements than American pattern files
- Used by tool and die makers, jewelers, model makers and home craftsman
- Double cut on both flat and half-round sides
- Tapered in thickness and width to point
- Half round shape
- Made in much finer cuts, which vary from No. 00 (coarsest) to No. 4 (finest)

| Cat. No. | File Length | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|---------|-----------|----------------|-----------------|
| 36521N | 6 in | 0 | No | Boxed | 0.10 lb | 12 |
| 36527N | 6 in | 1 | No | Boxed | 0.10 lb | 12 |
| 36533N | 6 in | 2 | No | Boxed | 0.10 lb | 12 |
| 36539N | 6 in | 3 | No | Boxed | 0.10 lb | 12 |
| 36545N | 6 in | 4 | No | Boxed | 0.10 lb | 12 |
| 36557N | 8 in | 00 | No | Boxed | 0.20 lb | 12 |
| 36563N | 8 in | 0 | No | Boxed | 0.20 lb | 12 |
| 36569N | 8 in | 1 | No | Boxed | 0.20 lb | 12 |

Round Files

- Made to more exacting measurements than American pattern files
- Round shape
- Double cut
- Tapers throughout length to fine point
- Made in much finer cuts, which vary from No. 00 (coarsest) to No. 4 (finest)

| Cat. No. | File Length | Diameter | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------|----------|---------|-----------|----------------|-----------------|
| 40580N | 4 in | 1/8 in | 0 | No | Boxed | 0.01 lb | 12 |
| 40645N | 6 in | 3/16 in | 00 | No | Boxed | 0.04 lb | 12 |
| 40651N | 6 in | 3/16 in | 0 | No | Boxed | 0.04 lb | 12 |
| 40663N | 6 in | 3/16 in | 2 | No | Boxed | 0.04 lb | 12 |
| 40687N | 8 in | 1/4 in | 00 | No | Boxed | 0.08 lb | 12 |
| 40699N | 8 in | 1/4 in | 1 | No | Boxed | 0.08 lb | 12 |
| 40705N | 8 in | 1/4 in | 2 | No | Boxed | 0.08 lb | 12 |
| 40717N | 8 in | 1/4 in | 4 | No | Boxed | 0.08 lb | 12 |

4 Pc. Thread Restoring File Set

- Ideal for restoring damaged or worn external threads on bolts and pipes
- Thread restoring files can be used with 8 different thread sizes, allowing you to find a true fit effortlessly
- 4-piece set offers 4 convenient file sizes for quick and effective application
- Color caps on tubes help identify the file type, so you can select the tool you need with ease
- Type 1 black cap: regular bolt; 11, 12, 13, 14, 16, 18, 20, 24 TPI
- Type 2 red cap: extra-fine/extra-coarse bolt; 9, 10, 12, 16, 20, 27, 28, 32 TPI
- Type 7 green cap: regular pipe; 8, 10, 11 1/2, 14, 16, 18, 24, 27 TPI
- Type 8 blue cap: metric bolt; .80, 1.00, 1.25, 1.50, 1.75, 2.00, 2.50, 3.00 mm
- Includes pouch for storage and organization



| Cat. No. | Included Storage | Product Weight | | |
|----------|--|-----------------------|----------|---|
| T33024 | Pouch | 1.60 lb | | |
| Cat. No. | Description | | Cat. No. | Description |
| T33001 | No. 1 Regular Bolt Thread Restoring File | | - | No. 7 Regular Pipe Restoring File |
| T33007 | No. 2 Extra Fine/Extra Coarse | Thread Restoring File | T33016 | No. 8 Metric Bolt Thread Restoring File |

Thread Restoring Files

- Used to restore damaged or worn external threads on bolts, pipes, etc.
- Each thread restoring file will work with 8 different thread sizes
- Color caps on tubes
- Excellent for bolt, thread, and pipe repairs



| Cat. No. | File Length | Style | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|-------|------------------------|---------|-----------|----------------|-----------------|
| T33001 | 8.44 in | 1 | Regular Bolt | No | Bagged | 0.40 lb | 16 |
| T33007 | 8.44 in | 2 | Ex Fine/Ex Coarse Bolt | No | Bagged | 0.40 lb | 16 |
| T33016 | 8.44 in | 8 | Metric Bolt | No | Bagged | 0.35 lb | 12 |

270 | 271

(TCRESCENT NICHOLSON)

Milled Tooth Bodifiles

- A flexible milled tooth body file with a curved-tooth pattern and no tang
- For smooth, rapid work on cast iron, bronze, lead, babbitt, or aluminum
- A good choice for filing down zinc or plastic stock
- Cuts any steel up to the hardness of annealed tool steel
- Rectangular file for maximum material removal
- Curved-cut pattern that leaves a smooth finish in even hard metals
- Pitch and rake designed to avoid pinning or binding even during heavy use
- 8 teeth per inch; cut: 50-908 standard



| Cat. No. | File Length | Teeth per inch | File Cut | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|----------------|-----------------|---------|-----------|----------------|-----------------|
| 20189NN | 14 in | 8 | 50-908 Standard | No | Boxed | 0.75 lb | 6 |

File Cleaners

- Perfect for general cleaning of file teeth
- Helps remove fillings, dirt, rust, burrs, corrosion, and most buildups of foreign material on metal
- File card and brush unclog teeth on finer cut files, allowing the abrasive to cut properly each time
- Wood base construction offers durability and ease of grip, so you can work confidently over time
- Cleaning files helps with long lasting performance



| Cat. No. | File Length | Description | Handled | Packaging | Product Weight | Shelf Pack Qty. |
|----------|-------------|-------------------------|---------|-----------|----------------|-----------------|
| T21455 | 8 in | 8" Flie Cleaner | Yes | Carded | 0.14 lb | 6 |
| 21458 | 10 in | 10" File Card | Yes | Boxed | 0.30 lb | 10 |
| 21467 | 10 in | 10" File Card and Brush | Yes | Boxed | 0.30 lb | 6 |

Universal Handle

- Handle holds files, reamers, hacksaw blades, and other tools, allowing you to work with a full line of instruments
- Adjustable, steel jaws clamp to the entire length of the tang for a powerful hold in tough working environments
- Large, quick adjusting knob offers fast tool changes, so you can swap files with ease
- Co-molded grip provides comfort and control and the longer, wider handle fits perfectly in your hand for more maneuverability
- Note that this product includes only a handle, and not a filing surface



Ergonomic File Handle

- Comes with two interchangeable cushion inserts
- Designed to fit most popular files
- Sleek black design
- Rubber-coated, ergonomic grip shaped for better comfort and control
- Rear taper, wide middle, and flared neck increases push force



| Cat. No. | Overall Length | Packaging | Product Weight | Shelf Pack Qty. |
|----------|----------------|-----------|----------------|-----------------|
| 21474H | 4.5 in | Carded | 0 15 lh | 6 |

Plastic Screw-on Handles

- Screw-on design fits most popular files
- For professionals or DIYers
- Handle made of strong high-impact material
- Contoured to fit hand for straight, lathe, and draw filing
- Non-slip textured finish for better grip



| Cat. No. | Overall Length | Handle No. | Packaging | Product Weight | Shelf Pack Qty. |
|----------|----------------|------------|-----------|----------------|-----------------|
| T21484 | 3.5 in | PH1 | Carded | 0.10 lb | 12 |
| 21493 | 3.75 in | PH2 | Carded | 0.10 lb | 12 |
| T21502 | 3.75 in | PH3 | Carded | 0.10 lb | 12 |
| 21512 | 4.125 in | PH4 | Carded | 0.15 lb | 12 |
| 21513 | 4.125 in | PH5 | Carded | 0.13 lb | 12 |
| 21514 | 4.75 in | PH6 | Carded | 0.20 lb | 12 |
| 21515 | 5 in | PH7 | Carded | 0.20 lb | 12 |
| 21516 | 5 in | PH8 | Carded | 0.20 lb | 12 |


CRESCENT NICHOLSON°

Metal Ferruled Wooden Handles

- Made from close grain hardwood with wax finish
- Handles have strong nickel-plated metal ferrules
- A selection of handles to fit most popular files
- Non-slip wax finish for better grip
- For professionals or DIYers



| Cat. No. | Overall Length | Handle No. | Packaging | Product Weight | Shelf Pack Qty. |
|----------|----------------|------------|-----------|----------------|-----------------|
| 21470N | 5.75 in | 000 | Boxed | 0.20 lb | 12 |
| 21471N | 5.75 in | 00 | Boxed | 0.19 lb | 12 |
| 21528N | 5.25 in | 0 | Carded | 0.20 lb | 6 |
| 21476N | 5.25 in | 0 | Boxed | 0.10 lb | 12 |
| 21526N | 4.875 in | 1 | Carded | 0.30 lb | 6 |
| 21485N | 4.875 in | 1 | Boxed | 0.11 lb | 12 |
| 21524N | 4.5 in | 2 | Carded | 0.12 lb | 6 |
| 21494N | 4.5 in | 2 | Boxed | 0.10 lb | 12 |
| 21522N | 4.125 in | 3 | Carded | 0.09 lb | 6 |
| 21503N | 4.125 in | 3 | Boxed | 0.08 lb | 12 |
| 21520N | 3.75 in | 4 | Carded | 0.10 lb | 6 |
| 21511N | 3.75 in | 4 | Boxed | 0.05 lb | 12 |
| TG4N | 5 in | RASP | Boxed | 0.15 lb | 12 |

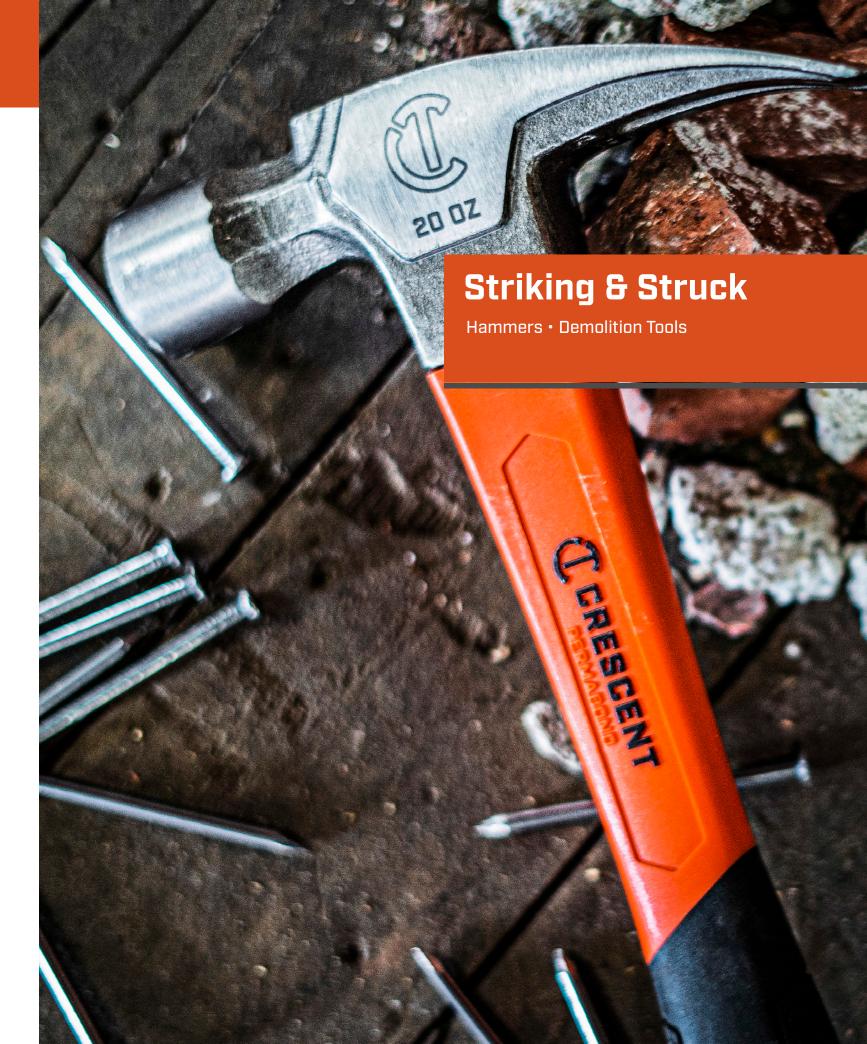

(T CRESCENT®

Claw Hammers with Fiberglass Handles

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Contoured handle to increase comfort and reduce fatigue
- Solid fiberglass handle covered with a molded nylon jacket
- Comfortable cushion-grip handle with an enlarged base for butting materials
- Permabond® construction securely attaches the head to the handle
- Extended steel throat prevents breakage due to overstrike
- Factory balanced for maximum striking power and control
- Convenient magnetic nail starter
- Rip claws designed to pull nails efficiently



| Cat. No. | Head Weight (Oz.) | Head Length | Face Diameter | Face Finish | Handle Length | Overall Length | Product Weight |
|----------|-------------------|-------------|---------------|-------------|---------------|----------------|----------------|
| 11419C | 16 oz | 5.41 in | 1.16 in | Polished | 5.5 in | 13 in | 1.200 lb |
| 11418C | 20 oz | 5.78 in | 1.21 in | Polished | 5.5 in | 13 in | 1.750 lb |

Indexing Claw Hammer with Steel Handle

- Extra-large smooth striking face provides solid contact when driving nails or persuading boards/materials
- Four unique positions for accessing and prying nails and boards with increased leverage
- Magnetic nail starter holds nails securely under the hammer head for quick and easy one hand nail starting
- Handle and claw are forged of carbon steel for maximum strength and finished with clear coat to prevent corrosion and rust
- TPR grip lets user comfortably apply more force when prying and prevents slippage when swinging with force



| Cat. No. | Head Weight (Oz.) | Head Length | Face Diameter | Face Finish | Handle Length | Overall Length | Product Weight |
|----------|-------------------|-------------|---------------|-------------|---------------|----------------|----------------|
| CINDEX18 | 18 oz | 5.25 in | 1.18 in | Polished | 7 in | 14 in | 2.110 lb |

DIYers and tradesmen alike can count on the Dual Claw Wrecking Bar for every home renovation project.



Bull Bar Indexing Decking Removal Tool

- Double fork design provides balanced lift on both sides of the nail for faster, cleaner, lower-effort board removal
- Rugged indexing joint allows for maximum flexibility and increased leverage
- Precision tips designed for fast access between boards and reduced damage for reclaiming materials
- Gripping teeth on forks assist in preventing board slippage
- Patent-pending center nail puller allows better balance and more leverage

| Cat. No. | Tip Length | Tip Width | Overall Length | Product Weight |
|----------|------------|-----------|----------------|----------------|
| DKB446X | 4.528 in | 5.5 in | 44 in | 7.650 lb |

Code Red™ Indexing Flat Renovation Bars

- Head indexes through an arc of over 180° and locks in 15 positions for
- Angled head with nail slot for prying and pulling nails or boards
- Extra-wide prying end prevents damage by spreading the prying force
- Raised heavy-duty striking surface on the head to assist in demolition
- Solid construction withstands wear, pressure, and damage
- Full steel body for increased durability and longer product life
- Heat-treated striking face
- Durable two-tone grip provides comfort, control, and slip prevention
- Always wear protective gear during use

| Cat. No. | Tip Length | Tip Width | Overall Length | Product Weight |
|----------|------------|-----------|----------------|----------------|
| DB18X | 3.74 in | 2.17 in | 18 in | 2.635 lb |
| DB30X | 3.74 in | 2.17 in | 30 in | 4.100 lb |

Code Red™ Adjustable Pry Bars

- Adjustable jaws slide and clamp to fit onto objects for straightening and prying
- Large claw on head adjusts for best leverage when pulling nails
- Crow bar end with nail puller slot
- Hammer head surface for striking



| Cat. No. | Tip Length | Tip Width | Overall Length | Product Weight |
|----------|------------|-----------|----------------|----------------|
| DB16 | 5 in | 1.73 in | 16 in | 3.68 lb |
| DB24 | 5 in | 1.73 in | 24 in | 4.43 lb |

Code Red™ Flat Pry Bars

- Precision ground ends for nail pulling with less material damage
- Nail slots in end and center for better access when pulling nails
- Radius end design adds strength and provides better prying leverage
- Durable high visibility red finish
- Finish is corrosion-resistant



| FB7 2.008 in 0.925 in 7 in 0.27 lb FB13 3.858 in 1.909 in 13 in 1.46 lb | ht | Product Weight | Overall Length | Tip Width | Tip Length | Cat. No. |
|---|----|----------------|----------------|-----------|------------|----------|
| FB13 3.858 in 1.909 in 13 in 1.46 lb | | 0.27 lb | 7 in | 0.925 in | 2.008 in | FB7 |
| | | 1.46 lb | 13 in | 1.909 in | 3.858 in | FB13 |
| FB15 3.701 in 1.913 in 15 in 1.59 lb | | 1.59 lb | 15 in | 1.913 in | 3.701 in | FB15 |

Code Red™ Molding Bars

- Precision ground ends for nail pulling with less material damage
- Nail slots in both claw and pry ends for better access when pulling nails
- Striking face has ground surface for precision nailing
- Durable high visibility red finish
- Finish is corrosion-resistant



| Cat. No. | Tip Length | Tip Width | Overall Length | Product Weight |
|----------|------------|-----------|----------------|----------------|
| MB8 | 2.12 in | .645 in | 8 in | 0.50 lb |
| MB10 | 2.48 in | .708 in | 10 in | 0.76 lb |
| MB12 | 2.48 in | .724 in | 12 in | 0.80 lb |

Code Red™ Nail Pulling Pliers

- Excellent for removing damaged nails and fasteners
- Roll bar allows you to pull nails with a smooth, low-effort action
- Easily extract nails, regardless of their size
- Functionality of the pliers allows you to remove nails from the front or the back
- Plier teeth designed for an optimal grip on varied types of nails
- Dual handles make it quick and easy to grip, roll, and remove nails or staples
- Durable forged steel construction with rubber grips for comfort and control
- Black-oxide finish resists corrosion
- Dipped grips wipe clean easily



| Cat. No. | Tip Length | Tip Width | Overall Length | Product Weight |
|----------|------------|-----------|----------------|----------------|
| NP11 | .709 in | 3.217 in | 11 in | 1.5 lb |

(T CRESCENT®

Nail Puller

- Forged alloy box-joint and hardened, tempered jaw
- Black enamel finish offers extra durability
- Works great on flush, hard-to-grip nails
- Ideal for remodeling or renovation projects
- 16 penny nail jaw capacity
- 19" length and 24" full extension
- Meets or exceeds U.S. Federal Spec. GGG-P-79Lb, Type 1, Class-1



| Cat. No. | Tip Length | Tip Width | Cont. Length | Ext. Length | Product Weight |
|----------|------------|-----------|--------------|-------------|----------------|
| 56 | 1.1 in | .24 in | 19 in | 24 in | 4.20 lb |

Indexing Nail Puller

- Indexing head with 14 locking positions for quick angle adjustment up to 180 degrees for optimized leverage
- Striking face allows for claw to be driven under nails that are under the surface
- Designed to reach between studs, joists, and other obstructions
- Ergonomic, contoured handle for superior grip and user safety
- Exceeds ASME standards for strength; joint tested up to 10,000 lbs. of force



| Cat. No. | Tip Length | Tip Width | Overall Length | Product Weight |
|----------|------------|-----------|----------------|----------------|
| DB12NP | 2.657 in | .906 in | 12.598 in | 1.130 lb |



Durahide™ Construction Gloves

Crescent has partnered with Mechanix Wear to provide work gloves with maximum durability and hand protection for professional tradespeople. Made with Durahide high-performance leather palms and rugged canvas backs, these gloves offer exceptionally long life and high abrasion resistance. Anatomically-shaped thermoplastic rubber (TPR) ribs protect knuckles and fingers from impact while EVA foam palm padding provides superior comfort.

> **Extended Cuff** Hook and loop wrist

closure for a secure fit





fingers from impact

Mixed-Size Counter Display

Heavy Impact Work Gloves

- Durahide™ high abrasion leather and thumb reinforcement
- Thermoplastic rubber (TPR) impact protection
- CW level 4 abrasion rating
- Microfiber sweat wipe on back of thumb
- Internal EVA foam palm padding
- Rugged canvas back
- Extended cuff
- Hook and loop closure
- Machine washable
- 90 day limited warranty



| Cat. No. | Gender | Size | Machine Washable | Waterproof | Description | Product Weight |
|----------|--------|------|------------------|------------|--|----------------|
| CWGMED | Unisex | M | Yes | Yes | Heavy Impact Work Gloves - Medium | 0.350 lb |
| CWGLRG | Unisex | L | Yes | Yes | Heavy Impact Work Gloves - Large | 0.360 lb |
| CWGXLG | Unisex | XL | Yes | Yes | Heavy Impact Work Gloves - Extra Large | 0.380 lb |

3-Blade Crimper

- Crimps male fitting end to connect guttering, downspouts, or metal pipe
- Optimal handle span for maximum power and comfortable operating range
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Handle latch keeps blades closed during storage or when not in use
- Compound action jaw provides excellent comfort and control



| Cat. No. | Handle Color | Number of Blades | Throat Depth | Product Weight |
|----------|--------------|------------------|--------------|----------------|
| WC3SN | Rawhide | 3 | 1.25 in | 0.85 lb |

5-Blade Crimper

- Crimps male fitting end to connect guttering, downspouts, or metal pipe
- Optimal handle span for maximum power and comfortable operating range
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Handle latch keeps blades closed during storage or when not in use
- Compound action jaw provides excellent comfort and control



| Cat. No. | Handle Color | Number of Blades | Throat Depth | Product Weight |
|----------|--------------|------------------|--------------|----------------|
| WC5SN | Rawhide | 5 | 1.25 in | 0.95 lb |
| WC5LN | Rawhide | 5 | 1.625 in | 1.00 lb |

Hand Notcher

- Cuts 30-degree V-shaped notch in sheet metal
- Produces a clean notch without slipping at corners or take-off tabs
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Handle latch keeps blades closed during storage or when not in use



| Cat. No. | Handle Color | Throat Depth | Product Weight |
|----------|--------------|--------------|----------------|
| WHN1N | Rawhide | .812 in | 0.95 lb |

Hand Seamer

- Used for bending and flattening sheet metal
- Optimal handle span for maximum power and comfortable operating range
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Handle latch keeps blades closed during storage or when not in use
- 1/4" depth markings
- Produces a permanent, tight-fitting seam



| Cat. No. | Handle Color | Jaw Capacity | Throat Depth | Jaw Width | Product Weight |
|----------|--------------|------------------|--------------|-----------|----------------|
| WS3N | Rawhide | .25 in - 1.25 in | 1.25 in | 3.25 in | 1.35 lb |
| WS6N | Rawhide | .25 in - 1.25 in | 1.25 in | 6 in | 1.90 lb |

Offset Hand Seamer

- Used for bending and flattening sheet metal
- Ideal for working in confined areas
- Optimal handle span for maximum power and comfortable operating range
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning with built-in hang hole for convenient storage
- Handle latch keeps blades closed during storage or when not in use
- 1/4" depth markings
- Produces a permanent, tight-fitting seam



| Cat. No. | Handle Color | Throat Depth | Jaw Width | Jaw Capacity | Product Weight |
|----------|--------------|--------------|-----------|------------------|----------------|
| WS4N | Rawhide | 1.25 in | 3.25 in | .25 in - 1.25 in | 1.40 lb |

Cable Tie Tensioning Tool

- Designed to install both heavy and light duty nylon cable ties
- For tightening nylon ties when securing flex duct to take-off collars
- Easy-to-operate cut-off mechanism that trims excess cable strap
- Ergonomic, single material non-slip handle grips provide excellent control and easy cleaning



| Cat. No. | Handle Color | Cable Tie Width | Product Weight |
|----------|--------------|-------------------|----------------|
| WT1 | Rawhide | .375" and Thinner | 0.90 lb |

Folding Tools

- Commonly used for folding channels and making long uniform bends in sheet metal
- Ideal for folding drive cleat channels with 3/8" depth to make longer wider folds in register boots, end caps, plenums, etc...
- Constructed of heavy 16 gauge steel that keeps folding channels from widening and ensures precise and accurate bends
- 3/8" and 1" depth folding channel to ensure proper depth alignment



| Cat. No. | Overall Length | Folding Channel Depths | Product Weight |
|----------|----------------|------------------------|----------------|
| WF12 | 12 in | .375 in & 1 in | 1.30 lb |
| WF18 | 18 in | .375 in & 1 in | 2.00 lb |
| WF24 | 24 in | .375 in & 1 in | 2.70 lb |

Ratcheting Pipe Cutters

- Cuts copper, brass, aluminum, and thin-wall conduit material
- Made from high-carbon chrome steel
- Includes 2 interchangeable wheels for added convenience
- Easily replaceable cutting wheel installs with a small standard screwdriver



| Cat. No. | Cutting Capacity | Product Weight |
|----------|--------------------|----------------|
| WRPCLG | .312 in - 1.125 in | 0.77 lb |

284 | 285

- Molding Miter Snips

 Perfect for cutting all types of small molding in PVC, MDF, and pine
- Built-in angle finder for convenience and accuracy
- Saves time by avoiding changing angles on a saw, no need for electricity
 Blade is able to be sharpened for prolonged use
- Single material, dipped grips for easy cleaning and better control
- Durable steel construction



| Cat. No. | Handed | Overall Length | Cutter Head / Blades | Blade Length | Cutting Capacity | Product Weight |
|----------|--------|----------------|-----------------------|--------------|-------------------|----------------|
| M45RS | Both | 8.5 in | Hardened Steel Cutter | 3.5 in | PVC, MDF and Pine | 1.050 lb |

Siding Removal Tool

- Innovative dual material handle for comfort and performance
- Includes reverse and offset scrapers
- Oil and solvent resistant




| Cat. No. | Overall Length | Product Weight |
|----------|----------------|----------------|
| WSR1N | 9 in | 0.20 lb |

- Snap Lock PunchForms tabs to secure vinyl siding or plastic skirting to finishing trim
- 3/8" throat
- Vinyl handle grips for added comfort



| Cat. No. | Overall Length | Product Weight |
|----------|----------------|----------------|
| WSLP1 | 11 in | 0.70 lb |

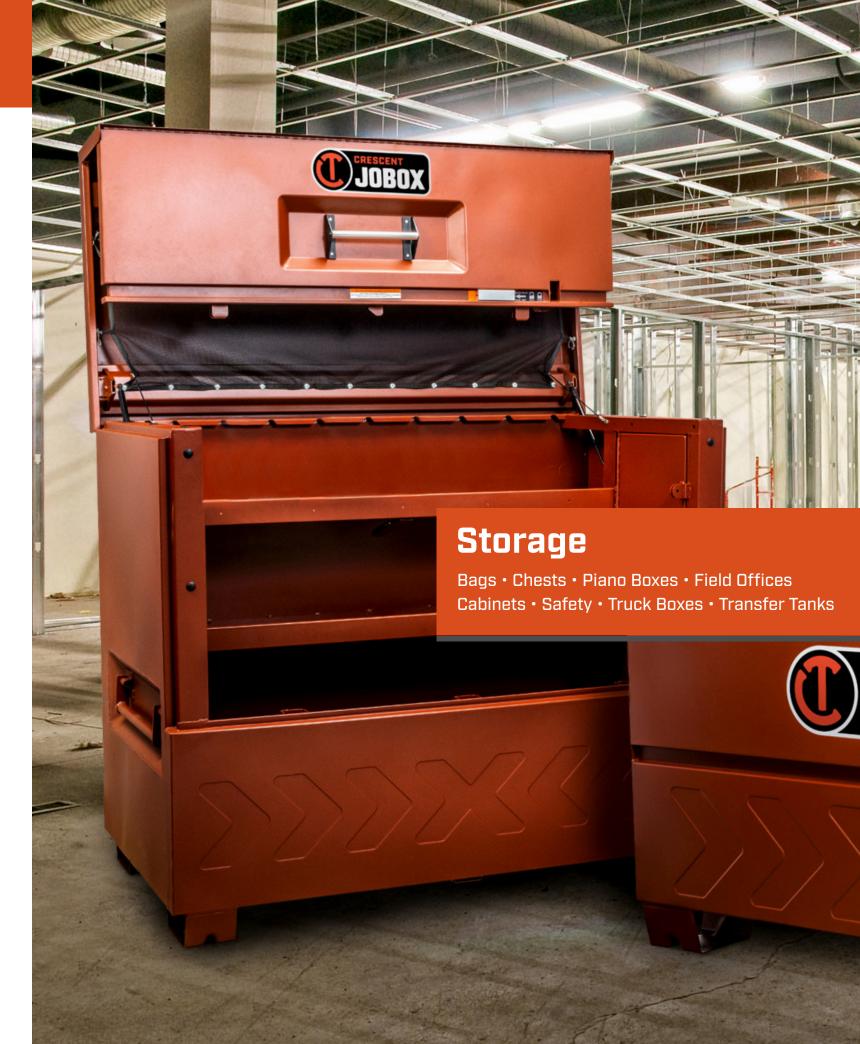



Crescent Tradesman Tool Bags

Introducing the new line of Crescent Tool Bags. Made for strength. Made to last. Made for the long haul. Superior tool organization combined with the quickest and easiest access. These bags are made to take the drops, drags, hits and misses that are just part of life on every jobsite.





Tradesman Closed Top Tool Bags

- Professional grade closed top bag is ideal for everyday use in rugged conditions
- 3 exterior pockets and a 29-pocket interior tool wall provide additional organization
- Hard polypropylene base resists moisture and withstands impacts, delivering lasting durability
- Bright orange interior helps you find your tools faster in darker environments
- Made with 1680D polyester and metal hardware to hold up on the toughest jobsite
- 13 PALS-style loops on the outside of the bag provide quick, easy access to your frequently used tools
- Inner sleeves are open at the bottom so small items won't get lost deep in narrow pockets
- Adjustable, padded shoulder strap and padded nonslip bar handle make carrying the bag more comfortable
- Includes a water bottle holder and a tape measure clip for added convenience
- Top-quality YKK zipper comes with a 3-year warranty and an oversized pull for added convenience



| Cat. No. | Depth | Width | Height | Inside Length | Inside Width | Inside Height | Product Weight |
|----------|-------|--------|---------|---------------|--------------|---------------|----------------|
| CTB1450 | 14 in | 9.2 in | 14.5 in | 13.75 in | 7.75 in | 10.75 in | 5.220 lb |
| CTB1750 | 17 in | 9.5 in | 16.7 in | 16.75 in | 8.75 in | 11.75 in | 6.550 lb |

Tradesman Open Top Tool Bags

- Professional grade open top bag is ideal for everyday use in rugged conditions
- 17 interior and 8 exterior pockets line the bag, so you can keep your equipment in order
- Hard polypropylene base resists moisture and withstands impacts, delivering lasting durability
- Bright orange interior helps you find your tools faster in darker environments
- Made with 1680D polyester and metal hardware to hold up on the toughest jobsite
- 2 exterior pocket sleeves for small parts such as sockets or screws
- Center metal handle meets durability standards and provides comfort while carrying the bag from job to job
- Adjustable, padded shoulder strap and padded nonslip bar handle make carrying the bag more comfortable
- Top-quality YKK zipper comes with a 3-year warranty and an oversized pull for added convenience



| Cat. No. | Depth | Width | Height | Inside Length | Inside Width | Inside Height | Product Weight |
|----------|-------|--------|---------|---------------|--------------|---------------|----------------|
| CTB1410 | 14 in | 9.6 in | 14.5 in | 13.75 in | 7.75 in | 9.25 in | 5.510 lb |
| CTB1710 | 17 in | 11 in | 16 in | 16.5 in | 8.75 in | 11 in | 7.050 lb |
| | | | | | | | |

288 | 289

MAGNETIC POCKET

STORAGE BAGS

20" Contractor Tool Baq

- Professional grade contractor bulk bag is perfect for everyday use in rugged conditions
- 11 exterior and 19 interior pockets provide a variety of storage and organization options for materials, tools and small parts
- Hard polypropylene base resists moisture and protects the bag from wear and tear in tough environments
- Bright orange interior helps you find your tools faster in darker environments
- Made with 1680D polyester and metal hardware to hold up on the toughest jobsite
- 13 PALS-style loops on the outside of the bag provide quick, easy access to your frequently used tools
- Two padded handles make carrying the bag more comfortable and distribute the bag's weight for added durability
- Padded shoulder strap provides convenient, hands-free transportation
- Top-quality YKK zipper comes with a 3-year warranty and an oversized pull for added convenience



| Cat. No. | Depth | Width | Height | Inside Length | Inside Width | Inside Height | Product Weight |
|----------|-------|---------|--------|---------------|--------------|---------------|----------------|
| CTB2010 | 20 in | 12.2 in | 13 in | 19.75 in | 10.75 in | 13.75 in | 4.870 lb |

Tradesman Backpack

- Professional grade backpack is ideal for everyday use, with an adjustable front pocket to hold large items like electrical cords
- 4 exterior pockets and 34 interior pockets for all parts as well as exterior pockets for the frequently used tools
- Hard polypropylene base is moisture resistant and stands up to tough environments for long-lasting durability
- Bright orange interior helps you find your tools faster in darker environments
- Made with 1680D polyester and metal hardware to hold up on the toughest jobsite
- Inner sleeves are open at the bottom so small items won't get lost deep in narrow pockets
- Specialized magnetic pocket stores items for quick access
- Ergonomic handle is easy to grab and provides a comfortable, nonslip grip
- Includes a water bottle holder and a tape measure clip for added convenience
- Top-quality YKK zipper comes with a 3-year warranty and an oversized pull for added convenience



| Cat. No. | Depth | Width | Height | Inside Length | Inside Width | Inside Height | Product Weight |
|----------|-------|-------|--------|---------------|--------------|---------------|----------------|
| CTB1000 | 14 in | 10 in | 18 in | 12.75 in | 7.5 in | 16.5 in | 8.000 lb |

Tradesman Rolling Tool Bag

- Professional grade rolling bag is ideal for everyday use in rugged conditions
- 200-lb lid capacity allows you to carry all your tool bags together
- 2-way magnetic lid
- Bright orange interior helps you find your tools faster in darker environments
- 1680 denier ballistic weave material for rugged durability
- Ergonomically designed top handle and telescoping pull handle for comfort and easy mobility
- 35 total pockets for ultimate tool storage capability
- 17 interior and 8 exterior pockets line the bag, so you can keep your equipment in order



| Cat. No. | Depth | Width | Height | Inside Length | Inside Width | Inside Height | Product Weight |
|----------|-------|-------|--------|---------------|--------------|---------------|----------------|
| CTBR1850 | 20 in | 13 in | 18 in | 16.5 in | 9.75 in | 15.5 in | 15.590 lb |

Tradesman Steel Chests

- High-security design features enclosed dual lock system that resists saws, pry bars, and bolt cutters
- Grip-Rite™ lifting channel provides better grip on lid for easier and safer lid operation
- Rain-Drain feature in padlock housing prevents water from collecting
- Ergonomic lifting handles are positioned inside deep recesses to prevent pinched knuckles and damage to handles
- EZ-Loader 4-way skid bolsters allow fork lift loading from any side for quicker and easier transport
- Skid bolsters are compatible with casters (Part #1-320993, not included) for easy mobility
- Heavy-duty hinge is staked and welded to prevent the pin from being forced out for break in



CHESTS

| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|-----------|--------|---------|---------|---------------|--------------|---------------|----------------------|---------------|
| CJB635990 | 36 in | 19.5 in | 22 in | 34 in | 18.5 in | 18.5 in | 8.9 ft ³ | 88 lb |
| CJB636990 | 42 in | 20 in | 22 in | 40 in | 19 in | 19 in | 10.7 ft ³ | 101 lb |
| CJB637990 | 48 in | 24 in | 27.5 in | 46 in | 23 in | 24 in | 18.3 ft ³ | 140.5 lb |
| CJB638990 | 60 in | 24 in | 27.5 in | 58 in | 23 in | 24 in | 22.9 ft ³ | 155 lb |

USA

HINGES

LID CONTRO



MADE IN THE USA

HIGH SECURITY





Lid Control Gas Spring-

Eases lifting and prevents lid from slamming shut

Ergonomic Lifting Handles

Recessed to prevent pinched fingers and damage to the handle

EZ-Loader 4-Way Skid Bolsters—

Allow fork lift loading from any side for quicker and easier transport

Crescent JOBOX Tradesman Steel Chests

Tradesman Steel Chests provide rugged, dependable, and secure on-site storage in commercial, industrial, and construction environments. Staked and welded hinges and a dual enclosed lock system provide maximum security that is highly resistant to saws, pry bars, and bolt cutters. Gas spring lid control and the exclusive Crescent JOBOX Grip-Rite™ lifting channel provide easy and safe lid operation. Tradesman Steel Chests offer the perfect combination of security, durability, and utility required by trade professionals.





bars, and bolt cutters



from moisture

Crescent JOBOX Site-Vault™ Heavy-Duty Chests

Designed for security, easy access and excellent weather resistance, the Crescent JOBOX Chest yields an abundance of features including four-way skid bolsters, and a visual, three-point locking system.

Site-Vault® Security System -

The patented system has a full-length steel lock console with three locking points and fluorescent reflective orange tape that indicates chest is locked

More Padlock Compatibility -

Use Master #1, #5, #175, and American 50

EDGE LID

Dual Built-In——Lid Storage Bins

Reinforced Lid with

Full-Length Bolster

Reduces damage from

resists pry bar entry

EZ-Lock Arm Securely locks lid open

excess stacking weight and

Cargo nets hold items like first aid kit, manuals, rain gear and safety items

Recessed Handles-

Prevent pinched fingers and damage to the handle

Integrated Sidewall Cargo Bin ——————

Convenient storage for small tools and parts



Allow fork lift loading from any side for quicker and easier transport

(T CRESCENT **JOBOX**°

Site-Vault™ Heavy-Duty Chests

- Site-Vault™ security system is a patented system with 3 locking points and a reflective orange lock indicator that shows when the box is locked or unlocked
- Heavy-duty beveled edge lid eliminates sharp front lid corners and enhances lid strength
- Dual built-in lid storage with integrated cargo nets is perfect for rain gear, PPE or small tools
- EZ-Lock support arm secures and locks lid in open position for safe use
- Upgraded lock system now allows usage of padlock models Master #1, #5, #175 and American #50
- Integrated sidewall cargo bin provides convenient storage for small tools
- Ergonomic lifting handles are positioned inside deep recesses to prevent pinched knuckles and damage to handles
- Heavy-duty EZ-Loader 4-way skid bolsters allow fork lift loading from any side for quicker and easier transport
- Skid bolsters are compatible with casters (Part #1-320993, not included) for easy mobility
- Heavy-duty hinge is staked and welded to prevent the pin from being forced out for break in

| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|----------|---------------|--------------|---------------|----------------------|---------------|
| 2-651990 | 30 in | 20 in | 19.75 in | 28 in | 19 in | 16.2 in | 5 ft ³ | 60 lb |
| 2-652990 | 36 in | 20 in | 27.5 in | 34 in | 19 in | 24 in | 9 ft ³ | 98 lb |
| 2-653990 | 42 in | 20 in | 27.5 in | 40 in | 19 in | 24 in | 10.5 ft ³ | 118 lb |
| 2-654990 | 48 in | 24 in | 30.75 in | 46 in | 23 in | 27.2 in | 16.7 ft ³ | 148 lb |
| 2-656990 | 48 in | 30 in | 36.75 in | 46 in | 29 in | 33.2 in | 25.6 ft ³ | 190 lb |
| 2-655990 | 60 in | 24 in | 30.75 in | 58 in | 23 in | 27.2 in | 21 ft ³ | 182 lb |
| 2-658990 | 72 in | 24 in | 30.75 in | 70 in | 23 in | 27.2 in | 25.3 ft ³ | 203 lb |

Embedded Lock Small Chest

- Bolt cutter-proof lock housing
- Compact and portable
- Staked and welded hinges
- Welded corner gussets
- Heavy-duty lifting handles
- Bottom bolsters for lift and support
- 1Π-nauge latching hasn

| - 10 gaugi | s latering i | iasp | | | | | | | |
|------------|--------------|-------|---------|---------------|--------------|---------------|-------------------|---------------|--|
| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. | |
| 651990D | 31 in | 18 in | 15.5 in | 28.48 in | 12.75 in | 11.95 in | 4 ft ³ | 70 lb | |



Site-Vault™ Heavy Duty Chests with Drawer

- Site-Vault™ security system is a patented system with 3 locking points and a reflective orange lock indicator that shows when the box is locked or unlocked
- Heavy-duty beveled edge lid eliminates sharp front lid corners and enhances lid strength
- EZ-Lock support arm secures and locks lid in open position for safe use
- Upgraded lock system now allows usage of padlock models Master #1, #5, #175 and American #50
- Drawer storage with up to 500lb capacity to meet all your equipment needs and keep your box organized
- Ergonomic lifting handles are positioned inside deep recesses to prevent pinched knuckles and damage to handles
- Heavy-duty EZ-Loader 4-way skid bolsters allow fork lift loading from any side for quicker and easier transport
- Skid bolsters are compatible with casters (Part #1-320993, not included) for easy mobility
- Heavy-duty hinge is staked and welded to prevent the pin from being forced out for break in

| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|------------|--------|-------|-----------|---------------|--------------|---------------|--------------------|---------------|
| 2D-656990 | 48 in | 30 in | 36.625 in | 44.5 in | 29.875 in | 14.625 in | 20 ft ³ | 200 lb |
| 2DL-656990 | 48 in | 30 in | 36.625 in | 44.5 in | 29.875 in | 14.625 in | 20 ft ³ | 225 lb |

Welder's Box

- Cut-out for supply hose
- Compact and portable
- Staked and welded hinges
- Welded corner gussets
- 10-gauge latching hasp Wide lifting handles

| Textured powder paint finish | |
|------------------------------|--|
| | |



JOBOX

| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|---------------|--------------|---------------|---------------------|---------------|
| 650990D | 30 in | 16 in | 12 in | 29 in | 15.45 in | 11.84 in | 3.3 ft ³ | 33 lb |

Slope Lid Chest

- Site-Vault™ security system with bolt-cutter proof housing
- Full-length steel lock console with three locking points
- Fully welded padlock housing
- Lid support rod props up lid for a flat working surface
- Grip-Rite™ lifting channel for easier opening
- Full-length A-frame lid bolster
- 1" locking arms
- Staked and welded hinge
- Lift-N-Stow hinged shelf to store bulky items in the bottom
- Recessed handles



| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|---------|---------------|--------------|---|----------------|---------------|
| 1-680990 | 60 in | 30 in | 39.5 in | 57.5 in | 19.4 in | Bottom to Shelf 19.4 in Shelf to Top 13 in | 32.7 ft³ | 243 lb |

High-Capacity Drop-Front Chest

- Site-Vault™ security system with bolt-cutter proof housing
- Full-length steel lock console with two locking points
- Fully welded padlock housing
- Grip-Rite[™] lifting channel for easier opening
- Full-length A-frame lid bolster
- Staked and welded hinge
- 1" locking arm
- Power cord access hole
- Recessed handles
- Lid lowering assist shock absorber



| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|---------------|--------------|---------------|----------------------|---------------|
| 1-657990 | 60 in | 31 in | 45 in | 57.5 in | 27.5 in | 39 in | 41.5 ft ³ | 340 lb |

Crescent JOBOX Piano Boxes

The perfect combination of storage space, organization, and security, the world renowned Crescent JOBOX Piano Box is a job site must-have. Two storage bins on both side walls and the Crescent JOBOX Lift-N-Stow Shelf give you room to store any item, while the Site-Vault™ security system ensures that your valuables remain safe and secure.





Built-In Lid Storage

Easy access for hanging harnesses

Top Shelf -

Designed for 1,000 lb. capacity to hold chain hoists

Full-Width Shelf — With 500 lb. capacity

Recessed Handles —
Prevent pinched fingers

and damage to the handle

personal items

-Side Wall Storage

With padlock-able

box for



Swings up to accommodate large items

Low Height Front Panel
For easier loading and
unloading of equipment

(T CRESCENT **JOBOX**°

Site-Vault™ Heavy-Duty Piano Boxes

- Site-Vault™ is a patented security system with 3 locking points and a reflective orange lock indicator that shows when the box is locked
- Heavy-duty beveled edge lid eliminates sharp front lid corners and enhances lid strength
- Built-in door storage with hooks and cargo nets for storing harnesses, rain gear, jackets, etc...
- Upgraded lock system now allows usage of padlock models Master #1, #5, #175 and American #50
- Integrated sidewall storage locker can be padlocked for personal items
- Ergonomic lifting handles are positioned inside deep recesses to prevent pinched knuckles and damage to handles
- Heavy-duty EZ-Loader 4-way skid bolsters allow fork lift loading from any side for quicker and easier transport
- Skid bolsters are compatible with casters (Part #1-320993, not included) for easy mobility
- High-strength top shelf Is rated to hold 1,000 pounds
- Rigid 4" formed sidewalls resist wind-driven rain and pry bar break-in for long term durability and equipment protection

| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Drop Front | Usable Cu. Ft. | App. Ship Wt. |
|-------------|---------|-------|--------|---------------|--------------|---------------|------------|----------------------|---------------|
| 2-681990-01 | 47.9 in | 31 in | 51 in | 47.9 in | 29.9 in | 47.2 in | No | 39.1 ft ³ | 298 lb |
| 2-682990-01 | 60 in | 31 in | 51 in | 59.9 in | 29.9 in | 47.2 in | No | 48.9 ft ³ | 354.000 lb |
| 2-688990-01 | 60 in | 31 in | 39 in | 60 in | 29.9 in | 35.2 in | No | 36.5 ft ³ | 279.000 lb |
| 2-689990-01 | 74 in | 31 in | 51 in | 59.9 in | 29.9 in | 47.2 in | No | 60. ft ³ | 413.000 lb |
| 2-683990-01 | 60 in | 31 in | 51 in | 59.9 in | 29.9 in | 47.2 in | Yes | 48.9 ft ³ | 380.000 lb |
| 2-684990-01 | 74 in | 31 in | 51 in | 73.9 in | 29.9 in | 47.2 in | Yes | 60.3 ft ³ | 437.500 lb |
| 2-685990-01 | 74 in | 35 in | 64 in | 74 in | 34 in | 60.2 in | No | 87.4 ft ³ | 520.000 lb |

Heavy-Duty Piano Box

- Two gas springs assist with opening and closing the door
- Ergonomic lifting handles are positioned inside deep recesses to prevent pinched knuckles and damage to handles
- Tall bottom bolsters for easily moving a loaded piano box with a forklift
- Rain-Drain feature in padlock housing prevents water from collecting in box
- High-security design features enclosed dual lock system that resists saws, pry bars, and bolt cutters



| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|---------|----------|---------------|--------------|---------------|----------------|---------------|
| 640990 | 60 in | 30.5 in | 49.88 in | 56.5 in | 28.5 in | 45.3 in | 48 ft³ | 308 lb |

Site-Vault™ Heavy-Duty Piano Boxes with Drawer

- Site-Vault™ is a patented security system with 3 locking points and a reflective orange lock indicator that shows when the box is locked or unlocked
- Heavy-duty beveled edge lid eliminates sharp front lid corners and enhances lid
- Built-in door storage with hooks and cargo nets for storing harnesses, rain gear, jackets, etc...
- Integrated sidewall storage locker can be padlocked for personal items
- Drawer capacity of up to 500lb- keeping your equipment locked and organized
- Lift-N-Stow™ Bottom Shelf lifts up for easy loading & is rated to support up to 500lbs, High-Strength Top Shelf Is Rated to Hold 1,000 lbs
- Rigid 4" Formed Sidewalls resists wind driven rain and pry bars for long term durability and equipment protection
- Short formed lower front panel is stronger and allows easier loading and unloading
- 3 Built-in sidewall bins for convenient access and organized storage
- Improved gas spring mounts allow easier door opening



PIANO BOXES

| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Drop Front | Usable Cu. Ft. | App. Ship Wt. |
|-----------|--------|----------|----------|---------------|--------------|---------------|------------|-----------------------|---------------|
| 2D-681990 | 48 in | 31.15 in | 56.78 in | 47.875 in | 28.875 in | 37.75 in | No | 44.45 ft ³ | 450 lb |
| 2D-682990 | 60 in | 30.75 in | 56.78 in | 59.875 in | 28.875 in | 37.75 in | No | 20 ft ³ | 580 lb |

Field Office

- Large lockable desktop can be raised to make a flat working surface
- Beveled sidewalls for enhanced weather resistance and security
- Steel pegboard
- 30 cubic foot storage locker
- Rain gutters
- Upper door safety bar support with locking pin
- Stainless steel door hinges resist rust
- EZ-Loader® skid bolsters
- One handle lock
- Storage area for plans and binders on side wall



| Cat. No. | Length | Width | Height | Storage Cap. Upper | Storage Cap. Lower | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|----------------------|---------------------|---------------------|---------------|
| 1-674990 | 63 in | 42 in | 80 in | 60.6 ft ³ | 9.4 ft ³ | 100 ft ³ | 660 lb |

Mobile Field Office

- Full size desk, easily handles size "E" prints
- 11 built-in bins for organization while on the job
- Removable upper shelf opens the rear wall to add a monitor
- Extreme mobility for convenience on the job; roll it (through 36" doors), telehandle it, or hoist it
- Perfect desk height for comfort while working
- Slide-out bottom shelf for easy access to items



| Cat. No. | Length | Width | Height | Storage Cap. Upper | Storage Cap. Lower | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|----------------------|-----------------------|--------------------|---------------|
| 1-510990 | 63 in | 33 in | 80 in | 46.5 ft ³ | 24.69 ft ³ | 61 ft ³ | 581 lb |

Tradesman Field Office

- Large lockable desktop can be raised to make a flat working surface
- Built-in sidewall bins
- Upper door safety bar support with locking pin
- Full 42" deep bottom shelf
- Full door weather stripping
- **■** EZ-Loader® 4-way skid bolsters
- One handle lock
- Lid lowering assist shock absorber
- EZ-Loader® skid bolsters
- Formed-in reinforcements strengthen skid bolsters



| Cat. No. | Length | Width | Height | Storage Cap. Upper | Storage Cap. Lower | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|----------------------|--------------------|----------------------|---------------|
| 1-669990 | 63 in | 42 in | 79 in | 60.1 ft ³ | 39 ft³ | 99.6 ft ³ | 604 lb |

Mesh Cabinets

- Removable shelves can be adjusted to multiple positions for maximum storage flexibility
- Sliding shelves provide easy access even when loaded to the maximum capacity of 200 lbs
- Built-in door shelves provide convenient highly visible storage
- Solid top and bottom construction to prevent items from falling through mesh
- Flat bottom shelf with no lip allows easy loading and unloading of heavy items
- White shelving provides high visibility in the cabinet
- Rugged 3 point locking system and continuous door hinges provide long term durability
- Conveniently fits through a standard 3' commercial doorway
- Push handle and shelf provide convenient storage for a step ladder, shelf can hold up to 200 lbs



| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|----------|-------|----------|---------------|--------------|---------------|-----------------------|---------------|
| 1-402990 | 42.5 in | 33 in | 51.25 in | 41.75 in | 50.75 in | 32.625 in | 40 ft ³ | 215 lb |
| 1-401990 | 59.25 in | 33 in | 55 in | 58.625 in | 54.625 in | 32.625 in | 60.46 ft ³ | 328 lb |
| 1-403990 | 75 in | 33 in | 55 in | 74.625 in | 54.625 in | 32.625 in | 76.96 ft ³ | 368 lb |
| 1-400990 | 75 in | 33 in | 55 in | 74.625 in | 54.625 in | 32.625 in | 76.96 ft ³ | 375 lb |

Heavy-Duty Cabinets

- Nearly 17 linear feet of door shelf storage
- Three 5/8" steel locking pins per door
- Welded corner gussets
- Three heavy-duty lock hooks per door
- EZ-Loader® skid bolsters
- Access holes for electrical cables
- Staked and welded hinge
- Stainless steel door hinges resist rust
- Hand or foot operated door latch release system
- Grip-Rite™ lifting channel



| Cat. No. | Description | Length | Width | Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|------------------------|-----------|----------|----------|----------------------|---------------|
| 1-698990 | Two Doors | 60.125 in | 30.25 in | 60.75 in | 58.7 ft ³ | 436 lb |
| 1-694990 | Two Doors | 60.750 in | 24.25 in | 60.25 in | 47.5 ft ³ | 379 lb |
| 1-697990 | Two Doors, Open Side | 60.125 in | 24.25 in | 60.75 in | 47.5 ft ³ | 366 lb |
| 1-695990 | Four Doors, Both Sides | 60.125 in | 32.25 in | 60.75 in | 63.7 ft ³ | 523 lb |

Rolling Work Benches

- Fully adjustable interiors for maximum storage flexibility
- Heavy-duty 18-gauge steel drawers
- 75 lb. capacity drawers
- Ball bearing glides on drawers
- 4 heavy-duty casters; 2 fixed and 2 locking swivel
- Staked and welded hinge
- Welded corner gussets



| Cat. No. | Description | Length | Width | Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|---|-----------|-----------|-----------|----------------------|---------------|
| 675990 | 2 Drawers, 2 Shelves, 4" Casters | 43.375 in | 26.875 in | 38.5 in | 21.7 ft ³ | 267 lb |
| 675996 | 2 Drawers, 2 Shelves, 6" Casters | 43.375 in | 26.875 in | 40.5 in | 21.7 ft ³ | 280 lb |
| 676990 | 4 Drawers, 1 Shelf, 4" Casters | 43.375 in | 26.875 in | 38.5 in | 21.7 ft ³ | 294 lb |
| 676996 | 4 Drawers, 1 Shelf, 6" Casters | 43.375 in | 26.875 in | 40.5 in | 21.7 ft ³ | 307 lb |
| 677990 | Body with 6" Casters, Add Drawers & Shelves | 49.375 in | 26.875 in | 40.625 in | 24.6 ft ³ | 264 lb |
| 678990 | 6 Drawers, 1 Shelf, 6" Casters | 49.375 in | 26.875 in | 40.625 in | 24.6 ft ³ | 342 lb |

Extra-Heavy Duty Bin Cabinet

- Over 40' of shelving built into doors for holding smaller items
- Heavy-duty galvanized movable bin dividers
- Dividers can be moved in 2" increments or removed to create various size bins
- Divider assembly required
- Center EZ-Loader® skid bolster
- Formed-in reinforcements strengthen skid bolsters
- 7-gauge, one-piece steel bolsters with holes to install optional casters
- Access holes for electrical cables
- Staked and welded hinges
- Hand or foot operated door latch release system



| Cat. No. | Length | Width | Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|----------------|---------------|
| 1-693990 | 72 in | 24 in | 61 in | 49 ft³ | 522 lb |

Rolling Clam Shell Cabinet

- Eight 4" heavy-duty casters open and close cabinet
- Hinge stop prevents cabinet from fully opening and reduces notential for tipping
- High center handles for opening, closing, and moving cabinet
- 10-gauge latching hasp
- Rugged 16-gauge steel construction
- Moveable top and bottom shelves
- Open storage closet for tall items
- Lockable storage locker inside cabinet
- Only key entry area of padlock is exposed



| Cat. No. | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|----------|-------|---------|---------------|--------------|---------------|----------------|---------------|
| 692990 | 62.25 in | 30 in | 63.5 in | 60 in | 15.75 in | 57.772 in | 58 ft³ | 472 lb |

Drawer Cabinet

- Drawers fully extend for easy access
- Hand or foot operated door latch release system
- Site-Vault™ security system
- Fully welded padlock housing
- EZ-Loader® skid bolsters
- Welded corner gussets
- Forklift accessible from all sides
- 4.5" deep top shelf and three 3" deep shelves on each door
- Recessed handles
- 2.5" drawers have 75-lb. load capacity and 5.5" drawers have 125-lb. load capacity.



| Cat. No. | Length | Width | Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|----------|-----------|----------|----------------------|---------------|
| 1-679990 | 60.75 in | 60.125 in | 60.75 in | 58.7 ft ³ | 610 lb |



Safety Cabinets

- UL certified; Crescent JOBOX* safety cabinets are fully insulated to provide superior fire retardant performance and eliminate gaps or hot spots
- Crescent JOBOX® 12-gauge steel EZ-Level™ skid bolsters come equipped with a leveling screw access hole to provide quick and easy access for leveling your cabinet
- Featuring EZ-Level[™], our unique anti-tip design, which provides maximum stability and tipping resistance
- Highly visible safety and warning labels provide a permanent reminder and reference for following proper safety and usage practices
- Cabinets have a 3-point locking system, featuring a rugged lockable paddle handle to restrict access and reduce the potential for theft
- Tilted spill-guide interior shelving directs spills to the back of the cabinet and into the retention sump area for easy cleaning
- Bright white shelves makes it easier to identify spills
- High-quality powder paint finish has 10x the corrosion resistance, 5x the abrasion resistance, and 2x the chip and scratch resistance of liquid paint
- High and low vent connections



■ Use yellow Crescent JOBOX® cabinets to store flammable liquids

| Cat. No. | Capacity | Color | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|------------|--------|----------|----------|----------|---------------|--------------|---------------|-----------------------|------------------|
| 1-750640 | 12 Gallons | Yellow | 30.4 in | 20.04 in | 37.17 in | 26.92 in | 16.56 in | 31.29 in | 8.07 ft ³ | 160 lb |
| 1-753640 | 30 Gallons | Yellow | 46.12 in | 23.25 in | 45.72 in | 42.84 in | 17.32 in | 36.47 in | 15.66 ft ³ | 235 lb |
| 1-756640 | 45 Gallons | Yellow | 46.07 in | 23.25 in | 66.71 in | 42.84 in | 17.36 in | 57.42 in | 24.71 ft ³ | 325 lb |
| 1-758640 | 60 Gallons | Yellow | 46.12 in | 30.22 in | 66.71 in | 42.84 in | 24.41 in | 57.42 in | 34.74 ft ³ | 384 lb |
| 1-759640 | 90 Gallons | Yellow | 46.12 in | 33.23 in | 66.71 in | 42.84 in | 27.38 in | 57.42 in | 38.97 ft ³ | 408 lb |

■ Use red Crescent JOBOX® cabinets to store paints, inks, and combustibles

| Cat. No. | Capacity | Color | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|------------|-------|----------|----------|----------|---------------|--------------|---------------|-----------------------|------------------|
| 1-750610 | 12 Gallons | Red | 30.4 in | 20.04 in | 37.17 in | 26.92 in | 16.56 in | 31.29 in | 8.07 ft ³ | 160 lb |
| 1-753610 | 30 Gallons | Red | 46.12 in | 23.25 in | 45.72 in | 42.84 in | 17.32 in | 36.47 in | 15.66 ft ³ | 235 lb |
| 1-756610 | 45 Gallons | Red | 46.07 in | 23.25 in | 66.71 in | 42.84 in | 17.36 in | 57.42 in | 24.71 ft ³ | 325 lb |
| 1-758610 | 60 Gallons | Red | 46.12 in | 30.22 in | 66.71 in | 42.84 in | 24.41 in | 57.42 in | 34.74 ft ³ | 384 lb |
| 1-759610 | 90 Gallons | Red | 46.12 in | 33.23 in | 66.71 in | 42.84 in | 27.38 in | 57.42 in | 38.97 ft ³ | 408 lb |

■ Use green Crescent JOBOX® cabinets to store pesticides and insecticides

| Cat. No. | Capacity | Color | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|------------|-------|----------|----------|----------|---------------|--------------|---------------|-----------------------|------------------|
| 1-750620 | 12 Gallons | Green | 30.4 in | 20.04 in | 37.17 in | 26.92 in | 16.56 in | 31.29 in | 8.07 ft ³ | 160 lb |
| 1-753620 | 30 Gallons | Green | 46.12 in | 23.25 in | 45.72 in | 42.84 in | 17.32 in | 36.47 in | 15.66 ft ³ | 235 lb |
| 1-756620 | 45 Gallons | Green | 46.07 in | 23.25 in | 66.71 in | 42.84 in | 17.36 in | 57.42 in | 24.71 ft ³ | 325 lb |
| 1-758620 | 60 Gallons | Green | 46.12 in | 33.23 in | 66.71 in | 42.84 in | 24.41 in | 57.42 in | 38.97 ft ³ | 384 lb |
| 1-759620 | 90 Gallons | Green | 46.12 in | 33.23 in | 66.71 in | 42.84 in | 27.38 in | 57.42 in | 38.97 ft ³ | 408 lb |

Self Closing Safety Cabinets

- UL certified; Crescent JOBOX' safety cabinets are fully insulated to provide superior fire retardant performance and eliminate gaps or hot spots
- Crescent JOBOX[®] 12-gauge steel EZ-Level™ skid bolsters come equipped with a leveling screw access hole to provide quick and easy access for leveling your cabinet
- Featuring EZ-Level[™], our unique anti-tip design, which provides maximum stability and tipping resistance
- Highly visible safety and warning labels provide a permanent reminder and reference for following proper safety and usage practices
- Self-latching 3-point door locking system includes a heavy-duty enclosed staggering mechanism that ensures the doors close in proper order
- Fusible link assembly disconnects at 165° F to close doors automatically and keep cabinet contents protected
- Tilted spill-guide interior shelving directs spills to the back of the cabinet
 and into the retention sump area for easy cleaning
- Bright white shelves makes it easier to identify spills
- High-quality powder paint finish has 10x the corrosion resistance, 5x the abrasion resistance, and 2x the chip and scratch resistance of liquid paint



■ Use yellow Crescent JOBOX® cabinets to store flammable liquids

| Cat. No. | Capacity | Color | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|------------|--------|----------|----------|----------|---------------|--------------|---------------|-----------------------|------------------|
| 1-754640 | 30 Gallons | Yellow | 46.12 in | 23.25 in | 45.72 in | 42.84 in | 17.32 in | 36.47 in | 15.66 ft ³ | 235 lb |
| 1-757640 | 45 Gallons | Yellow | 46.07 in | 23.25 in | 66.71 in | 42.84 in | 17.36 in | 57.42 in | 24.71 ft ³ | 325 lb |

■ Use red Crescent JOBOX® cabinets to store paints, inks, and combustibles

| Cat. No. | Capacity | Color | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|------------|-------|----------|----------|----------|---------------|--------------|---------------|-----------------------|------------------|
| 1-754610 | 30 Gallons | Red | 46.12 in | 23.25 in | 45.72 in | 42.84 in | 17.32 in | 36.47 in | 15.66 ft ³ | 235 lb |
| 1-757610 | 45 Gallons | Red | 46.07 in | 23.25 in | 66.71 in | 42.84 in | 17.36 in | 57.42 in | 24.71 ft ³ | 325 lb |

■ Use green Crescent JOBOX® cabinets to store pesticides and insecticides

| Cat. No. | Capacity | Color | Length | Width | Height | Inside Length | Inside Width | Inside Height | Usable Cu. Ft. | App. Ship Wt. |
|----------|------------|-------|----------|----------|----------|---------------|--------------|---------------|-----------------------|------------------|
| 1-754620 | 30 Gallons | Green | 46.12 in | 23.25 in | 45.72 in | 42.84 in | 17.32 in | 36.47 in | 15.66 ft ³ | 235 lb |
| 1-757620 | 45 Gallons | Green | 46.07 in | 23.25 in | 66.71 in | 42.84 in | 17.36 in | 57.42 in | 24.71 ft ³ | 325 lb |

Type I Canisters

- Rugged tubular steel handle
- Spring-loaded, gasketed lid seals automatically after handle is released
- High quality terne plate steel construction for superior corrosion resistance
- High visibility safety label
- Zinc plated flame arrestors
- Single opening recommended for storage, but can be used with a funnel for pouring

5 gal (US), 19 l

5 gal (US), 19 l

| Use yellow to | store flammable liqu | ilds and red to store pai | nts, inks, and combust | ibles | |
|---------------|----------------------|---------------------------|------------------------|----------------------|---------------|
| Cat. No. | Color | Capacity | Dia. (in) x Hose | Approvals / Listings | App. Ship Wt. |
| 821990Y | Yellow | 1 gal (US), 4 l | 9 x 6 | UL/ULC | 7 lb |
| 811990YF* | Yellow | 1 gal (US), 4 l | 9 x 6 | UL/ULC | 5 lb |
| 812990Y | Yellow | 2 gal (US), 7.5 l | 9 x 6 | UL/ULC | 6 lb |
| 812990YF* | Yellow | 2 gal (US), 7.5 l | 9 x 6 | UL/ULC | 6 lb |
| 815990Y | Yellow | 5 gal (US), 19 l | 11.5 x 9 | UL/ULC | 9 lb |
| 815990YF* | Yellow | 5 gal (US), 19 l | 11.5 x 9 | UL/ULC | 9 lb |
| 812990 | Red | 2 gal (US), 7.5 l | 9 x 6 | UL/ULC | 6 lb |
| 812990F* | Red | 2 gal (US), 7.5 l | 9 x 6 | UL/ULC | 6 lb |

11.5 x 9

11.5 x 9

815990

815990F*

Type II Canisters

- Rugged tubular steel handle
- Spring-loaded, gasketed lid seals automatically after handle is released

Red

- High quality terne plate steel construction for superior corrosion resistance
- High visibility safety label
- Zinc plated flame arrestors
- Two openings, one for filling and one for pouring
- Spark-resistant brass tip on pouring hose
- Use yellow to store flammable liquids and red to store paints, inks, and combustibles

| Cat. No. | Color | Capacity | Dia. (in) x Hose | Approvals / Listings | App. Ship Wt. |
|----------|--------|-------------------|------------------|----------------------|---------------|
| 822990Y | Yellow | 2 gal (US), 7.5 l | 9 x 6 | UL/ULC | 8.5 lb |
| 825990Y | Yellow | 5 gal (US), 19 l | 11.5 x 9 | UL/ULC | 12 lb |
| 822990 | Red | 2 gal (US), 7.5 l | 9 x 6 | UL/ULC | 8.5 lb |
| 825990 | Red | 5 gal (US), 19 l | 11.5 x 9 | UL/ULC | 12 lb |



9 lb

UL/ULC

UL/ULC

Safety Accessories

Replacement nozzles and funnel for safety cans



| Cat. No. | Description | Size | Product Weight |
|----------|-----------------------|------|----------------|
| 800990 | Replacement Funnel | - | 0.100 lb |
| 830990 | 6" Replacement Nozzle | 6 in | 1.1 lb |
| 835990 | 9" Replacement Nozzle | 9 in | 1.1 lb |

26" Long Floor Model with Three **Drawers**

- Extruded heavy-duty drawer glides support up to 75 lbs per drawer
- Latches automatically lock the drawers when closed Pins prevent the drawers from rolling off the glides
- Moveable dividers to create different size bins
- Heavy-gauge aluminum Is light enough for easy mobility and durable enough to stand up to heavy loads on top of and inside drawers



| Cat. No. | Length | Width | Height | Drawer Compartments | Plastic Dividers | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|---------------------|------------------|---------------------|---------------|
| 1405980 | 26 in | 36 in | 6 in | 3 | 2 | 3.6 ft ³ | 51.0 lb |

26" Long Stacked Model with Six Drawers

- Extruded heavy-duty drawer glides support up to 75 lbs per drawer
- Latches automatically lock the drawers when closed
- Pins prevent the drawers from rolling off the glides
- Moveable dividers to create different size bins
- Heavy-gauge aluminum Is light enough for easy mobility and durable enough to stand up to heavy loads on top of and inside drawers



| Cat. No. | Length | Width | Height | Drawer Compartments | Plastic Dividers | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|---------------------|------------------|----------------|---------------|
| 1406980 | 26 in | 36 in | 12 in | 6 | 2 | 7 ft³ | 81.0 lb |

^{*} Funnel Included

50" Long Floor Models

- Extruded heavy-duty drawer glides support up to 75 lbs per drawer
- Latches automatically lock the drawers when closed
- Pins prevent the drawers from rolling off the glides
- Moveable dividers to create different size bins
- Heavy-gauge aluminum Is light enough for easy mobility and durable enough to stand up to heavy loads on top of and inside drawers



| Cat. No. | Length | Width | Height | Drawer Compartments | Plastic Dividers | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|---------------------|------------------|----------------------|---------------|
| 1401980 | 50 in | 12 in | 6 in | 1 | 5 | 2.5 ft ³ | 31.0 lb |
| 1402980 | 50 in | 24 in | 6 in | 2 | 5 | 5.1 ft ³ | 61.0 lb |
| 1403980 | 50 in | 36 in | 6 in | 3 | 5 | 7.6 ft ³ | 89.0 lb |
| 1404980 | 50 in | 48 in | 6 in | 4 | 5 | 10.1 ft ³ | 119.0 lb |

50" Long Stacked Models

- Extruded heavy-duty drawer glides support up to 75 lbs per drawer
- Latches automatically lock the drawers when closed
- Pins prevent the drawers from rolling off the glides
- Moveable dividers to create different size bins
- Heavy-gauge aluminum Is light enough for easy mobility and durable enough to stand up to heavy loads on top of and inside drawers



| Cat. No. | Length | Width | Height | Drawer Compartments | Plastic Dividers | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|---------------------|------------------|----------------------|---------------|
| 1407980 | 50 in | 12 in | 12 in | 2 | 5 | 5.1 ft ³ | 59.0 lb |
| 1408980 | 50 in | 12 in | 18 in | 3 | 5 | 7.6 ft ³ | 85.0 lb |
| 1409980 | 50 in | 12 in | 24 in | 4 | 5 | 10.1 ft ³ | 114.0 lb |

Plastic Drawer Divider

- For use with Crescent JOBOX aluminum drawer storage products
- Moveable divider to create different size bins
- Can be used with the following Crescent JOBOX Items: 1401980 through 1409980
- Customize storage with the addition of this divider
- Durable divider
- Sold as singles



| Cat. No. | Length | Width | Height | Plastic Dividers | Used On | App. Ship Wt. |
|----------|----------|---------|--------|------------------|-------------------|---------------|
| 1410980 | 0.125 in | 11.5 in | 4.5 in | 1 | 1401980 - 1409980 | 0.2 lb |

9" Tall Drawer Units


- 14-gauge steel StorAll® drawer storage is designed to provide extreme durability and safety with unprecedented versatility
- Perfect for work trucks, trailers, and vans, StorAll® provides up to 50% more drawer weight capacity and up to 20% more storage capacity than competitors
- Drawers are customizable with adjustable front-to-rear dividers and bin dividers
- Grip-and-Release™ system allows safe opening and closing of heavy drawers on sloped surfaces
- Cabinet top and bottom reinforced with 12-gauge steel channels
- Built-in rain gutter channel, anti-skid strips, full bulb-shaped automotive weather stripping and 16-gauge galvanized movable bin dividers all benefit the user
- Steel plunger engages internal drawer stops, drawers have 650 lb. load rating and steel bearing tractors with 1,000 lb. rated bearings make for smooth drawer operation
- Recessed drawer fronts protect the handles from damage

| Cat. No. | Length | Width | Height | Drawer Compartments | Galvanized Dividers | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|---------------------|---------------------|---------------------|---------------|
| 661980 | 48 in | 12 in | 9 in | 1 | 7 | 1 ft³ | 115.0 lb |
| 662980 | 48 in | 24 in | 9 in | 2 | 13 | 2.3 ft ³ | 180.0 lb |
| 663980 | 48 in | 36 in | 9 in | 3 | 19 | 3.6 ft ³ | 222.0 lb |
| 664980 | 48 in | 48 in | 9 in | 4 | 24 | 5 ft³ | 255.0 lb |

13" Tall Drawer Units

- 14-gauge steel StorAll® drawer storage is designed to provide extreme durability and safety with unprecedented versatility
- Perfect for work trucks, trailers, and vans, StorAll® provides up to 50% more drawer weight capacity and up to 20% more storage capacity than competitors
- Drawers are customizable with adjustable front-to-rear dividers and bin dividers
- Grip-and-Release™ system allows safe opening and closing of heavy drawers on sloped surfaces
- Cabinet top and bottom reinforced with 12-gauge steel channels
- Built-in rain gutter channel, anti-skid strips, full bulb-shaped automotive weather stripping and 16-gauge galvanized movable bin dividers all benefit the user
- Steel plunger engages internal drawer stops, drawers have 650 lb. load rating and steel bearing tractors with 1,000 lb. rated bearings make for smooth drawer operation
- Recessed drawer fronts protect the handles from damage

| Cat. No. | Length | Width | Height | Drawer Compartments | Galvanized Dividers | Usable Cu. Ft. | App. Ship Wt. |
|----------|--------|-------|--------|---------------------|---------------------|---------------------|---------------|
| 665980 | 48 in | 12 in | 13 in | 1 | 7 | 1.8 ft ³ | 155.0 lb |
| 666980 | 48 in | 24 in | 13 in | 2 | 13 | 4.2 ft ³ | 245.0 lb |
| 667980 | 48 in | 36 in | 13 in | 3 | 19 | 6.6 ft ³ | 305.0 lb |
| 668980 | 48 in | 48 in | 13 in | 4 | 24 | 9 ft³ | 380.0 lb |

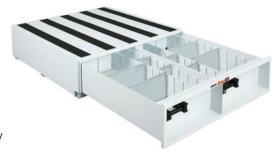


RSL™ Single Lid Paddle Handle Aluminum Crossovers


- Lid reinforced with RSL™ rigid structural lid bolster for superior strength
- Adjustable lid strikers keep the lid locked down tight for improved security
- High-strength body design resists cargo damage and protects the locking mechanism
- Leak proof stainless steel paddle handles prevent moisture from entering
- Self rising lids with dual gas spring lid lifts for easy access
- Small parts storage tray for organization
- Built in storage bins on both ends for convenient small item storage
- Lid locks from drivers side but can be opened from either side of vehicle



| Bright | Black | | | | | | | | | |
|----------|----------|---------------|-----------|-----------|----------|-------|-------|----------|---------|---------------|
| Cat. No. | Cat. No. | Size | Α | В | C | D | E | F | G | App. Ship Wt. |
| 1-304000 | 1-304002 | Mid-Size | 62.75 in | 50.5 in | 14.25 in | 9 in | 17 in | 20.25 in | 63.5 in | 36.0 lb |
| 1-300000 | 1-300002 | Fullsize | 69.125 in | 59.125 in | 14.25 in | 9 in | 17 in | 20.25 in | 70 in | 36.0 lb |
| 1-301000 | 1-301002 | Deep Fullsize | 69.125 in | 59.125 in | 17.25 in | 12 in | 17 in | 20.25 in | 70 in | 45.5 lb |

Low-Profile, RSL™ Single Lid Paddle Handle Aluminum Crossovers





- High-strength body design resists cargo damage and protects the locking mechanism
- Leak proof stainless steel paddle handles prevent moisture from entering
- Self rising lids with dual gas spring lid lifts for easy access
- Small parts storage tray for organization
- Built in storage bins on both ends for convenient small item storage
- Lid locks from drivers side but can be opened from either side of vehicle



| Bright | Black | | | | | | | | | |
|----------|----------|----------|-----------|-----------|----------|-----------|-------|----------|---------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | F | G | App. Ship Wt. |
| 1-310000 | 1-310002 | Mid-Size | 62.75 in | 50.5 in | 14.25 in | 11.812 in | 17 in | 20.25 in | 63.5 in | 36.0 lb |
| 1-302000 | 1-302002 | Fullsize | 69.125 in | 59.125 in | 14.25 in | 11.812 in | 17 in | 20.25 in | 70 in | 37.0 lb |

Mid-Lid RSL™ Aluminum Crossovers

- Lid reinforced with RSL™ rigid structural lid bolster for superior strength
- Adjustable lid strikers keep the lid locked down tight for improved security
- High-strength body design resists cargo damage and protects the locking mechanism
- Leak proof stainless steel paddle handles prevent moisture from entering
- Self rising lids with dual gas spring lid lifts for easy access
- Small parts storage tray for organization
- Built in storage bins on both ends for convenient small item storage
- Lid locks from drivers side but can be opened from either side of vehicle



| Bright | Black | | | | | | | | | |
|----------|----------|----------|-----------|-----------|----------|------|-------|----------|-------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | F | G | App. Ship Wt. |
| 1-306000 | 1-306002 | Fullsize | 69.125 in | 59.125 in | 14.25 in | 9 in | 17 in | 20.25 in | 70 in | 37.0 lb |

Slimline Single Lid Aluminum Crossovers

- Lid reinforced with RSL™ rigid structural lid bolster for superior strength
- Adjustable lid strikers keep the lid locked down tight for improved security
- High-strength body design resists cargo damage and protects the locking mechanism
- Leak proof stainless steel paddle handles prevent moisture from entering
- Self rising lids with dual gas spring lid lifts for easy access
- Small parts storage tray for organization
- Built in storage bins on both ends for convenient small item storage
- Lid locks from drivers side but can be opened from either side of vehicle



| Bright | Black | | | | | | | | | |
|----------|----------|----------|-----------|-----------|-------|----------|-----------|---------|-------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | F | G | App. Ship Wt. |
| 1-311000 | 1-311002 | Fullsize | 69.125 in | 59-1/8 in | 16 in | 10.75 in | 10.375 in | 13.5 in | 70 in | 33.5 lb |

Hybrid Single Lid Crossover

- Durable steel box construction with durable powdercoat finish and non-rusting aluminum treadplate lid
- High-strength body design resists cargo damage and protects the locking mechanism
- Adjustable lid strikers keep the lid locked down tight for improved security
- Heavy-duty gas springs for easy access
- Leak proof stainless steel paddle handles prevent moisture from entering
- Weathertight seal forms from compressed foam gasket



| Cat. No. | Color | Size | Α | В | C | D | E | F | G | App. Ship Wt. |
|------------|-------|----------|------------|-------|----------|----------|-----------|-----------|-----------|---------------|
| DHC1450000 | Black | Fullsize | 70.1875 in | 60 in | 13.72 in | 11.07 in | 20.062 in | 20.843 in | 71.062 in | 56 lb |

Gear-Lock™ Paddle Handle Single Lid Crossovers

- RSL™ laminated rigid structural lid bolster for superior strength
- Self aligning hoop lid strikers lock the lid down tight for improved security
- High-strength body design resists cargo damage and protects the
- Gear-Lock™ latches ratchet lid tightly closed for superior security
- Wide stainless steel paddle handles resist corrosion
- Self rising lids with dual gas spring lid lifts for easy access
- Small parts storage tray for organization
- Built in storage bins on both ends for convenient small item storage
- Wide top box flanges provide extra strength and durability
- Lid locks from drivers side but can be opened from either side of vehicle



| Bright | Black | | | | | | | | | |
|----------|----------|-----------------------|-------|-------|----------|-----------|----------|-------|-------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | F | G | App. Ship Wt. |
| 1-351000 | 1-351002 | Full Size Low Profile | 69 in | 59 in | 14.25 in | 12.125 in | 20.25 in | 21 in | 70 in | 56.0 lb |
| 1-232000 | 1-232002 | Full Size | 69 in | 59 in | 14.25 in | 9 in | 20.25 in | 21 in | 70 in | 50.5 lb |
| 1-238000 | 1-238002 | Full Size Mid-Lid | 69 in | 59 in | 14.25 in | 9 in | 20.25 in | 21 in | 70 in | 52.5 lb |

Low-Profile Push Button Gear-Lock™ Single Lid Aluminum Crossovers

- Gear-Lock™ self adjusting dual rotary lock system always latches and closes for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- High-strength body and full-width lock console resist cargo damage and protect the locking mechanism
- RSL™ laminated rigid structural lid bolster for superior strength
- Tough Armor-Brite® powder paint finish has superior rust resistance
- Self rising lids with dual gas spring lid lifts for easy access
- 4-compartment storage tray assists with organization
- Built in storage bins on both ends for convenient small item storage
- Wide top box flanges provide extra strength and durability
- Lid locks from drivers side but can be opened from either side of vehicle



| Bright | Black | | | | | | | | | |
|------------|------------|----------|-------|----------|-----------|-----------|-----------|-------|-----------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | F | G | App. Ship Wt. |
| PAC1357000 | PAC1357002 | Fullsize | 70 in | 60.25 in | 15.125 in | 12.125 in | 17.875 in | 21 in | 71.125 in | 76.5 lb |

Push-Button Premium Gear-Lock™ Single Lid Aluminum Crossovers

- Gear-Lock™ self adjusting dual rotary lock system always latches and closes for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- High-strength body and full-width lock console resist cargo damage and protect the locking mechanism
- RSL™ laminated rigid structural lid bolster for superior strength
- Tough Armor-Brite® powder paint finish has superior rust resistance
- Self rising lids with dual gas spring lid lifts for easy access
- 4-compartment storage tray assists with organization
- Built in storage bins on both ends for convenient small item storage
- Wide top box flanges provide extra strength and durability
- Lid locks from drivers side but can be opened from either side of vehicle





| Bright | Black | | | | | | | | | |
|------------|------------|------------------------|-----------|-----------|-----------|-----------|----------|----------|-------|---------------|
| Cat. No. | Cat. No. | Size | Α | В | C | D | E | F | G | App. Ship Wt. |
| PAC1580000 | PAC1580002 | Fullsize | 70.125 in | 60.125 in | 14.25 in | 9 in | 20.25 in | 20.88 in | 71 in | 76.5 lb |
| PAC1582000 | PAC1582002 | Deep Fullsize | 70.125 in | 60.125 in | 17.25 in | 12 in | 20.25 in | 20.88 in | 71 in | 80.0 lb |
| PAC1585000 | PAC1585002 | Super Deep Fullsize | 70.125 in | 60.125 in | 19.875 in | 14.625 in | 20.25 in | 21 in | 71 in | 83.0 lb |

Mid-Lid Gear-Lock™ Push Button Aluminum Crossovers

- Gear-Lock™ self adjusting dual rotary lock system always latches and closes for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- High-strength body and full-width lock console resist cargo damage and protect the locking mechanism
- RSL™ laminated rigid structural lid bolster for superior strength
- Tough Armor-Brite" powder paint finish has superior rust resistance
- Self rising lids with dual gas spring lid lifts for easy access
- 4-compartment storage tray assists with organization
- Built in storage bins on both ends for convenient small item storage
- Wide top box flanges provide extra strength and durability
- Lid locks from drivers side but can be opened from either side of vehicle






| Bright | Black | | | | | | | | | |
|------------|------------|----------|-----------|-----------|----------|------|----------|-----------|-------|---------------|
| Cat. No. | Cat. No. | Size | Α | В | C | D | E | F | G | App. Ship Wt. |
| PAC1596000 | PAC1596002 | Fullsize | 70.125 in | 60.125 in | 14.25 in | 9 in | 20.25 in | 20.875 in | 71 in | 62.5 lb |

(T CRESCENT **JOBOX**°

Limited Edition Premium Push Button Gear-Lock™ Truck Boxes

- Gear-Lock™ end-mounted push button locks ratchet lid tightly closed for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- High-strength body and full-width lock console resist cargo damage and protect the locking mechanism
- RSL™ laminated rigid structural lid bolster for superior strength
- Tough Armor-Brite" powder paint finish has superior rust resistance
- Self rising lids with dual gas spring lid lifts for easy access
- 4-compartment storage tray assists with organization
- Built in storage bins on both ends for convenient small item storage
- Wide top box flanges provide extra strength and durability





| Cat. No. | Color | Size | Α | В | C | D | E | F | G | App. Ship Wt. |
|----------|--------|---------------------------------|-----------|----------|-------|-------|----------|-------|-----------|---------------|
| 1701000 | Bright | Deep Super Duty & Fullsize Deep | 71.125 in | 58.75 in | 18 in | 12 in | 20.25 in | 21 in | 72.125 in | 77.0 lb |

Gear-Lock™ Push Button Single Lid Steel Crossovers

- Gear-Lock™ self adjusting dual rotary lock system always latches and closes for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- High-strength, self-rising lids will resist attempted break-ins better than other steel lids
- High-strength body design resists cargo damage and protects the locking mechanism
- End-mounted push buttons provide easy access
- Heavy-duty guards on single lid models protect the gas springs and extend long term durability
- Built-in storage bins on both ends and 4-compartment sliding tray for convenient small item storage
- Tough Armor-Brite" powder paint finish has superior rust resistance





| White | Black | | | | | | | | | |
|------------|------------|-------------------------------|-----------|-----------|----------|-------|----------|-----------|-------|---------------|
| Cat. No. | Cat. No. | Size | Α | В | C | D | E | F | G | App. Ship Wt. |
| PSC1458000 | PSC1458002 | Compact | 60.125 in | 50.125 in | 11.25 in | 6 in | 20.25 in | 20.875 in | 61 in | 77.0 lb |
| PSC1455000 | PSC1455002 | Fullsize | 70.125 in | 60.125 in | 14.25 in | 9 in | 20.25 in | 20.875 in | 71 in | 94.0 lb |
| PSC1456000 | PSC1456002 | Deep Fullsize | 70.125 in | 60.125 in | 17.25 in | 12 in | 20.25 in | 20.875 in | 71 in | 101.0 lb |
| PSC1457000 | PSC1457002 | Deep & Extra-Wide Fullsize | 70.125 in | 60.125 in | 17.25 in | 12 in | 29.25 in | 30 in | 71 in | 175.5 lb |

Gull Wing Gear-Lock™ Push Button Steel Crossovers

- Gear-Lock™ self adjusting dual rotary lock system always latches and closes for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- High-strength, self-rising lids will resist attempted break-ins better than other steel lids
- High-strength body design resists cargo damage and protects the locking mechanism
- End-mounted push buttons provide easy access
- Heavy-duty guards on single lid models protect the gas springs and extend
- Built-in storage bins on both ends and 4-compartment sliding tray for convenient small item storage





| White | Black | | | | | | | | | |
|------------|------------|----------|-----------|-----------|----------|------|----------|-----------|-------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | F | G | App. Ship Wt. |
| PSC1460000 | PSC1460002 | Fullsize | 70.125 in | 60.125 in | 14.25 in | 9 in | 20.25 in | 20.875 in | 71 in | 85.0 lb |

Aluminum Innersides

- Lid reinforced with bolster for superior strength
- Adjustable lid strikers keep the lid locked down tight for improved security
- High-strength body design resists cargo damage and protects the locking mechanism
- Leak proof stainless steel paddle handles prevent moisture
- Self rising lids with gas spring lid lifts for easy access
- Includes mounting kit and supporting legs with hardware




| Bright | Black | | | | | | | | | | |
|----------|----------|--------------|----------|-------|----------|----------|------|-----------|-------|---------------------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | F | G | Usable Cu. Ft. | App. Ship Wt. |
| 1-312000 | 1-312002 | 49" Long Lid | 47.75 in | 11 in | 5.375 in | 12.25 in | 8 in | 48.625 in | 13 in | 2.7 ft ³ | 24.5 lb |
| 1-313000 | 1-313002 | 59" Long Lid | 57.75 in | 11 in | 5.375 in | 12.25 in | 8 in | 58.625 in | 13 in | 3.2 ft ³ | 30.0 lb |

Gear-Lock™ **Aluminum Innersides**

- Gear-Lock™ self adjusting dual rotary lock system always latches and closes for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- High-strength RSL™ laminated 3-layer rigid structural lid is the strongest, most rigid aluminum lid we've tested
- Reinforced high-strength body and full-width lock console resists cargo damage and protects the lock system
- Heavy-duty guards protect the vertical-action gas spring lid lifts and help ensure long-term durability
- Built-in full-length storage compartment for small tools and parts
- Includes mounting kit and supporting legs with hardware





| Bright | Black | | | | | | | | | | |
|------------|------------|------------------|----------|-------|----------|-----------|----------|---------|-------|---------------------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | F | G | Usable Cu. Ft. | App. Ship Wt. |
| PAN1441000 | PAN1441002 | 48 1/2" Long Lid | 47.75 in | 11 in | 5.375 in | 12.125 in | 7.875 in | 48.5 in | 13 in | 2.7 ft ³ | 28.5 lb |
| PAN1442000 | PAN1442002 | 58 1/2" Long Lid | 57.75 in | 11 in | 5.375 in | 12.125 in | 7.875 in | 58.5 in | 13 in | 3.2 ft ³ | 32 lb |

Gear-Lock™ Steel Innersides

- Gear-Lock™ push button lock ratchets lid to box for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- High-strength body design resists cargo damage and protects the locking mechanism
- Self rising lids with gas spring lid lifts for easy access
- Tough Armor-Brite® powder paint finish has superior rust resistance
- RSL[™] laminated rigid structural lid bolster for superior strength
- Built-in front storage for convenient small item storage
- Includes mounting kit and supporting legs with hardware



| White | Black | | | | | | | | | | |
|------------|------------|------------------|----------|-----------|----------|----------|---------|---------|-------|---------------------|---------------|
| Cat. No. | Cat. No. | Size | Α | В | C | D | E | F | G | Usable Cu. Ft. | App. Ship Wt. |
| PSN1451000 | PSN1451002 | 47 1/2" Long Lid | 47.75 in | 11.125 in | 5.375 in | 12.25 in | 8.25 in | 47.5 in | 12 in | 2.6 ft ³ | 48.5 lb |
| PSN1452000 | PSN1452002 | 58 1/2" Long Lid | 57.75 in | 11.125 in | 5.375 in | 12.25 in | 8.25 in | 58.5 in | 12 in | 3.2 ft ³ | 60.0 lb |

Aluminum Topsides

- Reinforced rain gutter doors seal around topside opening to prevent leakage or moisture
- Heavy-duty hinges provide high strength security and longevity
- Stainless steel rotating t-handle pulls the door tight against the seal
- Quick release coated aircraft cables allow door to drop down 180 degrees for full accessibility
- Automotive bulb weather stripping seals door 360°
- Includes mounting kit and supporting legs with hardware





| Bright | Black | | | | | | | | |
|----------|----------|----------|-------|-------|-------|-------|----------|----------------------|---------------|
| Cat. No. | Cat. No. | Size | Α | В | C | D | E | Usable Cu. Ft. | App. Ship Wt. |
| 572000 | 572002D | 72" Long | 72 in | 15 in | 17 in | 40 in | 12.75 in | 9.4 ft ³ | 55.0 lb |
| 573000 | 573002 | 88" Long | 88 in | 15 in | 17 in | 40 in | 12.75 in | 11.5 ft³ | 58.0 lb |
| 574000D | 574002D | 96" Long | 96 in | 15 in | 17 in | 40 in | 12.75 in | 12.5 ft ³ | 63.0 lb |

Steel Topsides

- Reinforced rain gutter doors seal around topside opening to prevent leakage or moisture
- Heavy-duty hinges provide high strength security and longevity
- Stainless steel rotating t-handle pulls the door tight against the seal
- Quick release coated aircraft cables allow door to drop down 180 degrees for full accessibility
- Automotive bulb weather stripping seals door 360°
- Includes mounting kit and supporting legs with hardware
- Tough Armor-Brite® powder paint finish has superior rust resistance





| Cat. No. | Color | Size | А | В | С | D | E | Usable Cu. Ft. | App. Ship Wt. |
|----------|-------|----------|-------|-------|-------|-------|----------|----------------------|---------------|
| 577000 | White | 72" Long | 72 in | 15 in | 17 in | 40 in | 12.75 in | 9.4 ft ³ | 118.0 lb |
| 578000 | White | 88" Long | 88 in | 15 in | 17 in | 40 in | 12.75 in | 11.5 ft³ | 140.0 lb |
| 579000 | White | 96" Long | 96 in | 15 in | 17 in | 40 in | 12.75 in | 12.5 ft ³ | 146.0 lb |

Steel Underbed Boxes

- Industrial grade steel hinges and drop down door for easy loading and unloading and the high strength door cables create versatility and strength
- Bulb-shaped automotive weather stripping and extended rain gutter help keep out the weather
- Quick release keyway connectors allow the door to drop down when cables are detached
- Rugged, one-piece lock housing helps protect the lock components and provides extra strength to the door
- Rotating t-handle with a reinforced cam lock, three-point locking system and one-piece lock housing provide greater security





| White | Black | | | | | |
|----------|----------|--------|-------|--------|-----------------------|---------------|
| Cat. No. | Cat. No. | Length | Width | Height | Usable Cu. Ft. | App. Ship Wt. |
| 7924160 | 7924162 | 24 in | 16 in | 14 in | 3.06 ft ³ | 55 lb |
| 790980 | 790982 | 24 in | 18 in | 18 in | 4.16 ft ³ | 68 lb |
| 7924240 | 7924242 | 24 in | 24 in | 24 in | 7.96 ft ³ | 94 lb |
| 791980 | 791982 | 30 in | 18 in | 18 in | 5.20 ft ³ | 80 lb |
| 7930240 | 7930242 | 30 in | 24 in | 24 in | 9.95 ft ³ | 110 lb |
| 7936140 | 7936142 | 36 in | 12 in | 14 in | 3.43 ft ³ | 68 lb |
| 7936160 | 7936162 | 36 in | 16 in | 14 in | 4.0 ft ³ | 76 lb |
| 792980 | 792982 | 36 in | 18 in | 18 in | 6.24 ft ³ | 92 lb |
| 7936240 | 7936242 | 36 in | 24 in | 24 in | 11.94 ft ³ | 126 lb |
| 793980 | 793982 | 48 in | 18 in | 18 in | 8.32 ft ³ | 117 lb |
| 7948240 | 7948242 | 48 in | 24 in | 24 in | 15.92 ft ³ | 158 lb |
| 794980 | 794982 | 60 in | 18 in | 18 in | 10.40 ft ³ | 142 lb |
| 7960240 | 7960242 | 60 in | 24 in | 24 in | 18.90 ft ³ | 190 lb |
| 7972180 | 7972182 | 72 in | 18 in | 18 in | 12.51 ft ³ | 168 lb |

Mounting Brackets

- Heavy-duty 2" C-channel brackets for mounting underbed boxes
- Brackets have multiple mounting holes for easy installation
- Sold in pairs



| Cat. No. | Length | Width | Height | App. Ship Wt. |
|----------|--------|-------|--------|---------------|
| 228000 | 18 in | 2 in | 18 in | 15.0 lb |
| 229000 | 24 in | 2 in | 24 in | 33.5 lb |

Aluminum Portable Chests

- Removable and portable aluminum chests offer versatility wherever secure storage is needed
- Wide lifting handles are easy to grip and will support heavy loads
- Rugged aluminum strikers will adjust vertically and horizontally to keep the lid locked down tight
- Leak proof stainless steel paddle handles prevent moisture from entering
- Full weatherstripping helps seal out moisture and dust
- Gas spring lid lifts automatically raise lid and allows for easier access



| Cat. No. | Color | Size | А | В | C | D | E | App. Ship Wt. |
|----------|--------|----------|-------|-------|---------|-------|-------|---------------|
| 220000D | Bright | 37" Long | 37 in | 36 in | 14.5 in | 18 in | 20 in | 33.0 lb |
| 221000D | Bright | 49" Long | 49 in | 48 in | 18 in | 18 in | 20 in | 43.0 lb |
| 222000D | Bright | 57" Long | 57 in | 56 in | 18 in | 18 in | 20 in | 50.0 lb |

Aluminum Chests for Trucks

- Recessed hinge allows the lid to fully open when the back of the chest is placed against another object
- Rugged aluminum construction with reinforced lid for maximum strength and security
- Gas spring lid lifts allow easier access
- Leak proof stainless steel paddle handles prevent moisture from entering
- Full weatherstripping helps seal out moisture and dust
- Tapered lower front wall will fit better in trucks with all types of bed liners



| Cat. No. | Color | Size | A | В | C | D | E | App. Ship Wt. |
|----------|--------|-------|----------|---------|-----------|----------|----------|---------------|
| 808000 | Bright | 36 in | 36.75 in | 36 in | 15.5 in | 17.25 in | 17 in | 25.5 lb |
| 896260 | Bright | 58 in | 59.5 in | 58.5 in | 17.875 in | 18.75 in | 17.75 in | 47.5 lb |
| 896262 | Black | 58 in | 59.5 in | 58.5 in | 17.875 in | 18.75 in | 17.75 in | 47.5 lb |

Hybrid Fullsize Portable Chest

- Stylish tread plate aluminum lid with rigid steel base for support
- Removable and portable chest offers versatility where secure storage is needed
 Leak proof stainless steel paddle handles prevent moisture from entering
- Gas spring lid lifts automatically raise lid and allow for easier access
- Wide lifting handles are easy to grip and will support heavy loads
- Full weatherstripping helps seal out moisture and dust
- Rugged aluminum strikers will adjust horizontally to keep the lid locked down tight



| Cat. No. | Color | Size | A | В | C | D | E | App. Ship Wt. |
|------------|-------|----------|-------|-------|-------|-------|-------|---------------|
| DYH1453002 | Black | Fullsize | 49 in | 48 in | 18 in | 21 in | 20 in | 50 lb |

(T CRESCENT **JOBOX**°

Gear-Lock™ Paddle Handle Aluminum Chests

- Gear-Lock™ paddle handle lock ratchets lid to box for superior security
- Self aligning hoop strikers pivot from side-to-side and lock the lid for
- RSL™ laminated rigid structural lid bolster for superior strength
- Self rising lids with dual gas spring lid lifts for easy access
- Full weatherstripping helps seal out moisture and dust
- Wide top box flanges provide extra strength and durability
- Angled edges on front and side walls provide best fit, even when installed with a bed liner



| Bright | Black | | | | | | | |
|----------|----------|----------------|-------|----------|----------|---------|-------|---------------|
| Cat. No. | Cat. No. | Size | A | В | C | D | E | App. Ship Wt. |
| 1-350000 | 1-350002 | Full Size Long | 61 in | 61.25 in | 19.25 in | 20.5 in | 20 in | 53.0 lb |

Steel Portable Utility Chests

- 18-gauge steel construction with fully welded seams and formed edges
- Lock down chest and remove easily with quick connect brackets
- Sliding tray provides convenient storage for hand tools and small parts
- Full weatherstripping helps seal out moisture and dust
- Tough Armor-Brite® powder paint finish has superior rust resistance



| Cat. No. | Color | Size | Α | В | C | D | E | App. Ship Wt. |
|----------|-------|-------|-----------|-------|----------|----------|----------|---------------|
| 810000 | White | 32 in | 32.625 in | 32 in | 12.75 in | 11.25 in | 10.75 in | 31.5 lb |

Steel Heavy-Duty Chest

- High strength beveled edge lid
- Sliding tray for small parts and tools
- Leak-proof stainless steel paddle handles
- Dual gas spring lid lifts for easy opening lid
- Channel reinforced front panel
- Recessed hinge



Gear-Lock™ Aluminum Chests

- Gear-Lock™ self adjusting dual rotary lock system always latches and closes for superior security
- Self-aligning latch pins pivot from side to side and lock the lid into Gear-Lock™ latch for premium security
- RSL™ laminated rigid structural lid bolster for superior strength
- High-strength body and full-width lock console resist cargo damage and protect the locking mechanism
- Self rising lids with dual gas spring lid lifts for easy access
- Leak proof stainless steel paddle handles prevent moisture from entering
- Universal fit design features a tapered bottom section on the ends and





| Bright | Black | | | | | | | |
|------------|------------|---------------------|-------|-----------|-----------|-----------|-----------|---------------|
| Cat. No. | Cat. No. | Size | Α | В | C | D | E | App. Ship Wt. |
| PAH1420000 | PAH1420002 | SWB Fullsize | 61 in | 60.125 in | 19.375 in | 20.625 in | 18.75 in | 53.0 lb |
| PAH1424000 | PAH1424002 | Extra-Wide Fullsize | 61 in | 60.125 in | 19.375 in | 27.625 in | 24.875 in | 68.0 lb |

Aluminum Trailer Tonque Boxes


- Trailer tongue box mounts easily against rail or trailer wall
- Rugged aluminum construction with reinforced lid for maximum strength and security
- Offset gas spring lid lift allows easier access from drivers side
- Leak proof stainless steel paddle handles prevent moisture from entering
- Full weatherstripping helps seal out moisture and dust
- Tough Armor-Brite® powder paint finish has superior rust resistance



| Cat. No. | Color | A | В | С | D | E |
|----------|--------|-------|-------|-------|---------|---------|
| 405000D | Bright | 33 in | 16 in | 20 in | 17.5 in | 20.5 in |
| 410000D | Bright | 48 in | 18 in | 25 in | 21.5 in | 20.5 in |

Aluminum Liquid Transfer Tanks

- Two full center baffles add extra strength and control the flow of the contents when moving
- 2" NPT reinforced bungs allow mounting a pump on either side of tank
- Four high strength brackets for securing the tank to the bed
- Lockable filler cap and coupler
- Heavy-duty 0.125" tread plate aluminum



| C | at. No. | Color | Shape | Safe Fill (US) | Max Fill (US) | A | Capacity (US) | В | С | D | E | App. Ship Wt. |
|----|---------|--------|-------------|----------------|---------------|----------|---------------|----------|----------|------|-------|------------------|
| 43 | 39000 | Bright | Square | 47 gal | 52 gal | 23.25 in | 50 gal | 23.25 in | 23.25 in | - | - | 64.0 lb |
| 43 | 38000 | Bright | Rectangular | 91 gal | 102 gal | 45.25 in | 100 gal | 23.25 in | 23.25 in | - | - | 94.0 lb |
| 43 | 37000 | Bright | L-Shaped | 99 gal | 104 gal | 57.5 in | 100 gal | 25 in | 31 in | 9 in | 10 in | 112.0 lb |

Fuel-N-Tool Combo Aluminum Transfer Tank

- Offers the convenience of a L-shaped transfer tank and a removable chest
- Two full center baffles add extra strength and control the flow of the contents
- 2" NPT reinforced bungs allow mounting a pump on either side of the tank
- Four high strength brackets for securing the tank to the bed
- Leak proof stainless steel paddle handles prevent moisture and dirt from
- Chest provides 4.5 cubic feet of high-strength storage for tools and accessories
- RSL™ rigid structural lid, heavy-duty adjustable lid strikers, and high-strength body resist break-ins
- Self-rising lid has two heavy-duty gas spring lid lifts



| Cat. No. | Color | Shape | Safe Fill (US) | Max Fill (US) | A | В | C | D | E | App. Ship Wt. |
|----------|--------|----------|----------------|---------------|----------|-------|-------|------|----------|---------------|
| 433000 | Bright | L-Shaped | 72 gal | 77 gal | 48.25 in | 19 in | 31 in | 9 in | 10.75 in | 129.0 lb |

Steel Transfer Tanks

- Tanks have internal baffles for extra strength and to control the flow of contents when moving
- 2" NPT reinforced bungs allow mounting a pump on either side of the tank
- Built-in lifting rings to assist with lifting and moving an empty tank
- Lockable filler cap and coupler prevent excessive pressure build up
- Heavy-duty brackets to secure the tank to the truck bed
- Safety fill capacity allows space for the contents to expand in warm weather





| White | Black | | | | | | | | | | App. |
|----------|----------|---------------------|----------------|---------------|----------|---------------|-------|----------|--------|-------|----------|
| Cat. No. | Cat. No. | Shape | Safe Fill (US) | Max Fill (US) | Α | Capacity (US) | В | C | D | E | Ship Wt. |
| 486000 | _ | Vertical | 36 gal | 42 gal | 54 in | 36 gal | 19 in | 9 in | - | - | 97.0 lb |
| 485000 | _ | Square | 50 gal | 55 gal | 23.25 in | 50 gal | 24 in | 23.25 in | - | - | 85.5 lb |
| 484000 | 484002 | Rectangle | 96 gal | 107 gal | 45.63 in | 100 gal | 24 in | 23.25 in | - | - | 145.0 lb |
| 488000 | 488002 | Low Profile L-Shape | 76 gal | 82 gal | 46 in | 85 gal | 26 in | 31 in | 6.5 in | 11 in | 155.0 lb |
| 482000 | _ | L-Shape | 51 gal | 54 gal | 27 in | 48 gal | 26 in | 31 in | 9 in | 11 in | 106.0 lb |
| 487000 | _ | L-Shape | 88 gal | 92 gal | 54 in | 88 gal | 25 in | 31 in | 6.5 in | 11 in | 186.0 lb |
| 480000 | 480002 | L-Shape | 103 gal | 109 gal | 54 in | 100 gal | 26 in | 31 in | 9 in | 11 in | 200.0 lb |

Steel Transfer Tanks For 4-Door Trucks

- Built-in lifting rings to assist with lifting and moving an empty tank
- Lockable filler cap and coupler prevent excessive pressure build up
- Heavy-duty brackets to secure the tank to the truck bed
- Safety fill capacity allows space for the contents to expand in warm weather
- 2" NPT reinforced bungs allow mounting a pump on either side of the tank
- Drain plug allows for safe drainage of combustible liquids



| White | Black | | | | | | | | | | | App. |
|----------|----------|----------|----------------|---------------|----------|---------------|-------|-------|--------|----------|-----------|----------|
| Cat. No. | Cat. No. | Shape | Safe Fill (US) | Max Fill (US) | Α | Capacity (US) | В | C | D | E | F | Ship Wt. |
| 498000 | 498002 | L-Shaped | 98 gal | 106 gal | 60.25 in | 100 gal | 25 in | 33 in | 7.5 in | 48.25 in | 10.125 in | 175.0 lb |

Optional Casters

- Available in heavy-duty
- Set of 4 casters comes with two fixed and two swivel casters
- Size: 6 in; load rating: 3600 lb
- All purpose rubber tread for grip on many surfaces
- Wheels never puncture or go flat
- 3" x 3" hole patterns



| Cat. No. | Width | Height | Load Rating | Size | Style | Used On |
|----------|--------|---------|-------------|------|-------|--------------------|
| 1-320990 | - | - | 2800 lb | 4" | HD | - |
| 1-321990 | 3.5 in | 7.75 in | 3600 lb | 6 in | HD | All Crescent JOBOX |
| 1-320993 | 3.5 in | 6 in | 3600 lb | 6 in | HD | All Crescent JOBOX |

Touch Up Paint

- Crescent JOBOX on site storage touch up paint
- Available in 12 oz cans
- Color is Crescent JOBOX red/rust



| Cat. No. | Color | Used On | Product Weight |
|----------|-------|------------------|----------------|
| 82936 | Rust | All JOBOX Models | 1.100 lb |

Removable Trays

- Built-in handles
- Convenient for hand tools and small parts
- Hemmed edges add strength and eliminate sharp edges
- Powder paint



| Cat. No. | Length | Width | Height | Used On |
|----------|-----------|-------|--------|------------------------------|
| 626990 | 22.187 in | 8 in | 4 in | 1-654990, 1-655990, 1-658990 |
| 627990 | 28.187 in | 8 in | 4 in | 1-656990 |
| 628990 | 18.187 in | 8 in | 4 in | 1-652990, 1-653990 |
| 620990 | 21.875 in | 8 in | 4 in | 635990 |

Replacement Parts for Models 675, 676, 677 & 678



| Cat. No. | Description | Length | Width | Height | Used On | Product Weight |
|----------|--------------------------|-----------|-----------|--------|------------------|----------------|
| 608990 | Shelf | 21.875 in | 16.875 in | - | Models 677 & 678 | 8.000 lb |
| 605990 | 2-1/2" Deep Drawer | 21.875 in | 16.875 in | 2.5 in | Models 675 & 676 | 16.000 lb |
| 609990 | 2-1/2" Deep Drawer | 21.875 in | 16.875 in | 2.5 in | Models 677 & 678 | 17.000 lb |
| 606990 | 4-1/2" Deep Drawer | 21.875 in | 16.875 in | 4.5 in | Models 675 & 676 | 19.000 lb |
| 610990 | 4-1/2" Deep Drawer | 21.875 in | 16.875 in | 4.5 in | Models 677 & 678 | 18.100 lb |
| 607990 | 5-1/2" Deep Drawer | 21.875 in | 16.875 in | 5.5 in | Models 675 & 676 | 19.000 lb |
| 611990 | 5-1/2" Deep Drawer | 21.875 in | 16.875 in | 5.5 in | Models 677 & 678 | 21.000 lb |
| 616990 | 10" Deep Drawer | 21.875 in | 16.875 in | 10 in | Models 675 & 676 | 17.800 lb |
| 617990 | 10" Deep Drawer | 21.875 in | 16.875 in | 10 in | Models 677 & 678 | 19.300 lb |
| 612990 | Optional 2nd Push Handle | 21.875 in | 16.875 in | 2.0 in | Models 675 & 676 | 2.000 lb |

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
|----------|-------------|----------|------|----------|------|------------|------|
| <u>0</u> | | 03863NN | 249 | 06601NN | 251 | 0890SMC | 181 |
| 00024NN | 250 | 0390CSP | 182 | 06602NN | 251 | 09179N | 254 |
| 00047NN | 250 | 0390FC | 178 | 06686NN | 251 | 0990T | 184 |
| 00070NN | 250 | 0390FCS | 182 | 066FN | 228 | | |
| 0090FC | 178 | 0390MC | 177 | 06704NN | 254 | <u>1</u> | |
| 0090MC | 177 | 0390MCP | 177 | 06706NN | 254 | 1DSN | 167 |
| 0090MCP | 177 | 0390MCX | 179 | 06711N | 252 | 11904 | 255 |
| 0090MNE | 178 | 0390MHX | 180 | 06773N | 252 | 11936 | 256 |
| 0190FC | 178 | 0390MLN | 187 | 06804N | 252 | 11969 | 256 |
| 0190FCX | 179 | 0390MTN | 182 | 06836N | 252 | 12019 | 255 |
| 0190MC | 177 | 03929NN | 249 | 06867N | 252 | 12051 | 256 |
| 0190MCP | 177 | 03980NN | 249 | 06898N | 252 | 12084 | 256 |
| 0190MCS | 180 | 04695N | 250 | 0690TN | 183 | 12131 | 255 |
| 0190MCX | 179 | 04729N | 250 | 06930N | 252 | 12134 | 255 |
| 0190MHC | 180 | 04762N | 250 | 06961N | 252 | 12166 | 256 |
| 0190MNE | 178 | 04795N | 250 | 06992N | 252 | 12199 | 256 |
| 0190MTN | 182 | 04828N | 250 | 07054N | 252 | 12248 | 255 |
| 02144N | 256 | 04861N | 250 | 07085N | 252 | 12790 | 255 |
| 02147N | 256 | 04896N | 250 | 07657NN | 252 | 12857 | 255 |
| 02230B | 256 | 04927N | 250 | 07688NN | 252 | 12967 | 255 |
| 02244NN | 257 | 04960N | 250 | 07719NN | 252 | 13033 | 255 |
| 02373NN | 258 | 04995N | 250 | 07835N | 252 | 13081 | 255 |
| 02375NN | 258 | 05026N | 250 | 07842N | 252 | 13147 | 255 |
| 0290FC | 178 | 05059N | 251 | 07851N | 252 | 13262 | 255 |
| 0290FCS | 182 | 05090N | 250 | 07863N | 252 | 13310 | 255 |
| 0290FHJN | 183 | 05094N | 250 | 07894NN | 253 | 13343 | 255 |
| 0290MC | 177 | 05125N | 250 | 07917NN | 253 | 13376 | 255 |
| 0290MCP | 177 | 05158N | 251 | 07941NN | 253 | 19875 | 261 |
| 0290MCX | 179 | 05190N | 250 | 08243NN | 253 | 100010VNN | 134 |
| 0290MLC | 188 | 05194N | 250 | 08306NN | 254 | 10008VNN | 134 |
| 03367NN | 249 | 05258N | 251 | 08354NN | 253 | 10336CVNN | 135 |
| 03434NN | 249 | 05307N | 250 | 08385NN | 253 | 10337CVNN | 135 |
| 03467NN | 249 | 05738N | 251 | 08416NN | 254 | 1066DMN | 227 |
| 03500NN | 249 | 05771N | 251 | 08497NN | 253 | 1066DN | 227 |
| 03533NN | 249 | 05804N | 251 | 08529NN | 254 | 11418C | 276 |
| 03534NN | 249 | 05853N | 251 | 08560NN | 254 | 11419C | 276 |
| 03566NN | 249 | 05886N | 251 | 08642NN | 253 | 11526NN | 255 |
| 03599NN | 249 | 0590MC | 177 | 08673NN | 254 | 11592NNN | 256 |
| 03632NN | 249 | 0590MHX | 180 | 08704NN | 254 | 11748NN | 255 |
| 03633NN | 246;249 | 0590RBJN | 189 | 08737NN | 253 | 120PN | 219 |
| 03665NN | 249 | 05919N | 251 | 08768NN | 254 | 120TPN | 219 |
| 03698NN | 249 | 05968N | 251 | 08799NN | 254 | 1261MEN | 224 |
| 03731NN | 249 | 06001NN | 251 | 08832NN | 253 | 1290G | 185 |
| 03732NN | 246;247;249 | 06034N | 251 | 08894NN | 254 | 1290SF590N | 234 |
| 03762NN | 249 | 06084N | 251 | 0890CSFW | 184 | 1293SF590N | 234 |
| 03764NN | 249 | 06117N | 251 | 0890CSJ | 183 | 1293SM590N | 234 |
| 03797NN | 249 | 06150N | 251 | 0890MA | 181 | 13807MN | 257 |
| 03830NN | 249 | 062CMEN | 228 | 0890MC | 181 | 13875MN | 257 |

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
|----------|---------|--------------|-------|-------------|----------------|----------|-----------------------|
| 13930NN | 257 | 17615N | 260 | 1-400990 | 301 | 21503N | 274 |
| 1401980 | 308 | 17683N | 260 | 1-401990 | 301 | 21511N | 274 |
| 1402980 | 308 | 17751N | 260 | 1-402990 | 301 | 21512 | 273 |
| 1403980 | 308 | 17873N | 262 | 1-403990 | 301 | 21513 | 273 |
| 1404980 | 308 | 17903N | 262 | 1-510990 | 300 | 21514 | 273 |
| 1405980 | 307 | 17910N | 262 | 1-657990 | 296 | 21515 | 273 |
| 1406980 | 307 | 18057N | 262 | 1-669990 | 300 | 21516 | 273 |
| 1407980 | 308 | 18130N | 261 | 1-674990 | 299 | 21520N | 274 |
| 1408980 | 308 | 18155N | 261 | 1-679990 | 303 | 21522N | 274 |
| 1409980 | 308 | 18846N | 260 | 1-680990 | 296 | 21524N | 274 |
| 14106MN | 257 | 18861N | 260 | 1-693990 | 302 | 21526N | 274 |
| 1410980 | 308 | 18924NNN | 260 | 1-694990 | 301 | 21528N | 274 |
| 14162MN | 257 | 19136N | 261 | 1-695990 | 301 | 21687HNN | 245;253 |
| 14224MN | 257 | 193610CVSMNN | 136 | 1-697990 | 301 | 21687NN | 253 |
| 14255MN | 247;257 | 193610VNN | 136 | 1-698990 | 301 | 21690NN | 248 |
| 14290MN | 257 | 19394N | 261 | 1-750610 | 304 | 21694HNN | 246;253 |
| 14341NNN | 257 | 19427N | | 1-750620 | 304 | | 253 |
| 14547MN | | 19460N | | | 304 | 21701HNN | 245;253 |
| 14599MN | 257 | 19493N | | 1-753610 | 304 | 21701NN | |
| 14665MN | 257 | 1-232000 | | 1-753620 | 304 | 21708NN | 255 |
| 14729NN | | 1-232002 | | | 304 | 21715 | 255 |
| 1490MC | | 1-238000 | | | 305 | | 245;246;257 |
| 1490MCP | | 1-238002 | | | 304 | | 257 |
| 1490MTN | | 1-300000 | | | 304 | | 257 |
| 14942MN | | 1-300002 | | | 304 | | 257 |
| 14992MN | | 1-301000 | | 1-757620 | 305 | 21745N | 250 |
| 15024NN | | 1-301002 | | | 304 | | 250 |
| 15056NN | | 1-302000 | | | 304 | | 245:249 |
| 1570BN | | 1-302002 | | | 304 | | 248;253 |
| 1571BN | | 1-304000 | | | 304 | | 247;253 |
| 15925NNN | | 1-304002 | | | 304 | | 247;253 |
| 15991NNN | | 1-306000 | | | 304 | | 245;253 |
| 16036NNN | | 1-306002 | | . , | | | 246;253 |
| 16102NNN | | 1-310000 | | 2 | | | 248;255 |
| 16147NNN | | 1-310002 | | | 168 | | 255 |
| 16507NN | | 1-311000 | | | 272 | | 246;247;255 |
| 16540N | | 1-311002 | | | I N 134 | | 246;250 |
| 16573NN | | 1-312000 | | | 134 | | 246;247;250 |
| 166 | | 1-312002 | | | 272 | | 246;260 |
| 16663NN | | 1-313000 | | | 272 | | 249 |
| 16729NN | | 1-313002 | | | 274 | | 246;247;248;257 |
| 16761NN | | 1-320990 | | | 274 | | 249 |
| 16827NN | | 1-320993 | | | 273 | | 245;246;249 |
| 1701000 | | 1-321990 | | | 272 | | 245,240,249 |
| 175E | | 1-350000 | | | 274 | | 240,247,249 |
| 175E5 | | 1-350002 | | | 274 | | 257 |
| 175E5V | | 1-351000 | | | 273 | | 257 |
| 17505N | | 1-351000 | | | 274 | | |
| 1/ 30314 | 200 | 1-33 100E | ےا تی | C173417 | ∠/4 | | nntinued on next page |

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
|-------------|------|---------|------|---------------|------|----------|------|
| 21878N | 261 | 35031N | 269 | 37947 | 266 | 428N | 163 |
| 21881N | 250 | 35061N | 269 | 38059 | 266 | 438N | |
| 21908N | 244 | 35073N | 269 | 39855N | 267 | 433000 | 322 |
| 21910N | 244 | 35108N | 269 | 39861N | 267 | 437000 | 322 |
| 21981N | 244 | 35114N | 269 | 39873N | 267 | 438000 | 322 |
| 220000D | 319 | 36018N | 267 | 39881N | 267 | 439000 | 322 |
| 22015HNNN | 245 | 36219N | 268 | 39893N | 267 | 480000 | 323 |
| 22015NNN | 248 | 36227N | 268 | 39899N | 267 | 480002 | 323 |
| 22025NNN | 247 | 36253N | 268 | 39905N | 267 | 482000 | 323 |
| 22030HNNN | 245 | 36281N | 268 | 39911N | 267 | 484000 | 323 |
| 22030NNN | 246 | 36521N | 270 | 39923N | 267 | 484002 | 323 |
| 22040NNN | 247 | 36527N | 270 | 39929N | 267 | 485000 | 323 |
| 22062NNN | 248 | 36533N | 270 | 39935N | 267 | 486000 | 323 |
| 2210000 | | 36539N | 270 | 39947N | 267 | 487000 | |
| 22150HIN | 246 | 36545N | 270 | 39965N | 267 | 488000 | 320 |
| 2220000 | | 36557N | | 39971N | 267 | 488002 | |
| 228000 | 318 | 36563N | | 39992N | | 498000 | |
| 229000 | | 36569N | | | | 498002 | |
| 23861 | | 37N | | 4 | | | |
| 261PTHN | | 37029 | | 40076N | 267 | 5 | |
| 263PCALN | | 37060 | | 40082N | | 507CVNN | 134 |
| 263PN | | 37081 | | 40088N | | 508CVNN | |
| 2690GP | | 37116 | | 40222N | | 52910N | |
| 27N | | 37200 | | 40242N | | 5427CVNN | |
| 28N | | 37228 | | 40248N | | 5428CVNN | |
| 29N | | 37256 | | 40254N | | 5437CENN | |
| 2-651990 | | 37392 | | 40260N | | 5438CENN | |
| 2-652990 | | 37398 | | 40281N | | 552N | |
| 2-653990 | | 37404 | | 40281N | | 56 | |
| 2-654990 | | 37416 | * | 4028/N4050000 | | 572000 | |
| | | | | 4050000 | | | |
| 2-655990 | | 37430 | | | | 5720020 | |
| 2-656990 | | 37486 | | 40645N | | 573000 | |
| 2-658990 | | 37500 | | 40651N | | 573002 | |
| 2-681990-01 | | 37591 | | 40663N | | 574000D | |
| 2-682990-01 | | 37612 | | 40687N | | 5740020 | |
| 2-683990-01 | | 37619 | | 40699N | | 577000 | |
| 2-684990-01 | | 37640 | | 40705N | | 578000 | |
| 2-685990-01 | | 37752 | | 40717N | | 579000 | |
| 2-688990-01 | | 37767 | | 41DBN | | 586N | |
| 2-689990-01 | | 37779 | 266 | 410000D | 321 | 58712N | |
| 20-656990 | | 37793 | | 41018 | | 590GMEN | |
| 20-681990 | 299 | 37828 | | 41102 | | 590GMN | |
| 20-682990 | 299 | 37842 | 265 | 41612N | 268 | 590GN | 234 |
| 2DL-656990 | 295 | 37849 | 265 | 41618N | | | |
| | | 37863 | 265 | 41636N | | <u>6</u> | |
| <u>3</u> | | 37891 | 265 | 42030L | 262 | 6012INN | 225 |
| 31300N | 239 | 37898 | 266 | 426N | 163 | 605N | 160 |
| 35025N | 269 | 37926 | 266 | 427N | 163 | 605990 | 325 |

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
|-------------|---------|----------|------|----------|------|-----------|-----------------|
| 606990 | 325 | 664980 | 309 | 7960240 | 318 | 8886CVNN | 133 |
| 607990 | | 665980 | | 7960242 | | | |
| 608990 | | 666980 | | 7972180 | 318 | 9 | |
| 609990 | | 667980 | | 7972182 | 318 | 99150LN | 239 |
| 610990 | | 668980 | 309 | | | 9175N | 239 |
| 611990 | | 675990 | | <u>8</u> | | 9190C | |
| 612990 | | 675996 | 302 | 80170 | 190 | 9190NE | 188 |
| 616990 | | 676990 | | 80176 | | 9290C | 188 |
| 617990 | | 676996 | | 80263 | 190 | 9336CVNN | 133 |
| 620990 | | 677990 | | 80269 | 190 | 9336NN | 133 |
| 621FTN | | 678990 | | 80299 | 191 | 9337CVNN | |
| 622FTN | | 692990 | 303 | 80814 | 195 | 953FTN | |
| 623FTN | 225 | 6990FS | 185 | 80951 | 192 | 954FTN | 225 |
| 624FTN | | | | 80952 | 193 | 966N | 228 |
| 62635N-02 | | <u>7</u> | | 80956 | 192 | | |
| 626FTN | 225 | 7030 | 217 | 80965 | 193 | A | |
| 626990 | 324 | 7060 | 217 | 80968 | 194 | AC210BK | 7 |
| 62706N-02 | 196 | 706L | 217 | 80969 | 194 | AC210CBK | 9 |
| 62723N-02 | 196 | 727CVN | 135 | 80975 | 193 | AC210CVS | 8;9 |
| 62749N-02 | 196 | 728CVNN | 135 | 82936 | 324 | AC210VS | 6;7 |
| 62776N-02 | 196 | 729CVNN | 135 | 800990 | 307 | AC212BK | 7 |
| 627990 | 324 | 765 | 166 | 808000 | 319 | AC212CBK | 9 |
| 62811N-02 | 196 | 7776CVNN | 133 | 810000 | 320 | AC212CVS | 9 |
| 62826N-02 | 196 | 7777CVNN | 133 | 812990 | 306 | AC212VS | 6;7 |
| 62830N-02 | 196 | 790980 | 318 | 815990 | 306 | AC215BK | 7 |
| 62832N-02 | 196 | 790982 | 318 | 817980 | 320 | AC215VS | 7 |
| 62838N-02 | 196 | 791980 | 318 | 822990 | 306 | AC218BK | 7 |
| 62839N-02 | 196 | 791982 | 318 | 825990 | 306 | AC218VS | 7 |
| 628990 | 324 | 792980 | 318 | 830990 | 307 | AC224BK | 7 |
| 63103 | 195 | 792982 | 318 | 835990 | 307 | AC224VS | 7 |
| 63112 | 195 | 793980 | 318 | 896260 | 319 | AC24BK | 7 |
| 63145 | 195 | 793982 | 318 | 896262 | 319 | AC24CVS | 9 |
| 63158 | 195 | 794980 | 318 | 811990YF | 306 | AC24VS | 7 |
| 63220 | 195 | 794982 | 318 | 812990F | 306 | AC2610CVS | 8 |
| 63256 | 194;195 | 7924160 | 318 | 812990Y | 306 | AC26810CV | 8 |
| 63268 | 194;195 | 7924162 | 318 | 812990YF | 306 | AC26BK | 7 |
| 63280 | 194;195 | 7924240 | 318 | 815990F | 306 | AC26CVS | 8;9 |
| 63838 | 194 | 7924242 | 318 | 815990Y | 306 | AC26VS | 6;7 |
| 640990 | 298 | 7930240 | 318 | 815990YF | 306 | AC2812VS | 6 |
| 646LN | 228 | 7930242 | 318 | 821990Y | 306 | AC28BK | 7 |
| 650990D | 295 | 7936140 | 318 | 822990Y | 306 | AC28CBK | 9 |
| 651990D | 294 | 7936142 | 318 | 825990Y | 306 | AC28CVS | 8;9 |
| 6546CVSMLNN | 136 | 7936160 | 318 | 86N | 226 | AC28VS | 6;7 |
| 6546NN | 136 | 7936162 | 318 | 8690CK | 187 | AC3PC | 6 |
| 6547CVNN | 136 | 7936240 | 318 | 8690CS | 186 | AC610RS | 15 |
| 661980 | 309 | 7936242 | 318 | 8690FH | 186 | ACFR8VS | 14 |
| 662980 | 309 | 7948240 | 318 | 8690FSK | 186 | ACL10VS | 14 |
| 663980 | 309 | 7948242 | 318 | 8690TN | 187 | Continu | ed on next page |

330

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
|--------------------------|------|----------------------------|------|--------------------------|------|-------------------|------|
| AL725MAGN | 209 | AMB1SL6-25 | 112 | AMB2TX15-2 | 114 | AMN1C28-1 | 115 |
| AL725N | | AMB1SL8-2 | | AMB2TX15-25 | | AMN1C28-25 | |
| AL748CMEN | | AMB1SL8-25 | | AMB2TX20-2 | | AMN1C32-1 | |
| AMB1HM2-25 | | AMB1SQ1-2 | | AMB2TX20-25 | | AMN1C32-25 | |
| AMB1HM25-25 | | AMB1SQ1-50 | 112 | AMB2TX25-2 | | AMN1CSET-3 | |
| AMB1HM3-25 | 111 | AMB1SQ2-10 | | AMB2TX25-5 | | AMN2B16-1 | |
| AMB1HM4-25 | | AMB1SQ2-2 | | AMB2TX25-50 | 114 | AMN2B16-25 | |
| AMB1HM5-25 | | AMB1SQ2-50 | | AMB2TX27-50 | | AMN2B20-1 | |
| AMB1HM6-25 | | AMB1SQ3-50 | | AMB2TX30-2 | | AMN2B20-25 | |
| AMB1HMSET-6 | | AMB1TR10-25 | | AMB2TX30-50 | | AMN2B24-1 | |
| AMB1HX10-25 | | AMB1TR15-25 | | AMB2TX40-2 | | AMN2B24-25 | |
| AMB1HX12-25 | | AMB1TR20-25 | | AMB2TX40-50 | | AMN2B28-1 | |
| AMB1HX14-25 | | AMB1TR25-25 | | AMB3BPH1-25 | | AMN2B28-25 | |
| AMB1HX16-25 | | AMB1TR27-25 | | AMB3BPH2-1 | | AMN2B32-1 | |
| AMB1HX5-25 | | AMB1TR30-25 | | AMB3BPH2-25 | | AMN2B32-25 | |
| AMB1HX6-25 | | AMB1TR40-25 | | AMB3BPH3-25 | | AMN616-25 | |
| AMB1HX7-25 | | AMB1TRSET-7 | | AMB3BSQ1-25 | | AMN620-25 | |
| AMB1HX8-25 | | AMB1TX10-25 | | AMB3BSQ2-1 | | AMN624-25 | |
| AMB1HX9-25 | | AMB1TX15-2 | | AMB3BSQ2-25 | | AMSET-38 | |
| AMB1HXR10-25 | | AMB1TX15-25 | | AMB3BSQ3-25 | | AT210BK | |
| AMB1HXR12-25 | | AMB1TX20-2 | | AMB3BTX25-1 | | AT210CVS | |
| AMB1HXR5-25 | | AMB1TX20-25 | | AMB3BTX25-25 | | AT210SPUD | |
| AMB1HXR6-25 | | AMB1TX25-10 | | AMB6PH1-25 | | AT210VS | |
| AMB1HXR7-25 | | AMB1TX25-15 | | AMB6PH2-1 | | AT212BK | |
| AMB1HXR8-25 | | AMB1TX25-2 | | AMB6PH2-25 | | AT212CVS | |
| AMB1HXR9-25 | | AMB1TX25-30 | | AMB6PH3-25 | | AT212VS | |
| AMB1HXRSET-7 | | AMB1TX25-50 | | AMB6SQ1-25 | | AT215BK | |
| AMB1HXSET-9 | | AMB1TX27-50 | | AMB6SQ2-25 | | AT215SPUD | |
| AMB1PH1-2 | | AMB1TX30-50 AMB1TX40-25 | | AMB6SQ3-25 AMB6TX25-1 | | AT218BK AT24BK | |
| AMB1PH1-50 AMB1PH2-10 | | AMB11X4U-25 | | AMB61X25-1 | | A124BK | |
| AMB1PH2-15 | | AMB2CPH2-25 | | AMBH12-1 | | AT2610CVS | _ |
| AMB1PH2-2 | | AMB2CPH3-25 | | AMBH12-25 | | AT26BK | |
| AMB1PH2-30 | | AMB2PH1-50 | | AMBH2-25 | | AT26CVS | |
| AMB1PH2-50 | | AMB2PH2-1 | | AMBH3-1 | | AT26VS | , |
| AMB1PH3-2 | | AMB2PH2-15 | | AMBH3-25 | | AT28BK | _ |
| AMB1PH3-50 | | AMB2PH2-5 | | AMBH6-1 | | AT28CVS | |
| AMB1PH4-25 | | AMB2PH2-50 | | AMBH6-25 | | AT28VS | |
| AMB1PT1-50 | | AMB2PH3-50 | | AMBQ2A-1 | | ATWJ210VS | |
| AMB1PT2-2 | | AMB2SL4-25 | | AMBQ2A-25 | | ATWJ212VS | |
| AMB1PT2-50 | | AMB2SL6-25 | | AMDG3-1 | | ATWJ2610VS | |
| AMB1PZ1-25 | | AMB2SL8-1 | | AMDG3-25 | | ATWJ26VS | |
| AMB1PZ2-25 | | AMB2SL8-25 | | AMN1C16-1 | | ATWJ28VS | |
| AMB1PZ3-25 | | AMB2SQ1-50 | | AMN1C16-25 | | AUGB3BPH2-1 | |
| AMB1SL1-25 | | AMB2SQ2-1 | | AMN1C20-1 | | AUGB3BFH2-1 | |
| AMB1SL2-25 | | AMB2SQ2-5 | | AMN1C20-25 | | AUGB3B3V2-1 | |
| AMB1SL3-25 | | AMB2SQ2-50 | | AMN1C24-1 | | AUGB381723-1 | |
| AMB1SL4-25 | | AMB2SQ3-50 | | AMN1C24-25 | | AUGBQ2A-1 | |
| AND 1014 'EU | 116 | AMDEOQU-00 | 114 | AMIN 1027-20 | | 7000åEV-1 | |

| PROPUST | DACE | PROPUST | DACE | PROPUST | DACE | DRODUOT | DACE |
|----------------------------|------|-------------------|-------------|---------|--|-------------|--|
| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
| AUGN2B16-1 | | C2915MME590N | | | 61;93;94;97 | | 39;41;49;52;55 |
| AUGN2B20-1 | | C2920MME150MN | | | 92;97 | | 39;41;42;49;52;55 |
| AUGN2B24-1 | | C2920MME590N | | | 92;97 | | 39;41;49;52;55 |
| AUGN2B28-1 | | C2930MME590N | | | 92;97 | | 39;41;42;49;52;55 |
| AUGN2B32-1 | | C4ASN | | | 92;97 92:97 | | 41;42;49;52;55 |
| AUGN2BSET-3 | | C5CVN | | | | | 39;41;42;49;52;55 |
| AUGSET-30 | | C6CCSVN | | | 92;97 | | |
| AUMB3BPH2-1 AUMB3BSQ2-1 | | C6CCVN | | | 92;97 93;97 | | 49;52;56 58;59;66;72 |
| | | | | | 61;93;94;95;96;97 | | 58;59;66;72 |
| AUMB3BTX25-1 | 108 | C711H | | | 93;94;95;96;97 93;94;95;96;97 | | 58;59;66;72 |
| C | | C718 | | | | | |
| <u>C</u> C106PMN | 010 | C718 | | , , | 61;93;94;95;96;97 93:94:95:97 | |);41;59;60;62;66;72):41:59:60:62:66:72 |
| C106PMN | | C7CVN | | | , , , | | -,,,,,,- |
| C10CVN | | C7SVN | | , , | 61;93;94;95;96;97 61:93:94:95:96:97 | | 0;41;59;60;62;66;72 |
| C10SVN | | C8SMVN | | , | 43:61:93:94:96:97 | | 0;41;59;60;62;66;72 |
| C11CCSVN | | C9212 | | | ,,,, | | 48;51;55 |
| C11CCVBN | | C9212X | | | 43;61;93;94;97 | | 0;41;59;60;62;66;72 40;41;59;60;66;72 |
| | | C9212X | | | 43:93:94:97 | | |
| C11CCVN C12OTPN | | C9WN | , | | , , , | | 59;60;72 |
| C1276DN | | CAEAD316 | | | 93;97 | | 59;60;72 |
| C1276N | | | | , , | 61;92;93;94;95;97 93:94:97 | | 59;60;72 |
| | | CAEAD324 | | | , , | | 40;41;59;60;66;72 |
| C1278DN C1278N | | CAEAD332CAEBH2C | | | 93;97 | | 39;41;42;48;51;55 |
| | | | | | 93;97 | | |
| C1286DN | | CAPW10S | | | 97 | | 40;41;59;60;66;72 |
| C1286NC1288BLKN | | CAPW14 CAPW14L | | | 97 61:92:93:94:95:97 | | 0;41;59;60;62;66;72 |
| | | | | , , | | | 0;41;59;60;62;66;72 |
| C129012SFN | | CAPW18 | | , , | 61;92;93;94;95;97 | | 0;41;59;60;62;66;72 |
| C1290SF590N C1291SF590N | | CAPW24 CB08B | | | 61;92;93;94;95;97 43:61:92:93:95:97 | | 40;59;60;66;72 40;59;60;62;72 |
| C12915F59UN | | CB08BA | | | , , , , , | | 40:59:60:62:66:72 |
| | | | | | 43;92;93;95;97 | | ,,,, _ |
| C1676DN | | CB08BL | | | 92;93;97 95 | | 59;60;72 |
| C18CCRN | | CB08Y | | | 96 | | |
| C20CHN | | CB25B | | | 93 | | 81 |
| C213CN | | CB25BA | | | 94 | | 76;81 |
| C213CXN | | CB25R | | | 92 | | 76;81 |
| C213DN | | CB8 | | | 93 | | 76;81 |
| C21616THBLKN | | CBSSON | | | 92 | | 76;81 |
| C216DN | | CBSS1N | | | 91 | | 39;41;42;48;51;55 |
| C2276DN | | CBSS2N | | | 95 | | 76;81 |
| C2276MEN | | CBSS2TN | | | 94 | | 76,81 |
| C2730MMEN | | CCA20509 | | | 221 | | 76:81 |
| C2730MMEN | | CCA5428 | | | 221 | | 76;81 76;81 |
| C2750DMMN | | CCFWSON | | | 51;55 | | 81 |
| C2750MMECALN | | CCFWSIN | | | 48;52;55 | | 81 |
| C2750MMECALN | | CCP8V | | | 48;52;55 | | 81 |
| | | CCWO | | | | | |
| C2910MME590N | 233 | WUb | 01,93,94;9/ | CDD213N | 39;41;42;48;52;55 | ■ Ca | ontinued on next page |

| PRODUCT PAGE | PRODUCT PAGE | PRODUCT PAGE | PRODUCT PAGE |
|---------------------------------------|---------------------------------------|------------------------------------|---------------------------------|
| CDDS67N81 | CDS25N39;41;43;44;59;60;61; | CDS53N40;74;75;80 | CDTA14N47 |
| CDDS6N39;41;48;51;55 | 62;63;64;65;71 | CDS54N40;74;75;80 | CDTA15MDN46 |
| CDDS71N77;81 | CDS26N 39;41;42;43;44;59;60; | CDS55N40;74;75;80 | CDTA15N70 |
| CDDS72N77;81 | 61;62;63;64;65;71 | CDS56N40;75;80 | CDTA16N46;47;54 |
| CDDS73N77;81 | CDS27N39;41;42;43;44;59;60; | CDS57N40;74;75;80 | CDTA17N 46;47;59;71 |
| CDDS74N77;81 | 61;62;63;64;65;71 | CDS58N40;74;75;80 | CDTA18N 79 |
| CDDS75N81 | CDS28N 39;41;42;43;44;59;60; | CDS59N40;74;75;80 | CDTA1N 42;43;44;46;47;70 |
| CDDS76N77;81 | 61;62;63;64;65;71 | CDS5N39;41;42;43;44;47;48; | CDTA2N46;70 |
| CDDS77N77;81 | CDS29N 39;41;42;43;44;59;60; | 49;50;54 | CDTA3N46;80 |
| CDDS78N77;81 | 61;62;63;64;65;71 | CDS60N40;74;75;80 | CDTA4N46;80 |
| CDDS7N39;41;42;48;51;55 | CDS2N39;41;42;43;44;47;48; | CDS61N74;75;80 | CDTA5N85 |
| CDDS80N77;81 | 49;50;54 | CDS62N75;80 | CDTA6N43;46;47;53 |
| CDDS8N39;41;42;48;51;55 | CDS30N 42;43;44;59;60;61; | CDS63N80 | CDTA7N46;48;53 |
| CDDS9N48;51;55 | 62;63;64;65;71 | CDS64N 80 | CDTA8N 39;40;42;43;44;46; |
| CDSON 39;41;42;43;44;48;49; | CDS31N 39;41;42;43;44;59;60; | CDS66N80 | 58;59;60;61;62;70 |
| 50;54 | 61;62;63;64;65;71 | CDS6N39;41;42;43;44;47;48; | CDTA9N 46;58;59;60;61;62; |
| CDS100N82;83;85 | CDS32N 39;42;44;59;60;61; | 49;50;54 | 64;70 |
| CDS101N83;85 | 62;64;71 | CDS72N76;80 | CDTSON45;56 |
| CDS102N83;85 | CDS33N42;59;64;71 | CDS73N76;80 | CDTS10N45;73 |
| CDS103N86 | CDS37N39;41;61;71 | CDS74N76;80 | CDTS11N45;73 |
| CDS104N83;86 | CDS38N39;41;59;60;61;71 | CDS75N76;80 | CDTS1N45;56 |
| CDS105N83;86 | CDS39N 39;41;59;60;61;62;65;71 | CDS76N80 | CDTS2N45;56 |
| CDS106N83;86 | CDS3N39;41;42;43;44;47;48; | CDS77N76;80 | CDTS3N45;56 |
| CDS107N83;86 | 49;50;54 | CDS78N76;80 | CDTS4N45;56 |
| CDS11N 39;41;42;43;44;48;51;54 | CDS40N 39;41;43;44;59;60; | CDS79N76;80 | CDTS5N45;56 |
| CDS12N 39;41;42;43;44;47;48; | 61;62;63;64;65;71 | CDS7N 39;41;42;43;44;47;48; | CDTS6N45;73 |
| 50;51;55 | CDS41N39;41;43;44;59;60; | 49;50;54 | CDTS7N45;73 |
| CDS13N 39;41;42;43;44;47;49; | 61;63;64;65;71 | CDS80N 80 | CDTS8N45;73 |
| 50;51;55 | CDS42N 39;41;42;43;44;59;60; | CDS81N76;80 | CDTS9N45;73 |
| CDS14N 39;41;42;43;44;47;49; | 61;62;63;64;65;71 | CDS82N80 | CFNWSO 100 |
| 50;51;55 | CDS43N 39;41;42;43;44;59;60; | CDS84N 80 | CFNWS1 100 |
| CDS15N 39;41;42;43;44;47;49; | 61;62;63;64;65;71 | CDS87N81 | CGPS8PCSET27 |
| 50;51;55 | CDS44N 39;41;42;43;44;59;60; | CDS8N39;41;43;44;47;48; | CGS4PCSET27 |
| CDS16N 39;41;42;43;44;47;49; | 61;62;63;64;65;71 | 49;50;54 | CHBSON 72 |
| 50;51;55 | CDS45N 40;41;42;43;44;59;60; | CDS91N83;85 | CHBS10N 67;73 |
| CDS17N 39;41;42;43;44;47;49; | 61;62;63;64;65;71 | CDS92N83;85 | CHBS11N67;73 |
| 50;51;55 | CDS46N 40;41;42;44;59;60; | CDS93N83;85 | CHBS12N67;73 |
| CDS18N 39;41;42;43;44;47;49; | 64;71 | CDS94N83;85 | CHBS1N72 |
| 50;51;55 | CDS47N 40;41;42;43;44;59;60; | CDS95N83;85 | CHBS2N 72 |
| CDS19N 39;41;43;44;47;49; | 61;62;63;64;65;71 | CDS97N82;83;85 | CHBS3N 73 |
| 50;51;55 | CDS48N 40;41;42;44;59;60;61; | CDS98N82;85 | CHBS4N 73 |
| CDS1N 39;41;42;43;44;47;48; | 64;71 | CDS99N82;85 | CHBS5N 73 |
| 49;50;54 | CDS49N 40;41;42;44;58;60; | CDS9N39;41;44;47;48;49;50;54 | CHBS6N 73 |
| CDS20N 39;41;44;47;48;50;51; | 61;62;63;65;71 | CDTAON46;54 | CHBS7N 67;73 |
| 55 | CDS4N39;41;42;43;44;47; | CDTA10N 46;70 | CHBS8N 67;73 |
| CDS23N 39;41;59;60;61;65;71 | 48;49;50;54 | CDTA11N74;75;79 | CHBS9N 67;73 |
| CDS24N 39;41;44;59;60;61;62; | CDS51N71 | CDTA12N39;46;79 | CHK3PC 30 |
| 63;65;71 | CDS52N71 | CDTA13N 46;79 | CHKFM8 31 |

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
|-------------|-------|---------------|------|------------|-----------------|-----------------|---------------------|
| CHKFSAE9 | 31 | CIPW18 | 19 | CND10M | 29;30 | CRW15N | 46;69 |
| CHKFT8 | 31 | CJB635990 | 291 | CND1132 | 29 | CRW16N | 46;79 |
| CHKLABALL13 | 32 | CJB636990 | 291 | CND11M | 30 | CRW19N | 82;83;84 |
| CHKLASAE13 | 32 | CJB637990 | 291 | CND12 | 29 | CRW20N | 82;83;85 |
| CIMBS11N | 88 | CJB638990 | 291 | CND14 | 28;29 | CRW21N | 82;83;85 |
| CIMSON | 86 | CJCMO | 96 | CND316 | 28;29 | CRW22N | 83;85 |
| CIMS10N | 86;90 | CJCW1 | 96 | CND38 | 28;29 | CRW23N | 82;83;84 |
| CIMS11N | 86;90 | CJCW2 | 96 | CND516 | 28;29 | CRW24N | 84 |
| CIMS12N | 87;90 | CJCM3 | 96 | CND5M | 30 | CRW25N | 26;40;41;42;43;61 |
| CIMS13N | 87;90 | CJCW4 | 96 | CND5MM | 29 | CRW4N | 44;53 |
| CIMS14N | 87;90 | CJCW5 | 96 | CND5SAEN | 28 | CRW5N | 52 |
| CIMS15N | 87;90 | CJCW6 | 96 | CND6M | 29;30 | CRW6 | 68 |
| CIMS16N | 87;90 | CJCW7 | 96 | CND716 | 28;29 | CRW6N 39 | ;40;42;43;44;58;59; |
| CIMS17N | 87;90 | CJCM8 | 96 | CND7M | 29;30 | | 60;61;62;63;64;68 |
| CIMS18N | 87;90 | CJCM3 | 96 | CND8M | 29;30 | CRW7 | 69 |
| CIMS19N | 87;90 | CL100B | 231 | CND9M | 29;30 | CS14112 | 25 |
| CIMS1N | 87 | CL100R | 231 | CP0212 | 21;22;24 | CS144 | 22;23;25 |
| CIMS20N | 87;90 | CL150 | 231 | CP1112 | 21;22;24 | CS148 | 25 |
| CIMS21N | 87;90 | CL50 | 230 | CP13 | 21;22;24 | CS182 | 21;25 |
| CIMS22N | 87;90 | CLA100 | 230 | CP2112 | 21;24 | CS184 | 21;22;23;25 |
| CIMS23N | 87;90 | CLA100A | 230 | CP24N | 21;22;24 | CS316112 | 21;23;25 |
| CIMS24N | 87;90 | CLA100AB | 230 | CP26 | 21;22;24 | CS3164 | 21;23;25 |
| CIMS25N | 87;90 | CLA100B | 230 | CP28 | 21;24 | CS3166 | 21;22;25 |
| CIMS26N | 87;90 | CLA100R | 230 | CP36 | 24 | CS3169 | 21;25 |
| CIMS27N | 87;90 | CL0100 | 231 | CP48 | 24 | CS316R4 | 25 |
| CIMS28N | 88;91 | CLP100 | 231 | CP4PCSET | 22 | CS316R8 | 25 |
| CIMS29N | 88;91 | CLP100B | 231 | CPK325A | 173 | CS388 | 25 |
| CIMS2N | 87 | CLP100R | 231 | CPK325C | 174 | CS4PCS | 23 |
| CIMS30N | 88;91 | CLP2SETN | 142 | CPK350A | 173 | CS5166 | 25 |
| CIMS31N | 88;91 | CLP3SETN | 141 | CPK350C | 174 | CS5168 | 25 |
| CIMS32N | 88;91 | CLP5SETN | 141 | CPS2OPCSET | 21 | CS61N | 24 |
| CIMS33N | 88;91 | CN129012SF5N | 233 | CPS6PCSET | 22 | CS8506 | 207 |
| CIMS34N | 88;91 | CN1290SF590N | 233 | CPTAW8 | 16 | CS8506MP | 207 |
| CIMS35N | 88;91 | CN1290SMEN | 233 | CPW12 | 20 | CSASON | 75 |
| CIMS3N | 88 | CN1291SF590N | 233 | CPW12S | 21 | CSAS10N | 51 |
| CIMS4N | 86;90 | CN1293SDF590N | 233 | CPW16S | 21 | CSAS11N | 52 |
| CIMS5N | 86;90 | CN1293SF5871N | 233 | CRTW12 | 102 | CSAS1N | 76 |
| CIMS6N | 86;90 | CN1293SF590N | 233 | CRTW38 | 102 | CSAS2N | 76 |
| CIMS7N | 86;90 | CN1293SMEF59N | 233 | CRWON39;4 | 40;42;43;47;48; | CSAS3N | 77 |
| CIMS8N | 86;90 | CN1294SF5871N | 233 | | 49;50;52 | CSAS4N | 65 |
| CIMS9N | 86;90 | CN1294SF590N | 233 | CRW1 | 53 | CSAS5N | 65 |
| CIMSA1N | 89 | CN1294SMEF59N | 233 | CRW10 | 69 | CSAS6N | 66 |
| CIMSA2N | 89 | CN1295SF590N | 233 | CRW11 | 68 | CSAS7N | 66 |
| CIMSA3N | 89 | CN1295SME590N | 233 | CRW12 | 77 | | 50 |
| CIMSA4N | 89 | CN1295SMEN | 233 | CRW12EXT | 78 | CSAS9N | 51 |
| CINDEX18 | 276 | CN1296SF590N | 233 | CRW12N | | CSDP6SET | 28 |
| | | | | | | | |
| CIPW10S | 20 | CN1296SMEF59N | 233 | CRW13 | 78 | CSPSON | 44;59;61;74 |

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
|-------------|----------|--------------------|------|------------------|------|-------------------|------|
| CSPS1N | 74 | CTK84CMPN | 42 | FM050CM | 216 | L | |
| CSPS2N | | CW10T | | FM050CME | | L06CS | 223 |
| CSPS3N | | CW10TL | | FM060CME | | L0812US | |
| CSPS4N | | CW10TM | | FM100CME | | L1016C | 207 |
| CSRO | | CW11TM | 159 | | | L1025C | |
| CSR1 | | CW12H | 16 | <u>G</u> | | L1025CB | 207 |
| CSR2 | 82 | CW15 | 16 | GG010HNN | 135 | L1025CD | 207 |
| CSWS10N | 58;59 | CW24 | 16 | GG014HNN | 135 | L1025CME | 207 |
| CSWS11N | 74;75 | CW5T | 160 | | | L1030C | 207 |
| CSWS12N | 75 | CW7T | 158 | <u>H</u> | | L1035C | 207 |
| CSWS13N | 44 | CW812S | 158 | H26N | 137 | L1035CME | 207 |
| CSWS14MM12 | 50 | CWGLRG | 283 | H26VN | 137 | L1108B | 207 |
| CSWS14SAE12 | 49 | CWGMED | 283 | H28N | 137 | L1116 | 206 |
| CSWS1N | 47 | CWGXLG | 283 | H28VN | 137 | L1116B | 206 |
| CSWS2N | 48 | CX6DBM2 | 99 | HC253N | 218 | L1116CME | 206 |
| CSWS38B | 57 | CX6DBS2 | 99 | HC256N | 218 | L1125 | 206 |
| CSWS38MM10 | 64 | CX6PT20 | 58 | HD403DN | 217 | L1125B | 206 |
| CSWS38SAE10 | 63 | CX6RWM7 | 98 | HD403N | 217 | L1125CME | 206 |
| CSWS3N | 48;49 | CX6RWS7 | 98 | HD406DN | 217 | L1135 | 206 |
| CSWS6N | | | | HD406N | 217 | L1135B | 206 |
| CSWS7N | 62;63 | <u>D</u> | | HDH406DN | 217 | L1135CME | 206 |
| CSWS8N | 59;60 | DB12NP | 280 | HDH406N | 217 | L12CS | |
| CSWS9N | | DB16 | 278 | HTZ26 | | L1624CS | |
| CT103 | 21;26 | DB18X | | HTZ26CG | 129 | L1624RS | |
| CT153 | 21;23;26 | DB24 | | HTZ28 | | L48DS | |
| CT203 | | DB30X | | HTZ28CG | • | L610CMEN | |
| CT254 | | DHC1450000 | | HW100 | | L610N | |
| CT274 | | DKB446X | | HW223 | | L616CMEN | |
| CT304 | | DYH1453002 | 319 | HW223D | | L616N | |
| CT4PCSET | | _ | | HW223ME | | L625CMEN | |
| CT63 | | <u>F</u> | | HW226 | | L625N | |
| CTB1000 | | FB13 | | HW226D | | L725MAG | |
| CTB1410 | | FB15 | | HW226ME | | L725SCTMPN | |
| CTB1450 | | FB7 | | HW227CME | | L748MAG | |
| CTB1710 | | FE050 | | HW50 | | L912 | |
| CTB1750 | | FE050D | | HX46N | | L916L | |
| CTB2010 | | FE100 | | HYT100 | | L925L | |
| CTBR1850 | | FE100D | | HYT1000 | | L930L | |
| CTK121 | | FE150 | | HYT15CME | | L935L LSSP6-07 | |
| CTK128MP2N | | FE1500 | | HYT30CME | | L55Pb-U/ | 223 |
| CTK142 | | FE200 | | HYT50 | | М | |
| CTK14SAEN | | FE200D | | HYT50CME | 215 | <u>M</u> M1D | 140 |
| CTK150 | | FE300 | | | | M1R M1RS1 | |
| CTK16ASET | | FE300D FM015CME | | <u>↓</u> J7SN | 160 | M1X | |
| CTK21SAEN | | FM013CME | | U/ 3IN | | M2R | |
| CTK3OSETN | | FM030CME | | K | | M2X | |
| CTK70MPN | | FM0300ME | | <u>^</u> KSRN | 180 | M2X | |
| 01 K/ UMFN | 43 | 1- MOSODIAI | 210 | N3RII | 108 | MODULE | 104 |

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT |
|---------------|------|-------------|------|------------|
| мзг | 150 | OS1291F590N | 236 | PHV1430N |
| M3X | 153 | OS1293F59ON | 236 | PHV1433DMN |
| M400N | 155 | OY100 | 238 | PHV1433N |
| M45RS | 286 | 0Y50 | 238 | PQR1312N |
| M4RN | 154 | | | PQR1316N |
| M5R | 150 | <u>P</u> | | PQR1425N |
| M6R | 151 | P2133DN | 211 | PS1806DN |
| M7R | 151 | P2210MEXN | 211 | PS1806N |
| M80SS | 152 | P2212XN | 211 | PS1808DN |
| MB10 | 279 | P2335MEN | 211 | PS1808N |
| MB12 | 279 | PAC1357000 | 312 | PS1809DN |
| MB8 | 279 | PAC1357002 | 312 | PS20509C |
| MPC3SN | 155 | PAC1580000 | 313 | PS5429C |
| MPX5 | 154 | PAC1580002 | 313 | PS6549C |
| | | PAC1582000 | 313 | PSC1455000 |
| <u>N</u> | | PAC1582002 | 313 | PSC1455002 |
| NP11 | 279 | PAC1585000 | 313 | PSC1456000 |
| NS503N | 191 | PAC1585002 | 313 | PSC1456002 |
| NSP1 | 191 | PAC1596000 | 313 | PSC1457000 |
| NSP2 | 191 | PAC1596002 | 313 | PSC1457002 |
| NSP5 | 191 | PAH1420000 | 321 | PSC1458000 |
| NSP9 | 192 | PAH1420002 | 321 | PSC1458002 |
| | | PAH1424000 | 321 | PSC1460000 |
| <u>0</u> | | PAH1424002 | 321 | PSC1460002 |
| 0120PN | 235 | PAN1441000 | 316 | PSCA2SET |
| 01290SF590N | 237 | PAN1441002 | 316 | PSFE100 |
| 01293SF590N | 237 | PAN1442000 | 316 | PSFE200 |
| 0261PTHN | 237 | PAN1442002 | 316 | PSFE300 |
| 09100BN | 237 | PHV1010N | 211 | PSFM030CME |
| 09200BN | 237 | PHV1012N | 211 | PSFM060CME |
| 09300BN | 237 | PHV1023CMEN | 211 | PSFM100CME |
| OC129012SF59N | 236 | PHV1023CMN | 211 | PSMW18N |
| OC1290SF590N | 236 | PHV1024CMEN | 211 | PSMW28CL |
| OC1291SF590N | 236 | PHV1034CMEN | 211 | PSMW48CL |
| OC213DN | 235 | PHV1034DMN | 211 | PSMW48N |
| OC2276DN | 238 | PHV1035CMEN | 211 | PSMW48NM |
| OC2276MEN | 238 | PHV1035CMN | 211 | PSN1451000 |
| OC2910MME590N | 236 | PHV1048CMEN | 211 | PSN1451002 |
| OCN129012SF5N | 236 | PHV1048CMN | 211 | PSN1452000 |
| OCN1290SF590N | | PHV1048DMN | | PSN1452002 |
| OCN1291SF590N | 236 | PHV1049CMEN | 211 | PSX200C |
| OCN1293SF59ON | 236 | PHV1312DN | 211 | PSX201C |
| OCN1293SMEF5N | | PHV1312N | 211 | PSX204C |
| OCN1294SF59ON | 236 | PHV1316N | 211 | PWC9 |
| OCN1294SMEF5N | 236 | PHV1410CMEN | 211 | |
| OCN1295SF59ON | 236 | PHV1425DN | 211 | Q |
| OCN1296SF59ON | 236 | PHV1425EDN | 211 | QRL625MP |
| OCN1296SMEF5N | 236 | PHV1425N | 211 | QRL635M |
| | - | | • | - |

| DOUCT | PAGE | PRODUCT | PAGE |
|---------|---------|-------------|------------------|
| 1430N | 211 | <u>R</u> | |
| 1433DMN | 211 | RB4 | 189 |
| 1433N | 211 | RB5 | 189 |
| I312N | 210 | RB6 | 189 |
| I316N | 210 | RS1N | 164 |
| 1425N | 210 | RT200SET3 | 130 |
| 06DN | 216 | RT210CVN | 130;131 |
| 06N | 216 | RT212CVN | 130;131 |
| 08DN | 216 | RT216CVN | 131 |
| 08N | 216 | RT24CVS | 132 |
| 109DN | 216 | RT27CVN | 130;131 |
|)509C | 137;138 | RT400SGSET2 | 129 |
| 429C | 137;138 | RT410CVN | 131 |
| 549C | 138 | RT410SGVN | 129;130 |
| 455000 | 314 | RT412CVN | 131 |
| 455002 | 314 | RT412SGVN | 129;130 |
| 456000 | 314 | RTAB10CG | 118;120 |
| 456002 | 314 | RTAB12CG | 118;120 |
| 457000 | 314 | RTAB6CG | 120 |
| 457002 | 314 | RTAB8CG | 118;120 |
| 458000 | 314 | RTABCGSET2 | 118 |
| 458002 | 314 | RTABCGSET3 | 118 |
| 460000 | 315 | RTZ210 | 120;121;123 |
| 460002 | 315 | RTZ210CG | 122;124 |
| A2SET | 137 | RTZ210CGV | 123 |
| 100 | 215 | RTZ210V | 121 |
| 200 | 215 | RTZ212 | 120;121 |
| 300 | 215 | RTZ212CG | 122 |
| M030CME | 215 | RTZ212CGV | |
| M060CME | 215 | RTZ212V | 121 |
| M100CME | 215 | RTZ216 | , |
| W18N | 214 | RTZ216V | |
| W28CL | | RTZ28 | |
| W48CL | 214 | RTZ28CG | |
| W48N | 214 | RTZ28CGV | 123 |
| W48NM | | RTZ28V | |
| 1451000 | | RTZ2CGSET2 | |
| 1451002 | | RTZ2CGVSET2 | |
| 1452000 | | RTZ2SET3 | |
| 1452002 | | RWK14D | |
| 200C | | RWK14V | |
| 201C | | RWK14VR | |
| 204C | | RWK16V | 176 |
| 9 | 184 | _ | |
| | | <u>S</u> | |
| | | S1291F590N | |
| 625MP | | S1293F590N | |
| 335M | 212 | Continu | ied on next page |

| PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE | PRODUCT | PAGE |
|---------|---------|-----------|------|-------------|------|----------|---------|
| S590N | 234 | T37584 | 266 | W20 | 162 | WHCS2 | 161 |
| ST100 | 217 | T37598 | 266 | W20LH | 162 | WHN1N | 284 |
| | | T37626 | 265 | W20P | 163 | WK500V | 176 |
| I | | T37647 | 265 | W20SP | 165 | WK8V | 175 |
| T01590 | 256 | T37703 | 266 | W20W | 164 | WK9V | 176 |
| T01630 | 256 | T37755 | 264 | W22N | 162 | WKAR2 | 175 |
| T01765 | 256 | T37761 | 264 | W22P | 163 | WKF2 | 175 |
| T01888 | 256 | T37786 | 266 | W22W | 164 | WRPCLG | 285 |
| T01891 | 256 | T37800 | 266 | W30 | 165 | WS19H | 145 |
| T01974 | 256 | T37807 | 265 | W393 | 213 | WS3N | 284 |
| T066N | 228 | T37814 | 265 | W606 | 213 | WS4N | 284 |
| T1260N | 224 | T37821 | 265 | W606ME | 213 | WS6N | 284 |
| T13196 | 247;255 | T37835 | 265 | W606P | 213 | WSLP1 | 286 |
| T150MMN | | T37870 | 265 | W606PD | 213 | WSR1N | 286 |
| T21455 | 247;272 | T37919 | 266 | W606PM | 213 | WT1 | 285 |
| T21484 | 273 | T37954 | 266 | W608 | 213 | | |
| T21502 | | T37961 | | W6110 | | X | |
| T31100N | 238 | T37975 | 265 | W616 | 212 | X46FN | 227 |
| T31200N | 239 | T37982 | 265 | W616BO | 212 | X48N | 227 |
| T33001 | 271 | T37989 | 265 | W8BLT | 165 | | |
| T33007 | 271 | T37996 | 265 | W8TAAT8W | 162 | <u>Y</u> | |
| T33016 | 271 | T38003 | 265 | W912 | 161 | Y1276DN | 220 |
| T33024 | 271 | T38010 | 265 | W9210 | 212 | Y613ME | 212 |
| T35976 | 267 | T38115 | 265 | W9210ME | 212 | Y8210 | 212 |
| T35982 | 267 | T38N | 165 | W9212 | 212 | Y8212 | 212 |
| T36054 | 267 | T41096 | | W928 | 212 | | |
| T37035 | 264 | T584N | 240 | W9312 | 212 | <u>Z</u> | |
| T37053 | | T636N | | W9312D | 212 | Z20508 | |
| T37088 | | T656N | | WAL13S | | Z20508CG | 124;127 |
| T37109 | | T703 | | WC3SN | | Z20509 | |
| T37165 | | T764 | 166 | WC5LN | 283 | Z20509CG | 124;127 |
| T37172 | | TC1 | | WC5SN | | Z2SET3CG | |
| T37193 | 266 | TC213N | 218 | WCSET3CMNNN | 259 | Z2SET5CG | 124 |
| T37221 | 266 | TC5 | 167 | WDF10D | 170 | Z5426 | |
| T37249 | 265 | TG4N | 274 | WDF100 | 170 | Z5426CG | 125 |
| T37277 | 265 | TT40506 | 269 | WDF10S | 169 | Z5428 | 125 |
| T37423 | 266 | TT524N | 226 | WDF12D | | Z5428CG | |
| T37444 | 265 | TT590N | 234 | WDF12S | 169 | Z6546 | |
| T37451 | 265 | TX46N | 227 | WDF16BD | | Z6546CG | |
| T37458 | 265 | | | WDF7S | 169 | Z6548 | |
| T37472 | | <u>W</u> | | WEZSNIP | | Z6548CG | 124;127 |
| T37479 | | W1225 | | WF12 | | | |
| T37556 | 266 | W1225HLSP | 163 | WF18 | 285 | | |
| T37563 | 266 | W1226 | 164 | WF24 | 285 | | |