

Homak

professional

OWNER'S MANUAL & OPERATING INSTRUCTIONS

35" PROFESSIONAL SERIES 4 DRAWER SERVICE CART

MODEL
BK06032000 - BLACK



Homak Manufacturing
1605 Old Route 18 Suite 4-36, Wampum, PA 16157



WARNING:

1. Close and lock drawers before moving.
2. Do not stand on the product. You may fall which may cause personal injury.
3. Do not climb on, in or around. IT MAY TIP OVER! Keep away from children.
4. Unit has a maximum load capacity of 100 lb (45.4 kg) per drawer. Do not overload.
5. Do not pull, push to move.
6. Do not step in the drawers. You may fall which may cause personal injury.
7. Read all instructions and safety tips before using this product.
8. For indoor use only.
9. Fill the bottom drawer first.

THANK YOU FOR PURCHASING A HOMAK UNIT. WE APPRECIATE YOUR BUSINESS.







Congratulations on your new purchase!
Before operating your unit, please read the following carefully.

**KEEP INSTRUCTION MANUAL IN A SAFE PLACE UPON OPENING YOUR NEW UNIT.
THE KEY CODE TO YOUR HMC SECURE PREMIUM TUBULAR LOCK CAN BE FOUND
ON THE BACK OF THIS MANUAL.**

1. Before assembling parts, please check the parts quantity according to the PARTS LIST.
2. Carefully unpack and spread out all parts in a large uncluttered area.
3. Familiarize yourself with all parts and compare them with the drawing below to make sure none are missing. Read all assembly instructions before beginning.

PARTS LIST

- A) Keys
- B) Top Mats & Drawer Liner
- C) 4 Casters (2 Swivel Locking, 2 Swivel)
- D) 16 Caster Bolts
 - 16 Caster Washers
 - 16 Spring Washers for Casters
 - 16 Non-nylon Nuts
- E) 4 Legs
- F) 4 Leg Bumpers
- G) 40 Bolts for Legs and Bumpers
 - 40 Washers for Legs and Bumpers
 - 40 Spring Washers for Legs and Bumpers
 - 40 Non-nylon Nuts for Legs and Bumpers
- H) 1 Shelf
- I) 1 Push Handle
- J) 8 Push Handle Bolts / Opposite Side of Cart
 - 8 Washers for Push Handle / Opposite Side of Cart
 - 8 Nylon Locknuts for Push Handle / Opposite Side of Cart



ASSEMBLY

* We recommend that TWO PEOPLE work together on the assembly, due to the weight of this cart. Cart weight is approximately 170 lbs, please be careful during assembly.

1. Locate the key tied to the bottom tray. Using the key, open the lid and remove the caster box from the bottom drawer. After removal, make sure all drawers are completely closed and the inside lever is in the locked position. Close and lock the top lid.

2. Using the protective foam provided, lay out a work surface. Gently turn the cart onto its lid on top of the foam surface.

3. (Before assembling the legs remove the cable tie holding the bumper in place). Insert the front leg (Part E), labeled FL or FR into top lip of the cart. Then place the Front bumper (Part F) over the leg aligning the center bolt holes. With holes aligned insert stove bolt (Part G) and finger tighten with washer, spring washer, and then the nut.




4. Install back leg (Part E) labeled BL or BR and bumper (Part F) following the same procedure as above. Note: Make sure the back leg is inside the hinge rivet. Otherwise the holes will not line up during assembly.

5. Repeat steps 3 & 4 to mount the legs on the opposite side.

6. Completely tighten the 8 bolts just inserted.

7. Insert bottom shelf (Part H) between the four legs flat side facing up towards the ceiling. Insert sixteen stove bolts. (Part G) and completely tighten.

8. Mounting casters: Put the four casters (Part C) in place. The two locking casters should be on one side of the cart and the two non locking casters should be on the other (Left or right side NOT front or back). Using the 16 bolts (Part D), washers

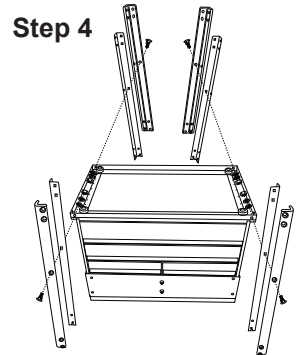

and fasteners (located in separate Caster bag) completely tighten the casters to the bottom tray using a 14mm socket and 14mm combination wrench for the bolt head. (Note: Bolt head and one washer should be on the inside of the bottom shelf, nyloc nut and one washer will be on the caster side.)

9.) Carefully turn cart onto its casters.

10.) Open top lid using the key provided.


11.) Mount push handle (Parts I) to the same side of the cart with the locking casters using the four long neck stove bolts, washers, and locknuts (Part J) provided. Finger tighten at this time.

12.) Insert remaining 4 short neck stove bolts, washers, and locknuts (Part J) provided to the opposite side of the cart. **Note: This stove bolt is shorter due to not having to pass through a handle or bumper.**


13.) Insert the remaining stove bolts, washers, spring washers, and nuts (Part G).

14.) Using 13mm socket, completely tighten all fasteners.


Step 8



Step 11



Step 13

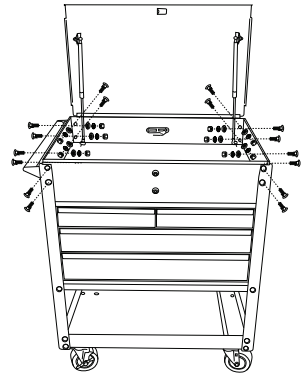

MAINTENANCE


Ball-Bearing Slides

Note: Unload drawer prior to drawer removal.

Never overload drawers.

To remove drawers and slides, pull drawer all the way out, depress the black drawer release levers on each slide. For ball-bearing glides, there is one black lever per slide. One black lever will be pushed down and the other will be pushed up for drawer removal. After levers are pushed, the drawer is released. Pull out drawer all the way for removal.

To re-install the drawer, insert guides on drawer side into slides and firmly close drawer all the way.

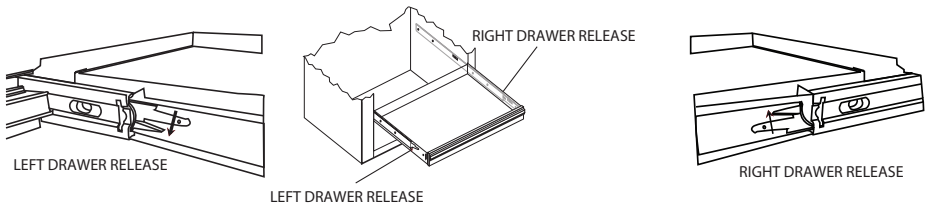

To maintain the smooth and quiet operation of the ball-bearing slides, lubricate the extension track that houses the ball bearings every 3-6 months with a high quality jelly-like petroleum based lubricant.

Powder Coat Finish

For heavy build-up of dirt and grime, our powder coat paint finish can be cleaned with spray wax. Lightly spray the wax on the surface, and gently wipe with a soft, dry microfiber cloth.

Window cleaner and a soft cloth dampened with water can be used to clean the finish on a regular basis.

Customer Satisfaction

All mechanical parts are inspected and adjusted for proper use before shipment; however, mechanisms such as drawer slides and locks may shift during transit.