


## PRODUCT DESCRIPTION

**JTape** Smooth Edge Foam Masking Tape is designed for masking door apertures to reduce the ingress of paint during the automotive refinish process. Available in two sizes.

## PRODUCT CONSTRUCTION

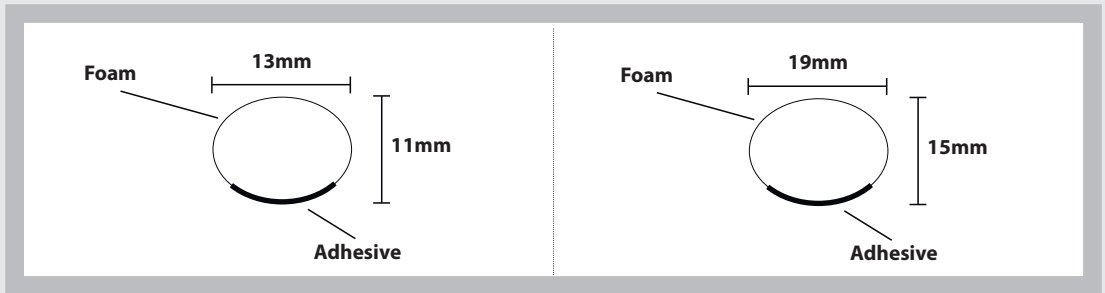

## SHELF LIFE

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

## PHYSICAL PROPERTIES

Values shown are typical values and not to be used for specification purposes.

|                  |   |                  |   |
|------------------|---|------------------|---|
| <b>Foam</b>      | White   | <b>Foam</b>      | White   |
| <b>Adhesive</b>  | Rubber  | <b>Adhesive</b>  | Rubber  |
| <b>Thickness</b> | 11mm (+/- 1mm)                                  | <b>Thickness</b> | 15mm (+/- 1mm)                                  |
| <b>Width</b>     | 13mm (+/- 2mm)                                  | <b>Width</b>     | 19mm (+/- 2mm)                                  |
| <b>Length</b>    | 50m (+/- 2.5m)                                  | <b>Length</b>    | 35m (+/- 1.75m)                                 |
| <b>Density</b>   | 30 kg/m <sup>3</sup> (+/- 4 kg/m <sup>3</sup> ) | <b>Density</b>   | 30 kg/m <sup>3</sup> (+/- 4 kg/m <sup>3</sup> ) |

## PERFORMANCE PROPERTIES

Values shown are typical values and not to be used for specification purposes.

|                               |        |         |
|-------------------------------|--------|---------|
| <b>Peel Adhesion</b>          | N/25mm | 6       |
| <b>Shear Adhesion</b>         | h/23°C | >10     |
| <b>UV Resistance</b>          |        | Limited |
| <b>Temperature Resistance</b> | 1h/°C  | 95      |