


**PRODUCT DESCRIPTION**

**JTape** Primeshield is designed for masking door apertures during the priming process - protecting the panel edges from a build up of primer. Available in two sizes.

**PRODUCT CONSTRUCTION**

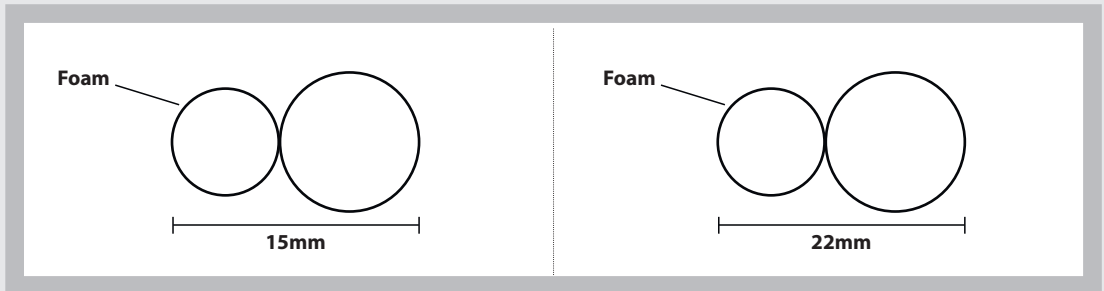

**SHELF LIFE**

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

**PHYSICAL PROPERTIES**

Values shown are typical values and not to be used for specification purposes.

<b>Foam</b>	White	<b>Foam</b>	White
<b>Thickness</b>	10mm (+/- 1mm)	<b>Thickness</b>	13mm (+/- 1mm)
<b>Width</b>	15mm (+/- 2mm)	<b>Width</b>	22mm (+/- 2mm)
<b>Length</b>	35m (+/- 0.5m)	<b>Length</b>	25m (+/- 0.5m)
<b>Density</b>	30 kg/m <sup>3</sup> (+/- 4 kg/m <sup>3</sup> )	<b>Density</b>	30 kg/m <sup>3</sup> (+/- 4 kg/m <sup>3</sup> )

**PERFORMANCE PROPERTIES**

Values shown are typical values and not to be used for specification purposes.

<b>UV Resistance</b>	Limited