

LINCOLN

Model 1550 fuel transfer pump

From the brand you trust

Lincoln's model 1550 fuel transfer pump quickly delivers diesel, kerosene or mineral spirits from both mobile and stationary tanks. The durable cast-iron housing, long-life low-friction vanes, special seal design, UL-listed motor and stainless steel outlet adapter provide reliability in even the harshest environments.

The pump's unique, three-piece, telescoping pick-up tube is suitable for a wide range of tank depths and designs, and its 360-degree, locking bung enables the operator to properly position the pump. The model 1550 delivers fuel at a rate of 15 gal./min. (57 l/min) and comes with a 13 ft. (4 m), commercial-grade, anti-static hose that is kink resistant for uninterrupted flow.



SKF


Quickly transfers fuel in agricultural, construction, mobile equipment and fleet applications



Model 1550 technical data

Voltage	12 V DC
Flow rate	15 gal./min. (57 l/min.)
Pump inlet/outlet	1 in. (25,4 mm) NPT
Hose connection	3/4 in. (19 mm) NPT
Power cord length	18 ft. (5,5 m) with heavy-duty connectors
Duty cycle	30 min.
Locking bung	Yes
Hose	13 ft. x 3/4 in. ID (4 m x 19 mm ID)
UL-listed motor	Yes
Inlet filter	Yes
Outlet adapter	Stainless steel

Model 1550 fuel transfer pump

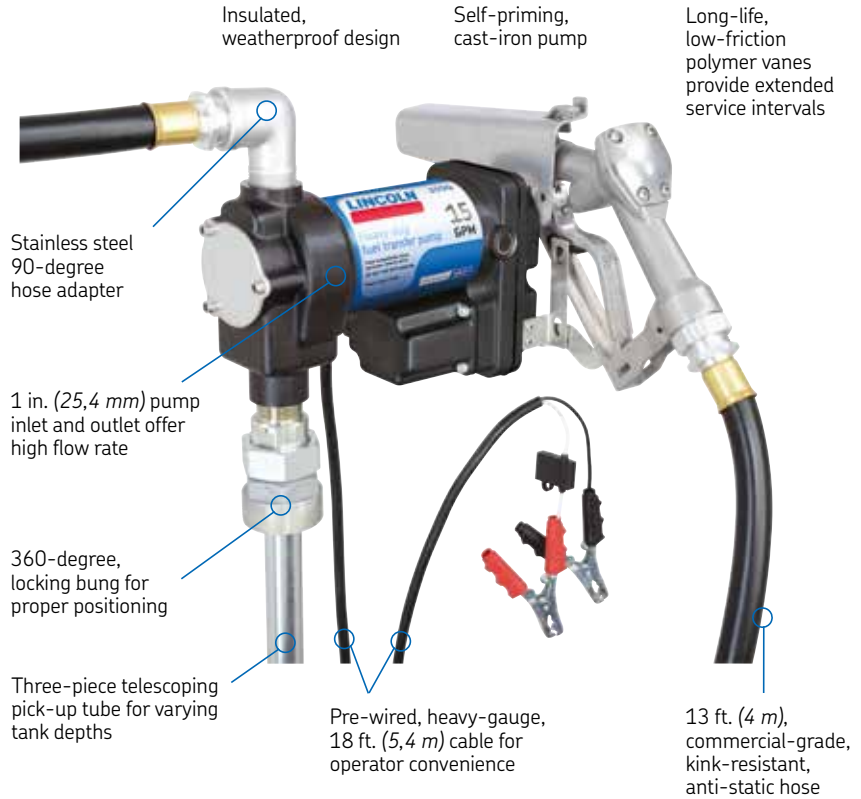

This brochure was presented by:

