




Nitrile

## Extra durability with a thin, moisture absorbing flock lining

- Soft, flock lining absorbs moisture
- Thick design resists punctures and tears
- Durable nitrile for reliable splash protection

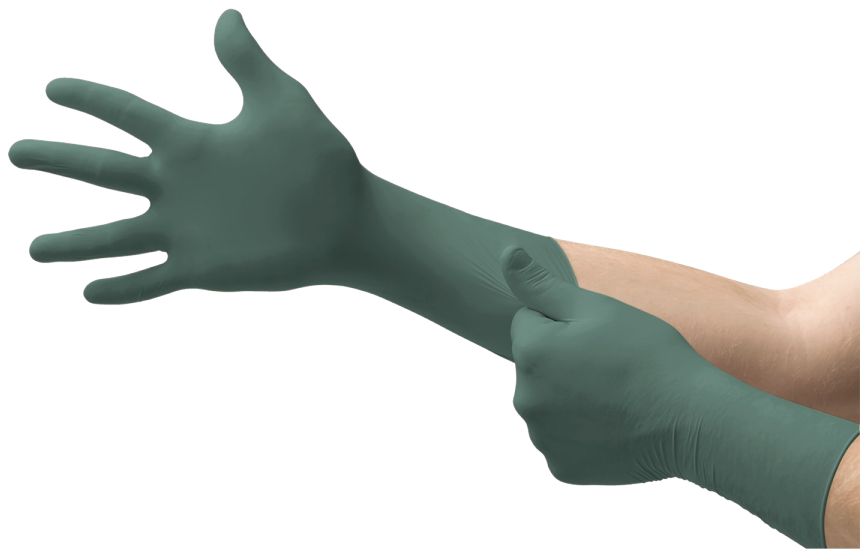

### Industries

- Automotive
- Automotive Aftermarket
- Machinery and Equipment

### Recommended For

- Production line support and maintenance
- General Purpose Auto Aftermarket
- Assembly and inspection of components



## TECHNICAL DATA SHEET

### PRODUCT INFORMATION

	<b>Dura Flock</b> <sup>®</sup> <b>DFK-608</b>
<b>Material</b>	Nitrile
<b>Color</b>	Green
<b>Glove Design</b>	Flock Lined, Fully Textured
<b>Cuff</b>	Beaded
<b>Manufacturing/QMS Audit Standards</b>	ISO 9001:2008
<b>Regulatory</b>	EN 420:2003 + A1:2009, EN 421:2010
<b>Packaging</b>	50 gloves per dispenser 10 dispensers per case 500 gloves per case
<b>Storage</b>	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
<b>Country of Origin</b>	China
<b>User Needs Segment</b>	Robust
<b>Available sizes</b>	S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11)
<b>Anti-static</b>	No

### PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	270 / 10.6		ASTM D3767, EN 420
Freedom from Holes (Inspection level I)	2.5 AQL		ASTM D5151, EN 455-1
Palm Thickness (mm/mils)	0.22 / 8.7		ASTM D3767, EN 420
Finger Thickness (mm/mils)	0.28 / 11.02		ASTM D3767, EN 420
	<b>BEFORE AGING</b>	<b>AFTER AGING</b>	
Ultimate Tensile Strength (MPa)	≥ 14	≥ 19	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412

### ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
<b>Product Code</b>	DFK-608-S	DFK-608-M	DFK-608-L	DFK-608-XL	DFK-608-XXL

### Performance Standards and Regulatory Compliance

