SERVICE PARTS LIST


Milwaukee


SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS	REVISED BULLETIN	
M18™ BATTERY	NAMED IN COLUMN	
CATALOG NO. 48-11-1815, 48-11-1820, 48-11-1828,	WIRING INSTRUCTION	
48-11-1840, 48-11-1850, 48-11-1860,		
48-11-1890		


EXAMPLE:

00 _

Component Parts (Small #) Are Included When Ordering The Assembly (Large #).

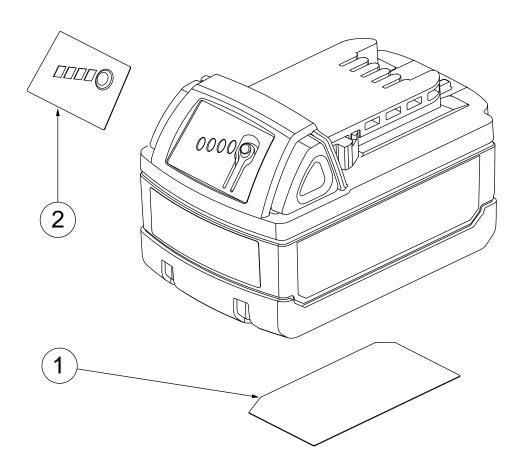





Front label

10-20-4305

TRANSPORT NOTE:

Personal transport of Li-Ion battery packs is allowed when done in accordance with these warnings and instructions. The proper classification, packaging, labeling, marking, and documentation requirements for shipping Li-Ion batteries is dependent upon whether the particular batteries are rated greater than or less than 100 Wh. Generally, Li-Ion batteries rated 100 Wh or less are "excepted" from certain Class 9 DG requirements. Always check compliance of Li-Ion battery consignments against the current regulations governing the chosen mode of transport. When in doubt, contact the carrier or another trained Dangerous Goods professional to confirm acceptability. Li-Ion packs are shipped under classification UN 3480 (battery only) or UN 3481 (batteries contained in or packed with equipment).

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.	FIG.	NOTES
1	12-20-0131	Service nameplate	(1)	1, 2	The service nameplate and front label will fit on all catalog numbers
_	40.00.4005	For at tale of	(4)		listed above.

A clean, dry surface is essential for proper performance for any adhesive system. The area intended for application of any adhesive label or nameplate must be prepared by cleaning with isopropyl alcohol. The solvent is to be applied with a clean, lint free applicator and the surface allowed to dry before applying the label or name plate.

(1)