




2. The lower switch controls the safety light. Press for constant (non-flashing) safety light. Press again to activate alternating flasher. Press again for off.

#### MODEL 1174

#### SAFETY LIGHT

1. The upper switch controls the flashlight. Lightly press the switch for momentary flashlight operation. For constant on, press the switch until it clicks. Press again for off.
2. The lower switch controls the flood /safety light. Press for floodlight. Press again to

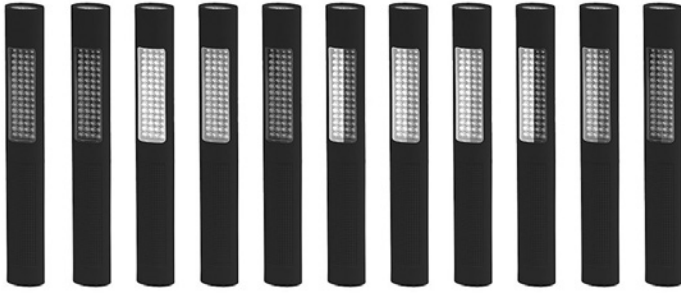

## Instruction Manual

### Safety Light / Flashlights

**Models NSP 1162 / 1164 / 1166 / 1168 / 1170  
/ 1172 / 1174 / 1176 / 1178 / 1180 / 1182**

**THANK YOU FOR PURCHASING THE SAFETY LIGHT / FLASHLIGHT.  
SAVE THESE INSTRUCTIONS.**

Please read these instructions before using your safety light / flashlight.

- CAUTION: Do not use this work light in explosive atmospheres, near flammable liquids, or where explosion-proof lamps are required. Do not immerse in water.
- CAUTION: For light duty work only.

#### INSTALLING OR REPLACING BATTERIES

1. Remove the battery cover on the lower back of the light.
2. Install the 4 AA alkaline batteries and align the battery + / - with the light housing. For best performance and run-time always use premium quality AA alkaline batteries.
3. Replace the battery cover.

#### BATTERY NOTES

- Batteries may lose power when stored for long periods.
- Alkaline batteries can leak and cause corrosion if stored for long periods. Always remove batteries if the light will be unused for extended periods.
- Batteries should be stored between 68-78°F (20-25°C)

#### ATTACHING THE LANYARD RING

The lanyard ring is made of pliable material. Loop a suitable lanyard through the rectangular lanyard attachment hole. Slide the flashlight into the ring. The ring will conform to the light body and hold the light.

#### REMOVABLE MAGNETIC CLIP

Snap the magnetic clip onto the light body. Attach to any steel surface. The light can rotate inside the clip.

#### OPERATION

##### TURNING THE SAFETY LIGHT / FLASHLIGHT ON/OFF

All models have two body switches that control the flashlight and the safety light. The flashlight and safety light functions can be operated independently and together.

##### MODELS 1162 / 1164 / 1166 / 1168

#### SAFETY LIGHT

1. The upper switch controls the flashlight. Lightly press the switch for momentary flashlight operation. For constant on, press the switch until it clicks. Press again for off.
2. The lower switch controls the safety light. Press for full power.
3. Press again for half-power. Press again to activate flashing safety light. Press again for off.

##### MODELS 1170 / 1172 / 1176 / 1178 / 1180 / 1182

#### SAFETY LIGHT

1. The upper switch controls the flashlight. Lightly press the switch for momentary flashlight operation. For constant on, press the switch until it clicks. Press again for off.