

LED Area Light Kit Rechargeable

Flood High



Flood Low



1000 Lumens



- High/Low brightness modes
- Constructed from lightweight 6061-T6 aluminum
- Multi-angle tilt and swivel design w/ magnetic base
- Rechargeable Li-ion
- Includes 6' tripod, AC and DC power supplies and carrying case



NSR1514C

LED Area Light Kit

Rechargeable

FEATURES

- High/Low brightness modes
- Constructed from lightweight 6061-T6 aluminum
- Multi-angle tilt and swivel fixture design
- Powerful magnetic base for hands-free operation
- 6' tripod with camlock adjusters
- Placed inside a durable carrying case
- Multi-fin heat sink keeps light cool to the touch
- LED is rated at 50,000 hours of life
- Adjustable comfort-grip handle
- Single sealed push button switch
- Tempered glass lens
- Powder coated for long wear
- IP-67 rated waterproof
- Impact and chemical resistant design
- Meets requirements of NFPA-1971-8.6 (2013)
- Rechargeable Li-ion
- Includes AC and DC power supplies
- 1 Year Limited Warranty

SPECIFICATIONS

- High Floodlight Lumens – 1000
- Low Floodlight Lumens – 500
- High Floodlight Run-time – 4hrs
- Low Floodlight Run-time – 8hrs
- Water Rating – IP-67 waterproof
- Drop Rating – 2m
- Length: 32in (813mm), width: 5in (127mm), height: 16in (406mm)
weight: 288oz (3629g)

INCLUDED

- Area Light
- Adjustable handle
- 6' tripod
- AC/DC power supplies
- Carrying case



Area Light
with Magnetic Base



Tripod Base



Camlock Adjusters



AC/DC Power Supplies



Area Light and Tripod
in Carrying Case

Model **UPC 0 17398**




NSR-1514C 80560 5

NSR-1514

Rechargeable LED Area Light with Magnetic Base

MARKET APPLICATIONS	Automotive, industrial, law enforcement, fire and rescue, security, hardware/tool
DESCRIPTION	The NSR-1514 Rechargeable LED Area Light with Magnetic Base is perfect when portability is important. This area light cranks out an impressive 1,000 lumens of light on high and 500 lumens on low using a single sealed push button switch. The housing is constructed from lightweight 6061-T6 aluminum and the multi-fin heat sink design keeps the fixture cool to the touch. The light can be swiveled independently allowing the user to position the fixture exactly wherever light is needed and the heavy-duty magnetic base allows the light to be attached to most metal surfaces for hands-free operation. The area light includes an adjustable handle, and AC and DC power supplies.
CASE MATERIAL	Housing - 6061-T6 aluminum - Black
DIMENSIONS	Length: 6.1in (155mm) • Width: 3.5 inches (89 mm) • Height: 12 inches (305 mm)
WEIGHT	Weight: 58.2oz (1,496g)
LENS	Tempered glass
LIGHT SOURCE	LED – Impervious to shock with a 50,000 hour lifetime.
LIGHT OUTPUT	Dual-brightness Floodlight High - 1000 Lumens, Low - 500 Lumens
ON/OFF	Single switch push button - High / Low / Off
RUN-TIME	Floodlight High - 4 hrs, Floodlight Low - 8 hrs
BATTERY	Integrated Lithium-ion battery
CHARGING	AC & DC wall power supply/charger. Charges in 9 hrs (typical)
FEATURES	<ul style="list-style-type: none">• High/Low brightness modes• Constructed from lightweight 6061-T6 aluminum• Multi-angle tilt and swivel fixture design• Powerful magnetic base for hands-free operation• Multi-fin heat sink keeps light cool to the touch• LED is rated at 50,000 hours of life• Adjustable comfort-grip handle• Single sealed push button switch• Tempered glass lens• Powder coated for long wear• IP-67 rated waterproof• Impact and chemical resistant design• Meets requirements of NFPA-1971-8.6 (2013)• Rechargeable Li-ion• Includes AC and DC power supplies• 1 Year Limited Warranty

APPROVALS

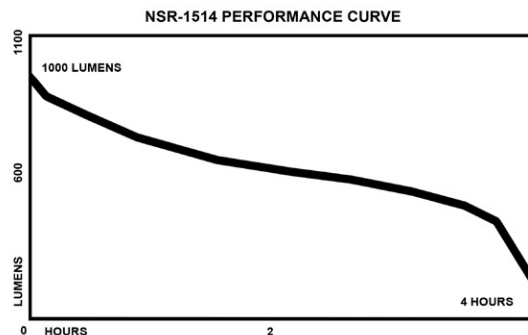

NSR-1514

Rechargeable LED Area Light with Magnetic Base

MARKET APPLICATIONS	Automotive, industrial, law enforcement, fire and rescue, security, hardware/tool
DESCRIPTION	The NSR-1514 Rechargeable LED Area Light with Magnetic Base is perfect when portability is important. This area light cranks out an impressive 1,000 lumens of light on high and 500 lumens on low using a single sealed push button switch. The housing is constructed from lightweight 6061-T6 aluminum and the multi-fin heat sink design keeps the fixture cool to the touch. The light can be swiveled independently allowing the user to position the fixture exactly wherever light is needed and the heavy-duty magnetic base allows the light to be attached to most metal surfaces for hands-free operation. The area light includes an adjustable handle, and AC and DC power supplies.
CASE MATERIAL	Housing - 6061-T6 aluminum - Black
DIMENSIONS	Length: 6.1in (155mm) • Width: 3.5 inches (89 mm) • Height: 12 inches (305 mm)
WEIGHT	Weight: 58.2oz (1,496g)
LENS	Tempered glass
LIGHT SOURCE	LED – Impervious to shock with a 50,000 hour lifetime.
LIGHT OUTPUT	Dual-brightness Floodlight High - 1000 Lumens, Low - 500 Lumens
ON/OFF	Single switch push button - High / Low / Off
RUN-TIME	Floodlight High - 4 hrs, Floodlight Low - 8 hrs
BATTERY	Integrated Lithium-ion battery
CHARGING	AC & DC wall power supply/charger. Charges in 9 hrs (typical)
FEATURES	<ul style="list-style-type: none"> • High/Low brightness modes • Constructed from lightweight 6061-T6 aluminum • Multi-angle tilt and swivel fixture design • Powerful magnetic base for hands-free operation • Multi-fin heat sink keeps light cool to the touch • LED is rated at 50,000 hours of life • Adjustable comfort-grip handle • Single sealed push button switch • Tempered glass lens • Powder coated for long wear • IP-67 rated waterproof • Impact and chemical resistant design • Meets requirements of NFPA-1971-8.6 (2013) • Rechargeable Li-ion • Includes AC and DC power supplies • 1 Year Limited Warranty
WARRANTY	Limited 1-Year Warranty
APPROVALS	