

2 CR123

FORTEM™ HELMET LIGHT

FORTEM™ XPP-5466R



## NEW 360° MOUNT

Positions light **at any angle** and **holds firm**.

CERTIFIED  
INTRINSICALLY  
**SAFE**  
CLASS I DIV 1



Provides **maximum versatility and safety**.



## DUAL-LIGHT

**POWERFUL SPOTLIGHT AND 45° FLOODLIGHT**



The durable **integrated brim mount** clamps securely to nearly all helmets.



**360-degree mount** provides user infinite aiming options, as well as clearance for external shields.



Helmet clamp features **no-mar rubber foot** for robust grip and peace of mind.



Large spotlight and floodlight buttons are **designed to be activated with gloved hand**.

# 250 LUMENS



**FORTEM™****DUAL-LIGHT™ HELMET LIGHT****2 CR123****ITEM NUMBER/UPC**

XPP-5466R - 017398805940

**CERTIFICATIONS**

- CE
- cULus
- NFPA 1971-8.6 (2013)

**CASE MATERIAL**

- 6061-T6 aluminum

**LUMENS/RUNTIME****SPOTLIGHT**

- HIGH: 250L, 3.5 hrs. runtime
- MEDIUM: 100L, 6.5 hrs. runtime
- LOW (SURVIVALMODE) 25L: 16 hrs. runtime

**FLOODLIGHT**

- HIGH: 115L, 3.5 hrs. runtime
- MEDIUM: 50L, 6.5 hrs. runtime
- LOW (SURVIVAL MODE) 10L: 16 hrs. runtime

**DUAL-LIGHT**

- 150L, 3.5 hrs. runtime

**CANDELA**

- HIGH: 10,335
- MEDIUM: 3,975
- LOW: 1,021

**BEAM DISTANCE****SPOTLIGHT**

- HIGH: 203m
- MEDIUM: 126m
- LOW: 64m

**WATER RATING**

- IP-67 (waterproof)

**DROP RATING**

- 2 meters

**DIMENSIONS**

- LENGTH: 3.2 in (81mm)
- WIDTH: 1.4 in (36mm)
- DEPTH: 3.2 in (81mm)
- BEZEL DIAMETER: 1.1 in (28mm)
- WEIGHT: 7.2 oz (204g)

**BATTERY**






- 2 CR123 batteries (included)

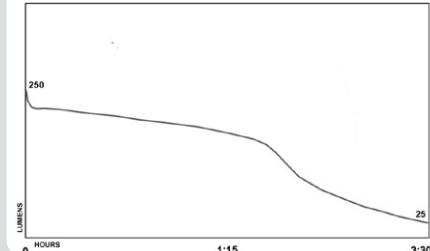
**WARRANTY**

- Limited lifetime warranty

**WHAT'S INCLUDED**

- Helmet Light
- 2 CR123 batteries

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>250</b> LUMENS	<b>100</b> LUMENS	<b>25</b> LUMENS
	<b>3h 30min</b>	<b>6h 30min</b>	<b>16h</b>
	<b>203m</b>	<b>126m</b>	<b>64m</b>
	<b>10,335cd</b>	<b>3,975cd</b>	<b>1,021cd</b>
	<b>2m</b>		<b>1m</b>

**XPP-5466R PERFORMANCE CURVE**

E 467756

INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

Bayco Products, Inc.

XPP-5466

ID 4001184

CE 0359

CLASS I DIV 1 GRPS A-D T4  
 CLASS II & III DIV 1 GRPS E-G T135°C  
 CLASS I ZONE 1 AEx ia IIC T4 Ga  
 CLASS I ZONE 1 Ex ia IIC T4  
 -20°C ≤ Tamb ≤ +40°C  
 3.0V/Cell / Energizer 123

SEE INSTRUCTION MANUAL  
VOIR MANUEL

CERTIFIED



NFPA

