



# REPORT

3933 US ROUTE 11    CORTLAND, NEW YORK 13045

Order No. 3196092

Date: December 3, 2009

REPORT NO. 3196092CRT-001

TEST OF A FLASHLIGHT, MODEL: 9410

RENDERED TO

PELICAN PRODUCTS

TEST: Mechanical shock testing was requested by the client.

AUTHORIZATION: The tests were authorized by quote no. Q500157919

SPECIFICATION: NATIONAL FIRE PROTECTION ASSOCIATION, NFPA, 1901 Automotive Fire Apparatus.

DESCRIPTION OF SAMPLE: The client supplied one sample. The sample was received by Intertek on November 24<sup>th</sup>, 2009 and tested as received. Sample designation number is N09V035.

DATE OF TEST: December 1<sup>st</sup>, 2009.

Sample	Specification	Result
N09V035 Configuration 1	NFPA, 1901	Pass
N09V035 Configuration 2	NFPA, 1901	Pass



EQUIPMENT LIST

Equipment Used	Model Number	Control Number	Calibration Due Date
Vibration Controller	UDC	V254	09/18/2010
Signal Conditioner	CVA-4	V252	11/20/2010
Accelerometer	10B10T	V253	08/18/2010
Accelerometer	10B10T	V255	08/18/2010
Torque wrench	DM70NM	N580	04/15/2010

TEST, TEST METHOD, AND RESULTS OF TEST

MECHANICAL SHOCK TEST: NFPA, 1901 Automotive Fire Apparatus:


Test Procedure:

The test sample was mounted in design orientation. The test fixture was rigidly secured to a vibration exciter. The test sample was subjected to a 11ms Half sine shock pulse in the three mutually perpendicular axes for configuration 1 and configuration 2.

Axis	g-pk	Number of pulses	Width (ms)	Type
Longitudinal	9g	3+, 3-	11ms	Half Sine
Horizontal	3g	3+, 3-	11ms	Half Sine
Vertical	3g	3+, 3-	11ms	Half Sine



TEST, TEST METHOD, AND RESULTS OF TEST, Cont'd:

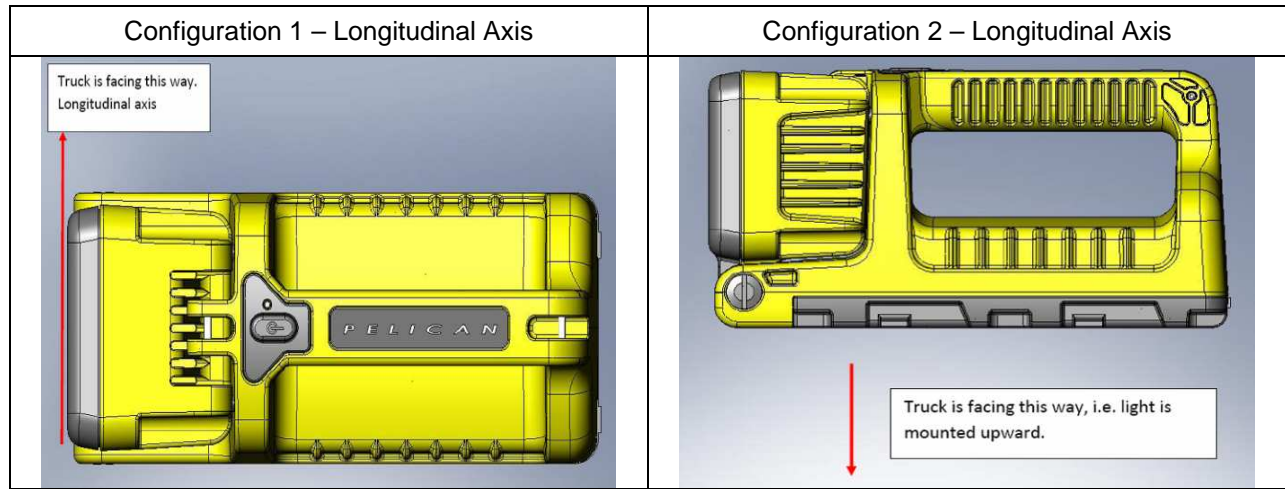

Results:

The test sample showed no signs of visible damage throughout testing. Test sample remained attached to the vehicle mounting device throughout the testing. Test sample maintained physical and electrical integrity.

In Charge Of Tests

Peter Leshkiv  
Technician I  
Lighting Division

Report Reviewed By:



Christopher W. Metcalf  
Project Engineer  
Lighting Division

Attachment: Picture page.  
Mechanical shock plot page.

TEST OF A FLASHLIGHT, MODEL: 9410  
TESTED FOR PELICAN PRODUCTS.



TEST OF A FLASHLIGHT, MODEL: 9410  
TESTED FOR PELICAN PRODUCTS.

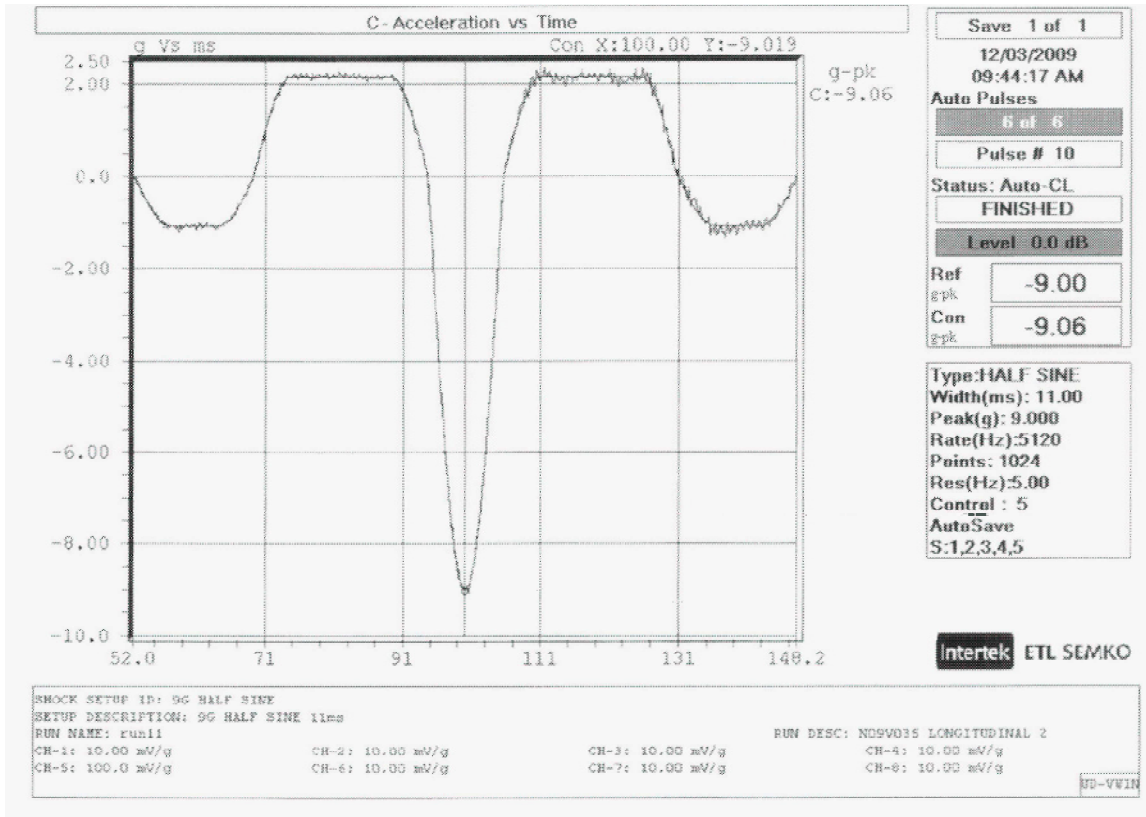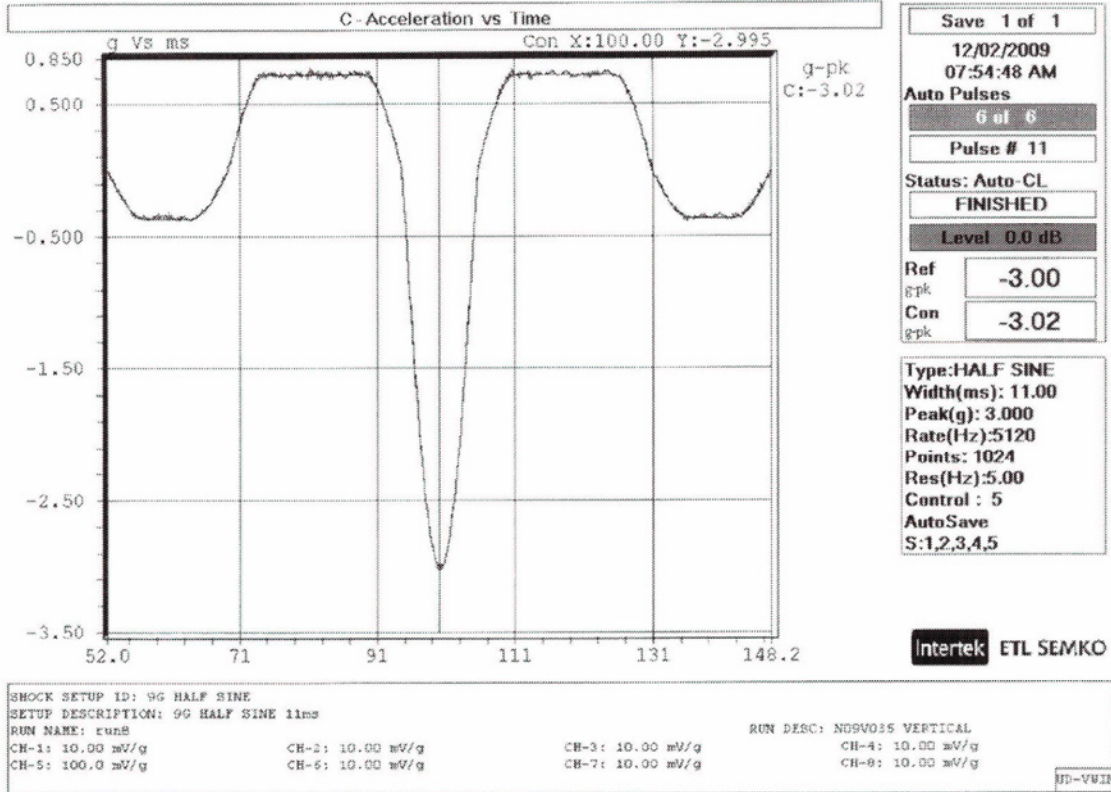



**\*\*\*IMPORTANT SAFETY NOTICE\*\*\***  
**\*\*\*RECALL NOTIFICATION\*\*\***

Re: Pelican 9410L Flashlights and Catalog #9419L Replacement Battery Packs

Our records indicate that, between May 1, 2014 and October 13, 2015, you may have purchased the above-referenced flashlights (“Lights”) or replacement battery packs (“Battery Packs”) (collectively, the “Products”). Pelican Products, Inc. (“Pelican”) is voluntarily recalling these Products in cooperation with the U.S. Consumer Product Safety Commission (“CPSC”).

**Product being recalled:**

- Pelican 9410L Flashlights (“Lights”) in yellow and black showing a manufacturer part number of 9410-021-245 (for yellow Light) and 9410-021-110 (for black Light);
- The Catalog #9419L Replacement Battery Packs showing a manufacturer part number of 9413-301-001.

Please note that the Lights equipped with lithium ion Battery Packs are the subject of this recall. Pelican’s nickel metal hydride battery packs are not being recalled.

**Reason for Recall:** The battery packs in the flashlights can overheat, posing a fire hazard to consumers.










# Flashlight ANSI Standards

While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific needs.

As a result, the American National Standards Institute (ANSI) with input from the flashlight industry, developed performance standards and symbols to effectively communicate a flashlight's features and benefits.

Resulting ANSI/NEMA FL 1 Standards include the six criteria described below:

	<p><b>LIGHT OUTPUT</b></p> <p>Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.</p>
	<p><b>RUN TIME</b></p> <p>Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.</p>
	<p><b>BEAM DISTANCE</b></p> <p>Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").</p>
	<p><b>PEAK BEAM INTENSITY</b></p> <p>Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.</p>
	<p><b>IMPACT RESISTANCE</b></p> <p>Impact Resistance is the degree to which a device resists damage from dropping on a solid surface.</p>
	<p><b>IPX4 WATER PENETRATION RATINGS</b></p> <p>IPX4 - Water Resistance - Water splashed against the device from any direction shall have no harmful effects.</p>
	<p><b>IPX7 / IPX8 WATER PENETRATION RATINGS</b></p> <p>IPX7 - Water Proof - Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.</p> <p>IPX8 - Submersible - Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.</p>

## ANSI (AMERICAN NATIONAL STANDARDS INSTITUTE)

These standards are accredited by ANSI, which is a private non-profit organization that oversees the development of voluntary consensus standards for products, services, processes, systems, and personnel in the United States. The organization also coordinates U.S. standards with international standards so American products can be used globally.

## GLOSSARY OF TERMS

**Candela** - A unit of measurement of the intensity of light that is, power emitted by a light source in a particular direction.

**Lux** - The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

**Lumen** - A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

**Integrating Sphere** - An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

**IP (Ingress Protection)** - Ingress Protection (IP) ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) where the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids.