

**FLASHLIGHTS - PELICAN LIMITED LIFETIME GUARANTEE OF EXCELLENCE**

Pelican Products, Inc. guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

**REMOTE AREA LIGHTING SYSTEMS - PELICAN**

**1 YEAR LIMITED WARRANTY FOR RALS PRODUCTS**

Pelican Products, Inc. guarantees to the original purchaser of its **RALS** products that its products will be free of defects in materials and workmanship for one year from the date of purchase. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.



**LIGHTS CATALOG**

JANUARY 2017



**REMOTE AREA LIGHTING SYSTEMS**

**SMALL LIGHTS**

**MEDIUM LIGHTS**

**LARGE LIGHTS**

**TACTICAL LIGHTS**

**HEADLAMPS**

**RIGHT ANGLE LIGHTS**

**DIVE LIGHTS**

**SPECIALTY LIGHTS**



**DEAR CUSTOMER,**

Lighting tools – they're a core element of every toolbox. They have a straightforward and simple purpose. Yet, when you're in a situation that requires a lighting tool, you want to make sure you have the right one. Pelican understands the critical importance of this tool. We provide a wide range of advanced lighting systems to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools and remote area lighting systems enable you to accomplish your tasks in a safer and more efficient manner.

With this perspective, Pelican relentlessly pursues innovation for new lighting tool products and manufacturing processes. We have adopted the ANSI FL-1 flashlight standards (see page 2) and continue to increase the number of industry leading safety certificates for specific models.

Our new lighting catalog features multiple technology advances. These include state of the art LED performance upgrades, new electronic features, upgraded safety certificates and enhanced packaging. We are committed to environmentally responsible manufacturing, in fact most of our lights use LED bulbs that help protect our planet. LEDs are long lasting, promote extended battery life and allow for the latest technological advancements.

From basic models to the high-performance 9410L LED Lantern (our brightest handheld flashlight to date) and the 9470 Remote Area Lighting System (which delivers 12,000 lumens), we are ready to provide world-class support for our dealers and end users across the globe. And, all of this comes with Pelican's industry-leading guarantee of excellence.

We invite you to look through our new catalog and discover the ideal lighting tools for your specific needs.

CEO and President  
Lyndon Faulkner



MARKETS SERVED//

**Fire**  
**Military**  
**Industrial**  
**Law Enforcement**  
**Outdoor**  
**Consumer**  
**Dive**



**REMOTE AREA LIGHTING SYSTEM** PGS 04-07



**SMALL LIGHTS** PGS 08-09



**MEDIUM LIGHTS** PGS 10-13



**LARGE LIGHTS** PGS 14-15



**TACTICAL LIGHTS** PGS 16-17



**HEADLAMPS** PGS 18-21




**RIGHT ANGLE LIGHTS** PGS 22-25



**DIVE LIGHTS** PGS 26-27



**SPECIALTY LIGHTS** PGS 28-29

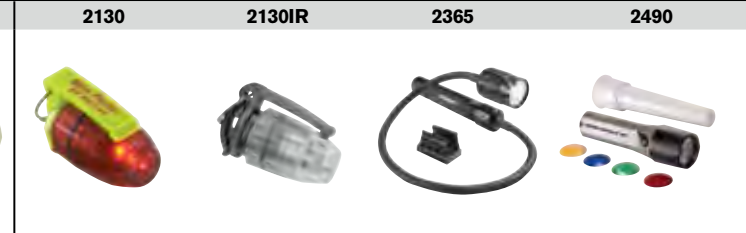

## PELICAN LIGHTING TOOLS: MORE THAN JUST FLASHLIGHTS.

Here are just a few features that make our lighting tools shine:



**WIRELESS BLUETOOTH CONTROL**  
(on select models only)



**SELF PROGRAMMABLE**  
(on select models only)



**GESTURE ACTIVATION**  
(on select models only)



**PHOTOLUMINESCENT DESIGNS**  
(on select models only)



**BATTERY LEVEL INDICATION**  
(on select models only)



**DOWNCAST LIGHTING FEATURES**  
(on select models only)



**UNDERWATER APPLICATIONS**  
(on select models only)



**LEGENDARY LIFETIME GUARANTEE**



**INTELLIGENT CONTROL**  
(on select models only)





# TABLE + OF CONTENTS

<b>Performance &amp; Safety</b>	<b>2-3</b>
<b>Remote Area Lighting Systems</b>	<b>4-7</b>
<b>Small Lights</b>	<b>8-9</b>
<b>Medium Lights</b>	<b>10-13</b>
<b>Large Lights</b>	<b>14-15</b>
<b>Tactical Lights</b>	<b>16-17</b>
<b>Headlamps</b>	<b>18-21</b>
<b>Right Angle Lights</b>	<b>22-25</b>
<b>Dive Lights</b>	<b>26-27</b>
<b>Specialty Lights</b>	<b>28-29</b>
<b>Light Mounting Systems Holster and Holder Styles</b>	<b>30-31</b>
<b>Specifications</b>	<b>32-35</b>
<b>Custom Labels   Lighting Features</b>	<b>36-37</b>

TABLE OF CONTENTS


# PERFORMANCE

## STANDARDS AND RATINGS

(Applicable to flashlights only)

### LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.

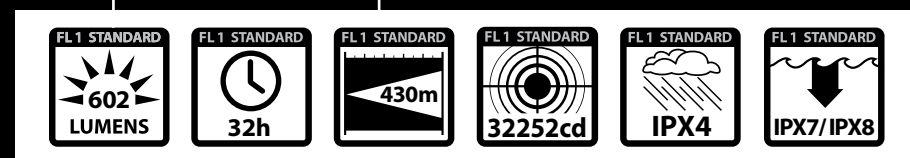

### RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.

### BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon “on a clear night in an open field”).

### PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.

### WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.

### WATERPROOF/SUBMERSIBLE

**Water Proof // IPX7** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time. **Submersible // IPX8** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.



## NEW DEEP MOUNT LED TECHNOLOGY

Our engineering team has designed a new high performance LED lamp module (Deep Mount LED Module). These lights are now brighter, with close to 100% increase in lumens and a 2.5 times increase in lux value over previous versions (as well as offering a more robust design).

- A New deep dish reflector provides up to 2.5 times lux increase, and 100% lumen increase
- B Robust, over-molded polycarbonate lens won't yellow
- C Opti-mechanical design gathers and focuses 100% of the light
- D LED is mounted directly to the PCB board, creating a strong and efficient design solution

## ANSI STANDARDS □ (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the flashlight industry, developed

performance standards and symbols to effectively communicate a flashlight's features and benefits.

The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

## GLOSSARY OF TERMS

**Candela** A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

**Lux** The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

**Lumen** A unit of measurement of the amount of brightness that comes from a light source. Lumens define “luminous flux,” which is energy within the range of frequencies we perceive as light.

**Integrating Sphere** An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

**IP** (Ingress Protection) – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) whereas the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

**Rechargeable** Denotes a flashlight which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.



# SAFETY.

## YOUR PASSPORT THROUGH HAZARDOUS LOCATIONS

Whether working in a **Class I** Oil Refinery or in the silo of a **Class III** Textile Mill, safety is always a concern and your lighting tool shouldn't add to your worries. Pelican builds lighting tools approved for any work environment. In fact we and groups **ABCDEFG** than anyone else.

### HAZARDOUS AREA ELECTRICAL GUIDELINES

CLASSIFICATIONS	SUBSTANCE	TYPICAL ENVIRONMENTS
CLASS I DIVISION 1 DIVISION 2	Flammable Gases, Vapors, or Liquids	Oil Refinery, Paint Warehouse Spray Booth, Offshore Oil Rig
CLASS II DIVISION 1 DIVISION 2	Combustible Dusts	Coal Mine, Munitions Factory, Grain Silo, Hay Storage Facility
CLASS III DIVISION 1 DIVISION 2	Ignitable Fibers & Flyings	Paper Mill, Woodworking Facility, Textile Mill, Cotton Gin

**Division 1 (hazard likely):** Where volatile substances can exist all of the time or some of the time under normal operating conditions.  
**Division 2 (hazard not likely):** Where volatile substances are not likely to exist under normal operating conditions.



# RAALS

## REMOTE AREA LIGHTING SYSTEMS

Providing increased performance, safer working conditions, emergency preparedness and greater flexibility, Pelican's RAALS line is the modern alternative to generator based lighting:

- Silent performance
- No flammable fuel
- Eliminated trip hazards
- No exhaust fumes
- Remote activation



### 9420XL RAALS

**LIGHT SOURCE** LED  
**BATTERIES**//Lithium ion  
**DIMENSIONS**//29" (73.6 cm) Closed, 62" (157.4 cm) Deployed  
**MODES**// High / Low  
**BEAM SPREAD**// 58°, 2 LEDs per head

LUMENS  
 RUN TIME UP TO  
**1000**  
**4h**



### 9430 RAALS

**LIGHT SOURCE**//LED  
**BATTERIES**//Sealed Lead Acid  
**DIMENSIONS**//15.75" (40 cm) Closed, 32.28" (82 cm) Extended  
**MODES**// High / Low  
**BEAM SPREAD**// 125°, 6 LEDs

LUMENS  
 RUN TIME UP TO  
**3000**  
**15h**



### 9430SL SPOT LIGHT RAALS

**LIGHT SOURCE**//LED  
**BATTERIES**//Sealed Lead Acid  
**DIMENSIONS**//15.75" (40 cm) Closed, 32.28" (82 cm) Extended  
**MODES**// High / Low  
**BEAM SPREAD**// 10°, 24 LEDs

LUMENS  
 RUN TIME UP TO  
**2000**  
**15h**



### 9435 SAFETY LIGHT RAALS

**LIGHT SOURCE**//LED  
**BATTERIES**//NiMH  
**DIMENSIONS**//15.75" (40 cm) Closed, 32.28" (82 cm) Extended  
**MODES**// High / Low  
**BEAM SPREAD**// 90°, 18 LEDs  
**CERTIFICATIONS**// CI, D2

LUMENS  
 RUN TIME UP TO  
**1500**  
**10h**  
 SAFETY CERTIFIED



### 9440 RAALS

**LIGHT SOURCE**//LED  
**BATTERIES**//Lithium-Ion  
**DIMENSIONS**//37.4" (95 cm) Closed, 85"(215.8 cm) Extended  
**MODES**// High / Medium / Low  
**BEAM SPREAD**// 120°, 10 LEDs

LUMENS  
 RUN TIME UP TO  
**5300**  
**8h**




### 9500 SHELTER LIGHTING SYSTEM

**LIGHT SOURCE**//LED  
**INPUT VOLTAGE**//12 - 30vdc or 110-240vac  
**DIMENSIONS**//20.62"(52.4 cm) Closed, 157.5" (399.9 cm) Extended  
**LIGHT OUTPUT**// 6000 (White LED) Per Head, 1200 (Red LED) Per Head  
**BEAM SPREAD**// 210° Diffused, 36 LEDs per head 24 White/12 Red, 3 lamp heads  
**PELICAN CASE**// Included

LUMENS  
 RUN TIME UP TO  
**6000**



Select between white light or red night vision mode

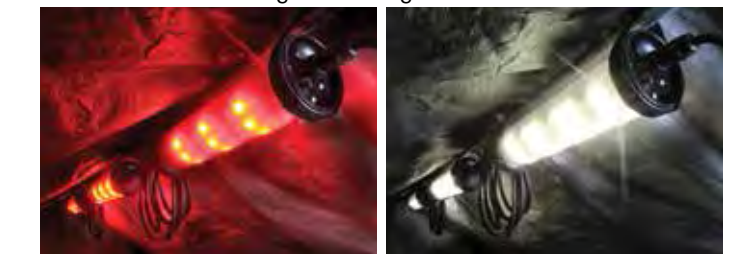



## 9460/9460M RALS

**LIGHT SOURCE**// LED  
**BATTERIES**// Sealed Lead Acid  
**DIMENSIONS**// 23.25"(59.1 cm) Closed, 79.50" (201.9 cm) Deployed  
**MODES**// Variable Light Output / Flashing / 3 Preset Levels  
**BEAM SPREAD**// 120°, 10 LEDs per head, 2 lamp heads



LUMENS  
**12000**  
 RUN TIME  
**24h**



**INTELLIGENT CONTROL SYSTEM**  
 calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



9460



9460M

## 9470/9470M RALS

**LIGHT SOURCE**// LED  
**BATTERIES**// Sealed Lead Acid  
**DIMENSIONS**// 24.75" (62.9 cm) Closed, 80.00"(208.3 cm) Deployed  
**MODES**// Variable Light Output / Flashing / 3 Preset Levels  
**BEAM SPREAD**// 120°, 10 LEDs per head, 4 lamp heads



LUMENS  
**24000**  
 RUN TIME  
**24h**



**INTELLIGENT CONTROL SYSTEM**  
 calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



9470



9470M

## 9460, 9460M, 9470, 9470M FEATURES



**12V POWER SUPPLY WITH DUAL USB ADAPTER**  
 12 volt power supply port can be used to power any electrical product that utilizes a standard 12v vehicle style connector (up to 4 amps) or a variety of USB connections.



**BLUETOOTH™ CONTROL**  
 Bluetooth app controls multiple units and variable light from 0-100% output. Free App for iOS™ and Android™.



**MULTI-TERRAIN TROLLEY (ONLY ON 9460M, 9470M)**  
 Large 1.5 inch polyurethane wheels allow for easier transport across rough surfaces. Molded feet level and stabilize case.

## 9480 RALS

**LIGHT SOURCE**// LED  
**BATTERIES**// Sealed Lead Acid  
**DIMENSIONS**// 15.50 (39.4 cm) Closed, 23.75" (60.3 cm) Deployed  
**MODES**// High/ Medium / Low / Flashing  
**BEAM SPREAD**// 125°, 8 LEDs



LUMENS  
**4000**  
 RUN TIME  
**28h**



Bluetooth



Bluetooth

## 9490 RALS

**LIGHT SOURCE**// LED  
**BATTERIES**// Sealed Lead Acid  
**DIMENSIONS**// 20" (50.8 cm) Closed, 72" (182.9 cm) Deployed  
**MODES**// High/ Medium / Low/ / Flashing / (6000-Variable)  
**BEAM SPREAD**// 125°, 10 LEDs



LUMENS  
**6000**  
 RUN TIME  
**24h**



**INTELLIGENT CONTROL SYSTEM**  
 calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



**SWAPPABLE POWER PACK**  
 Swappable power pack w/12v aux. port adapter powers smartphones, laptops, etc.



**BATTERY LEVEL INDICATOR**  
 Full time battery level indication.



**BLUETOOTH™ CONTROL**  
 Bluetooth app controls multiple units and variable light from 0-100% output. Free App for iOS™ and Android™.



# SMALL LIGHTS

When compact is a must or just a convenience, choose from Pelican's range of powerful lights. Whether composite or alloy, certified or colored, you'll find the perfect model for your next job.



## 1810

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 LR 41 Alkaline (included)  
**LENGTH//**  
1.50" (3.8 cm)



LUMENS  
**16**  
RUN TIME  
**8h 30m**

## L4™ 1830

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 AAAA Alkaline (included)  
**LENGTH//**  
6.2" (15.7cm)  
**CERTIFICATIONS//**  
CI, D1



LUMENS  
**5**  
RUN TIME  
**32h**

## MITYLITE™ 1900

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
2 AAA Alkaline (included)  
**LENGTH//**  
4.09" (10.4cm)  
**CERTIFICATIONS//**  
CI, D1/CI, D2



LUMENS  
**11**  
RUN TIME  
**1h 30m**

## 1910

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
1 AAA Alkaline (included)  
**LENGTH//**  
3.8" (9.7cm)  
**MODES//**  
High / Low



LUMENS  
**106**  
RUN TIME  
**4h**

LUMENS  
**72**  
RUN TIME  
**4h**



## MITYLITE™ 1965

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 AAA Alkaline (included)  
**LENGTH//**  
5.48" (13.9cm)  
**CERTIFICATIONS//**  
CI II, D1



LUMENS  
**34**  
RUN TIME  
**3h 45m**



## MITYLITE™ 2300

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
2 AA Alkaline (included)  
**LENGTH//**  
5.62" (14.3cm)  
**CERTIFICATIONS//**  
CI, D1/CI, D2



LUMENS  
**11**  
RUN TIME  
**4h 30m**



## 1920

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 AAA Alkaline (included)  
**LENGTH//**  
5.5" (14.0cm)  
**MODES//**  
High / Low



LUMENS  
**224**  
RUN TIME  
**8h 45m**

LUMENS  
**120**  
RUN TIME  
**8h 30m**



## TRACKER™ 2140

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
2 AAA Alkaline (included)  
**LENGTH//**  
3.5" (8.9 cm)  
**CERTIFICATIONS//**  
CI, D2



LUMENS  
**13**  
RUN TIME  
**2h**



## MITYLITE™ 2340

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
2 AA Alkaline (not included)  
**LENGTH//**  
6.25" (15.9cm)  
**CERTIFICATIONS//**  
CI II, D2



LUMENS  
**10**  
RUN TIME  
**4h 30m**



## L1™ 1930

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 LR 44 Alkaline (included)  
**LENGTH//**  
2.64" (6.7cm)  
**CERTIFICATIONS//**  
CI, D1/CI, D2



LUMENS  
**12**  
RUN TIME  
**4h 15m**



## VB3™ 2220

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 CR2032 Lithium (included)  
**LENGTH//**  
3.5" (8.9cm)  
**CERTIFICATIONS//**  
CI, D1



LUMENS  
**9**  
RUN TIME  
**34h**





# MEDIUM LIGHTS

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. And when hazardous areas are present, you can count on Pelican's line of safety certified lighting tools. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your flashlight in an emergency.



## PELILITE™ 1800

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
2 C Alkaline (not included)  
**LENGTH//**  
6" (15.2cm)  
**CERTIFICATIONS//**  
CI II, D2



**SAFETY CERTIFIED**  
LUMENS  
**21**  
RUN TIME  
**7h**

## POCKET SABRE™ 1820

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
2 C Alkaline (included)  
**LENGTH//**  
5.83" (14.8cm)  
**CERTIFICATIONS//**  
CI II III, D2



**SAFETY CERTIFIED**  
LUMENS  
**22**  
RUN TIME  
**6h 45m**

## SABRELITE™ 2000

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
3 C Alkaline (not included)  
**LENGTH//**  
7.79" (19.8cm)  
**CERTIFICATIONS//**  
CI, D1/CII, D2



**SAFETY CERTIFIED**  
LUMENS  
**53**  
RUN TIME  
**5h**

## SABRELITE™ 2000PL PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
3 C Alkaline (not included)  
**LENGTH//**  
7.79" (19.8cm)  
**CERTIFICATIONS//**  
CI, D1/CII, D2



**SAFETY CERTIFIED**  
LUMENS  
**53**  
RUN TIME  
**5h**

## SABRELITE™ 2010

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 C Alkaline (not included)  
**LENGTH//**  
8.11" (20.6cm)  
**CERTIFICATIONS//**  
CI II III, D1



**SAFETY CERTIFIED**  
LUMENS  
**161**  
RUN TIME  
**22h**

## SABRELITE™ 2010PL PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
3 C Alkaline (not included)  
**LENGTH//**  
8.11" (20.6cm)  
**CERTIFICATIONS//**  
CI II III, D1



**SAFETY CERTIFIED**  
LUMENS  
**161**  
RUN TIME  
**22h**

## SABRELITE™ 2020

**LIGHT SOURCE//**  
Recoil™ LED  
**BATTERIES//**  
3 C Alkaline (not included)  
**LENGTH//**  
8.75" (22.2cm)  
**CERTIFICATIONS//**  
CI, D1



**SAFETY CERTIFIED**  
LUMENS  
**75**  
RUN TIME  
**6h 30m**

## STEALTHLITE™ 2400

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
4 AA Alkaline (included)  
**LENGTH//**  
6.49" (16.5cm)  
**CERTIFICATIONS//**  
CI, D1/CII, D2



**SAFETY CERTIFIED**  
LUMENS  
**45**  
RUN TIME  
**3h 45m**

## STEALTHLITE™ 2400PL PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
4 AA Alkaline (included)  
**LENGTH//**  
6.49" (16.5cm)  
**CERTIFICATIONS//**  
CI D1, CII D2



**SAFETY CERTIFIED**  
LUMENS  
**45**  
RUN TIME  
**3h 45m**





**STEALTHLITE™ 2410 LED**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
4 AA Alkaline (included)

**LENGTH//**  
7" (17.8cm)

**CERTIFICATIONS//**  
CI II III, D1



**SAFETY CERTIFIED**  
LUMENS  
**183**  
RUN TIME  
5h 45m



**STEALTHLITE™ 2450**



**LIGHT SOURCE//**  
Incandescent (Xenon)

**BATTERIES//**  
NiMH (included)

**LENGTH//**  
6.5" (16.5cm)

**CERTIFICATIONS//**  
CI II, D2



**SAFETY CERTIFIED**  
LUMENS  
**35**  
RUN TIME  
3h 30m



**3315**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AA Alkaline (included)

**LENGTH//**  
6.14" (15.8cm)

**CERTIFICATIONS//**  
CI II III, D1



**SAFETY CERTIFIED**  
LUMENS  
**160**  
RUN TIME  
**19h**



**STEALTHLITE™ 2460**



**LIGHT SOURCE//**  
LED

**BATTERIES//**  
NiMH (included)

**LENGTH//**  
7" (17.8cm)

**CERTIFICATIONS//**  
CI II, D2



**SAFETY CERTIFIED**  
LUMENS  
**183**  
RUN TIME  
**5h**



**3315PL  
PHOTOLUMINESCENT**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AA Alkaline (included)

**LENGTH//**  
6.14" (15.8cm)

**CERTIFICATIONS//**  
CI II III, D1

(Photoluminescent)

**SAFETY CERTIFIED**  
LUMENS  
**160**  
RUN TIME  
**19h**



**STEALTHLITE™ 2410PL  
PHOTOLUMINESCENT SHROUD**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
4 AA Alkaline (included)

**LENGTH//**  
7" (17.8cm)

**CERTIFICATIONS//**  
CI, II, III D1



**SAFETY CERTIFIED**  
LUMENS  
**183**  
RUN TIME  
5h 45m



**3310PL  
PHOTOLUMINESCENT**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AA Alkaline (included)

**LENGTH//**  
6.14" (15.6cm)

**MODES//**  
High / Low / Flashing  
(flashlight body glows in the dark)

(Photoluminescent)

**SAFETY CERTIFIED**  
LUMENS  
**378**  
RUN TIME  
**202h**  
UP TO



**3315R**



**LIGHT SOURCE//**  
LED

**BATTERIES//**  
Lithium-Ion (included)

**LENGTH//**  
6.11" (15.5cm)

**CERTIFICATIONS//**  
CI, D1



**SAFETY CERTIFIED**  
LUMENS  
**132**  
RUN TIME  
**34h**



**MITYLITE™ 2430**

**LIGHT SOURCE//**  
Incandescent (Xenon)

**BATTERIES//**  
4 AA Alkaline (included)

**LENGTH//**  
6.50" (16.5cm)

**CERTIFICATIONS//**  
CI, D2



**SAFETY CERTIFIED**  
LUMENS  
**70**  
RUN TIME  
2h 15m



**3310 ELS (EMERGENCY LIGHTING SYSTEM)**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AA Alkaline (included)

**LENGTH//**  
6.14" (15.6cm)

**INCLUDES//**  
3310PL and Wall Mountable Case  
(flashlight body glows in the dark)

(Photoluminescent)

**SAFETY CERTIFIED**  
LUMENS  
**378**  
RUN TIME  
**202h**  
UP TO



**3325**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AA Alkaline (included)

**LENGTH//**  
6.06" (15.4cm)

**CERTIFICATIONS//**  
CI, D1, IECEx ia



**SAFETY CERTIFIED**  
LUMENS  
**162**  
RUN TIME  
**16h**



MEDIUM LIGHTS



# LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Pelican is also a leader of high performance lithium-ion technology in portable lighting.



LARGE LIGHTS

## KINGLITE™ 4000

**LIGHT SOURCE//**  
Incandescent (Xenon)

**BATTERIES//**  
8 D Alkaline (not included)

**LENGTH//**  
9.37" (23.8cm)

**CERTIFICATIONS//**  
C1 II, D2



## 9410L LED LANTERN



**LIGHT SOURCE//**  
LED

**BATTERIES//**  
Lithium-Ion (included)

**LENGTH//**  
8.75" (22.2 cm)

**MODES//**  
High / Low / Flashing  
Full Time Battery Indicator



## 9415 LED LANTERN




**LIGHT SOURCE//**  
LED

**BATTERIES//**  
NiMH (included)

**LENGTH//**  
8.75" (22.2cm)

**CERTIFICATIONS//**  
C1, D1

**MODES//**  
High / Low / Flashing  
Full Time Battery Indicator



LARGE LIGHTS





# TACTICAL LIGHTS

Pelican's tactical lights are field ready and built to withstand the hard knocks that come with the job. Intense, focused beams provides downrange visibility and peripheral lighting aids in situational awareness.

## 2350

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
1 AA Alkaline (included)

**LENGTH//**  
4.23" (10.7 cm)

**MODES//**  
High/ Strobe / Low



LUMENS  
**178**  
RUN TIME  
**21h**  
UP TO

## 2380R

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
Lithium-Ion (included)

**LENGTH//**  
6.48" (16.5 cm)

**MODES//**  
High / Strobe / Low  
Spot To Flood



USB  
LUMENS  
**305**  
RUN TIME  
**25h**  
UP TO

## 7100

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
Lithium-Ion (included)

**LENGTH//**  
5.12" (13cm)

**MODES//**  
High / Strobe / Medium / Low

**PROGRAMMABLE//**  
5 Selectable Programs



USB  
LUMENS  
**695**  
RUN TIME  
**9h 15m**  
UP TO

## 2360 LED

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
2 AA Alkaline (included)

**LENGTH//**  
6.2" (15.7cm)

**MODES//**  
High/ Strobe/ Low



LUMENS  
**375**  
RUN TIME  
**13h**  
UP TO

## PM6 3330

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
2 CR123 Lithium-Ion (included)

**LENGTH//**  
5.27" (13.4cm)

■ ■



LUMENS  
**90**  
RUN TIME  
**4h 45m**  
UP TO

## 7600

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
Lithium-Ion (included)

**LENGTH//**  
6.19" (15.7cm)

**MODES//**  
High / Strobe / Medium / Low

**LED COLORS//**  
White / Red / Green

**PROGRAMMABLE//**  
5 Selectable Programs



USB  
LUMENS  
**944**  
RUN TIME  
**29h**  
UP TO

## 2370

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
2 AA Alkaline (included)

**LENGTH//**  
6.43" (16.3cm)

**MODES//**  
High / Low / Red / Blue

**LIGHT COLORS//**  
White / Red / Blue



LUMENS  
**358**  
RUN TIME  
**11h**  
UP TO

## 7000

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
2 CR123 Lithium-Ion

**LENGTH//**  
5.31" (13.5 cm)

**MODES//**  
High / Strobe / Medium / Low  
Self Programmable



LUMENS  
**602**  
RUN TIME  
**1h 30m**  
UP TO

## M11 8050

**LIGHT SOURCE//**  
Incandescent (Xenon)

**BATTERIES//**  
NIMH (included)

**LENGTH//**  
11.25" (28.6cm)

■ ■



LUMENS  
**164**  
RUN TIME  
**2h 15m**  
UP TO

## 2380

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
2 AA Alkaline (included)

**LENGTH//**  
6.44" (16.4cm)

**MODES//**  
High / Low /  
Spot To Flood



NEW

LUMENS  
**372**  
RUN TIME  
**13h**  
UP TO

## 7060

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
Lithium-Ion (included)

**LENGTH//**  
8.65" (22cm)

**MODES//**  
High / Strobe / Medium / Low  
Self Programmable



LUMENS  
**368**  
RUN TIME  
**45h**  
UP TO

## 8060

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
NIMH (included)

**LENGTH//**  
12.67" (32.2cm)

**MODES//**  
High / Strobe / Medium / Low  
Flashing / Self Programmable



LUMENS  
**803**  
RUN TIME  
**69h**  
UP TO



TACTICAL LIGHTS





# HEADLAMPS

With up to 500 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colors and multiple settings, make these headlamps your best partner for the dark.

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

## HEADSUP LITE™ 2600

**LIGHT SOURCE//**  
Incandescent (Krypton)

**BATTERIES//**  
4 AA Alkaline (included)

**LENGTH//**  
3.81" (9.7cm)

**CERTIFICATIONS//**  
CI, D1, D2



SAFETY CERTIFIED	LUMENS	18
	RUN TIME	3h 30m



## HEADSUP LITE™ 2610

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
1.49" (3.8cm)

**CERTIFICATIONS//**  
CI, D1

**MODES//**  
High / Low



SAFETY CERTIFIED	LUMENS	30
	RUN TIME	47h



## HEADSUP LITE™ 2620

**LIGHT SOURCE//**  
Incandescent (Xenon), LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.16" (5.5cm)

**CERTIFICATIONS//**  
CI, D1

**MODES//**  
High / Low



SAFETY CERTIFIED	LUMENS	26
	RUN TIME	18h



## HEADSUP LITE™ 2690

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.81" (7.1 cm)

**CERTIFICATIONS//**  
CI II III, D1



SAFETY CERTIFIED	LUMENS	74
	RUN TIME	11h



## HEADSUP LITE™ 2640

**LIGHT SOURCE//**  
Incandescent (Halogen), LED

**BATTERIES//**  
4 AA Alkaline (included)

**LENGTH//**  
2.63" (6.7cm)

**CERTIFICATIONS//**  
CI, D2

**MODES//**  
High / Low



SAFETY CERTIFIED	LUMENS	29
	RUN TIME	17h



## 2720 HEADLAMP

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.48" (6.3 cm)

**MODES//**  
Variable Light Output / Spot to Flood /  
Red Night Vision Friendly LEDs



SAFETY CERTIFIED	LUMENS	200
	RUN TIME	103h



## HEADSUP LITE™ 2680

**LIGHT SOURCE//**  
Recoil™ LED

**BATTERIES//**  
4 AA Alkaline (included)

**LENGTH//**  
4.64" (11.8cm)

**CERTIFICATIONS//**  
CI II III, D2



SAFETY CERTIFIED	LUMENS	79
	RUN TIME	10h



## 2740 HEADLAMP

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.25" (5.7 cm)

**MODES//**  
High / Low /  
Flashing / Red LED

■ ■ (Translucent Blue)

SAFETY CERTIFIED	LUMENS	66
	RUN TIME	21h



SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)



**2745 HEADLAMP**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.25" (5.7 cm)

**CERTIFICATIONS//**  
CI, D1

**MODES//**  
High / Low / Flashing



**SAFETY CERTIFIED**  
LUMENS **33**  
RUN TIME **40h**  
UP TO



**2760 HEADLAMP**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.25" (5.7 cm)

**MODES//**  
High / Medium / Low /  
Downcast / Flashing/  
Red LED / Full-time Battery  
Level Indicator

■ ■ (Translucent Red)

LUMENS **204**  
RUN TIME **11h**  
UP TO



**2750 HEADLAMP**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.25" (5.7 cm)

**MODES//**  
High / Low / Flashing /  
Red LED /  
Low Battery Warning

■ ■ (Photoluminescent)

LUMENS **193**  
RUN TIME **11h**  
UP TO



**2765 HEADLAMP**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.25" (5.7 cm)

**CERTIFICATIONS//**  
CI, D1

**MODES//**  
High / Low / Flashing / Downcast



LUMENS **105**  
RUN TIME **9h**  
UP TO



**2755 HEADLAMP**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 AAA Alkaline (included)

**LENGTH//**  
2.25" (5.7 cm)

**CERTIFICATIONS//**  
CI, D1

**MODES//**  
High / Low / Flashing /  
Low Battery Warning



LUMENS **72**  
RUN TIME **15h**  
UP TO



**2780 HEADLAMP**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
4 AA Alkaline (included)

**LENGTH//**  
3.00" (7.6 cm)

**MODES//**  
High / Medium /  
Low / Flashing / Downcast/  
Full-time Battery  
Level Indicator

■ ■ ■ (Photoluminescent)  
3 Interchangeable Covers Included

LUMENS **430**  
RUN TIME **12h**  
UP TO



**2780R HEADLAMP**



**LIGHT SOURCE//**  
LED

**BATTERIES//**  
Lithium-Ion (included)

**LENGTH//**  
3.00" (7.6 cm)

**MODES//**  
High / Medium /  
Low / Flashing / Downcast/  
Full-time Battery  
Level Indicator

■ ■ ■ (Photoluminescent)  
3 Interchangeable Covers Included

LUMENS **558**  
RUN TIME **7h 30m**  
UP TO



**2785 HEADLAMP**

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
4 AA Alkaline (included)


**LENGTH//**  
3.00" (7.6 cm)

**CERTIFICATIONS//**  
CI, D1

**MODES//**  
High / Medium / Low /  
Flashing / Downcast



LUMENS **226**  
RUN TIME **66h**  
UP TO

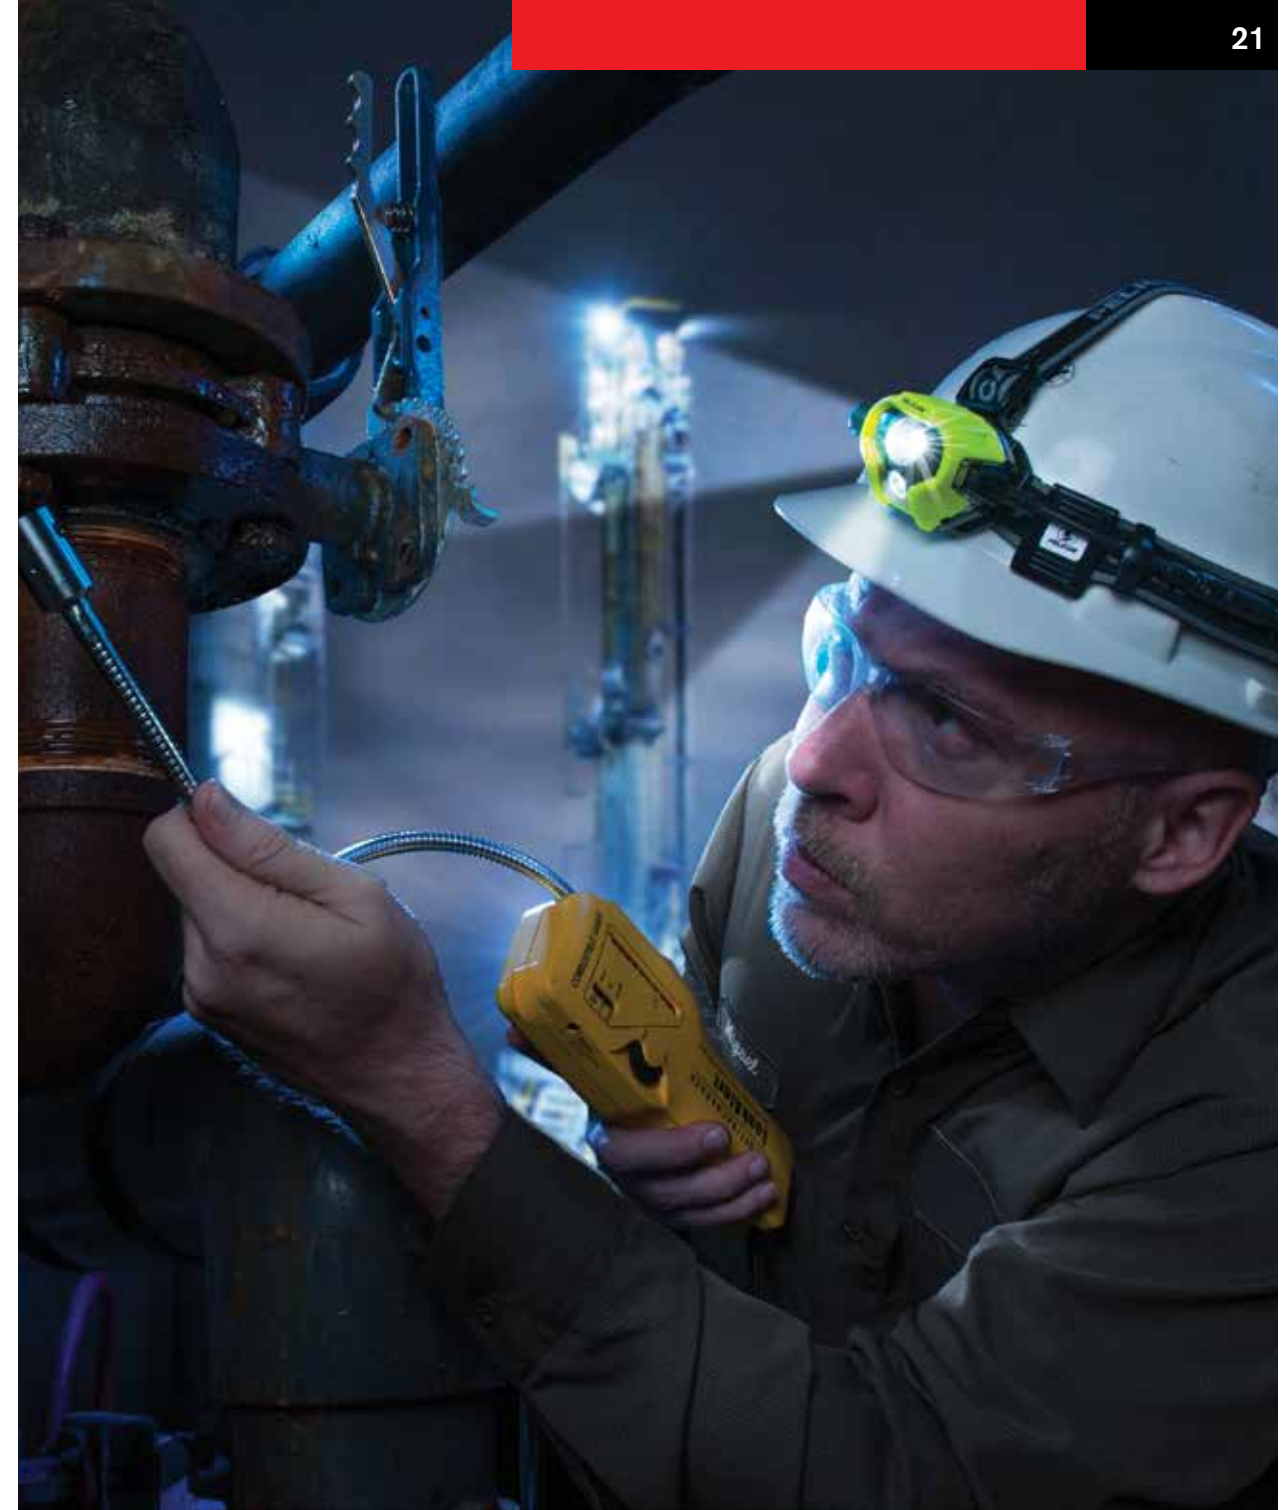



# RIGHT ANGLE LIGHTS

Firefighters put everything on the line and the correct lighting tools are critical. Right angle (90°) flashlights often worn on turnout coats offer hands-free performance. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.

RIGHT ANGLE LIGHTS



## VERSABRITE™ 2250

**LIGHT SOURCE//**  
Incandescent (Xenon)  
**BATTERIES//**  
2 AA Alkaline (included)  
**LENGTH//**  
3.87" (9.8cm)  
**CERTIFICATIONS//**  
CI II, D2



**SAFETY CERTIFIED**

LUMENS	7
RUN TIME	5h 30m

## 3315R-RA

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
Lithium-Ion (included)  
**LENGTH//**  
6.11" (15.5cm)  
**CERTIFICATIONS//**  
CI, D1



**SAFETY CERTIFIED**

LUMENS	132
RUN TIME	34h

## LITTLE ED™ 3610

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 AA Alkaline (included)  
**LENGTH//**  
7.51" (19.1cm)  
**CERTIFICATIONS//**  
CI II III, D1



**SAFETY CERTIFIED**

LUMENS	183
RUN TIME	5h 45m

## LITTLE ED™ 3610PL PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 AA Alkaline (included)  
**LENGTH//**  
7.51" (19.1cm)  
**CERTIFICATIONS//**  
CI II III, D1



**SAFETY CERTIFIED**

LUMENS	183
RUN TIME	5h 45m

## LITTLE ED™ 3660

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
NiMH (included)  
**LENGTH//**  
7.51" (19.1cm)  
**CERTIFICATIONS//**  
CI II, D2



**SAFETY CERTIFIED**

LUMENS	183
RUN TIME	5h

## BIG ED™ 3700

**LIGHT SOURCE//**  
Incandescent (Krypton)  
**BATTERIES//**  
4 C Alkaline (not included)  
**LENGTH//**  
7" (17.8cm)  
**MODES//**  
High / Backup  
**CERTIFICATIONS//**  
CI, D2



**SAFETY CERTIFIED**

LUMENS	39
RUN TIME	8h 30m
UP TO	

## BIG ED™ 3700PL PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
Incandescent (Krypton)  
**BATTERIES//**  
4 C Alkaline (not included)  
**LENGTH//**  
7" (17.8cm)  
**CERTIFICATIONS//**  
CI, D2  
**MODES//**  
High / Backup



**SAFETY CERTIFIED**

LUMENS	39
RUN TIME	8h 30m
UP TO	

## 3715

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 AA Alkaline (not included)  
**LENGTH//**  
5.36" (13.6cm)  
**CERTIFICATIONS//**  
CI, D1  
**MODES//**  
High / Low / Flashing / Downcast



**SAFETY CERTIFIED**

LUMENS	233
RUN TIME	31h
UP TO	

## 3715PL PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 AA Alkaline (not included)  
**LENGTH//**  
5.36" (13.6cm)  
**CERTIFICATIONS//**  
CI, D1  
**MODES//**  
High / Low / Flashing / Downcast



**SAFETY CERTIFIED**

LUMENS	233
RUN TIME	31h
UP TO	

RIGHT ANGLE LIGHTS





RIGHT ANGLE LIGHTS

**BIG ED™ 3750**



**LIGHT SOURCE//**  
Incandescent (Krypton)  
**BATTERIES//**  
NiCad (included)  
**LENGTH//**  
7" (17.8cm)  
**CERTIFICATIONS//**  
Cl, D2  
**MODES//**  
High / Backup



**BIG ED™ 3750PL  
PHOTOLUMINESCENT SHROUD**



**LIGHT SOURCE//**  
Incandescent (Krypton)  
**BATTERIES//**  
NiCad (included)  
**LENGTH//**  
7" (17.8cm)  
**CERTIFICATIONS//**  
Cl, D2  
**MODES//**  
High / Backup



**3765**



**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
NiMH (included)  
**LENGTH//**  
5.36" (13.6cm)  
**CERTIFICATIONS//**  
Cl, D1(w/alkalines)/Cl, D2  
**MODES//**  
High / Low / Flashing / Downcast



**3765 PL  
PHOTOLUMINESCENT SHROUD**



**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
NiMH (included)  
**LENGTH//**  
5.36" (13.6cm)  
**CERTIFICATIONS//**  
Cl, D1(w/alkalines)/Cl, D2  
**MODES//**  
High / Low / Flashing / Downcast



RIGHT ANGLE LIGHTS



# DIVE LIGHTS

Whether you'll be exploring underwater caves and crevices during daylight hours or the exhilarating adventure of a night dive, Pelican's Nemo line of dive lights will fill your needs. Designed to support depths up to 100 meters and built Pelican tough, you'll appreciate the reliability these underwater tools provide.



## NEMO™ 1960N PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
2 AAA Alkaline (included)

**LENGTH//**  
5.48" (13.9cm)

**SUBMERSIBLE//**100 Meters



LUMENS  
**34**  
RUN TIME  
**3h 30m**



## NEMO™ 2010N PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
3 C Alkaline (not included)

**LENGTH//**  
8.11" (20.6cm)

**SUBMERSIBLE//**  
100 Meters



LUMENS  
**161**  
RUN TIME  
**22h**



## NEMO™ 2410N PHOTOLUMINESCENT SHROUD

**LIGHT SOURCE//**  
LED

**BATTERIES//**  
4 AA Alkaline (included)

**LENGTH//**  
7" (17.8cm)

**SUBMERSIBLE//**  
100 Meters



LUMENS  
**183**  
RUN TIME  
**5h 45m**





# SPECIALTY LIGHTS

Whether directing fighter jets on the decks of aircraft carriers or protecting our troops with friend-or-foe infrared beacons, Pelican manufactures quality lighting tools for many unique military applications. Also available, magnetically secured flexible neck designs for mechanics and red LED flashers that are helpful in keeping workers safe.



## MINI FLASHER™ 2130

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 L1154 Alkaline (included)  
**LENGTH//**  
1.73" (4.4 cm)



## MINI FLASHER™ 2130IR

**LIGHT SOURCE//**  
LED (infrared)  
**BATTERIES//**  
2 L1154 Alkaline (included)  
**LENGTH//**  
1.73" (4.4 cm)



## 2365 FLEX NECK

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
2 AA Alkaline (not included)  
**LENGTH//**  
21.92" (55.7cm)



LUMENS  
**65**  
RUN TIME  
**7h**



## 2490 (WITH TRAFFIC WAND)

**LIGHT SOURCE//**  
LED  
**BATTERIES//**  
4 AA Alkaline (not included)  
**LENGTH//**  
12.5" (31.7 cm)



NEW

LUMENS  
**64**  
RUN TIME  
**12h**





# LIGHT MOUNTING SYSTEMS



CAT. NO. 610

### FRONT SIGHT MOUNT

Fits Pelican Light 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



CAT. NO. 630

### FOREGRIP MOUNT

Fits Pelican Light 7000. Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5



CAT. NO. 620

### SIDE SLING MOUNT

Fits Pelican Light 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



CAT. NO. 7006

### REMOTE PRESSURE SWITCH

Our tactical pressure switch replaces the standard tailcap on the flashlight. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip. Fits Pelican Light 7000 (Cat. No. 7006). COLOR: Black // WT.: 2.0 oz.



### NEW PELICAN™ HELMET HOLDERS BY BLACK JACK™ FLASHLIGHT HOLDER

Tough aluminum mounts are built to hold the flashlight under the brim of the helmet, parallel to the line of sight of the user. Cat. No. #780, 781, 782



### NEW PELICAN™ HEAD STRAP RETAINERS BY BLACK JACK™

Set of four high temperature composite clips that utilize a 3M™ adhesive and will attach to any helmet. CAT. No. 783

LIGHT MOUNTING | HOLSTER | HOLDER STYLES

LIGHT MOUNTING | HOLSTER | HOLDER STYLES

	CAT. NO. 2327 Nylon Holster	CAT. NO. 2357/2367 Nylon Holster	CAT. NO. 2377 Nylon Holster	CAT. NO. 2383 Nylon Holster	CAT. NO. 2407 Nylon Holster	CAT. NO. 7077 Plain Leather Holster	CAT. NO. 7078 Nylon Holster	CAT. NO. 7075 Basketweave Leather Holster	CAT. NO. 7106 Nylon Holster	CAT. NO. 7606 Nylon Holster	CAT. NO. 7607 Nylon Holster / Wand Kit	CAT. NO. 8057 Nylon Holster
CAT NO.												
2300	•											
2320	•											
2330	•											
2360		•										
2370			•									
2380			•									
2380R				•								
2340/NVG		•										
2400/NVG					•							
2400PL					•							
2450					•							
2410					•							
2410PL					•							
2460					•							
7000	•											
7060						•	•	•				
7100									•			
7600										•	•	
8040												•
8050												•

	CAT. NO. 700	CAT. NO. 750	CAT. NO. 770	CAT. NO. 780 FULL HOUSE	CAT. NO. 781 ACE	CAT. NO. 782 ALL IN	CAT. NO. 783 DOUBLE DOWN
CAT NO.							
2140		•					
2250	•						
2300		•			•		
2320			•		•		
2330			•		•		
2340		•			•		
2350					•		
2360					•		
2370					•		
2380/2380R					•		
2390			•		•		
2400/PL	•	•	•	•	•		
2410/PL	•	•	•	•	•		
2430	•	•	•	•	•		
2450	•	•	•	•	•		
2460	•	•	•	•	•		
3310			•			•	
3315/PL			•			•	
3325						•	
3330			•		•		
7000					•		
All Headlamps							•



CAT NO.	BATTERIES (included)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	LUMENS	RUN TIME	BEAM SPREAD	NUMBER OF LEDs	LAMP HEADS	CERTIFICATIONS	COLORS
<b>9420XL</b>	Rechargeable Lithium ion	8.4 lbs. (3.8)	62.0" (157) <sup>A</sup>	1000*, 500***	2h*, 4h***	58°	2	1	N/A	■
<b>9430</b>	Rechargeable, Sealed Lead Acid	22.65 lbs. (10.27)	32.28" (82) <sup>A</sup>	3000*, 1500***	8h*, 15h***	125°	6	1	N/A	■ ■
<b>9430SL</b>	Rechargeable, Sealed Lead Acid	22.05 lbs. (10)	32.28" (82) <sup>A</sup>	2000*, 1000***	8h*, 15h***	10°	24	1	N/A	■
<b>9435</b>	Rechargeable NiMH	17.6 lbs. (7.98)	32.28" (82) <sup>A</sup>	1500*, 750***	5h*, 10h***	90°	18	1	CI, D2	■
<b>9440</b>	Rechargeable Lithium ion	16.09 lbs. (7.3)	85" (215.8) <sup>A</sup>	5300*, 2800** 1400***	1h 30m*, 4h** 8h***	125°	12	1	N/A	■ ■
<b>9460</b>	Rechargeable, Sealed Lead Acid	61 lbs. (27.7)	79.50" (201.9) <sup>A</sup>	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ ■
<b>9460M</b>	Rechargeable, Sealed Lead Acid	64 lbs. (24.95)	79.50" (201.9) <sup>A</sup>	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ ■
<b>9470</b>	Rechargeable, Sealed Lead Acid	105 lbs. (47.6)	82.00" (208.3) <sup>A</sup>	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ ■
<b>9470M</b>	Rechargeable, Sealed Lead Acid	108lbs. (49)	82.00" (208.3) <sup>A</sup>	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ ■
<b>9480</b>	Rechargeable, Sealed Lead Acid	27.5 lbs. (12.47)	23.75" (60.3) <sup>A</sup>	4000*, 3000** 1000***	6h*, 8h** 28h***	125°	8	1	N/A	■ ■
<b>9490</b>	Rechargeable, Sealed Lead Acid	32 lbs. (14.51)	72" (182.8) <sup>A</sup>	6000 (variable)	3h 30m*, 12h** 24h***	125°	10	1	N/A	■ ■
<b>9500</b>	N/A	29.8 lbs. (13.52)	20.62" (52.4)	6000 (white LED) 1200 (red LED)	constant 120V	210° (diffused)	36	3	N/A	■

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
<b>1810</b>	4 LR 41 Alkaline (included)	0.5 oz. (0.01)	1.5" (3.8)	16	8h 30m	23	137	IPX4	N/A	■ ■ ■ ■ ■ ■
<b>1830</b>	3 AAAA Alkaline (included)	1.2 oz. (0.03)	6.2" (15.7)	5	32h	13	44	IPX4	CI, D1	■ ■
<b>1900</b>	2 AAA Alkaline (included)	1.6 oz. (0.05)	4.09" (10.4)	11	1h 30m	45	571	IPX7	CI, D1/CI, D2	■ ■ ■ ■ ■ ■
<b>1910</b>	1 AAA Alkaline (included)	1.5 oz. (0.04)	3.8" (9.6)	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■
<b>1910</b>	1 AAA Alkaline (included)	1.5 oz. (0.04)	3.8" (9.6)	72*, 14***	1h 45m*, 4h***	64*, 28***	1031*, 198***	IPX7	N/A	■ ■ ■ ■ ■ ■
<b>1920</b>	2 AAA Alkaline (included)	2.2 oz. (0.06)	5.5" (14)	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■
<b>1920</b>	2 AAA Alkaline (included)	2.2 oz. (0.06)	5.5" (14)	120*, 12***	2h 45m*, 8h 30m***	87*, 27***	1893*, 184***	IPX7	N/A	■ ■ ■ ■ ■ ■
<b>1930</b>	4 LR 44 Alkaline (included)	0.9 oz. (0.03)	2.64" (6.7)	12	4h 15m	17	70	IPX4	CI, D1/CI, D2	■ ■
<b>1965</b>	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.48" (13.9)	34	3h 45m	45	512	IPX7	CI II III, D1	■ ■
<b>2140</b>	2 AAA Alkaline (included)	1.8 oz. (0.05)	3.5" (8.9)	13	2h	84	1761	IPX7	CI, D2	■
<b>2220</b>	2 CR2032 Lithium (included)	1 oz. (0.03)	3.5" (8.9)	9	34h	12	38	IPX4	CI, D1	■ ■ ■
<b>2300</b>	2 AA Alkaline (included)	3.4 oz. (0.1)	5.62" (14.3)	11	4h 30m	43	478	IPX4	CI, D1/CI, D2	■ ■
<b>2340</b>	2 AA Alkaline (not included)	3.5 oz. (0.1)	6.25" (15.9)	10	4h 30m	43	461	IPX4	CI II, D2	■ ■

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | ^ Extended Height |

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
<b>1800</b>	2 C Alkaline (not included)	7.8 oz. (0.22)	6" (15.2)	21	7h	131	4370	IPX7	CI II, D2	■ ■
<b>1820</b>	2 C Alkaline (included)	8.3 oz. (0.24)	5.83" (14.8)	22	6h 45m	146	5466	IPX7	CI II III, D2	■ ■
<b>2000</b>	3 C Alkaline (not included)	12.8 oz. (0.36)	7.79" (19.8)	53	5h	158	6234	IPX7	CI, D1/CI, D2	■ ■ ■
<b>2000PL</b>	3 C Alkaline (not included)	12.8 oz. (0.36)	7.79" (19.8)	53	5h	158	6234	IPX7	CI, D1/CI, D2	■
<b>2010</b>	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■ ■
<b>2010PL</b>	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■
<b>2020</b>	3 C Alkaline (not included)	14.7 oz. (0.42)	8.75" (22.2)	75	6h 30m	113	3211	IPX7	CI, D1	■ ■
<b>2400</b>	4 AA Alkaline (included)	7.1 oz. (0.2)	6.49" (16.5)	45	3h 45m	125	3934	IPX7	CI, D1/CI, D2	■ ■ ■ ■
<b>2400PL</b>	4 AA Alkaline (included)	7.1 oz. (0.2)	6.49" (16.5)	45	3h 45m	125	3934	IPX7	CI, D1/CI, D2	■
<b>2410</b>	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1	■ ■
<b>2410PL</b>	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1	■
<b>2430</b>	4 AA Alkaline (included)	6.1 oz. (0.17)	6.5" (16.5)	70	2h 15m	104	2766	IPX4	CI, D2	■ ■
<b>2450</b>	Rechargeable NiMH (included)	7.8 oz. (0.22)	6.5" (16.5)	35	3h 30m	122	3735	IPX7	CI II, D2	■ ■
<b>2460</b>	Rechargeable NiMH (included)	7.8 oz. (0.22)	7" (17.8)	183	5h	179	8050	IPX7	CI II, D2	■ ■
<b>3310PL</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
<b>3310ELS</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
<b>3315</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IPX7	CI II III, D1	■ ■
<b>3315R</b>	Rechargeable Lithium-Ion (included)	6.2 oz. (0.18)	6.11" (15.5)	132*, 15***	5h*, 34h***	108*, 35***	2931*, 308***	IPX7	CI, D1	■ ■
<b>3315PL</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IPX7	CI II III, D1	■ (photoluminescent)
<b>3325</b>	3 AA Alkaline (included)	6.1 oz. (0.17)	6.06" (15.4)	162	16h	144	5215	IPX7	CI, D1	■
<b>4000</b>	8 D Alkaline (not included)	74.08 oz. (2.1)	9.37" (23.8)	249	11h	106	3168	IPX7	CI II, D2	■ ■ ■
<b>9410L</b>	Rechargeable Lithium-Ion (included)	44.7 oz. (1.27)	8.75" (22.2)	1203*, 553***	4h 30m*, 10h 30m***	430*, 287***	46,328*, 20,616***	IPX4	N/A	■ ■
<b>9415</b>	Rechargeable NiMH (included)	49.3 oz. (1.4)	8.75" (22.2)	413*, 159***	4h 30m*, 12h***	325*, 201***	26352*, 10076***	IPX4	CI, D1	■
<b>2350</b>	1 AA Alkaline (included)	3.4 oz. (0.1)	4.23" (10.7)	178*, 15***	2h 15m*, 21h***	130*, 37***	4196*, 345***	IPX7	N/A	■
<b>2360</b>	2 AA Alkaline (included)	5.4 oz. (0.15)	6.2" (15.7)	375*, 29***	2h 30m*, 13h***	192*, 53***	9187*, 705***	IPX8	N/A	■
<b>2370</b>	2 AA Alkaline (included)	6.5 oz. (0.18)	6.43" (16.3)	358*, 35***	2h*, 11h***	158*, 52***	9000*, 823***	IPX7	N/A	■
<b>2380</b>	2 AA Alkaline (included)	6.6 oz. (0.19)	6.44" (16.4)	372*, 31***	3h 30m*, 13h***	167*, 46***	6967*, 527***	IPX7	N/A	■

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | ^ Extended Height |



CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS	
TACTICAL LIGHTS +	<b>2380R</b>	Rechargeable Lithium-Ion (included)	6.6 oz. (0.19)	6.48" (16.5)	305*, 30***	3h 30m*, 25h***	159*, 50***	6317*, 613***	IPX7	N/A	■
	<b>3330</b>	2 CR123 Lithium (included)	3.45 oz. (0.1)	5.27" (13.4)	90	4h 45m	88	1959	IPX4	N/A	■ ■
	<b>7000</b>	2 CR123 Lithium (included)	5.6 oz. (0.16)	5.31" (13.5)	602*, 311** , 64***	1h 30m*, 2h**, 16h***	233*, 165**, 75***	13604*, 6830**, 1409***	IPX7	N/A	■
	<b>7060</b>	Rechargeable Lithium-Ion (included)	10.4 oz. (0.29)	8.65" (22)	368*, 150**, 18***	3h*, 9h**, 45h***	199*, 125**, 43***	9953*, 3922**, 473***	IPX4	v	■
	<b>7100</b>	Lithium-Ion	4.4 oz. (0.13)	5.12" (13)	695*, 348**, 33***	1h 15m*, 1h 30m**, 9h 15m***	194*, 130**, 38***	9314*, 4247**, 358***	IPX8	N/A	■
	<b>7600</b>	Lithium-Ion	7.1 oz. (0.20)	6.19" (15.7)	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8	N/A	■
	<b>8050</b>	Rechargeable NiMH (included)	17.92 oz. (0.51)	11.25" (28.6)	164	2h 15m	256	16448	IPX4	N/A	■ ■
	<b>8060</b>	Rechargeable NiMH (included)	23.2 oz. (0.66)	12.67" (32.2)	803*, 447**, 25***	2h 30m*, 4h**, 69h***	359*, 265**, 62***	32252*, 17492**, 958***	IPX4	N/A	■
	HEAD LAMPS +	<b>2600</b>	4 AA Alkaline (included)	9.7 oz. (0.27)	3.81" (9.7)	18	3h 30m	27	203	IPX7	CI II III, D2
<b>2610</b>		3 AAA Alkaline (included)	3.2 oz. (0.09)	1.49" (3.8)	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	CI, D1	■
<b>2620</b>		3 AAA Alkaline (included)	4.8 oz. (0.14)	2.16" (5.5)	26*, 14***	2h 15m*, 18h**	44*, 29**	491*, 216**	IPX4	CI, D1	■
<b>2640</b>		4 AA Alkaline (included)	10.9 oz. (0.31)	2.63" (6.7)	29*, 16***	2h 45m*, 17h**	46*, 20***	586*, 103***	IPX4	CI, D2	■
<b>2680</b>		4 AA Alkaline (included)	9.7 oz. (0.27)	4.64" (11.8)	79	10h	123	3789	IPX7	CI II III, D2	■
<b>2690</b>		3 AAA Alkaline (included)	4.1 oz. (0.12)	2.81" (7.1)	74	11h	92	2124cd	IPX7	CI II III, D1	■
<b>2720</b>		3 AAA Alkaline (included)	3.8 oz. (0.11)	2.48" (6.3)	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
<b>2740</b>		3 AAA Alkaline (included)	3.3 oz. (0.09)	2.25" (5.7)	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■ ■ (translucent)
<b>2745</b>		3 AAA Alkaline (included)	3.3 oz. (0.09)	2.25" (5.7)	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IPX4	CI, D1	■ ■
<b>2750</b>		3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	193*, 63***	3h*, 11h***	98*, 58***	1250*, 591***	IPX4	N/A	■ ■ (photoluminescent)
<b>2755</b>		3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	72*, 34***	6h*, 15***	57*, 40***	807*, 404***	IPX4	C1, D1	■ ■
<b>2760</b>		3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	204*, 141**, 95***, 42***	2h*, 3h 15m**, 5h**, 11h***	111*, 80**, 59***, 19***	3065*, 1606**, 861***, 88***	IPX4	N/A	■ ■ (translucent)
<b>2765</b>		3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	105*, 104**, 65***, 33***	4h 15m*, 4h**, 6h 15m***, 9h***	107*, 93**, 63***, 9***	2876*, 2163**, 978***, 18***	IPX4	C1, D1	■ ■
<b>2780</b>		4 AA Alkaline (included)	250 oz. (7.09)	3" (7.6)	430*, 203**, 53***	1h 30m*, 3h**, 12h***	127*, 81**, 27***	3868*, 1625**, 425***	IPX7	N/A	■ □ (photoluminescent)
<b>2780R</b>		Rechargeable Lithium-Ion (included)	250 oz. (7.09)	3" (7.6)	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ □ (photoluminescent)
<b>2785</b>	4 AA Alkaline (included)	250 oz. (7.09)	3" (7.6)	226*, 103**, 33***	5h 45m*, 20h**, 66h***	111*, 74**, 41***	3058*, 1372**, 417***	IPX7	CI, D1	■ ■	

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | ^ Extended Height | Additional approvals may apply.

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS		
RIGHT ANGLE LIGHTS +	<b>2250</b>	2 AA Alkaline (included)	0.3 oz. (0.09)	3.87" (9.8)	7	5h 30m	54	726	IPX4	CI II, D2	■	
	<b>3315R-RA</b>	Rechargeable Lithium-Ion (included)	6.2 oz. (0.18)	6.11" (15.5)	132*, 15***	5h*, 34h***	108*, 35***	2931*, 308***	IPX7	CI, D1	■	
	<b>3610</b>	4 AA Alkaline (included)	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1	■ ■	
	<b>3610PL</b>	4 AA Alkaline (included)	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1	■	
	<b>3660</b>	Rechargeable 4 AA NiMH (included)	10.56 oz. (0.3)	7.51" (19.1)	183	5h	153	5828	IPX7	CI II, D2	■ ■	
	<b>3700</b>	4 C Alkaline (not included)	20.32 oz. (0.58)	7" (17.8)	39*, 25 (back-up)	6h 15m*, 8h 30m (back-up)	98*, 51 (back-up)	2437*, 684 (back-up)	IPX4	CI, D2	■	
	<b>3700PL</b>	4 C Alkaline (not included)	20.32 oz. (0.58)	7" (17.8)	39*, 25 (back-up)	6h 15m*, 8h 30m (back-up)	98*, 51 (back-up)	2437*, 684 (back-up)	IPX4	CI, D2	■	
	<b>3715</b>	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h**, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1	■ ■	
	<b>3715PL</b>	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h**, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1	■	
	<b>3750</b>	Rechargeable NiCad (included)	20.48 oz. (0.58)	7" (17.8)	96*, 28 (back-up)	1h 45m*, 4h (back-up)	133*, 65 (back-up)	4468*, 1048 (back-up)	IPX4	CI, D2	■	
	<b>3750PL</b>	Rechargeable NiCad (included)	20.48 oz. (0.58)	7" (17.8)	96*, 28 (back-up)	1h 45m*, 4h (back-up)	133*, 65 (back-up)	4468*, 1048 (back-up)	IPX4	CI, D2	■	
	<b>3765</b>	Rechargeable NiMH (included)	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1/CI, D2 (w/alkalines)	■ ■	
	<b>3765PL</b>	Rechargeable NiMH (included)	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1/CI, D2 (with/alkalines)	■	
	DIVE LIGHTS +	<b>1960N</b>	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.48" (13.9)	34	3h 30m	42	450	IPX8	N/A	■ ■ ■
		<b>2010N</b>	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	260	6398	IPX8	N/A	■ ■ ■
<b>2410N</b>		4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX8	N/A	■ ■ ■	
SPECIALTY LIGHTS +		<b>2130</b>	2 L1154 Alkaline (included)	0.5 oz. (0.01)	1.73" (4.4)	4.7 (non ANSI)	130h (non ANSI)	N/A	N/A	IPX7	N/A	■
		<b>2130IR</b>	2 L1154 Alkaline (included)	0.5 oz. (0.01)	1.73" (4.4)	N/A	65h (non ANSI)	N/A	N/A	IPX7	N/A	■
		<b>2365</b>	2 AA Alkaline (not included)	9.3 oz. (0.26)	21.92" (55.7)	65	7h	81	1644	IPX4	N/A	■
		<b>2490</b>	4 AA Alkaline (not included)	8.2 oz. (0.23)	12.5" (31.7)	64	12h	118	3459	IPX7	N/A	■

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | ^ Extended Height



# CUSTOM LABELS

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and molding programs.

CUSTOM LABELS



## GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.



## HOT STAMPING

Our hot stamping department is equipped with the latest technology in custom imprinting. Minimum quantities apply.



## 100% ACCURACY

Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.