

AQUA STROBE™ LED

FLASHING EMERGENCY SAFETY
AND RESCUE LIGHT

Operating and Maintenance
Instructions



Years of trouble free and reliable operations can be expected if you follow a few simple instructions and care for the light properly.

Battery Installation - See Figure 11

- 1AA Alkaline (LR6)
- Princeton Tec cares about the environment and recommends recycling battery.
- Observe proper battery polarity. Improper installation of the battery will damage the light and void the warranty.

Warning ⚠

- Always remove drained battery immediately.
- Remove battery during long periods of storage.

CAUTION to avoid leakage, do not over tighten lens cap.

O-RING – Occasionally clean and lightly lubricate the o-ring and lens cap threads. Use only silicone grease, never use aerosol spray lubricants.

WARNING – All plastic components are made of high-impact resistant polycarbonate plastic. Certain forms of aerosol sprays can cause damage and void warranty.

MAINTENANCE – As with any outdoor equipment, this light should be rinsed with fresh water after each day's use. Avoid getting dirt and grit in the threads of the lens cap. If this occurs, take the light apart, remove battery, and clean threads with soap and water, lubricate o-ring and reassemble light.


Operation - See Figure 2

Turn bezel clockwise to activate the strobe. Turn bezel counterclockwise to deactivate the strobe.

1. Battery Replacement

Remplacement des piles


Batteriewechsel

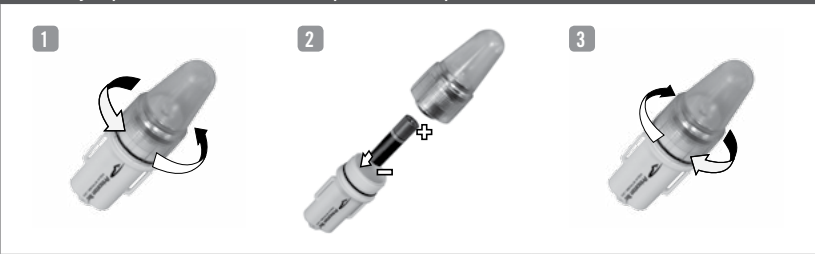

2. Operation

Modes de fonctionnement

Schalterbetätigung

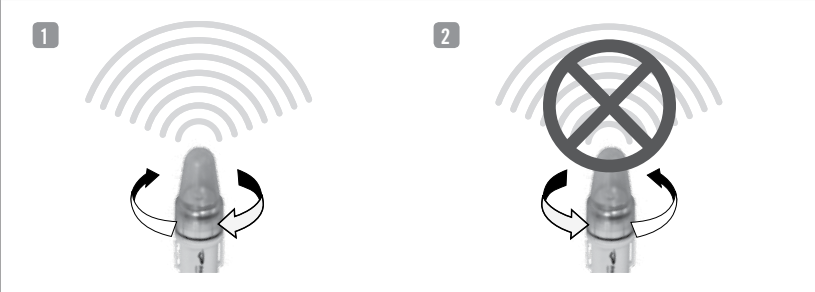

Troubleshooting

If the Aqua Strobe LED fails to light:

- Check the battery for proper installation.
- Replace battery if proper installation is confirmed.
- Check circuit board for water (the seal may have been compromised by improper rear cover installation or dirty seal). The light will resume normal operation once the water is shaken or blown out and the light is left open until completely dry. If the light has been contaminated with salt water, flush the unit with fresh water and dry as described above.

Princeton Tec reserves the right to change product specifications without notice.