

# Specifications


<b>Port Sizes</b>	1/4", 3/8", 1/2"
<b>Thread Styles</b>	NPT, BSPT, BSPP
<b>Flow Capacity</b>	25 SCFM @ 100 PSI
<b>Filter Capacity</b>	1.0 micron & larger Activated Carbon Oil Absorption to 0.003 PPM
<b>Differential Pressure</b>	< 5.0 PSID at rated flow
<b>Max. Temp./Pressure (Aluminum Bowl)</b>	125 °F/150 PSIG
<b>Approx. Weight (lb.)</b>	14.0
<b>ISO Class</b>	2 Particulate/Oil & 2 Pressure Dew Point



**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Water Vapor**  
**Odor**

# Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element, 1st Stage	4P-060
<b>B</b> Replacement Element, 2nd Stage	DE401
<b>C</b> Differential Pressure Indicator	N32-W1-DPi
<b>C</b> Blanking Cap (Cover for Indicator)	N32-95-020
<b>D</b> Bowl Assy, 1st Stage (Bowl, Drain, O-ring)	N34-95-201
<b>E</b> Bowl Assy, 2nd Stage (Bowl, Drain, O-ring)	N34-15-180
<b>F</b> O-ring, 1st Stage	N32-95-257
<b>G</b> O-ring, 2nd Stage	N32-95-256
<b>H</b> Automatic Float Drain, 1st Stage	N32-95-979
<b>J</b> Pressure Gauge	PG-160
<b>K</b> Regulator, 1/4"	R79
<b>L</b> Sight Glass	RTi-SG-651
<b>M</b> Petcock Drain	PC-03

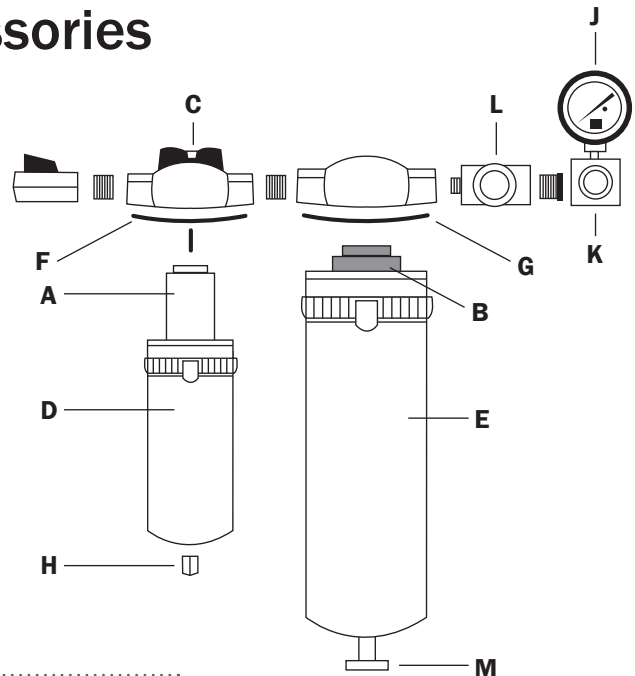

# Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
<b>1/4" Regulator &amp; Gauge Assembly</b>	1/4"	E4000-2	19.0	17.0	5.4
	3/8"	E4000-3	19.0	17.0	5.4
	1/2"	E4000-4	19.0	17.0	5.4
<b>No Regulator &amp; Gauge Assembly</b>	1/4"	N4000-2	19.0	14.0	5.4
	3/8"	N4000-3	19.0	14.0	5.4
	1/2"	N4000-4	19.0	14.0	5.4

