

Specifications


Port Sizes	1/4", 3/8", 1/2"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	25 SCFM @ 100 PSI
Filter Capacity	1.0 micron & larger Activated Carbon Oil Absorption to 0.003 PPM
Differential Pressure	< 5.0 PSID at rated flow
Max. Temp./Pressure (Aluminum Bowl)	125 °F/150 PSIG
Approx. Weight (lb.)	14.0
ISO Class	2 Particulate/Oil & 2 Pressure Dew Point



Water
Dirt
Oil
Oil Vapor
Water Vapor
Odor

Replacement Parts & Accessories

Description	Part Number
A Replacement Element, 1st Stage	4P-060
B Replacement Element, 2nd Stage	DE401
C Differential Pressure Indicator	N32-W1-DPi
C Blanking Cap (Cover for Indicator)	N32-95-020
D Bowl Assy, 1st Stage (Bowl, Drain, O-ring)	N34-95-201
E Bowl Assy, 2nd Stage (Bowl, Drain, O-ring)	N34-15-180
F O-ring, 1st Stage	N32-95-257
G O-ring, 2nd Stage	N32-95-256
H Automatic Float Drain, 1st Stage	N32-95-979
J Pressure Gauge	PG-160
K Regulator, 1/4"	R79
L Sight Glass	RTi-SG-651
M Petcock Drain	PC-03

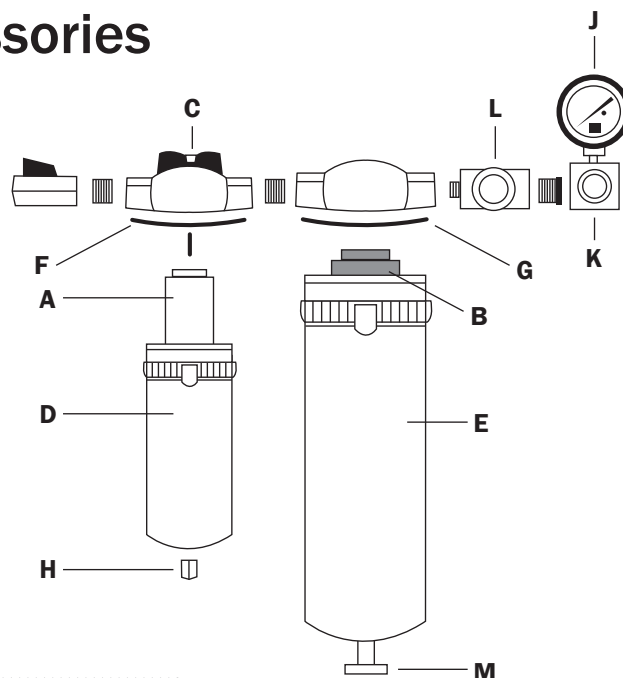

Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
1/4" Regulator & Gauge Assembly	1/4"	E4000-2	19.0	17.0	5.4
	3/8"	E4000-3	19.0	17.0	5.4
	1/2"	E4000-4	19.0	17.0	5.4
No Regulator & Gauge Assembly	1/4"	N4000-2	19.0	14.0	5.4
	3/8"	N4000-3	19.0	14.0	5.4
	1/2"	N4000-4	19.0	14.0	5.4

