

shop·air[®]
A Shop-Vac[®] Company




GALVANIZED STEEL

Stay cool and well ventilated with Shop-Air® Industrial Floor Fans. Choose from belt drive or direct drive, ranging from 24 in. up to 48 in. diameter's and as high as 3/4 Horsepower motors. Featuring high velocity air movement, these fans are perfect for moving large volumes of air quickly, keeping your factories and workplaces cool.

FEATURES:

- Durable galvanized steel housings built to last a long time.
- Non-skid front legs to keep your fan in position while operating.
- Metal handle for portability.
- Heavy duty wheels for mobility.
- Non-corroding aluminum fan blades for longer life.
- 3 and 4 blade designs provide even airflow and low noise levels.
- c UL us listed
- 10 ft. 3 prong heavy duty power cords.
- 1 year manufacturer's warranty

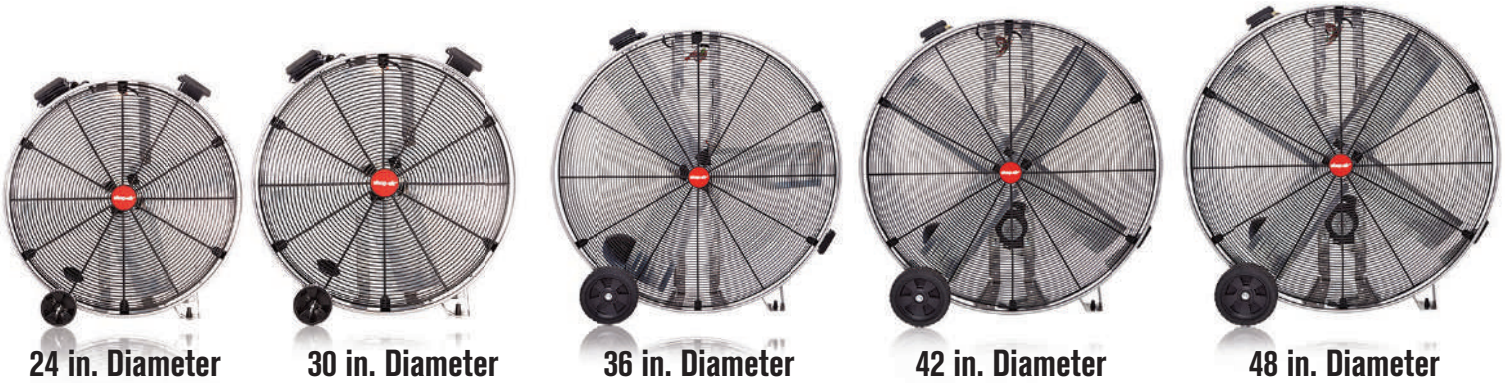

GALVANIZED STEEL - Direct Drive

Catalog	UPC	Carton Dimensions	Fan Dia.	Body Width	HP	Motor Type	Max CFM High	Max CFM Low	Blades	Unit Weight	Shipping Weight	Electric Rating
1183000	0 26282 11830 1	28 1/4" x 15 3/4" x 28 3/4"	24 in.	13 in.	1/3	Open	6,500	5,000	4	51 lbs.	55 lbs.	120V ~60Hz 5.0 Amps
1183100	0 26282 11831 8	34 1/4" x 15 3/4" x 34 3/4"	30 in.	13 in.	1/2	Open	9,600	7,500	4	64 lbs.	70 lbs.	120V ~60Hz 6.0 Amps
1183200	0 26282 11832 5	40 1/4" x 15 1/2" x 40 3/4"	36 in.	13 in.	1/2	Open	11,000	10,000	3	81 lbs.	85 lbs.	120V ~60Hz 6.0 Amps
1184300	0 26282 11843 1	47" x 15 1/4" x 47 1/2"	42 in.	13 in.	3/4	Open	14,500	12,000	3	96 lbs.	105 lbs.	120V ~60Hz 8.3 Amps
1184400	0 26282 11844 8	53 1/4" x 15 1/4" x 53 3/4"	48 in.	13 in.	3/4	Open	16,500	13,500	3	112 lbs.	121 lbs.	120V ~60Hz 8.5 Amps

GALVANIZED STEEL - Belt Drive


Catalog	UPC	Carton Dimensions	Fan Dia.	Body Width	HP	Motor Type	Max CFM High	Max CFM Low	Blades	Unit Weight	Shipping Weight	Electric Rating
1184000	0 26282 11840 0	40 1/4" x 19 1/2" x 40 3/4"	36 in.	17 in.	1/2	Open	12,200	11,000	4	90 lbs.	94 lbs.	120V ~60Hz 5.0 Amps
1184100	0 26282 11841 7	46 3/4" x 19 1/4" x 47 1/4"	42 in.	17 in.	3/4	Open	16,500	14,500	4	116 lbs.	120 lbs.	120V ~60Hz 8.0 Amps
1184200	0 26282 11842 4	53" x 19 1/4" x 53 1/2"	48 in.	17 in.	3/4	Open	22,000	20,000	4	130 lbs.	134 lbs.	120V ~60Hz 8.5 Amps

STAINLESS STEEL

Stay cool and well ventilated with Shop-Air® Industrial Floor Fans. Choose from belt drive or direct drive, ranging from 24 in. up to 48 in. diameter's and as high as ¾ Horsepower motors. Featuring high velocity air movement, these fans are perfect for moving large volumes of air quickly, keeping your factories and workplaces cool.

FEATURES:

- Durable stainless steel housings built to last a long time.
- Non-skid front legs to keep your fan in position while operating.
- Metal handle for portability.
- Heavy duty wheels for mobility.
- Non-corroding aluminum fan blades for longer life.
- 3 and 4 blade designs provide even airflow and low noise levels.
- c UL us listed
- 10 ft. 3 prong heavy duty power cords.
- 1 year manufacturer's warranty

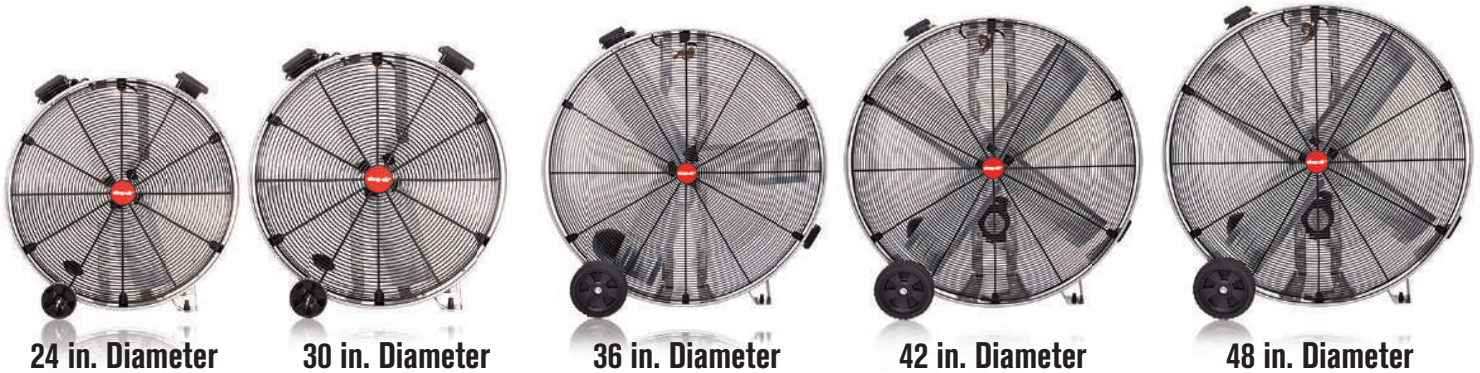

STAINLESS STEEL - Direct Drive

Catalog	UPC	Carton Dimensions	Fan Dia.	Body Width	HP	Motor Type	Max CFM High	Max CFM Low	Blades	Unit Weight	Shipping Weight	Electric Rating
1180000	0 26282 11800 4	28¼" x 15¾" x 28¾"	24 in.	13 in.	1/3	Open	6,500	5,000	4	50 lbs.	55 lbs.	120V ~60Hz 5.0 Amps
1180100	0 26282 01118 3	34¼" x 15¾" x 34¾"	30 in.	13 in.	1/2	Open	9,600	7,500	4	64 lbs.	70 lbs.	120V ~60Hz 6.0 Amps
1180200	0 26282 11802 8	40¼" x 15½" x 40¾"	36 in.	13 in.	1/2	Open	11,000	10,000	3	79 lbs.	84 lbs.	120V ~60Hz 6.0 Amps
1183300	0 26282 11833 2	47" x 15¼" x 47½"	42 in.	13 in.	¾	Open	14,500	12,000	3	96 lbs.	105 lbs.	120V ~60Hz 8.3 Amps
1183400	0 26282 11834 9	53¼" x 15¼" x 53¾"	48 in.	13 in.	¾	Open	16,500	13,500	3	112 lbs.	121 lbs.	120V ~60Hz 8.5 Amps

STAINLESS STEEL - Belt Drive

Catalog	UPC	Carton Dimensions	Fan Dia.	Body Width	HP	Motor Type	Max CFM High	Max CFM Low	Blades	Unit Weight	Shipping Weight	Electric Rating
1181000	0 26282 11810 3	40¼" x 19½" x 40¾"	36 in.	17 in.	1/2	Open	12,200	11,000	4	89 lbs.	94 lbs.	120V ~60Hz 5.0 Amps
1181100	0 26282 11811 0	46¾" x 19¼" x 47¼"	42 in.	17 in.	¾	Open	16,500	14,500	4	114 lbs.	118 lbs.	120V ~60Hz 8.0 Amps
1181200	0 26282 11812 7	53" x 19¼" x 53½"	48 in.	17 in.	¾	Open	22,000	20,000	4	128 lbs.	132 lbs.	120V ~60Hz 8.5 Amps

SLIM LINE STAINLESS STEEL FLOOR FANS - DIRECT DRIVE



11 in. Diameter

14 in. Diameter

16 in. Diameter

FEATURES:

- Durable stainless steel housings.
- Adjustable floor stands.
- Top carry handle.
- 6 plastic blades.
- c UL us listed



Catalog	UPC	Carton Dimensions	Fan Dia.	Body Width	Motor Type	Motor Rating	Max CFM High	Max CFM Low	Blades	Unit Weight	Shipping Weight	Electric Rating
1186000	0 26282 11860 8	15¾" x 15¾" x 11"	11 in.	8.5 in.	Open	58 Watt	1,000	800	6	11.5	13.5	120V ~60Hz 1 Amp
1186100	0 26282 11861 5	18¾" x 18¾" x 12¼"	14 in.	8.625 in.	Open	90 Watt	1,800	1,400	6	14	16	120V ~60Hz 1.4 Amps
1186200	0 26282 11862 2	20¾" x 20¾" x 13¼"	16 in.	8.75 in.	Open	90 Watt	2,200	1,500	6	15.5	18.5	120V ~60Hz 1.7 Amps

SLIM LINE GALVANIZED DRUM FANS - DIRECT DRIVE



24 in. Diameter

30 in. Diameter

36 in. Diameter

FEATURES:

- Rear wheels & handles for mobility.
- Galvanized drums for durability.
- 3 Aluminum blades.
- 10 ft. 3 prong heavy duty power cord.
- c UL us listed
- 1 year manufacturer's warranty



Catalog	UPC	Carton Dimensions	Fan Dia.	Body Width	Motor Type	HP	Max CFM High	Max CFM Low	Blades	Unit Weight	Shipping Weight	Electric Rating
1185000	0 26282 11850 9	31¼" x 12¼" x 32½"	24 in.	9.5 in.	Open	1/5	4,300	3,800	3	30.0	34.5	120V ~60Hz 2.2 Amps
1185100	0 26282 11851 6	37" x 12¼" x 35½"	30 in.	9.5 in.	Open	1/3	7,500	5,000	3	36.5	41.4	120V ~60Hz 4.5 Amps
1185200	0 26282 11852 3	43" x 12¼" x 42"	36 in.	9.5 in.	Open	1/3	9,000	7,000	3	42.0	48	120V ~60Hz 5.0 Amps

SELF CONTAINED STAINLESS STEEL AIR CIRCULATOR



- 3 speed settings: low/medium/high.
- Portable with telescopic handle & integrated wheels.
- High volume directional air movement (1033000, 1033100 & 1033200).
- Floor level cooling that does not blow air in the operators face (1033000, 1033100 & 1033200).
- Adjustable arm lets you direct the airflow (1034000, 1034100 & 1034200).
- Corrosion resistant stainless steel outer body with heavy-duty molded fan blade.
- OSHA approved grills.
- Convenient cord wrap.
- 1 year manufacturer's warranty.

Catalog	Model#	HP	UPC	Carton Dimensions	Cube	Shipping Weight	Max CFM	Wheels	Body Width	Electric Rating	Cord
1033000	SAIR-25	1/4	0 26282 10330 7	26 5/8" x 15 3/4" x 19"	4.6	32 lbs.	1,000	4 in.	11 in.	120V ~60Hz 2.0 Amps	30 ft.
1033100	SAIR-33	1/3	0 26282 10331 4	26 3/8" x 18 1/2" x 21 5/8"	6.2	40 lbs.	2,000	7 in.	14 in.	120V ~60Hz 3.0 Amps	30 ft.
1033200	SAIR-50	1/2	0 26282 10332 1	32 3/4" x 20 1/2" x 24"	9.2	52 lbs.	3,000	8 in.	16 in.	120V ~60Hz 3.5 Amps	30 ft.
1034000	WAIR-25	1/4	0 26282 10340 6	22 1/2" x 15 3/4" x 19"	3.9	33 lbs.	1,000		11 in.	120V ~60Hz 2.0 Amps	15 ft.
1034100	WAIR-33	1/3	0 26282 10341 3	22 1/4" x 18 3/4" x 21 5/8"	5.2	39 lbs.	2,000		14 in.	120V ~60Hz 3.0 Amps	15 ft.
1034200	WAIR-50	1/2	0 26282 10342 0	20 1/4" x 20 1/2" x 23 3/4"	5.7	41.5 lbs.	3,000		16 in.	120V ~60Hz 3.5 Amps	15 ft.

■ Mobile floor mounting bracket is not included.

**Specifications subject to change without notice.

Portable

AIR MOVER®



- 3 Speed air control.
- Built in outlets to connect multiple units (1032000, 1030400).
- 2 Operating positions for drying carpets, floors and ceilings (1030100).
- 3 Operating positions for drying carpets, floors, walls and ceilings.
- Units are stackable for easy storage.
- Collapsible transport handle and rear wheels (1030100).
- Lightweight and portable.
- 1 year manufacturer's warranty.

Catalog	Model#	UPC	Carton Dimensions	Cube	Shipping Weight	Max CFM	Electric Rating	Cord
1030300	AM300	0 26282 10303 1	10 4/8" x 10" x 8"	0.5	6 lbs.	200	120V ~60Hz 0.4 Amps	6 ft.
1032000	AM425	0 26282 10320 8	15" x 15" x 10 1/2"	1.4	12 lbs.	500	120V ~60Hz 1.5 Amps	10 ft.
1030400	AM1000	0 26282 10304 8	19 1/4" x 19 1/4" x 13 7/10"	2.9	24 lbs.	1,000	120V ~60Hz 3.5 Amps	10 ft.
1030100	AM1800A	0 26282 10301 7	23 7/8" x 23 7/8" x 18 1/8"	6.0	50 lbs.	1,800	120V ~60Hz 5.0 Amps	30 ft.

■ Mobile floor mounting bracket is not included.

**Specifications subject to change without notice.

Air Cleaner



- Super quiet operation by long life induction motor.
- Superior airflow (235 CFM) over filter area.
- Efficient cleaning from 2 stage filter system.
- Lightweight enough to carry right to the source of the dust.
- Durable stainless steel tank with molded poly end castings.
- Provides 2000 sq. inches of filtration area to capture particles as small as 5 microns.
- 10' power cord with easy storage.
- Removable end grill for convenient filter maintenance.
- 2 year manufacturer's warranty.



Catalog	Model#	UPC	Carton Dimensions	Cube	Shipping Weight	Max CFM	Electric Rating	Cord
1030000	AC235A	0 26282 10300 0	26 1/2" x 16 1/2" x 18 1/8"	4.6	18 lbs.	235	120V ~60Hz 1.4 Amps	10 ft.

**Specifications subject to change without notice.

FILTERS & MOUNTING RINGS



Polyester, Anti-Microbial and Carbon



11 in. Diameter Mounting Ring (9040900) 14 in. Diameter Mounting Ring (9041000) 16 in. Diameter Mounting Ring (9041100)

- Keeps your area dust free.
- Traps airborne particles to provide filtered air.
- Remove dust & contaminating particles.

Parts	Description	Parts	Description
9033700	Polyester Air Circulator Filter	9036500	Polyester Air Circulator Filter with 14" Filter Mounting Ring
9033800	Antimicrobial Air Circulator Filter	9036600	Antimicrobial Air Circulator Filter with 14" Filter Mounting Ring
9033900	Carbon Air Circulator Filter	9036700	Carbon Air Circulator Filter with 14" Filter Mounting Ring
9036200	Polyester Air Circulator Filter with 11" Filter Mounting Ring	9036800	Polyester Air Circulator Filter with 16" Filter Mounting Ring
9036300	Antimicrobial Air Circulator with 11" Filter Mounting Ring	9036900	Antimicrobial Air Circulator with 16" Filter Mounting Ring
9036400	Carbon Air Circulator Filter with 11" Filter Mounting Ring	9037100	Carbon Air Circulator Filter with 16" Filter Mounting Ring

9041900 - MOBILE FLOOR MOUNTING BRACKET*



- Free standing design makes it easy to place where needed.
- Easy roll heavy-duty wheels for portability.
- Non-ripping design.
- Reinforced heavy-duty steel construction for long lasting performance.

9042100 - WALL AND CEILING MOUNTING BRACKET*



- Steel construction
- Adjustable arm lets you direct the airflow.
- Easily attaches to your wall and ceilings.

Catalog	UPC	Carton Dimensions	Cube
9041900	0 26282 90419 5	7 ⁵ / ₈ " x 2 ⁷ / ₈ " x 55 ⁵ / ₈ "	0.7

Catalog	UPC	Carton Dimensions	Cube
9042100	0 26282 90421 8	12 ³ / ₄ " x 9 ¹ / ₂ " x 2 ¹ / ₄ "	0.16

■ Air circulator sold separately.

* For use with 11", 14" and 16" diameter wall mounted air circulators. Requires bracket included with air circulator or 9042100 mounting bracket.

■ Air circulator sold separately.

* For use with 11", 14" and 16" diameter wall mounted air circulators. **Specifications subject to change without notice.

MULTI-DIRECTIONAL AIRFLOW ADAPTER



- Allows you to direct airflow up to 8 different directions.
- Dries moisture in confined and hard to reach areas.
- 11 in. diameter adapter includes: Ring adapter, (2) 2½ x 12 ft. flexible hoses and (2) caps (9041200).
- 14 in. diameter adapter includes: Ring adapter, (3) 2½ x 12 ft. flexible hoses and (3) caps (9041300).
- 16 in. diameter adapter includes: Ring adapter, (4) 2½ x 12 ft. flexible hoses and (4) caps (9041400).

Remove the caps to attach additional hoses (sold separately).

Direct airflow to dry carpets/floors, rooms, crawl spaces, under desks and equipment, etc.

■ Air circulator sold separately.

Catalog	UPC	Carton Dimensions	Cube
9041200	0 26282 90412 6	18¾" x 18½" x 15½"	3.07
9041300	0 26282 90413 3	18⅞" x 18⅞" x 24½"	4.66
9041400	0 26282 90414 0	18⅞" x 18⅞" x 24½"	4.66
9042200	0 26282 90422 5	19" x 9⅞" x 20¼"	2.03
9042300	0 26282 90423 2		
9042400	0 26282 90424 9		

OPTIONAL ACCESSORIES FOR MULTI-DIRECTIONAL AIRFLOW ADAPTER

(sold separately)



FLEXIBLE AIR DUCT ADAPTER



- Allows you to adapt flexible air duct hosing to your Air Circulator.
- Available in 11 in., 14 in., and 16 in., diameter sizes.
- Dust evacuation.
- Smoke evacuation.
- Extends to 25 ft.



Catalog	UPC	Carton Dimensions	Cube
9041500	0 26282 90415 7	13½" x 13½" x 11½"	1.2
9041600	0 26282 90416 4	15" x 15" x 10½"	1.4
9041700	0 26282 90417 1	18¼" x 18¼" x 14½"	2.8

■ 11 in., 14 in., or 16 in. diameter mounting ring included. ■ Air circulator sold separately.

9041800 - 16 in. LOADING DOCK AIR CIRCULATING KIT

Provides continuous air circulation. Cools down hot trailers by forcing the cool air in and warm air out. The unique mounting bracket lets you easily mount the fan near any loading dock, clear of forklift traffic. With magnetic hose end mounting bracket, you're free to position the air duct hose anywhere within the dock door.



■ Forces cool air into trailer and warm air out.

For use with 16 in. portable or floor model.

■ Air circulator sold separately.

Catalog	UPC	Carton Dimensions	Cube
9041800	0 26282 90418 8	18¼" x 18¼" x 14½"	2.8