

Wet/Dry AutoVac



User's Manual


We are constantly improving our products so specifications are subject to change without notice.



RoHS
compliant

Wet/Dry AutoVac by Wagan Tech®

Thank you for purchasing the Wet/Dry AutoVac by Wagan Tech®. With normal care and proper treatment, it will provide years of reliable service. Please read all operating instructions carefully before use.

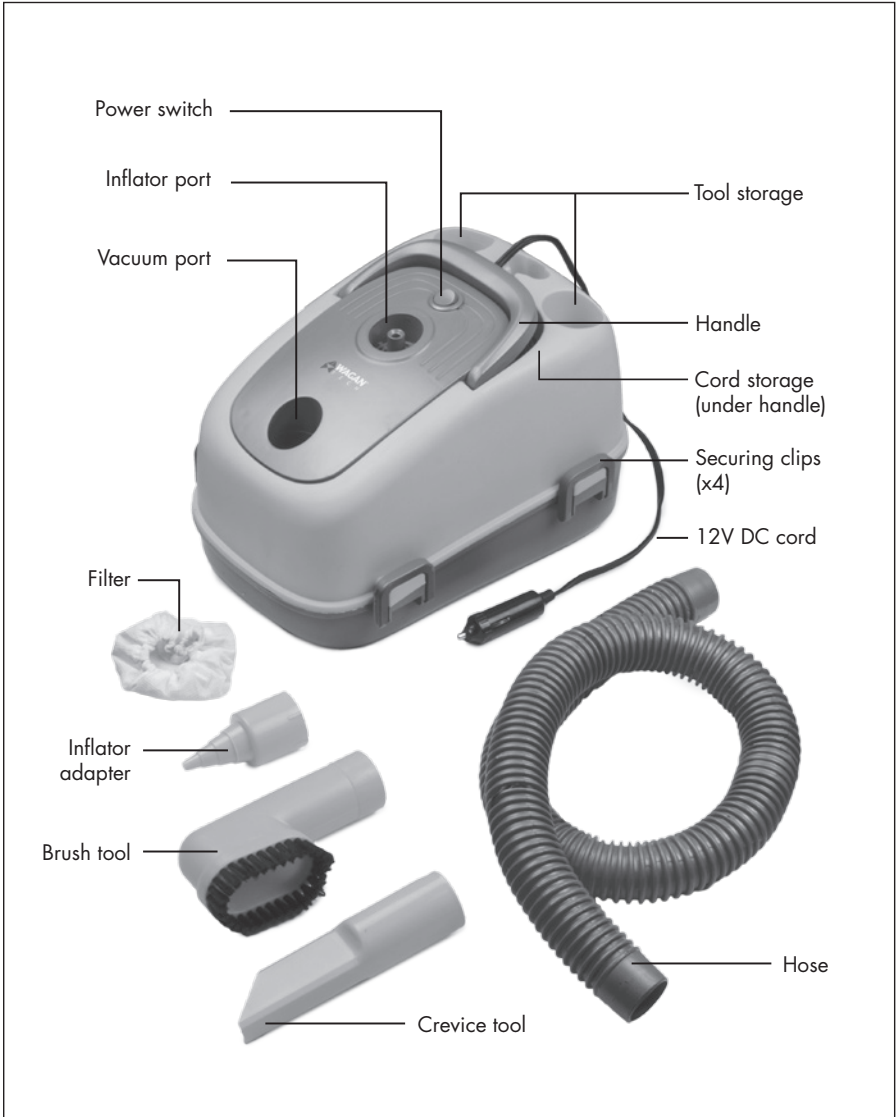

SPECIFICATIONS

Operating Voltage	12V
Operating Wattage	120W
Dimensions	11.0 × 8.2 × 6.5 (in)
Weight	2.4 lbs

PARTS & ACCESSORIES

1. Detach the dirt reservoir by releasing the four clips located around the reservoir.
2. Remove all contents from the reservoir and make sure you have the following:
 - 40-inch flexible hose
 - Brush tool: ideal for upholstery and carpet
 - Crevice tool: allows you to clean under seats and other narrow areas
 - Inflating adaptor: for pumping air into sports equipment, air mattresses, etc
 - Filter
3. Resecure the reservoir back in place with the four clips.

CAUTION

- Do not submerge the vacuum in water.
- The vacuum is not a toy. The vacuum should be used and stored out of the reach of the children. Keep nozzles away from eyes and ears at all times.
- Do not vacuum hot or smoldering substances, solvents, corrosive or acidic liquids, flammable or explosive substances or large pieces of sharp edged debris such as glass.
- Do not operate near gasoline and other flammable vapors.

USAGE

Vacuuming Instructions

1. Select the attachment you wish to use and connect it to one end of the hose.
2. Connect the other end of the hose to the Vacuum Port.
3. Plug the DC cord into your DC socket.
⚠ You must ensure that all other electrical equipment in the car is switched off when vacuum is in use, including other items plugged into the 12V socket.
4. Locate the power switch and turn the vacuum on.
⚠ For optimal performance and to avoid draining your battery, your vehicle's engine should be running when operating your vacuum.
5. When finished, turn the vacuum off and then unplug the DC cord from the DC socket.
6. Clean out dirt, debris, and etc from the reservoir by unlatching the four clips in the same manner as described in "Parts & Accessories".

Inflating Instructions

1. Connect the Inflator Adapter to one end of the hose.
2. Connect the other end of the hose to the Inflator Port.
3. Follow steps #3-5 from the "Vacuuming Instructions".

CARE & MAINTENANCE

1. DO NOT submerge vacuum in water. You may wipe the outside with a damp cloth.
2. After using the Wet/Dry AutoVac to vacuum up liquid, make sure to clean the reservoir and filter. Let all parts dry fully before storing it away for future use.

FILTER CLEANING & REPLACEMENT

1. Unlatch the four securing clips from the dirt reservoir and detach.
2. Locate cloth filter around air intake guard and remove carefully.
3. Clean filter by hand with mild soap and warm water. Allow to dry thoroughly.

⚠ Do not run vacuum without filter in place.