2019 MASTER CATALOG



A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.

DRUM TRUCK FEATURES:

■ Heavy duty, double-welded joints.

■ 1" structural steel frame.

■ Kickstands to store upright.





10BT & 10BTW Standard Series

- Machined steel load wheels behind nose prongs help ease the lifting of the drum.
- With wheels resting on floor, 22" to center of lowered chime hook.
- Steel drums only.
- Handles 55 & 85 gallon steel drums.

OVERALL

w: 24.5"

h: 62" d: 17"

OVERALL

DIMENSIONS

:5BT &

5BTW

Series

Kickstand.

hook

Economy

■ With wheels resting

of lowered chime

■ Steel drums only.

gallon steel drums.

■ Handles 55 & 85

on floor, 22" to center

DIMENSIONS

w: 24.5"

h: 61"

d: 14.5"



ADE IN THE USA

15BT & **15BTW Deluxe Series**


- Four wheel design enables user to quickly and easily load and unload drums from pallet.
- With two wheels resting on floor, 20.5" to center of lowered chime hook.
- Replaceable hard faced double-beveled nose prongs, Part # 240060.
- Steel drums only.
- Handles 30, 55 & 85 gallon steel drums.

OVERALL DIMENSIONS

w: 24"

h: 58"





Ergonomic Drum Truck

caster design reduces operator muscle strain and fatigue.

Ergonomic swivel

- With two wheels resting on floor, 20.5" to center of lowered chime hook.
- Replaceable hard faced doublebeveled nose prongs, Part # 240060.
- Steel drums only.
- Handles 30, 55 & 85 gallon steel drums.

OVERALL DIMENSIONS

w: 24"

h: 58" d: 21"



20BT & **20BTW-Deluxe** Series

- Floating axle reduces effort required to break over and balance load.
- Chime hook can be stored at the top of the frame for easy use.
- Replaceable hard faced double-beveled nose prongs, Part # 240060.
- Steel drums only.
- Handles 30, 55 & 85 gallon steel drums.

OVERALL DIMENSIONS

w: 23.5" h: 60"

d: 17"



30BT & 30BTW -Standard **Series**

- Multi-functional drum truck allows you to move drums on four wheels and acts as a drum cradle for storage or dispensing.
- 16.5" drain height.
- With two wheels resting on floor, 28" to bottom of lowered chime hook.
- Steel drums only.
- Handles 30, 55 & 85 gallon steel drums.

OVERALL **DIMENSIONS**

w: 24"

h: 56" d: 20.5"

	:										
Part #	240009	240010	240013	240014	240001	240002	240121	240003	240004	240005	240006
Model #	5BT	5BTW	10BT	10BTW	15BT	15BTW	15BTC	20BT	20BTW	30BT	30BTW
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs
10" Wheel 6" Wheel		Polyolefin N/A	Moldon Rubber N/A	•	Moldon Rubber Moldon Rubber			Moldon Rubber N/A		Moldon Rubber Moldon Rubber	
Weight	68 lbs	53 lbs	64 lbs	50 lbs	79 lbs	61 lbs	79 lbs	74 lbs	59 lbs	82 lbs	66 lbs



A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.

DRUM TRUCK FEATURES:

- Heavy duty, double-welded joints.
- 1" structural steel frame.
- Self standing or with kick stand for upright storage.



: 40BT & 40BTW Series

- Handles all poly and fiber drums except overpacks (use 45BT for overpacks).
- Replaceable feet Part# 240115 and replaceable belt - Part# 150303. ■ Floating axle reduces effort required to
- break over and balance load. ■ With wheels resting on floor, 28" to
- bottom of belt.
- Handles 30, 55 & 85 gal. drums.
- Steel, poly & fiber drums.

OVERALL **DIMENSIONS**

- w: 23.75"
- h: 59.75'
- d: 24"



45BT & 45BTW Series

- Recommended primarily for handling of overpacks.
- Wide "feet" eliminate the risk of drums being punctured by nose prongs.
- Replaceable feet Part # 240115 and replaceable belt - Part # 150304.
- Floating axle reduces effort required to break over and balance load.
- With wheels resting on floor, 28" to center of belt.
- Handles 30, 55 & 85 gal. drums.
- Steel, poly & fiber drums.

OVERALL **DIMENSIONS**

- w: 24"
- h: 59.75"
- d: 24"



50BT & 50BTW Series

- Acts as a Poly Drum Truck or Drain Stand.
- Wide "feet" and belt eliminate the risk of drums being punctured by nose prongs and chime hooks.
- With two wheels resting on floor, 32" to center of belt.
- Handles all poly drums (except overpacks).
- Handles 30, 55 & 85 gal. drums.
- Steel, poly & fiber drums.


OVERALL **DIMENSIONS**


- w: 24"
- h: 57.5"
- d: 25"

	u. 21		*·· =·				
Part #	240081	240076	240082	240077	240083	240078	
Model#	40BT	40BTW	45BT	45BTW	50BT	50BTW	
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	
10" Wheel 6" Wheel	Moldon Rubber N/A	Polyolefin N/A	Moldon Rubber N/A	Polyolefin N/A	Moldon Rubber Moldon Rubber	Polyolefin Polyolefin	
Weight	82 lbs	67 lbs	82 lbs	67 lbs	86 lbs	65 lbs	



WESCO KNOCK DOWN (KD) DRUM TRUCKS

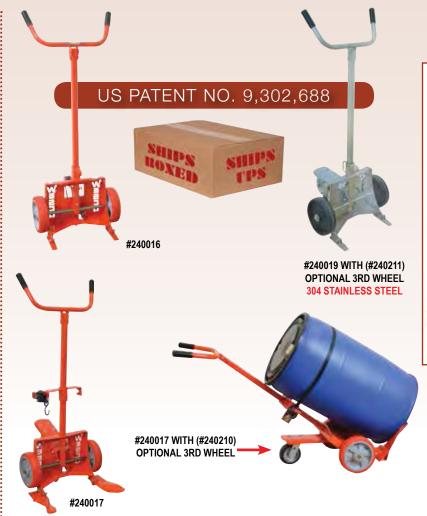





Knock Down (KD) Drum Trucks

- UPSable KD and boxed.
- Six models: (4) Steel and (2) **304 Stainless** Construction.
- Handles 30, 55 and 85 gallon drums.
- Models to handle steel and poly drums.
- Requires minimal assembly.
- Each of the six models include handle, frame, base, kickstand, axle, toe or feet, wheels, chime hook or belt and hardware.
- Foot operated break-over assist bar provides extra leverage to tilt and balance load and allows truck to rest in tilt-back position.
- All parts removable and interchangeable. Stainless models okay for wash down.

■ Optional 3rd Wheel:

- Ergonomic design, better maneuverability.
- Better load support.
- Helps reduce breakover effort.
- 5" x 2" swivel caster.
- Two Models: #240210 for steel trucks, 13 lbs. #240211 for **304 stainless** trucks, 14 lbs.

Part #	240016	240017	240052	240053	240019	240020
Model #	KD-STL-STL-PU	KD-STL-POLY-PU	KD-STL-STL-PO	KD-STL-POLY-PO	KD-SS-STL-PO	KD-SS-POLY-PO
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs
Wheel	10" x 2.5" Polyurethane	10" x 2.5" Polyurethane	10" Polyolefin	10" Polyolefin	10" Polyolefin	10" Polyolefin
Drum Type Handled	Steel	Poly	Steel	Poly	Steel	Poly
Toe/Foot (replaceable)	Milled Toe #240060	Formed Foot #240115	Milled Toe #240060	Formed Foot #240115	Stainless Milled Toe #051904	Stainless Foot #050362
Construction	Steel	Steel	Steel	Steel	304 Stainless	304 Stainless
Chime Hook	#240214 - steel	N/A	#240214 - steel	N/A	#050197- stainless	N/A
Belt	N/A	#240212 - steel ratchet assembly	N/A	#240212 - steel ratchet assembly		#240213 - stainless buckle
Weight	70 lbs	78 lbs	63 lbs	71 lbs	66 lbs	75 lbs



WES⊏□° DRUM TRUCKS, ALUMINUM, STEEL, STAINLESS



: Manual Aluminum Drum Trucks

- Spring loaded chime hook automatically engages drum.
- Two chime hooks available:
 - SCH: standard hook for closed head steel, fiber and poly drums (SC). (Not for use on drums with locking ring or
 - LCH: special order hook for steel, fiber and poly drums with locking rings. Can be used on 85 gallon drums.
- Two wheel choices:
 - 10" Moldon Rubber on Aluminum Hub #055684. - 12" Pneumatic Steel Hub - #108484.
- Disc wheel brake activited by hand lever: B: with brake.

NB: no brake.

Example: ABT-10-SC-NB (no brake).

- Steel, poly and fiber drums.
- 30 and 55 gallon drums.

OVERALL **DIMENSIONS**

w: 25.875"

h: 60"

d: 18.5"



4-Wheel Drum Cart

■ Two position, 4-wheel transport design to handle drums and standard loads.

Position I: Easily handles and maneuvers standard loads as a 4-wheel transport.

Position II: With the chime hook engaged and a press of the foot pedal, the frame tilts a 30 or 55 gallon steel drum to a balanced position to maintain 4-wheel contact even with half empty bottom heavy drums.

- Two 3.5" x 1.5" polyolefin swivel casters for easy maneuverability in narrow spaces.
- Chime hook to engage 30 & 55 gallon steel drums.
- \blacksquare 7.8" D x 14" W beveled edge noseplate.
- Curved frame holds 5-gallon pails and kegs.

OVERALL DIMENSIONS

W:	19.25"	19.25"
h:	48"	48.5"
d:	26.25"	25"





156DH Drum/ **Hand Truck**

- Utility of a hand truck and drum truck.
- Chime hook works with 55 and 30-gallon
- Curved frame holds 5-gallon pails and kegs.
- With noseplate resting flat on floor, 15.5" to center of lowered chime hook.
- Noseplate 7.8" D x 14" W.
- 304 stainless steel model #210352.
- Stainless model has 8" polyurethane, non-marking wheels with stainless precision ball bearings.

OVERALL

DIMENSIONS							
w: 20.5"	20.5"	20.5"	20.5"				
h: 48"	48"	48"	48"				
d: 18.5"	17.5"	18.5"	18.5"				

Stainless

Part #	240124	240132	240120	240134	210353	210354	210340	210349	210266	210352
Model#	ABT-10-SC-B	ABT-10-SC-NB	ABT-12-SC-B	ABT-12-SC-NB	4WDC-ZC	4WDC-HBC	156DH-Z	156DH-HB	156DH-P	156DH-PP8-SS
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	700 lbs	800 lbs	900 lbs	700 lbs	800 lbs	700 lbs	600 lbs
Brake	Yes	No	Yes	No	N/A	N/A	N/A	N/A	N/A	N/A
Wheels	10" Moldon Rubber Rear 6" Moldon	10" Moldon Rubber Rear 6" Moldon		12" Pneumatic Rear 6" Moldon		8"/ HB	Z	НВ	Р	8" Polyurethane
Weight	60 lbs	60 lbs	60 lbs	60 lbs	66 lbs	66 lbs	39 lbs	42.5 lbs	39 lbs	33.5 lbs





Steel Offset

10" x 2.75"



Steel Offset

10" x 3.5"





P-12

12" x 4"



10" x 2.5"

Moldon Rubber



8" x 2"



WES□° DRUM DOLLIES

24"

Stainless Steel Drum Dollies

- Wesco's Stability Advantage. By design, Wesco casters are mounted past the dolly and drum rim. Our casters are mounted further apart than standard designs with casters completely underneath the drum and closer together. The further the casters are apart the greater the stability.
- Welded 304 stainless steel dolly construction with reinforced outriggers.
- 304 stainless steel dollies are ideal for clean room, pharmaceutical, food and wash down applications.
- Models available for 30, 55, and 85 gallon drums. ASSEMBLED OVERALL

DIMENSIONS SS3



All stainless rigs with 3" polypropylene wheels



ASSEMBLED OVERALL DIMENSIONS SS8

■ Three caster set options:

HRZ: zinc plated swivel rig with 3" hard rubber wheel & zinc plated hardware *HRSS: 304 stainless steel swivel rig with 3" hard rubber wheel & stainless hardware

*PPSS: 304 stainless steel swivel rig with 3" white polypropylene wheel & stainless hardware.

*Suitable for wash down applications. ASSEMBLED OVERALL

DIMENSIONS SS5

	h: 6" d: 24"			h: 6" d: 28.5"			h: 6" d: 31.5"		
Part #	240192	240193	240194	240195	240196	240197	240198	240199	240200
Model #	SS3-HRZ	SS3-HRSS	SS3-PPSS	SS5-HRZ	SS5-HRSS	SS5-PPSS	SS8-HRZ	SS8-HRSS	SS8-PPSS
Capacity	900 lbs	900 lbs	1,000 lbs	900 lbs	900 lbs	1,000 lbs	900 lbs	900 lbs	1,000 lbs
I.D.	19"	19"	19"	24"	24"	24"	27"	27"	27"
Drum Size	30 gal	30 gal	30 gal	55 gal	55 gal	55 gal	85 gal	85 gal	85 gal
Caster Rig	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel
3" Caster Wheel	Hard Rubber	Hard Rubber	White Polypropylene	Hard Rubber	Hard Rubber	White Polypropylene	Hard Rubber	Hard Rubber	White Polypropylene
Dolly Material	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless
Weight	20 lbs	20 lbs	18 lbs	22 lbs	22 lbs	21 lbs	24 lbs	24 lbs	23 lbs

Steel Drum Dollies

CASTER MOUNTED BEYOND DRUM AND DOLLY RIM FOR GREATER STABILITY DOLLY RIM

CASTER MOUNTED BEYOND DRUM AND DOLLY RIM FOR

GREATER STABILITY

- Wesco's Stability Advantage. By design, Wesco casters are mounted past the dolly and drum rim. Our casters are centered under the dolly rim and further apart than standard designs which are inside the rim and closer together. The further the casters are apart, the greater the stability.
- All welded steel frame construction with reinforced outriggers.
- Four bolt on 3" swivel casters.
- I.D. varies among models.

ASSEMBLED OVERALL

■ Models available for 30, 55, and 85 gallon drums.



DIMENSIONS - D3

w: 24" h: 6"

d: 24"

ASSEMBLED OVERALL **DIMENSIONS - D5**

w: 28.5"

h: 6"

d: 28.5"



4 swivel casters.

D5-SI

ASSEMBLED OVERALL **DIMENSIONS - D8**

w: 31.5"

h: 6"

d: 31.5"

	A					
Capacity	1,000 lbs	900 lbs	1,000 lbs	900 lbs	1,000 lbs	900 lbs
I.D.	19"	19"	24"	24"	27"	27"
Drum Size	30 gal	30 gal	55 gal	55 gal	85 gal	85 gal
Caster Rig	Zinc plate 4 swivel					
3" Caster Wheel	Sintered Iron	Hard Rubber	Sintered Iron	Hard Rubber	Sintered Iron	Hard Rubber
Dolly Material	Steel	Steel	Steel	Steel	Steel	Steel
Weight	18 lbs	18 lbs	24.5 lbs	22 lbs	26 lbs	26 lbs

WESCO'S PECIALTY DOLLIES, PAIL TRUCKS



2 rigid and 2 swivel casters. **RSD**



*Model SSD with drain plug and handle.

SSD





- 5 swivel casters, 3" polyolefin wheels.
- Handles 30 or 55 gallon drums.
- Rigid latticed understructure for strength.

OVERALL DIMENSIONS

w:	24.25"
h:	7.125"
q.	24 25"







RAOD

Specialty Dollies

- 3" hard rubber caster.
- Steel or aluminum designs.

OVERALL	
DIMENSION	ς

DIMENSIONS						
w: 24.5"	25.75"	24.5"	24.5"			
h: 6"	6"	6"	6"			
d: 24.5"	24.5"	24.5"	24.5"			

Part #	240201	240033	240040	240043	240044
Model#	P55-30-P	RSD	SSD*	RASD	RAOD
Capacity	900 lbs	900 lbs	900 lbs	900 lbs	900 lbs
I.D.	23.25"	24"	23.625" sq.	24"	24"
Drum Size	30 or 55 gal	55 gal	30 or 55 gal	30 or 55 gal	30 or 55 gal
Caster Rig	Zinc Plate 5 Swivel	Zinc plate 2 Rgd./2 Sw.	Zinc plate 4 swivel	Zinc plate 4 swivel	Zinc plate 4 swivel
3" Caster Wheel	Polyolefin	Hard Rubber	Hard Rubber	Hard Rubber	Hard Rubber
Dolly Material	Polypropylene	Steel	Steel	Aluminum	Aluminum
Weight	17 lbs	22 lbs	47 lbs	20 lbs	14 lbs





PT Pail Truck

- Handles up to four standard steel or plastic 5-gallon pails.
- Ergonomic
 design eliminates the need
 to stack pails on
 a noseplate.
- 10" Semi-Pneumatic - #150589.

OVERALL DIMENSIONS

w: 26" h: 55" d: 21"





Pail Tipper

- Adjustable chime hook.
- Ships KD easy assembly.
- Boxed dimensions 16.5"W x 22"D x 3"H.
- For dispensing 5 gal. steel or plastic pails.

OVERALL DIMENSIONS

w: 14.5" h: 30"

h:	30"
d:	14.5"

Part #	240042	273108	
Model#	PT	PTR	
Capacity	500 lbs	70 lbs	
Brake	N/A	N/A	
Wheels	Semi- Pneumatic	N/A	
Weight	40 lbs	10 lbs	





WESC□° DRUM TRUCKS/CARRIERS/DISPENSERS

Pallet

Truck

Drum

Lifter

■ Hydraulic pallet

truck design to

lift and move 55

gallon steel drums.

■ Lowered height:10"

■ Raised height:14.5"

■ 8" x 2" nylon

■ 1" x 3" nylon

load wheels.

OVERALL


DIMENSIONS

w: 28.5"

h: 47.5"

d: 42"

steering wheels.



High-Lift Hydraulic **Drum Truck**

- Handles 55, and 85 gallon drums.
- Easy width adjustment to accommodate a variety of pallets.


HLDT-880

- Four 7½" moldon polyurethane swivel casters.
- Locking rear casters.
- Works with most rimmed steel and poly drums.
- Not for use with open head drums or drums with lid rings.

 OVERALL **DIMENSIONS**

w: 54.75" h: 71.25"

d: 43.5"





Economy Hydraulic **Drum Truck**

- Handles steel drums up to 221/2" in diameter.
- 2 rigid and 1 swivel locking caster for easy maneuverability.
- Pallet truck-type pump handle.
- Works with most rimmed steel drums.

OVERALL **DIMENSIONS**

w: 40"

h: 46"

d: 32.5"





Value Drum Carrier and **Dispenser**

- Economically priced. ■ Three height adjust-
- ments: 9.25", 10.625" and 12".
- Vertical and horizontal locking positions.
- Polyurethane wheels and casters.
- 8" x 2" wheels and 4" x 1.25" caster.
- Ships KD.

OVERALL **DIMENSIONS**

w: 35" h: 65.5" d: 37"





Spill-Less Open **DrumTruck**

- Transport drums in a vertical position.
- Handles 55 gallon drums.
- 8" x 2" moldon rubber wheels with roller bearings.
- 5" x 2" polyolefin swivel casters.
- All welded construction.


OVERALL **DIMENSIONS**

w: 32" 32.25" h: d: 25.25"

Part #	272967	272945	273250	272404	240015
Model #	HLDT-880	HDT-550	PTDL	VDCD	500
Capacity	880 lbs	550 lbs	660 lbs	Full Drum - 800 lbs Half Drum - 500 lbs	1,000 lbs
Wheels	(4) 7.5" Polyurethane Swivel	(2) 8" Polyurethane Wheels (1) 5" Polyurethane Caster	(2) 8" x 2" Nylon Steering Wheels (2) 1" x 3" Nylon Load Wheels	(2) 8" x 2" Polyurethane Wheels (1) 4" x 1.25" Polyurethane Caster	(2) 8" x 2" Moldon Rubber w/ Roller Bearings (1) 5" x 2" Polyolefin Swivel Caster
Lift Height	76.75" to top of drum 42.5" to bottom of 34.5" steel drum	48" to top of drum 13.5" to bottom of 34.5" steel drum	N/A	N/A	N/A
Lift	0.45" per stroke	0.87" per stroke	N/A	N/A	N/A
Leg Span Adjustment		N/A	N/A	N/A	N/A
Lift Range	42.5"	13.5"	N/A	N/A	N/A
Weight	220 lbs	99 lbs	115 lbs	105 lbs	70 lbs

WESCO DRUM RACKS/CRADLES





Drum Racks

- Two and three 55 gal. steel drum models.
- Four-side fork truck entry.
- Can be stacked 4 high.
- Standard models ship knocked down and boxed via UPS.
- Quick and easy to assemble.
- Welded and bolted construction.

OVERALL

DINILIVOIONO					
w: 45.5"	71.5"				
h: 12.5"	12.5"				
d: 30"	30"				



Deluxe Drum Cradle

- Tips, drains, stores, rotates and moves 30 or 55 gallon steel drums.
- Dual telescoping wood handles allow easy two handed control.
- Large 4" x 1.25" polyolefin wheels for easy movement over uneven floors.
- Shipped knocked down and boxed via UPS.
- Backed by 2 year warranty against weld failure.
- Drip tray option available.

OVERALL DIMENSIONS

- w: 19"
- d: 43" 67.375"
- h: 25.5"
 - 20" drain height





CWO-10 (Polyolefin wheels outside frame)



CWS-10 (Two Polyolefin swivel casters)

Standard Steel Drum Cradles

- Economical and convenient way to tip, drain and store 55 gallon steel drums.
- Easy for one person to use.
- All models ship knocked down and boxed via UPS.
- Models available with 2.5" polyolefin wheels, self-storing load tipping lever, and swivel casters.
- Drip tray option available for all models

OVERALL DIMENSIONS

- w: 19.5"
- d: 32.5"
- h: 15" on wheeled models 13.5" on non-wheeled models


Part #	240026	240027	240025	240022	240023	240024	
Model#	DR-2	DR-3	CW-20	CW-10	CWO-10	CWS-10	
Capacity	1,600 lbs (2 drums)	2,400 lbs (3 drums)	1,000 lbs	600 lbs	600 lbs	600 lbs	
Wheels	N/A	N/A	(4) 4" x 1.25" Polyolefin Wheels	(4) 2.5" Polyolefin Wheels	(4) 2.5" Polyolefin Wheels	2.5" Polyolefin: (2) Wheels (2) Casters	
Weight	49 lbs	64.5 lbs	50 lbs	30 lbs	32 lbs	34 lbs	

Drip Tray

- Steel slide-out tray 9.75" x 9.75" with 1.75" lip.
- Fits all Wesco drum cradles.
- Polyethylene pan.
- Cellulose absorbent holds 3 quarts of liquid.







270414 - Replacement Plastic Absorbent Pan (Disposable)

 CW-10 With Optional Drip Tray
 Part # Pa





Open head steel

Closed head steel







Universal

■ Two models -

head drums.

Drum Lifter

UDL: carbon steel

UDL-SS: 304 stainless

■ Design allows for theloading

For use with standard steel or poly

drums with at least a 3/16" chime.

Lifting arms are adjustable to work

with most 55 or 30 gallon drums.

arms prevents or minimizes defor-

mation of the drum and provides

■ Three-point contact of the lifting

of drums into overpacks.

■ Works on open and closed





SDL-85





DRL-3



EDL-5

Economy Drum Lifter

- Lightweight and easy to use.
- Lock pin design holds drum firmly in place.
- Ships boxed via UPS. ■ For use with
- closed head 55 gallon steel drums.

OVERALL DIMENSIONS

w: 23.5" h: 12.5" d: 25.5"

Open Head Drum Lifters

Open head poly

- For use with standard steel or poly drums with at least a 3/16" chime.
- Lifting arms are a djustable to work with most 55 or 30 gallon drums.
- Three-point contact of the lifting arms prevents or minimizes deformation of the drum and provides more secure lifting.
- Also works on closed head drums.

OVERALL DIMENSIONS

w: 29.5" h: 5.5" d: 29.5

OVERALL DIMENSIONS w: 29.5" 29.5"

more secure lifting.

h: 5.5" 5.5" 29.5 29.5 d:

Salvage **Drum Lifters**

- Convenient for fast and gentle loading of steel drums into overpacks.
- Ships boxed via UPS.
- For use with closed head steel drums.

OVERALL DIMENSIONS

w: 9.875" 9.875" h: 7.375" 7.375" d: 19.63" 19.63"

Hoist Mount Drum Lifter

- Heavy duty annealed ductile iron. ■ Curved foot on
- stabilizing arm prevents damage to drum.

OVERALL DIMENSIONS

w: 24.5" h: 17.5" d: 2.25"

Part #	240057	240038	240062	240063	240100	240102	440001	
Model #	EDL-5	OHDL-3	UDL	UDL-SS	SDL-55	SDL-85	DRL-3	
Capacity	700 lbs	1,000 lbs	3,000 lbs					
Weight	17 lbs	18 lbs	20 lbs	21 lbs	20 lbs	18 lbs	37 lbs	

Stainless





Value Lifter VDL-55

Value Drum Lifter/ Dispenser

- Easily lift drum and dispense contents.
- Economical, lower capacity VALUE product.
- Ships assembled and boxed.
- Locks in horizontal or vertical position.
- Handles 55 ■ Inverted ring fits gallon steel web-lifting slings. drums.

OVERALL DIMENSIONS

DLS Drum Sling

440009 (steel)

■ Horizontally

lift all "closed

or open-head"

■ D-shaped lifting

ring fits most

overhead

systems.

Drum

Sling

drums.

- w: 2.25" 18.75' h:
- d: 2"
- **OVERALL DIMENSIONS**
- w: 8.5" h: 36"
- d: 29"

Standard Drum Lifter/Dispenser

DL-55

- Higher capacity quality product.
- Ships assembled and boxed.
- Easily lift drum and dispense contents.
- Locks in horizontal or vertical position.
- Handles 55 gallon steel drums.
- Over 25 years of proven reliable quality.

OVERALL **DIMENSIONS**

- w: 8.5" h: 36"
- d: 29"



Value Drum

Lifter/ Dispenser ■ Economical, lower

- capacity VALUE product.
- Ships assembled and boxed.
- Locking control chain to secure drum from turning.
- Geared design for controlled dumping.

OVERALL DIMENSIONS

- w: 28.5" h: 39"
- d:



8"





Deluxe Gear Controlled Drum Lifter/Dispenser

- Higher capacity quality product.
- Geared design for controlled dumping from many heights and angles.
- Locking control chain to secure drum from turning.
- See options FBA, DMG-30A.
- Ships assembled and boxed.

OVERALL DIMENSIONS

- w: 28.5" h: 39"
- 8" d:

			•	•				
Part #	440009	278750	240032	278751	240034	270402	270040	
Model#	DLS-1000	VDL-55	DL-55	VDGL-55	DGL-55	FBA	DMG-30A	
Capacity	1,000 lbs Steel	Full Drum - 700lbs	Full Drum - 800 lbs	Full Drum - 700 lbs	Full Drum - 800 lbs	N/A	N/A	
		Half Drum - 440 lbs	Half Drum - 500lbs	Half Drum - 440 lbs	Half Drum - 500 lbs			
Weight	5 lbs	54 lbs	45 lbs	96 lbs	95.5 lbs	3 lbs	24 lbs	





Option

■ DMG-30A for use with 30 gallon drums, and FBA for use with fiber drums. For use with DL and DGL-55 models only.

GATOR GRIP® DRUM GRAB



Gator Grip®

US PATENT NO. 6,619,905

Traditional devices require drum weight to maintain a positive lock. If a drum bounces during fork truck transportation, the drum may momentarily become weightless, which can cause the grip to snap open dropping the drum. The patented Auto Grip Lock automatically locks the jaws closed, even over rough terrain.










The Wesco Gator Grip Fork Truck Mounted Drum Grab is designed for lifting and transporting 16, 30, 55 and 85 gallon steel, fiber and poly drums.









Single Drum Fork Mount - GG-F1



Power Stacker Mount - GGPS

- Single grip / drum attachment.
- Mounts only to Wesco fork stacker carriage.







Dual Drum Fork Mount - GG-F2



- Heavy-duty carriage design.
- Single and dual grips available.
- Fork truck attachment.
- Patented Gator Grip[®].

Gator Belt Option - GGBK

■ Optional Gator Belt protects drum from wear. NOT AVAILABLE ON EGG MODELS.



■ Purchase as two parts.

FOR COMPLETE **DETAILS, SEE PAGE 58.**

Triple Truck/

Drum Attachment

PATENT NO.

US9,139,214B2

■ Adjustable outriggers from 11.5" I.D. to 59" I.D.

■ Fork	truck	fork	attac	hment.

- Picks up drums automatically, driver never leaves seat while lifting or releasing drums.
- Handles steel, fiber and poly drums.
- Single and dual grips available.
- Gator Grips® made by Wesco.
- Economically priced.
- Patented Gator Grip®.

OVERALL

				DIMENSIONS			
	w: 28" h: 34"	33.25" 34"	15.625" 33.25"	32" 37"	32" 37"	18" 33.25"	30" 3"
	d: 34"	34"	18"	28"	28"	17"	25"
#	240091	240092	240093	240096	240097	240103	240107
	• •			•	·		


	u. 01	01	10	20	20	""	20	
Part #	240091	240092	240093	240096	240097	240103	240107	261160 & 261161
Model #	EGG-1	EGG-2	GG-C	GG-F1	GG-F2	GGPS	GGBK	TTF+TTF-GG
Capacity Per Grip	1,000 lbs	1,000 lbs	1,600 lbs	1,600 lbs	1,600 lbs	1,600 lbs	N/A	750 lbs
Fork Pocket ID	5.5" x 2"	7" x 2.25"	N/A	7" x 2.25"	7" x 2.25"	N/A	N/A	N/A
Weight	125.5 lbs	208 lbs	96 lbs	244 lbs	340 lbs	92 lbs	4 lbs	#261160 / 357 lbs #261161 / 32 lbs


Note: OSHA requires contacting the manufacturer of your fork truck for written approval for the use of any fork truck attachments.


WESC□° ERGONOMIC DRUM HANDLERS


NOW FIVE MODELS ALL WITH U.S. PATENTED GATOR GRIP®


U.S. PATENT NO. 6,619,905











Wesco® Ergonomic Drum Handlers

- 1 Year Warranty, parts only.
- WESCO MADE hydraulic pump all models.
- Handles most 30, 55 or 85 gallon drums Steel, Fiber and Poly.
- Works with most drums with locking rings.
- Up/Down remote on power units.
- Power drive travel speed 120'/min.
- Lifts, transports, weighs and places drums on spill or standard pallets.
- (6) models: (5) steel and (1) 304 Stainless Steel.

- The (5) steel models are standard with the Gator Grip® Drum Clamp:
- Spring-loaded jaws hold any 3/16" or higher drum rim.
- Operator does not need to touch drums to operate.
- Exclusive auto grip lock will not drop a drum if operated properly.
- (2) wheels and (2) swivel casters, 5" x 2" phenolic, and floor lock.





Standard Model







High Reach Model

Scale Model - Accuracy ±0 .50% of applied load or 1 lb., whichever is greater.

Part #	240150	240154	240155	
Model #	DM-1100	DM-1100-HR	DM-1100-S	
Description	Standard	High Reach	Scale	
Rise/Stroke	1"	1"	1"	
Legs Retracted Capacity	650 lbs	650 lbs	650 lbs	
Legs Extended Capacity	1100 lbs	1100 lbs	1100 lbs	
Drum Clamp Type	Gator Grip [®]	Gator Grip [®]	Gator Grip®	
Weight	355.5 lbs	376 lbs	356 lbs	

WESCO'ERGONOMIC DRUM HANDLERS

















- The 304 Stainless Steel SSDH model features:
- Wesco manufactured 304 Stainless Steel construction hydraulic jack.
- 304 Stainless Steel automatic Grab that grips drum rim and can be manually locked down for lift and travel.
- (2) $5\text{"} \times 2\text{"}$ black phenolic wheels with 304 Stainless Steel roller bearings.
- (2) 304 Stainless Steel NSF certified washdown swivel casters with 5" x 2" black phenolic wheels, 304 Stainless Steel bearings.
- Works with most drums with locking rings.
- Lift range: 26" 73" at lifting clamp.
- Single position outriggers non-telescoping.
- 304 Stainless Steel construction includes hydraulic pump, floor lock, clamp, casters and bearings.
- Handles most 30, 55 and 85 gallon steel, poly and fiber drums.







Part #	240156	240157	240240
Model #	DM-1100-PL	DM-1100-PLD	SSDH
Description	Power Lift	Power Lift & Drive	304 Stainless High Reach
Rise/Stroke	8.5" / sec. without load	8.5" / sec. without load	1"
Legs Retracted Capacity	650 lbs	650 lbs	N/A
Legs Extended Capacity	1100 lbs	1100 lbs	800 lbs
Drum Clamp Type	Gator Grip [®]	Gator Grip®	Auto Grab Manual Knob Lock Down
Weight	531 lbs	691 lbs	207 lbs

№⊑5CO° DRUM GRABS/FORK TRUCK DRUM LIFTERS & TILTERS

MADE IN THE USA



: Dr Ga

■ All welded steel construction for durability.

OVERALL DIMENSIONS

150 lbs

■ Cost effective way to move 55 gallon steel drums.

Part Model Capacit Handle

> ID For Pocket

Weight

145 lbs

DJ-55	30 gallon position
on position	Adjustable Drum
rum Grabs for 55	Grabs for 55 or 30
allon Steel Drums	Gallon Steel Drums
	- 157 110 " 111

- ADJ models feature all welded steel construction for durability.
- Handles 55 or 30 gallon steel drums.

135 lbs

		OVERALL DIMENSIONS		
W:	28"		28"	
h:	5.5"		5.5"	
d:	41.75"		41.75"	



Value Drum Grabs

233 lbs

Economically priced lower capacity grabs.

OVERALL

DIMENSIONS

- VG models: jaws not adjustable. Handles 55 gal. steel drums.
- AVG models: adjustable jaws. Handles 30 or 55 gal. steel drums.

128 lbs

						:		0.0		
	w: 28" h: 4.75"	28" 4.75"	46" 7.25"	w: 28" h: 5.5" d: 41.75"	28" 5.5" 41.75"	w: 28" h: 4.5" d: 42.5"	46" 7.25" 43.25"	28" 5.5" 41.75"	51" 7.25" 42.75"	
	d: 42.75"	42.75"	43.25"							
t#	240048	270051	240049	240047	270084	272400	272401	272408	272409	
I#	DJ-55	DJL-55	DJ-255	ADJ-53	ADJL-53	SVG-55	DVG-255	SAVG-53	DAVG-253	
ity	1,500 lbs/drum	1,500 lbs/drum	1,500 lbs/drum	1,500 lbs/drum	1,500 lbs/drum	1,000 lbs/drum	1,000 lbs/drum	1,000 lbs/drum	1,000 lbs/drum	
les	one 55-gallon	one 55-gallon	two 55-gallon	one 55 or one 30 gallon	one 55 or one 30 gallon	one 55-gallon	two 55-gallon	one 55 or one 30 gallon	two 55 or two 30 gallon	
ork	5.5" x 2"	7" x 2.25"	7" x 2.25"	5.5" x 2"	7" x 2.25"	5.5" x 2"	7" x 2.25"	5.5" x 2"	7" x 2.25"	

140 lbs



205 lbs

Fork Truck Drum Lifter & Tilter **DGF-55**

- Fork truck driver does not have to leave truck to dispense.
- Geared design allows controlled dumping and dispensing.
- Does not require any modifications to the fork truck.
- Ships assembled and boxed.
- \blacksquare Has 800 lbs capacity for a full drum, 500 lbs for a half full drum.
- Not for use with poly drums.
- Fork pocket dimensions (ID) 6.625"W x 2.625"H.
- Fork pocket dimensions center to center 31".
- Length of Chain 144".

OVERALL **DIMENSIONS**

- w: 38"
- 20.5" h:
- 32.5" d:



125 lbs

Wesco Polyjaws

- Fork truck adjustable attachment for handling most 55 and 30 gallon poly drums.
- Fork truck driver does not have to leave cab to engage or disengage drum.
- Works on poly drums that have at least a 3/16" top lip (chime).
- Substantially lower priced than any other poly drum lifter on the market.
- Ships knocked down/ boxed via UPS.
- Fork pocket dimensions (ID) 5.375"W x 1.5"H.

OVERALL **DIMENSIONS**

- w: 25.5" -29.375"
- h: 6.28"
- d: 21.38"



194 lbs

Value Fork Truck Drum Lifter & Tilter

- Economically priced lower capacity model.
- Two models, 700 & 1,400 lb capacities.
- Operator does not have to leave seat to tilt drum.
- Fork pocket dimensions (ID) 7" W x 2.5"H.
- Fork pocket dimensions center to center 24.4".
- Length of Chain 120"

- Dongar or can	120	OVERALL DIMENSIONS	
w: 39" h: 19" d: 26.75"		39" 19" 30.38"	
272402	:	272403	

Part # Model #	DGF-55	270240 DGF-30A 30 GAL.DRUM ADAPTER	270402 FBA FIBER DRUM ADAPTER	240148 PJ	272402 VFDLT-700	272403 VFDLT-1400
' '	Half Drum - 500 lbs Full Drum - 800 lbs		Half Drum - 500 lbs Full Drum - 800 lbs	,	•	Half Drum - 750 lbs Full Drum - 1,400 lbs
Weight	159 lbs	24 lbs	3 lbs	44 lbs	166 lbs	214 lbs



Zinc Die Cast Faucets

- Zinc die cast allov.
- Easy-to-use self-closing design.
- Can be padlocked in closed position.
- .75" NPT connection.
- Viton gasket.



Part# 272083 - .53 lbs. With flame arrestor. **FM APPROVED for** non-viscous liquids.



Part# 272080 - .53 lbs. No flame arrestor. **FM APPROVED for** viscous liquids only.

Heavy Duty 2" Brass Gate Valve

- Fast, self-closing PTFE blade.
- 2" NPSM connection designed to work in both a straight or tapered thread.
- 6.80 lbs.



Part# 272034 FM APPROVED for use with viscous non-corrosive fluids heavier than 30 SAE.

Heavy Duty 304 **Stainless Steel Faucet**

- Adjustable shank designed to easily adjust to proper drain position after installing in drum.
- .75" NPT connection.
- PTFE gasket.
- 1.50 lbs.



Part# 272038 Internal flame arrestor. FM APPROVED for use with oils (under 30 SAE) and non flammables, compatible with stainless steel.

Heavy Duty Brass Faucets

- Easy-to-use self-closing design.
- .75" NPT connection.
- PTFE gasket.



Part# 272037 - 1.40 lbs. Adjustable shank designed to easily adjust to proper drain position after installing in drum. Internal flame arrestor. FM APPROVED for use with oils (under 30 SAE) and non-corrosive flammables.



Part# 272081 - 1.43 lbs. Rigid shank design. External flame arrestor. **FM APPROVED** for use with oils (under 30 SAE) and non-corrosive flammables.

Plastic Faucets

- 2" NPT polyethylene drum faucet produced from FDA approved material. Includes 3 EPDM sealing gaskets: thin, medium, thick. Good for viscous non-corrosive fluids.



Part# 272176 - 2"

- Deluxe 2" NPT polyethylene drum faucet. Produced from FDA approved material.
 - Deluxe features:
 - Level gauge port
 - Pail hook
 - Lockable handle
 - 3 EPDM gaskets: thin, medium, thick.



Part# 272179 with level gauge



Part# 272179 - 2"

- .75" Polyethylene Faucet for use with non-flammable, noncorrosive thin liquids not suitable for heavy oils.
- .10 lbs.



Part# 272177 - .75"

Wesco recommends that if a question arises, the user contact the supplier of chemicals to determine if these faucets are compatible with those chemicals. Wesco is unable to offer specific recommendations for chemical usage.

FM APPROVED WESCO DRUM VENT/GAUGES/FUNNEL/WIRES

Drum Vent

- Automatically relieves pressure at 5 PSI.
- Maximum flow of 220 CFM at 20 PSI.
- Flame arrestor prevents sparks and flame from igniting drum contents.
- Fits 2" bung hole in steel and plastic drums.
- 1 lb.



Part# 272030
For drums in horizontal
(pouring) position.
Manual vacuum relief by
lifting and rotating valve stem.
FM APPROVED.

Gauges

- Economical way to gauge drum contents.
- Heavy gauge glass and plated steel construction.
- Accepts standard .75" NPT faucet.
- Buna-N seals; .75" NPT connection, 22" height (with supplied fitting).





Part# 272006 - 4 lbs. Basic gauge with fitting and 272080 faucet.

Part# 272041 - 5 lbs. Basic gauge with fitting and 272083 faucet.

Part# 272115 -Replacement glass for gauge.

Drum Funnel with Lockable Cover

- Red polyethylene 4-quart funnel with 2" NPS fitting to screw into bung opening.
- 9.625" opening.
- Equipped with black polyethylene lockable cover and removable strainer screen.
- I.I lbs





Vertical Polyethylene Pop-up Gauge

- Pops up to indicate drum is almost full.
- Fits standard 3/4" 14 NPS bung holes.
- Part #272216, Model # PUG-5 5" long.
 Part #272217, Model # PUG-11 11" long.
- Closure cap.



Ground and Bond Wires

■ A wide variety of designs for grounding and bonding applications.



Part# 272032 - .64 lbs
Deluxe Ground Wire: For connection between
drum and true ground.Three-foot-long heavy duty
insulated wire rope with "C" clamp on one end
and alligator clip on the other.



Part# 272031 - .53 lbs
All Purpose Bond Wire: For bonding drums
to each other, to containers being filled, and
to racks. Three-foot-long heavy duty wire
rope with "C" clamp on one end and
alligator clip on the other.



Part# 272033 - .37 lbs
Standard Bond Wire: For bonding drums to
each other, to containers being filled, and to
racks. Three-foot-long heavy duty wire rope
with alligator clips on both ends.

OSHA requires that all drums and containers storing and receiving fluids with a FLASH POINT BELOW 140°F be grounded and bonded. Single drums must be grounded, with containers being dispensed into bonded to the drum. Multiple drums must be bonded to each other with one drum or the rack grounded. Wesco Ground and Bond wires allow meeting these important safety requirements.



Deheaders

- Open any size and gauge steel drum quickly and easily, allowing drum recycling without the risk of fire from cutting with a torch.
- Sharp-edged hardened steel replaceable blade.
- Comfortable plastic hand grip.



Part# 272303 Vertical slide deheader. (6.2 lbs.) Part# 272304 Replacement blade. (1 lb.)



Part# 272018 Most popular deheader. (7 lbs.)

Part# 272012 Replacement blade. (.73 lbs.)



Part# 440013 Model DDH-1. Heavy duty deheader. (9 lbs.)

Part# 440014 Model DDH-P202 Replacement blade. (.60 lbs.)

Non-Sparking Deheader

- 100% non-sparking deheader.
- Sharp-edged hardened non ferrous alloy replaceable blade.
- Comfortable plastic hand grip.



Part# 272301 Non-sparking deheader. 100% non-sparking. (8 lbs.)

Part# 272302 Replacement blade. (.35 lbs.)


Universal Drum Plug Wrench

- Heavy duty cast iron construction.
- Opens most plugs and bung nuts, male & female, steel & plastic.
- Iron alloy will not chip or bend in normal use.
- Protects knuckles.



(4 lbs.) Handles bung patterns 1, 2, 3, & 4.

Bung Patterns



Non-Sparking Drum Plug Wrenches

- Bronze alloy.
- Stronger than aluminum.
- Offset handle design reduces user stress and minimizes knuckle injury.



Part# 272016 (2 lbs.) Our most popular wrench. Handles bung patterns 1, 2, 3, & 5.



patterns 1 & 3.



Part# 272086 (3 lbs.) Deluxe model. Built-in 1.25" wrench for tightening faucets into drums. Handles bung patterns 1, 2, 3, & 5.

Part #	Description	Weight - Ibs	Overall Width	Overall Height	Overall Length
272303	Vertical slide deheader	6.20	5.75"	5.875"	17.75"
272304	Replacement blade for Part# 272303	1.00	2.75"	2.75"	.1875"
272018	Manual drum deheader	7.00	6"	4.25"	20.68"
272012	Replacement blade for Part# 272018 deheader	.73	2.75"	2.50"	.1875"
440013	Zinc plated heavy duty deheader	9.00	6.375"	4.625"	23.625"
440014	Replacement blade for Part# 440013 deheader	.60	3.1875"	2.875"	.1875"
272301	Non-sparking deheader	8.00	6.625"	4.875"	19"
272302	Replacement blade for Part# 272301 deheader	.35	2.875"	2.375"	.1875"
272017	Universal cast iron drum wrench	4.00	3.625"	3.50"	13.125"
272016	Standard non-sparking drum wrench	2.00	2.50"	3.25"	12"
272178	Non-sparking aluminum wrench	.53	2.25"	1.75"	10.25"
272086	Deluxe non-sparking drum wrench	3.00	3.625"	3.125"	11.50"

Application Information (For Rotary and Lever Pumps): WESCO iron drum pumps have wetted parts fabricated from cast iron, steel, phenolic (270021 & 272212 only), and neoprene (272210 only) materials. These pumps were designed primarily for the transfer of fuel oil products. It should be noted that these pumps can only be used for chemicals which are compatible with cast iron, steel, neoprene and phenolic.

We recommend that if a question arises, the user contact the supplier of chemicals to determine if these pumps are compatible with those chemicals. WESCO is unable to offer specific recommendations for chemical usage.

Rotary Pump

- 47" 3 piece plated suction tube (assembled).
- Durable phenolic veins.
- Self-priming.
- Supplied with 48" PVC discharge tube.
- UPS shippable.
- Rugged cast iron construction.
- ALWAYS USE A GROUND WIRE.



Part# 272212 Deluxe Combo (consists of #270021 Rotary Pump and #272211 Drip Pan) (18 lbs.)

Part# 270021 Cast Iron Rotary Drum Pump ONLY (12.5 lbs.)

Non-Sparking Rotary Pump

- Rugged aluminum construction.
- 47" 3 piece steel-plated suction tube (assembled).
- Durable phenolic veins.
- Self-priming.
- Supplied with 48" PVC discharge tube.
- UPS shippable.
- ALWAYS USE A GROUND WIRE.



Aluminum Pump only.

Part# 440017
Aluminum, non-sparking for medium viscosity petroleumbased products.
Does not include drip pan. (17 lbs.)



Part# 272210 (18 lbs.)

Lever Pump/ Drip Pan

- For installation on pumps with metal suction tube.
- Cast iron and steel construction.
- Hinged cover and bung/suction adapter.
- UPS shippable.
- ALWAYS USE A GROUND WIRE.



Part# 272211 Drip pan. (6 lbs.)



Part# 272397 (13 lbs.)

304 Stainless Steel Rotary Pump

- Made from corrosion resistant materials of construction.
- 304 stainless steel pump body.
- 304 stainless steel dispensing spout.
- 304 stainless steel 3 piece suction tube.
- PTFE vanes.
- UPS shippable.
- Compatible fluids: solvents, oils, mild corrosives.
- Min./ Max. temperature rating: 40° Fahrenheit / 140° Fahrenheit.
- 2" NPT Bung Adapter fits 15, 30 and 55 gallon drums.
- ALWAYS USE A GROUND WIRE.

Part #	Description	Weight - Ibs	Overall Width	Overall Height	Overall Length
270021	Cast iron pump	12.50	9.4375"	56.25"	8.75"
272212	Deluxe combo with drip pan	18.00	9.4375"	56.25"	14"
440017	Non-sparking rotary pump	17.00	9.4375"	56.25"	9.50"
272210	Lever pump with drip pan	18.00	15.875"	60.343"	14"
272211	Drip pan	6.00	6.3125"	6.00"	14"
272397	304 stainless steel rotary pump	13.00	9.125"	53.125"	8.75"

<u> WESCO°100 SERIES INDUS</u>TRIAL HAND TRUCKS

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.

- Industrial strength heavy duty 3/4" structural steel frame construction.
- Ribbed cross braces for extra strength.
- All joints double welded.
- 8" deep by 14" wide nose is 7 gauge thick plate with machined beveled edge and radiused corners for safety.
- Zinc plated Auto-Loc® axles assure smooth wheel rotation.
- All frames handle 8" or 10" wheels.
- Order by part # or model #.

Example:

Part # or Model # 210009 or 126-R

Wesco Exclusive: Ribbed Cross Straps for Additional Strength



Series 126

- Single pin handle curved back design allows one hand control.
- Ideal for boxes, kegs, and packages.
- Three horizontal cross straps and full height vertical center strap offer support for small packages.

OVERALL DIMENSIONS

w: 22.5'

h: 46"

d: 16.5" w/8" wheel 18.5" w/10" wheel



Series 126D

- Single "D" shaped handle allows multiple hand positions for one hand control.
- Ideal for boxes, kegs, and packages.
- Three horizontal cross straps and full height vertical center strap provide support for small packages.

OVERALL DIMENSIONS

w: 22.5'

h: 46"

d: 16.5" w/8" wheel 18.5" w/10" wheel



Series 136

- lacksquare Two handle tapered body design.
- Three heavy duty horizontal cross straps for added strength.
- Full height center strap provides support for small packages.

OVERALL DIMENSIONS

w: 22.5"

h: 46"

d: 16.5" w/8" wheel 18.5" w/10" wheel

Part#	210009	210010	210011	210380	210012	210370	210016	210017	210018	210381	210019	210371	210024	210025	210026	210382	210027	210372
Model#	126-R	126-Z8	126-Z	126-Z2	126-P	126-PE	126D-R	126D-Z8	126D-Z	126D-Z2	126D-P	126D-PE	136-R	136-Z8	136-Z	136-Z2	136-P	136-PE
Capacity	800 lbs	600 lbs	700 lbs	800 lbs	700 lbs	700 lbs	800 lbs	600 lbs	700 lbs	800 lbs	700 lbs	700 lbs	800 lbs	600 lbs	700 lbs	800 lbs	700 lbs	700 lbs
Wheel Type	R	Z8	Z	Z2	Р	PE	R	Z8	Z	Z2	Р	PE	R	Z8	Z	Z2	Р	PE
Weight	32 lbs	38 lbs	40 lbs	40 lbs	37 lbs	34 lbs	33 lbs	39 lbs	41 lbs	41 lbs	38 lbs	35 lbs	33 lbs	39 lbs	41 lbs	40 lbs	39 lbs	34 lbs

Additional choices not listed above.

R	Z8	Z	Z2	Р	PE	BC-8	BC-10	CF (Flat Free)
Aluminum	Poly Offset	Steel Offset	Poly Offset	Steel Offset	Steel Offset	Poly Hub	Poly Hub	Steel Offset
8" x 1.625"	8" x 2"	10" x 2.75"	10" x 2.75"	10" x 3.5"	10" x 3.5"	8" x 2.165"	10" x 2.165"	10" x 3"
Moldon Rubber	Solid Rubber	Semi-Pneumatic	Solid Rubber	Pneumatic	Pneumatic	Balloon Cushion	Balloon Cushion	Microcellular
0	8	9		(9)	6			0
108545	150697	150589	150698	050602	151551	150229	150228	053446

WESCO° 100 SERIES INDUSTRIAL HAND TRUCKS

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.

Wesco Exclusive: Ribbed Cross Straps for Additional Strength



- Two handle extra high back curved design.
- Ideal for high loads.
- Four horizontal cross straps and vertical center strap provide support for small packages.

OVERALL DIMENSIONS

w: 22.5"

h: 51"

d: 16.5" w/8" wheel 18.5" w/10" wheel



Series 146D

- Single "D" shaped handle combined with high back curved design.
- Easier one hand control of stacked goods.
- Four horizontal cross straps and vertical center strap provide support for small packages.

DIMENSIONS

w: 22.5"

h: 51"

d: 16.5" w/8" wheel 18.5" w/10" wheel



Series 156

- Swept back continuous handle with curved back design.
- Versatile frame that allows one or two hand control.
- Four horizontal cross straps and vertical center strap provide support for small packages.
- Stainless model has 8" x 2" polyurethane tread on polypropylene hub, non-marking wheels with 440 stainless sealed 3/4" precision ball bearing.

OVERALL DIMENSIONS

w: 22.5"

h: 48"

d: 16.5" w/8" wheel 18.5" w/10" wheel

304 **Stainless**

Part#	210032	210033	210034	210383	210035	210373	210038	270056	210039	210384	210040	210374	210044	210045	210046	210385	210047	210375	210351
Model#	146-R	146-Z8	146-Z	146-Z2	146-P	146-PE	146D-R	146D-Z8	146D-Z	146D-Z2	146D-P	146D-PE	156-R	156-Z8	156-Z	156-Z2	156-P	156-PE	156-PP8-SS
Capacity	800 lbs	600 lbs	700 lbs	800 lbs	700 lbs	700 lbs	800 lbs	600 lbs	700 lbs	800 lbs	700 lbs	700 lbs	800 lbs	600 lbs	700 lbs	800 lbs	700 lbs	700 lbs	600 lbs
Wheel Type	R	Z8	Z	Z2	Р	PE	R	Z8	Z	Z2	Р	PE	R	Z8	Z	Z2	Р	PE	PP8
Weight	34 lbs	40 lbs	42 lbs	42 lbs	39 lbs	36 lbs	35 lbs	41 lbs	43 lbs	42 lbs	41 lbs	36 lbs	34 lbs	37 lbs	39 lbs	40 lbs	36 lbs	34 lbs	33 lbs

100 Series Industrial Hand Truck Options



Nose Extension

- 24" long, 10.5" wide.
- Steel construction.



- Continuous belt.
- Replaceable parts.
- Only available on 10" wheeled models.
- Factory installed only.







Cargo Push-Off Kit

- Fits any Wesco 100 Series or Greenline Series steel hand trucks.
- Foot operated pedal pushes cargo off noseplate.
- Easy installation no drilling required.

Part #	210099	054201	270412	210079
Model#	FN-24K	FN-24F	CBSCF	
•	24" Nose Extension - Field Installation	24" Nose Extension - Factory Installed	Continuous belt stairclimber Must be Factory Installed	Box Push Off - Field Installation
Weight	4 lbs	4 lbs	7 lbs	6 lbs

FACTORY INSTALLED add part # or model # to end of industrial hand truck part or model #. **EXAMPLE:** 156R with 24" nose extension Part # 210044,054201 or Model #156-R-FN-24F.





WESCO° CONVERTIBLE INDUSTRIAL HAND TRUCKS, CURB RAMP



2-in-1 Deluxe **Industrial Steel Hand Trucks***

■ 5 Year Weld Guarantee.

- Converts easily between 2 and 4 wheel truck.
- Handle locks in horizontal and vertical positions.
- Two lengthwise straps and two cross braces prevent package fall-through.
- Caster: 3.5" TPR gray, non-marking, round tread, thermoplastic rubber wheelresists almost every type of floor debris including metal shavings chips, sand and gravel.
- Heavy duty 3/4" Dia. structural steel frame. All joints double welded, both sides.
- Bed size: 14" x 44.5".
- Noseplate 14"W x 8"D.
- Less energy required to start moving load and keep it moving.
- Smooth, quiet ride of a soft-tread wheel, durable as a hard-tread wheel.

OVERALL DIMENSIONS

w: 20.5" h: 53" d: 19"

Curb Ramp

■ Lightweight, portable ramp allows for easy movement up and down curbs. 600 lb capacity.



	w: 21.5" h: 6" d: 23.5"
Part #	150800
Description	Yellow generic
Weight	7 lbs

OVERALL



Greenline Economical 2-in-1

- Converts easily between 2 and 4 wheel truck.
- Double welded tubular construction.
- Lengthwise strap and cross braces prevent package fall-through.
- Solid rubber swivel casters.
- Bed size 13" x 36".
- 14" W x 7" D noseplate.

OVERALL DIMENSIONS

	DINILIAGIONS								
w:	20"	20"	20"	20"					
h:	48"	48"	48"	48"					
d:	15"	16"	16"	16"					



Greenline E-Con 2-in-1 Truck

- Heavy duty tubular steel construction.
- 18"w. x 8.5"d.noseplate.
- Lever activated position conversion.
- Wheel guards.
- Bed size 13.75" x 48".
- Wheel: 10" x 2.75" solid rubber.
- Swivel caster: 5" x 1.375" moldon polyurethane.

OVERALL **DIMENSIONS**

w: 19.5"

h: 58" d: 18"

Part#	210138	210140	210139	210321	210324	210326	210325	210639
Model#	156-S23-Z	156-S23-Z2	156-S23-P	656-21-Z8	656-21-Z	656-21- Z 2	656-21PE	E-CON
Capacity 2 wheel 4 wheel	700 lbs 1,000 lbs	800 lbs 1,000 lbs	700 lbs 1,000 lbs	500 lbs 600 lbs	500 lbs 600 lbs	500 lbs 600 lbs	500 lbs 600 lbs	700 lbs 800 lbs
Caster	3.5"	3.5"	3.5"	5"	5"	5"	5"	5"
Wheel Type	Z	Z2	Р	Z8	Z	Z2	PE	10" x 2.75" Solid Rubber
Weight	61 lbs	58 lbs	55 lbs	37 lbs	46 lbs	44 lbs	38 lbs	74 lbs

Poly Offset 8" x 2" Solid Rubber

150697

10" x 2.75" Semi-Pneumatic

150589

Steel Offset



Z2

Poly Offset

10" x 2.75'





151551

PΕ

Steel Offset





Steel Offset



* For Aluminum Convertible Trucks, see pages 34-36.

WESCO° GREENLINE STANDARD DUTY STEEL HAND TRUCKS

- **Economically priced.**
- Zinc plated Auto-Loc® axles assure smooth wheel rotation.
- All frames can accommodate an 8" or 10" wheel.
- 7" deep x 14" wide 7 gauge beveled nose plate with radiused corners for safety.
- 1" OD x 14 gauge wall tubular frame.
- Order by part # or model #. Example:

Part # or Model # 210461 626-Q

Series 626

- Pin handle with curved back design.
- Welded frame construction.
- 1" O.D. tube.

OVERALL **DIMENSIONS**

w: 21.75" h: 45.5"

d: 17"



Series 626D

- Single loop handle with curved back design.
- Welded frame construction.
- 1" O.D. tube. **OVERALL DIMENSIONS**

w: 21.75"

h: 50.5" d: 17"



626D-R

Series 636

- Dual handle curved back design.
- Welded frame construction.
- 1" O.D. tube.

OVERALL **DIMENSIONS** w: 21.75"

h: 48.5" d: 17"

G.	
	636-78

Part#	210466	210330	210361	210456	210356	210467	210331	210362	210457	210357	210468	210332	210363	210458	210358
Model#	626-R	626-Z8	626-Z2	626-P	626-PE	626D-R	626D-Z8	626D-Z2	626D-P	626D-PE	636-R	636-Z8	636-Z2	636-P	636-PE
Capacity	600 lbs	500 lbs	600 lbs	600 lbs	600 lbs	600 lbs	500 lbs	600 lbs	600 lbs	600 lbs	600 lbs	500 lbs	600 lbs	600 lbs	600 lbs
Wheel Type		Z8	Z 2	Р	PE	R	Z8	Z 2	Р	PE	R	Z8	Z2	Р	PE
Weight	25.5 lbs	25.5 lbs	31 lbs	27.5 lbs	26 lbs	27 lbs	27 lbs	36 lbs	29 lbs	27.5 lbs	26 lbs	26 lbs	31.5 lbs	28 lbs	26.5 lbs



646-Z2

Series 646

- Dual pin handle with curved back design.
- Welded frame construction.
- 1" O.D. tube.

OVERALL DIMENSIONS

w: 21.75"

h: 50.5"

d: 20"



- Continuous handle with curved back design.
- Welded frame construction.
- 1" O.D. tube.

OVERALL DIMENSIONS

w: 21.75"

h: 49"

d: 19"



656-P

Folding Nose Extension Option

- To order field installation simply note part # or model # on P.O.
- To order factory installed option(626D-R with 24" nose extension) add option part # or model to the end of the truck part # or model.

Example:

Part # 210467,054218

Model + Option 626D-R-FNG-24F

Part#	210469	210333	210364	210459	210359	210470	210334	210365	210460	210360	210249	054218	
Model#	646-R	646-Z8	646-Z2	646-P	646-PE	656-R	656-Z8	656-Z2	656-P	656-PE	FNG-24K	FNG-24F	
Capacity	600 lbs	500 lbs	600 lbs	600 lbs	600 lbs	600 lbs	500 lbs	600 lbs	600 lbs	600 lbs	Capacity rating	same as truck.	
Wheel Type	R	Z8	Z2	Р	PE	R	Z8	Z 2	Р	PE	Field Installation	Factory Installed	
Weight	27 lbs	27 lbs	32.5 lbs	29 lbs	27.5 lbs	27.5 lbs	27.5 lbs	33 lbs	29.5 lbs	28 lbs	4 lbs	4 lbs	

Additional choices not listed above.

R	Z8	Z2	P	PE	BC-8	BC-10	CF (Flat Free)	Z	
Aluminium	Poly Offset	Poly Offset	Steel Offset	Steel Offset	Poly Hub	Poly Hub	Steel Offset	Steel Offset	
8" x 1.625"	8" x 2"	10" x 2.75"	10" x 3.5"	10" x 3.5"	8" x 2.165"	10" x 2.165"	10" x 3"	10" x 2.75"	
Moldon Rubber	Solid Rubber	Solid Rubber	Pneumatic	Pneumatic	Balloon Cushion	Balloon Cushion	Microcellular	Semi-Pneumatic	
(•)	8		2	•			0	0	
108545	150697	150698	050602	151551	150229	150228	053446	150589	



WESC□ ERGONOMIC TOUCH-N-TILT® & DRUM HAND TRUCKS

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive on All Wesco Made Hand Trucks.

■ Structural steel frame construction.

■ Ribbed x-braces for extra strength.

■ All joints double welded.

48'

210353

The Touch-N-Tilt® Ergonomic Hand Truck

Press the pedal and the effort to break over the load is reduced by as much as 66%. Minimizes physical demands of the workplace.





151551

108479

150589

Push a pedal and your load feels lighter – 66% lighter

Touch-N-Tilt®

- Simple and affordable.
- Up to 700 lbs. capacity.
- Available with 8" or 10" wheels.
- Same strong frames used on Wesco 100 series industrial truck.
- Noseplate 7 GA. 8" D x 14" W.

	OVERALL DIMENSIONS	
w: 20"	22"	22"
h: 50"	50"	50"
d: 19.75"	19.75"	19.75"



156DH Drum/Hand Truck

- Utility of a hand truck & drum truck.
- Chime hook works with 55 and 30 gallon steel drums.
- Curved frame holds 5-gallon pails and kegs.
- With noseplate resting flat on floor, 18" to center of lowered chime hook.
- Noseplate 7.8" D x 14" W.
- Stainless model has 8" x 2" polyurethane tread on polypropylene hub, non-marking wheels with 440 stainless sealed 3/4" precision ball bearing.

304 Stainless

053733

		OVERALL DIMENSIONS	
h:	20.5"	20.5"	20.5"
	48"	48"	48"
	18.5"	17.5"	18.5"

+_ +_ 4-Wheel Drum Cart

25 5/8"

41 5/8"

32 5/8"

35 5/8"

Two position, 4-wheel transport design to handle drums and standard loads.

Position I: Easily handles and maneuvers standard loads as a 4-wheel transport.

Position II: With the chime hook engaged and a press of the foot pedal, the frame tilts a 30 or 55 gallon steel drum to a balanced position to maintain 4-wheel contact even with half empty bottom heavy drums.

- Two 3.5" x 1.5" polyolefin swivel casters for easy maneuverability in narrow spaces.
- Chime hook to engage 30 & 55 gallon steel drums.
- 7.8 "D x 14" W beveled edge noseplate.
- Curved frame holds 5-gallon pails and kegs.

	DIMENSIONS
w: 19.25" h: 26.25" d: 48"	19.25" 48.5" 25"
u. 40	20

210353 4WDC-ZC

800 lbs

10"/Z

66 lbs

210354

4WDC-HBC

900 lbs

8"/ HB

66 lbs

OVERALL

Part#	210546	210549	210547	210340	210349	210266	210352
Model#	TNT56-Z	TNT56-Z2	TNT56-P	156DH-Z	156DH-HB	156DH-P	156DH-PP8-SS
Capacity	600 lbs	700 lbs	600 lbs	700 lbs	800 lbs	700 lbs	600 lbs
Wheel Type	Z	Z2	Р	Z	НВ	Р	8" Polyurethane
Weight	41.5 lbs	42 lbs	38.5 lbs	39 lbs	42.5 lbs	39 lbs	33.5 lbs

10" x 3.5" 10" x 2.5" 10" x 2.75" 8" x 2" 10" x 2.75" 10" x 3.5" Polyurethane Tread Pneumatic Solid Rubber Semi-Pneumatic Moldon Rubber Solid Rubber Pneumatic Polypropylene Hub	PE	SR	Z	НВ	Z2 I	P PP8	3
Pneumatic Solid Rubber Semi-Pneumatic Moldon Rubber Solid Rubber Pneumatic Polypropylene Hub	Steel Offset Po	oly Offset S	iteel Offset C	ast Iron Poly	Offset Steel	Offset 8" x 2	2"
	10" x 3.5" 1	0" x 2.5" 1	10" x 2.75"	3" x 2" 10"	x 2.75" 10" >	3.5" Polyurethai	ne Tread
3/4 ball bealing	Pneumatic Sc	olid Rubber Sen	ni-Pneumatic Mold	on Rubber Solid	Rubber Pneu	matic Polypropyle 3/4" Ball B	

150120

150698

050602

WESCO HEAVY DUTY STEEL HAND TRUCKS

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.



Heavy Duty Shovel Nose Trucks

- Five year weld guarantee.
- 13" deep x 17.5" x .25" thick tapered nose plate.
- 1" heavy duty structural steel frame.
- Easy grip continuous handle frame design.
- 3/4" axle.
- Wheel guards.
- 2 wheel types 8" & 12".

	OVERALL DIMENSIONS	
w:	20.5"	20.5"
h:	53"	53"
d:	22"	25.5"



Heavy Duty 186 Series

- Rear caster design allows small diameter turns in tight areas.
- Combination two handle and utility bar handle design.
- Distribution of load over 4 wheels improves load control.
- All wheels have ball bearings.
- Wheel guards.

OVERALL DIMENSIONS	NOSE PLATE
w: 20.5" h: 48"	d: 8"



146RN-HB

Heavy Duty Hand Truck

- 8" x 2" cast iron center moldon rubber wheels.
- 7.25" x 14" steel reinforced nose plate.
- .75 inch axle.
- Five handle choices.


OVERALL DIMENSIONS

w: 19.625"

h: 51"

d: 17.5"





	·		•	•						
Part#	210064	210066	210125	210263	210264	210134	210135	210265		
Model#	ST2-HB	ST2-P12	186-ZC	126RN-HB	126DRN-HB	136RN-HB	146RN-HB	156RN-HB		
Capacity	900 lbs	800 lbs	800 lbs	800 lbs	800 lbs	800 lbs	800 lbs	800 lbs		
Wheel: Front	НВ	P-12"	Z	НВ	НВ	НВ	НВ	НВ		
Rear	N/A	N/A	4" x 1.25" Poly Swivel Caster	N/A	N/A	N/A	N/A	N/A		
Weight	69 lbs	69 lbs	53 lbs	39 lbs	40 lbs	41.5 lbs	42 lbs	38 lbs		

- 5 year weld guarantee.
- All joints double welded.
- Structural steel frame construction.
- Ribbed x-braces for added strength.



WESC□ HEAVY DUTY WAREHOUSE AND ECONOMY HAND TRUCKS



5 Year Weld Guarantee





- Five year weld guarantee.
- Large 10" deep x 16.5" wide x .25" thick tapered nose plate.
- 1" heavy duty structural steel frame.
- Wheel guards standard.
- Dual handle design.
- Kick out four wheel model TM4W or standard two wheel model.
- 3.5" moldon rubber swivel casters on four wheel kick out trucks.
- New longer 14 ft. belt length on TM4W models.

	OVERALL DIMENSIONS		OVERALL DIMENSIONS					
w: 21"	21"	50.5"	w: 20.5"	20.5"	20.5"			
h: 50.5"	50.5"		h: 37.25" 4-V	Vheel / 50.25"	2 Wheel			
d: 22.5"	23.5"		d: 22.5"	22"	22"			

	Con			
210127		210215		

SR Economy Hand Truck

- 7.5" x 14" nose plate.
- 16 gauge frame.

w: 21.5" h: 51" d: 19"

■ Two Wheel Choices: 10" Pneumatic and 10" Solid Rubber Wheels.

OVERALL DIMENSIONS		
	21.5"	
	51"	
	10"	

Part#	210055	210056	210239	210060	210061	210062	210127	210215
Model#	TM-HB	TM-PB	TM-BT	TM4W-HB	TM4W-PB	TM4W-BT	SR Economy-PE	SR Economy - SR
Capacity	900 lbs	700 lbs	1,000 lbs	900 lbs	700 lbs	1,000 lbs bs	500 lbs	500 lbs
Wheel Type	HB	PB	BT	НВ	PB	BT	10" Pneumatic	10" Solid Rubber
Caster	N/A	N/A	N/A	3.5"	3.5"	3.5"	N/A	N/A
Weight	54 lbs	49 lbs	75 lbs	78 lbs	75 lbs	98 lbs	26 lbs	28 lbs



WESCO CYLINDER TRUCKS AND CARTS



- Cylinder Lift
- 1-year warranty, parts only.
- WESCO manufactured hydraulic Pedalift Jack, over 35 years of proven quality.
- Easily lifts and transports gas cylinders.
- Swivel casters make maneuvering in tight places easier:
- Two models:
- Foot operated hydraulic pump.
- Manual winch with auto-brake feature.
- Maximum cylinder diameter 9.5".
- Platform size: 12" x 20".

OVERALL DIMENSIONS

W:	20"	20"
h:	54"	58"
d:	29.25"	29.25"



Professional Series Cylinder Trucks

- Safety chain helps secure load.
- Easy conversion between all 3 modes using springloaded position lock mechanism.
- 8" moldon rubber wheels, 3" swivel casters.
- Holds cylinders up to 91/4" in. diameter.
- Noseplate 9" W x 7¹/₄" D single cylinder.


w:

■ Noseplate 16 ⁷/₈" W x 7¹/₄" D - double cylinder.

4-WHEEL OVERALL DIMENSIONS

h: d:	36.5" 32"	37" 32"
	2-WHEEL C	VERALL DIMENSIONS
w: h: d:	19" 41.75" 17.5"	29" 42.25" 18.5"
	STORAGE (OVERALL DIMENSIONS
W:	19"	29"







Hydraulic Large Liquid Gas Cylinder Cart


- 1-year warranty, parts only.
- WESCO made hydraulic pump over 35 years of proven quality.
- Easy transport of large liquid 20" gas cylinders.
- Foot operated hydraulic pump.
- 10" x 2.5" polyurethane wheels.
- 8" polyurethane non-marking swivel caster with swivel locks.
- Ratchet tightening belt to secure cylinder.
- Lifting hook engages cylinder without hand contact - permits hands-free lifting.
- **#240250** without brake. **#240251** with brake.

OVERALL DIMENSIONS

w: 29.75" h: 66.25" d: 44.75"

Part#	260161	260163	210123	210124	240250	240251	
Model#	LLHPB	LLWPB	CC-1	CC-2	HLCC	HLCC-B	
Capacity	300 lbs	300 lbs	250 lbs	500 lbs	1,000 lbs	1,000 lbs	
Wheel Type	5"	5"	8" Moldon Rubber	8" Moldon Rubber	10" x 2.5" Polyurethane	With Brake 10" x 2.5" Polyurethane	
Caster	5" swivel	5" swivel	3"	3"	8" x 2" Swivel	8" x 2" Swivel	
Lift Height	40" / Hydraulic	40" / Winch	N/A	N/A	71"	71"	
Lowered Height	25"	.25"	N/A	N/A	54"	54"	
Weight	165 lbs	152 lbs	40 lbs	50 lbs	130 lbs	140 lbs	

WESCO CYLINDER TRUCKS AND CARTS





Large Liquid Gas Cylinder Cart

- Easy transport of large liquid 20" gas cylinders.
- Low profile design eases cylinder loading.
- Upright design takes up less floor space than traditional lay-back design and provides greater maneuverability in confined space.
- 8" polyurethane-tread, non-marking crowned swivel caster with rolling and swivel lock.
- 10" polyurethane-tread main wheels.
- Heavy duty structural pipe and steel pipe frame.
- Quick-connecting chain helps secure load.

OVERALL DIMENSIONS

- w: 30"
- h: 48.625"
- d: 31"

Variable Speed **Power Drive Provides Unmatched Mobility** and Maneuverability in a Compact Design





Large Liquid Gas Cylinder Cart with Power Drive

- 180 degree hinged design allows precision steering in confined spaces.
- Maximum speed with full charge 1.7 mph (2.5 fps) (No Load).
- Speed control is adjustable from 0 to 1.7 mph.
- Automatic Dead Man Brake engages if handle is released.
- Automatic emergency safety switch instantly reverses direction if control comes in contact with the operator or an obstacle.
- Low profile design for ease of cylinder loading.
- High Strength Structural Tube Fame for Durability.
- Large 10" x 2.5" Polyurethane Front Wheels for smooth operation.
- Quick-connect Ratchet Strap to secure cylinder.

OVERALL **DIMENSIONS**

- w: 28" h: 49"
- d: 40"

Part#	210131	210131-PD
Model #	LCC LCC	LCC-PD
Capacity	1,000 lbs	1,000 lbs
Wheel Type	10" x 2.5" Polyurethane	10" x 2.5" Polyurethane
Caster	8" x 2" Swivel	8" x 2" Swivel
Lift Height	N/A	N/A
Lowered Height	N/A	N/A
Weight	90 lbs	196 lbs

10" x 2.5" Polyurethane Tread Poly-



Hydraulic **Cylinder Lift** Trucksee page 57.



WESC□° COBRA-LITE ALUMINUM HAND TRUCKS

Cobra-Lite features:

- All aluminum construction.
- Heavy duty cast 7.5" by 14" or 7.5" by 18" wide nose plate options.
- Quality light weight truck at an economical price.

Series 410

- Continuous handle.
- 49" overall height.
- Most popular model.
- Available with vinyl dipped handle. See component system on page 33.

OVERALL DIMENSIONS

- w: 18"
- h: 49"
- d: 20



- Ships KD and boxed or as components (see page 33).
- All 2" wide cross braces for additional strength. Great for advertising label.
- Assembly option available. Add "-A" to Part # below. Example: 220566-A.

Series 420

- High back pin handle.
- Comfortable vinyl hand grip.
- 52" overall height.

OVERALL DIMENSIONS

- w: 18"
- h: 52"
- d: 20



COBRA

T14" Nose Part#	220562	220332	220321	220370	220322	220375	220564	220333	220324	220371	220325	220376
Model#	410-T14-BC10	410-T14-R3	410-T14-Z	410-T14-Z2	410-T14-P	410-T14-PE	420-T14-BC10	420-T14-R3	420-T14-Z	420-T14-Z2	420-T14-P	420-T14-PE
Capacity	560 lbs	600 lbs	600 lbs	600 lbs	600 lbs	600 lbs	560 lbs	600 lbs	600 lbs	600 lbs	600 lbs	600 lbs
Wheel Type	BC-10	R3	Z	Z 2	Р	PE	BC-10	R3	Z	Z2	Р	PE
Weight	23 lbs	23 lbs	27.5 lbs	31 lbs	22.5 lbs	21 lbs	23 lbs	19.5 lbs	27.5 lbs	26 lbs	22.5 lbs	21 lbs
T18" Nose Part#	220563	220392	220381	220396	220382	220365	220565	220393	220384	220397	220385	220366
Model#	410-T18-BC10	410-T18-R3	410-T18-Z	410-T18-Z2	410-T18-P	410-T18-PE	420-T18-BC10	420-T18-R3	420-T18-Z	420-T18-Z2	420-T18-P	420-T18-PE
Capacity	560 lbs	600 lbs	600 lbs	600 lbs	600 lbs	600 lbs	560 lbs	600 lbs	600 lbs	600 lbs	600 lbs	600 lbs
Wheel Type	BC-10	R3	Z	Z 2	Р	PE	BC-10	R3	Z	Z2	Р	PE
Weight	23 lbs	20.5 lbs	28.5 lbs	27 lbs	23.5 lbs	22 lbs	23 lbs	20.5 lbs	28.5 lbs	27 lbs	23.5 lbs	22 lbs

Series 450

- Twin handle style with vinyl grips.
- 49" overall height.

OVERALL DIMENSIONS

- w: 18"
- h: 49"
- d: 20



Series 470

- High back loop handle.
- 52" overall height.

OVERALL DIMENSIONS

- w: 18"
- h: 52"
- d: 20



T14" Nose Part#	220566	220334	220327	220372	220328	220377	220568	220335	220330	220373	220331	220378	
Model#	450-t14-BC10	450-t14-R3	450-t14-Z	450-t14-Z2	450-t14-P	450-t14-PE	470-t14-BC10	470-t14-R3	470-t14-Z	470-t14-Z2	470-t14-P	470-t14-PE	
Capacity	560 lbs	600 lbs	600 lbs	600 lbs	600 lbs	600 lbs	560 lbs	600 lbs	600 lbs	600 lbs	600 lbs	600 lbs	
Wheel Type	BC-10	R3	Z	Z2	Р	PE	BC-10	R3	Z	Z2	Р	PE	
Weight	23 lbs	20 lbs	28 lbs	26.5 lbs	23 lbs	21.5 lbs	23 lbs	20 lbs	28 lbs	27 lbs	23 lbs	21.5 lbs	
T18" Nose Part#	220567	220394	220387	220398	220388	220367	220569	220395	220390	220399	220391	220368	
Model #	450-T18-BC10	450-T18-R3	450-T18-Z	450-T18-Z2	450-T18-P	450-T18-PE	470-T18-BC10	470-T18-R3	470-T18-Z	470-T18-Z2	470-T18-P	470-T18-PE	
Capacity	560 lbs	600 lbs	600 lbs	600 lbs	600 lbs	600 lbs	560 lbs	600 lbs	600 lbs	600 lbs	600 lbs	600 lbs	
Wheel Type	BC-10	R3	Z	Z 2	Р	PE	BC-10	R3	Z	Z2	Р	PE	
Weight	23 lbs	21 lbs	29 lbs	27.5 lbs	24 lbs	22.5 lbs	23 lbs	21 lbs	29 lbs	27.5 lbs	24 lbs	22.5 lbs	

BC-10 Poly Offset Hub 10" x 2.165" **Balloon Cushion**

R3 Aluminum Offset 8" x 1.625" Moldon Rubber

Z Steel Offset 10" x 2.75" Semi-Pneumatic

Z2 Poly Offset 10" x 2.75" Solid Rubber

Р Steel Offset 10" x 3.5"

PΕ Steel Offset 10" x 3.5" Pneumatic

BC-8 Poly Hub 8" x 2.165" **Balloon Cushion**

CF (Flat Free) Steel Offset 10" x 3" Microcellular









150698













■ When ordering by part # add option part # to truck part #.

Example:

220332,220351

■ When ordering by model #, add option model # to truck model #.

Example:

410-T14-R3-S3K.



Cobra-Lite Folding Nose for Cast and Extruded Noseplates

F3EF

Factory Installed

Part# Model#

Part#

Model#

F2EF

	■ 20" long	■ 30" long	■ 20" long	■ 30" long	١			
	CAST NOSE PRODUCTS							
	054223	054225	220346	220343				
	F2F	F3F	F2K	F3K				
3	EXTRUDED NOSE PRODUCTS							
	054202	054203	220082	220083				



Cobra-Lite Stairglide Options

Deluxe Cast Aluminum Stairglides

Deluxe Cast Aluminum Stairgildes						
Factory	Installed	Kit for Field Installation				
Pair Pair without with wearstrips wearstrips		Pair without wearstrips	Pair with wearstrips			
054211		220349	220351			
S2F	S3F	S2K	S3K			



Steel w/Wearstrip

*With continuous rolling belt (8" wheel only)

Cobra-Lite Cast Aluminum
Stairclimber Options

Stairclimbing Attachments

Ottair oillinning Attaorillionto					
Factory	Installed	Kit for Field Installation			
Steel pair with wearstrips	Cast alum-inum pair*	Steel pair with wearstrips	Cast alum-inum pair*		
054236	054237	220340	220339		
S4F	S5F	S4K	S5K		



Top Extensions for 410 & 450 Models

Kit for Field Installation

(Special Order: Call factory.)

Installed Height		Factory Installed				Kit for Field Installation			
of Extension	■ 44" high	■ 52" high	■ 60" high	■ 68" high	■ 44" high	■ 52" high	■ 60" high	■ 68" high	
Part#	050144	054206	054207	054209	220347	220080	220081	220094	
Model#	44UF	52UF	60UF	68UF	44UK	52UK	60UK	68UK	

WESCO° DESIGN IT WITH COBRA-LITE COMPONENTS

HERE'S HOW TO DESIGN YOUR TRUCK!





CHOOSE A HANDLE

















CHOOSE A NOSEPLATE



ALUMINUM T14 (cast) 14" W x 7.5" D 151521



ALUMINUM E14 (extruded) 14" W x 7.625" D 220287



ALUMINUM E18 (extruded) 18" W x 7.625" D 220285



ALUMINUM T18 (cast) 18" W x 7.5" D 151533



ALUMINUM E918 (extruded) 18" W x 9" D 220461



ALUMINUM E16 (extruded) 16" W x 12" D 220286



ALUMINUM EC16 (extruded) Recessed Heel 16" W x 12" D 220506 For Curved Frame Only

4

CHOOSE A WHEEL



BC-10 Poly Hub 10" x 2.165" Balloon Cushion 270274



CF (Flat Free) Steel Offset Hub 10" x 3" Microcellular Polyurethane. Will not go flat 220348



Steel Offset Hub 10" x 3.5" Pneumatic Tire 054045



PE Steel Offset Hub 10" x 3.5" Pneumatic Tire 054231



PWT Steel Offset Hub 10" x 3.625" Pneumatic Wide Tread Tire 220319



Steel Offset Hub 10" x 2.75" Semi-Pneumatic Tire 054047



Z2 Poly Offset Hub 10" x 2.75" Solid Rubber Tire 054230



BC-8 Poly Hub 8" x 2.165" Balloon Cushion 270275



R2 Poly Hub 8" x 1.625" Moldon Rubber Tire 054046



R3 Aluminum Offset Hub 8" x 1.625" Moldon Rubber Tire 054048



Poly Offset Hub 8" x 2" Solid Rubber Tire 220352



CHOOSE AN OPTION

EXTENSION OPTIONS



Top extension for 40R, 40B, 41 and 45 handles

44UK – 44" top extension 220347

52UK – 52" top extension 220080

60UK – 60" top extension 220081

68UK – 68" top extension 220094

(Vinyl coated top extensions available – see price list)



Folding nose extension

20" long
F2 – For Cast Noses
220346
F2E – For Extruded Noses 220082

30" long F3 – For Cast Noses 220343 F3E – For Extruded Noses 220083

HA

S2K:
*Deluxe cast
aluminum
stair glides without
wearstrip
220349

S3K: # 220351 with wearstrip



STAIR GLIDE & CLIMBER OPTIONS

S4K Steel stair glides with wearstrips

220340 Field Install Kit

S4F #054236 Factory Install



S5K Continuous belt stair climbers

220339 (For 8" wheel only) Field Install Kit S5F #054237 Factory Install

STRAP



CS Center strap option 054062

WES⊏□° COBRA ALUMINUM CONVERTIBLE TRUCKS

Cobra Jr. and Sr. features:

- 18" wide noseplate for large loads.
- Smooth and easy transition from the 2 to 4 wheeled position.
- Non-marking 5" x 1.25" swivel casters.
- Add B to end of part number for blue coated handle option.
- 8 rivets per cross brace. Welded release pedal.
- Custom advertising side strips available contact dealer for details.
- 2" wide cross braces for added strength and advertising labels.



Higher Capacity Convertible Trucks - 1,200 lbs. 2 Year Frame Warranty

Cobra Jr.

- 2 Year Frame Warranty.
- Dual hand grips for improved control.
- 3 frame cross braces.
- 12 inch x 38 inch frame bed.

0	2 Wheel VERALL MENSIONS
w:	22"

4 Wheel OVERALL **DIMENSIONS** w: 46.5"

h: 51.75"

d: 19"

h: 40" d: 19"



Cobra Sr.

- 2 Year Frame Warranty.
- Continuous handle allows multiple ways to control load.
- 4 frame cross braces.
- 12 inch x 50.75 inch frame bed.

2 Wheel OVERALL **DIMENSIONS**

w: 22" h: 61.75"

d: 19"

w: 55.625" h: 45.5" d: 19"

OVERALL

DIMENSIONS





Part#	18"W x 7.5"D 220293 CBR-JR-T18-PWT	220291	220295	220297	220622	220292	220290	220294	220296	220618	
Part#	18"W x 7.625"D 220482 CBR-JR-E18-PWT	220494	220486	220490	220515	220484	220496	220488	220492	220516	
Part#		16"W x 12"D 220495 CBR-JR-E16-PE	220487	220491	220666	220485	16"W x 12"D 220497 CBR-SR-E16-PE	220489	220493	220667	
Capacity 2 Wheel 4 Wheel	600 lbs	600 lbs 1,200 lbs	600 lbs 1,200 lbs	600 lbs 1,200 lbs	560lbs 1,160 lbs	600 lbs 1,200 lbs	600 lbs 1,200 lbs	600 lbs 1,200 lbs	600 lbs 1,200 lbs	560lbs 1,160 lbs	
Frame Bed	12" x 38"	12" x 38"	12" x 38"	12" x 38"	12" x 38"	12" x 50.75"	12" x 50.75"	12" x 50.75"	12" x 50.75	12" x 50.75"	
Wheel	PWT	PE	Z	Z 2	CF	PWT	PE	Z	Z 2	CF	
Weight	39 lbs	37.5 lbs	43.5 lbs	42.5 lbs	41 lbs	42.5 lbs	41 lbs	47 lbs	46 lbs	41 lbs	

Cobra **Platform Deck Option**

■ Platform Deck: Slip resistant diamond pattern surface for both cast and extruded noseplates.

Part #	220289	220288	220514	220318	
Model #	JRD	SRD	JRDE	SRDE	
For Use With	Jr/Cast Noseplate	Sr/Cast Noseplate	Jr/Extruded Noseplate	Sr/Extruded Noseplate	
Length	42"	55"	42"	55"	
Weight	8 lbs	10 lbs	7 lbs	9 lbs	

Cobra **Folding Nose Option**

Coated handle.

Kit for Field Installation

■ 20" for T-18 Noseplates ■ 20" for E-18 & E-16 Noseplates

■ 30" for T-18 Noseplates ■ 30" for E-18 & E-16 Noseplates

Part # 220346 220082 220343 220083 Model # F2 F2E F3 F3E Factory Installed 054223 054203 054202 054225 F2F F2EF F3F F3EF

> Additional choice not listed above.





WES⊏□° SPARTAN ECONOMY & COBRA POWERED CONVERTIBLE TRUCKS

220001

MADE IN THE US

■ 30" Folding Nose



Spartan Economy Aluminum 2 in 1 Trucks

- Value-priced truck.
- Two sizes Jr. and Sr.
- Sturdy, lightweight aluminum frame.
- 18" wide x 7.5" deep noseplate for large loads.
- Wheels: PE 10" pneumatic or SR 10" solid rubber.
- Non-marking 5" x 1.25" swivel casters.
- Pedal release allows easy conversion from 2-wheel to 4-wheel position.
- Extra strength noseplate cast from special aluminum alloy.
- Ships KD and boxed.
- Assembly option available. Add "-A" to Part # below. Example: 220000-A.

2 Wheel OVE	4 Wheel RALL DIMENS	4 Wheel	2 Wheel OVE	4 Wheel RALL DIMENS	4 Wheel
w: 22"	22"	22"	w: 22"	22"	22"
h: 52"	40"	40"	h: 61.5"	45.5"	45.5"
d: 19"	19"	19"	d: 19"	19"	19"

Part#	220000	219998	220145	220001	219999	220144
Model#	SPTN-JR-T18-PE	SPTN-JR-T18-SR	SPTN-JR-T18-CF	SPTN-SR-T18-PE	SPTN-SR-T18-SR	SPTN-SR-T18-CF
Capacity 2 Wheel 4 Wheel	500 lbs 1,000 lbs					
Description	12" x 38" Bed	12" x 38" Bed	12" x 38" Bed	12" x 51" Bed	12" x 51" Bed	12" x 51" Bed
Wheel	PE	SR	CF	PE	SR	CF
Caster	5" x 1.25"					
Weight	44 lbs	54 lbs	44 lbs	46.3 lbs	58 lbs	48 lbs

Spartan and CobraPRO Options



■ Platfo



rm Deck*		Spartan Sr. and
partan Jr. Models	CobraPRO Jr. Models	CobraPRO Sr. Models
220800	220289	220288

	Spartan Jr. Models	CobraPRO Jr. Models	CobraPRO Sr. Models	Field Install	Factory Install
Part #	220800	220289	220288	220343	054225
Model#	JRSD	JRD	SRD	F3	F3F
Length	42"	42"	55"	30"	30"
Weight	8 lbs	8 lbs	10 lbs	5 lbs	2 lbs











CobraPRO Jr. and Sr. have 950 lb. capacity in

4-wheel mode and 600 lb.

CobraPRO Jr.

2 Year Frame Warranty.

- Dual hand grips for improved control.
- Variable speed fingertip control. Forward and reverse.
- 3 frame cross braces.
- Battery and charger included.

2 Wheel 4 Wheel **OVERALL DIMENSIONS**

w:	22"	46.5"
h:	51.75"	40"
d:	19"	19"

CobraPRO Sr.

- 2 Year Frame Warranty.
- Continuous handle allows multiple ways to control load.
- Variable speed fingertip control. Forward and reverse.
- 4 frame cross braces
- Battery and charger included.

2 Wheel 4 Wheel **OVERALL DIMENSIONS**

w:	22"	55.625"
h:	61.75"	45.5"
d:	19"	19"

· · · · · · · · · · · · · · · · · · ·	•	
220653	220656	
PCBR-JR-T18-PWT	PCBR-SR-T18-PWT	
600 lbs 1,200 lbs	600 lbs 1,200 lbs	
12" x 38"	12" x 50.75"	
10" PWT Pneumatic	10" PWT Pneumatic	
5" x 1.25"	5" x 1.25"	
109 lbs	112.5 lbs	

Spare Battery Module

Part #220655

- Plugs directly into drive unit.
- No need to attach cables.
- Spare battery module includes 2 batteries and case.
- 25 lbs.

WESCO ALUMINUM MINI COBRA & 3 POSITION TRUCKS



Mini Cobra

- 2 Year Frame Warranty.
- Unique design allows user to fold nose for storage.
- 4" x 1.25" non-marking swivel casters.
- 8.25" x 32.25" frame bed.
- \blacksquare Folding no seplate 7" D x 14" W.
- 8" x 2.25" pneumatic wheels.

2 Wheel 4 Wheel OVERALL DIMENSIONS

w:	15"	15"
h:	44"	32.5"
d:	16"	16"





Spartan III

- Value priced truck.
- Aluminum construction.
- Quickly converts into 3 positions:
 - 1. Vertical 2-Wheel
 - 2. 45° 4-Wheel
 - 3. Platform Wheel.
- \blacksquare 18" x 7.5" cast aluminum noseplate.
- 7.5" W x 27" L recessed folding nose extension.
- Handle height 48".
- 10" full pneumatic wheel.
- 5" x 1.25" swivel casters.
- Ships KD/boxed.

2 Wheel 4 Wheel OVERALL DIMENSIONS

ΟV	ERALL	DIMENSION
w:	21.5"	*
h:	52"	42.25"
d:	19"	19"



Part #	220615
Model #	CBR-FBL
Capacity 2 Wheel 4 Wheel	300 lbs 500 lbs
Frame Bed	8.25" x 32.25"
Wheel	8" Pneumatic
Caster	4" Jarvis Advantage
Weight	28 lbs

	SPTN-III	
0 0 0 0 0 0 0 0	45°/ 4 Wheel - 500 lbs 2 Wheel - 500 lbs 4 Wheel - 750 lbs	
•	12" X 51"	
	PE	
•	5" x1.25" Swivel Casters	
•	45 lbs	

270391





^{*} Platform position 60". 45° position 49".

WESC□ POWER LIFTKAR HD STAIRCLIMBING TRUCKS









Extended Height HD

Complete with fold-out carriage.

OVEDALI

Power LiftKar HD: 725 lb. high capacity models

■ Three Models

Uni - straight frame - accepts #274102 fold-out wheel carriage for 4-wheel support.

Fold – upper handle angle can be adjusted. Best for copiers, safes, heavy motors or any short and heavy load which would require the user to pull the load back to a very low position for proper balance. The adjustable angle position on the Fold model allows the user to stand upright when using the truck at a very low angle.

Extended Fold – Same advantages as **Fold** but with an extra 7" in height and fold-out wheel carriage.

toe plate - #274103.

- Innovative edge-of-step braking system automatically applies brake when wheels are at edge of step. Helps prevent loss of load control caused by accidental rolling down steps.
- Brake can be shut off for use on level ground prevents unwanted braking when moving over ground with an uneven surface.
- Two operating modes: single step (ascend or descend button must be pressed after each step – ideal for maximum control), or continuous climb.
- 24v quick-change battery pack sealed maintenance-free battery.
- Battery, charger and 137" x 2" cargo belt included.
- 21" W x 7.25" D noseplate. Additional sizes available, contact Wesco Customer Service.
- Two climbing speeds: 6 steps/min. or 10 steps/min.
- Average number of steps with fully charged battery:
- 440 lbs. of cargo 220 steps
- $550\,lbs.$ of cargo $190\,steps$
- 725 lbs. of cargo 120 steps.
- Maximum stair height 8.25".
- I year warranty on parts against defects in materials and workmanship.
- 6 month warranty on battery.

Power LiftKar Options

- Part # 274103 Snap-on toe plate equipped with 4 dual casters. Provides additional cargo space and the ability to move loads without tilting truck. Especially useful in confined areas. 21" W x 14" D.
- Part # 274102 Fold-out rear wheel carriage for Universal model only slides easily into position to provide 4-wheel support.
- Part # 274116 Extra quick-change battery pack.
- Part # 274181 In-transit 12 Volt DC auto charger.
- Part # 274185 Standard 110 Volt battery charger.



DIMENSIONS	DIMENSIONS		DIMENSIONS	
w: 22"	w: 22"	h:	22"	
h: 63"	h: 47" - folded / 63" unfolded		53.5" - folded / 70" unfolded	
d: 19"	d: 19"		21.3"	

OVEDALI

•			
Part #	274100	274101	274238
Model	Universal	Fold	Extended Height Fold
Battery	Single	Single	Single
Capacity	725 lbs	725 lbs	725 lbs
Height	63" straight frame	47" folded	70" straight frame
Belt	2 piece with clasp - 137" x 2"	2 piece with clasp - 137" x 2"	2 piece with clasp - 137" x 2"
Weight	96 lbs	97 lbs	105 lbs

`WESC□ POWER LIFTKAR SAL STAIRCLIMBING TRUCKS

4 EASY STEPS TO CONFIGURE YOUR LIFTKAR!



- Dual speed control on all models to fit your application.
- Quick-change battery and charger included.
- Pivoting and fixed handle configurations available to handle a wide variety of cargo.
- Choose from the long list of options to maximize the utility of your Liftkar.
- 240, 300 and 375 lb. capacity models.
- Climbs up to 48 steps per minute.
- All models include charger and battery.
- I year warranty on parts against defects in materials and workmanship.
- 6 month warranty on battery.

Choose your frame.

Ergo

The ergo handle is the most popular all-purpose modelwith 3-handle gripping points providing proper balance for a variety of loads. (Recommended maximum cargo

height - 58".) (Shown with "G" Toe Plate.)



Choose your capacity and tire type.

Base Model - 240 lb capacity Base Model - 300 lb capacity Base Model - 375 lb capacity

See page 37 for 725 lb capcity HD models.

Maximum number of steps with fully charged battery - all models:

200 - 300 steps - ascending 400 - 600 steps - descending

	Pneumatic Tire Part Number	Microcellular Tire Part Number	Capacity	Max. Step per min		Weight
240 lb	Capacity Mod	dels - includes b	attery an	d charge	r	
Ergo	274140	274152	240 lbs	48	18.5" x 63"	42.7 lbs
Fold	274141	274153	240 lbs	48	18" x 61" unfolded/ 39.5 folded	42.2 lbs
Uni	274142	274154	240 lbs	48	17.5" x 59"	41.8 lbs
Fold-L	274143	274155	240 lbs	48	19" x 64.5" unfolded/ 51 folded	44.9 lbs
300 lb	Capacity Mod	dels - includes b	attery an	d charge	r	
Ergo	274144	274156	300 lbs	35	18.5" x 63"	42.7 lbs
Fold	274145	274157	300 lbs	35	18" x 61" unfolded/ 39.5 folded	42.2 lbs
Uni	274146	274158	300 lbs	35	17.5" x 59"	41.8 lbs
Fold-L	274147	274159	300 lbs	35	19" x 64.5" unfolded/ 51 folded	44.9 lbs
375 lb	Capacity Mod	dels - includes b	attery an	d charge	r	
Ergo	274148	274160	375 lbs	29	18.5" x 63"	42.7 lbs
Fold	274149	274161	375 lbs	29	18" x 61" unfolded/ 39.5 folded	42.2 lbs
Uni	274150	274162	375 lbs	29	17.5" x 59"	41.8 lbs
Fold-L	274151	274163	375 lbs	29	19" x 64.5" unfolded/ 51 folded	44.9 lbs


3 Choose toe plate.

Add Toe Plate Part Number to Base Model Number.


	Toe Plate Part Number	Grooved or Smooth*	WxD	Weight
G	274164	Grooved	16.5" x 13.4"	4.6 lbs
GS	274165	Grooved	18.8" x 9.4"	4.1 lbs
LH	274166	Smooth	18.45" x 10.9"	3.7 lbs
GS-NG	274167	Smooth	18.74" x 9.4"	4.1 lbs
DS-NG	274168	Smooth	17.7" x 7.5"	4.1 lbs
WL	274169	Grooved	14" x 7"	2.2 lbs
XWL	274170	Grooved	23.25" x 7"	3.9 lbs

















WESCO POWER LIFTKAR SAL STAIRCLIMBING TRUCKS

Uni

Ideal for tall, easily balanced loads. 2-handle gripping points. (Shown with "G" Toe Plate.)



Fold

This model allows user to place handle in optimum position. Ideal for short, heavy loads that require truck to be tilted to an extreme angle for proper balance. (Shown with "G" Toe Plate.)



Fold L

Similar to fold but has a longer frame and shorter folding handle. This makes it ideal for loads that require less tilt for proper balance than the Fold provides. (Shown with "G" Toe Plate.)



Choose accessories.

	Part Number	Weight
Keg Hook	274174	1.2 lbs
Center Strap w/ extra crossbar -		
Uni and Ergo only	274175	1.1 lbs
Center Bar provides flat		
surface - Uni and Ergo only	274176	1.8 lbs
55" x 1" Cargo Strap w/buckle	274177	1.1 lbs
107" x 1" Cargo Strap w/buckle	274178	1.1 lbs
137" x 2" Cargo Strap w/buckle	274199	1.5 lbs
Panel / Window / Door Holder	274179	35.6 lbs
Extension Wings (Uni, Ergo, Fold-L)	274180	3.3 lbs
Cigarette Lighter Charger	274181	0.9 lbs
Battery Retainer	274104	1.0 lbs
Lifting System (Uni, Ergo, Fold-L)	274237	51 lbs
Extra Battery	274116	9.5 lbs

For detailed information on accessories, contact Wesco $^{\circ}$.



Part #274174 Keg Hook



Part #274177 or #274178 - 1" Strap



Part #274199 2" Strap



Part #274180 Extension Wings



Part #274237 Lift System in use Not for use with toe plates WL or XWL. Capacity: 265 lbs. Lift height: 35.5"



Part #274175 Center Strap



Part #274179 in use Door/Window Holder



Part #274176 Center Bar

WESCO° STAIRKING APPLIANCE TRUCK & OPTIONS



StairKing Battery Powered Stair Climbing Appliance Truck

- U.S. Pat. No. 7,137,464
- Welded aluminum construction.
- 1/2 Horsepower, 50 amp, high torque motor runs cooler under load.
- Industrial grade gear box transmits steady power and is preferable to other drive designs.
- Large 2" diameter, polyurethane lifting feet provide more secure stair gripping.
- Auto rewind ratchet works first to take the slack out of the cargo belt, and then provides a ratchet crank to securely tighten the load.
- Noseplate measures 24" by 4" deep. Welded lightweight frame and noseplate.
- 30" from noseplate to center of belt.
- Sealed maintenance-free battery. AC charger and circuit breaker included.
- 6" moldon rubber wheels.
- Average number of steps with fully charged battery:

LOAD	STEPS
225 lbs	160
$450 \mathrm{lbs}$	135
$850 \mathrm{lbs}$	70

OVERALL DIMENSIONS


w: 24"

h: 66" or 72"

d: 12"

Part #	230051	230052
Model	DC-66	DC-72
Capacity	850 lbs	850 lbs
Ratchet	Auto rewind	Auto rewind
Belt	2 piece w/clasp	2 piece w/clasp
Height	66" tall frame	72" tall frame
Weight	101 lbs	102 lbs



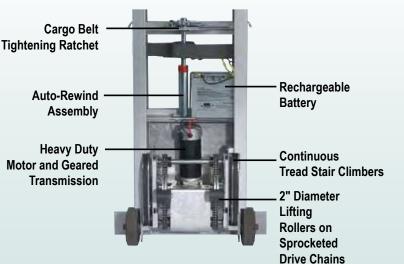

STAIRKING OPTIONS



- Superwheel attachment installs in seconds.
- Equipped with $10\mbox{"}$ x 4" full pneumatic tires. Provides 4 wheel support and eases transport over rough surfaces.

OVERALL **DIMENSIONS**

w: 11.5"

h: 4.5" d: 20.5"



■ Toe plate extension. Easily clips on to standard toe plate and provides 12" deep x 28" wide cargo surface.

OVERALL DIMENSIONS

w: 28" h: 4" d: 12"



SP-20 Platform Option slips onto WLF forks

■ Platform attachment. Slides in place over winch lift forks to provide a 20" x 20" lifting platform.

OVERALL DIMENSIONS

w: 20" 7" h: d: 20"

260160

Part # 270076 230055 Model # **MSWK NE-28 SP-20** N/A 850 lbs 800 lbs Capacity Steel Nose Description Superwheel Steel Slip on Platform Extension Option Weight 19 lbs 18 lbs 20 lbs



SINCE 1948

WESCO STAIRKING OPTIONS / ALUMINUM APPLIANCE TRUCK

STAIRKING OPTIONS

Accessory Winch Lift for StairKing



WLF Winch Lift Option

- Optional aluminum winch lift attachment has 800 lb capacity.
- 3-1/2" swivel casters for 4 wheel support and mobility.
- Winch equipped with autobraking system.
- 18" forks, adjustable width 8.5" to 19" outside dimension.
- 57.25" lift height.
- Factory or field installation.

OVERALL DIMENSIONS

w: 25"

h: 70" d: 30"







KOW Kick-out Wheel

Kick-Out 3.5" casters for four wheel stability.



Battery Charger Cord

- Charge battery while driving between stops.
- Plugs into cigarette lighter.
- Cable length 20'.
- Standard A.C. charger is included with truck purchase.



Economical Aluminum Appliance and Vending Trucks

- Exclusive Wesco ratchet design.
- Lightweight aluminum frame with auto rewind ratchet.
- Model AAP-612 has double ratchet design for greater cargo security.
- Model AVT-61 has four wheel swing-out design to support heavy loads and help reduce the strain of balancing the cargo over long distances.
- 6" x 2" moldon rubber wheel, poly hub.
- Noseplate: 24" W x 5" D.

	OVERALL DIMENSIONS	
w: 24"	24"	24"
h: 61"	61"	61"
d: 12"	12"	12"

Part #		230053	230059	230060
	Model #	WLF	KOW	BC
	Capacity	800 lbs	850 lbs	N/A
	Description	Aluminum Winch Lift Attachment	Kick-out Wheel	Cigarette Lighter Charger
	Weight	67 lbs	14 lbs	2 lbs

Part #	272410	272411	272412
Model #	AAP-61	AAP-612	AVT-61
Capacity	550 lbs	550 lbs	550 lbs
Ratchet	Auto rewind	Auto rewind	Auto rewind
Belt	2 piece w/clasp	double 2 piece w/clasp	2 piece w/clasp
Wheel	6" x 2"	6" x 2"	6" x 2" (2" x 1" caster)
Weight	40 lbs	43 lbs	50 lbs

`WESCO° STEEL VENDING & APPLIANCE TRUCKS

Features:

- Welded frame and handles for maximum strength.
- Non-marking grey vinyl on all contact surfaces securely mounted to truck.
- 2" wide heavy duty web belt.



Improved kick-out design allows operator to kick-out wheels with both hands on the truck.



Wesco Steel Vending Machine Trucks

- Retractable moldon rubber casters (3.5" diameter) help support load.
- Heavy duty 8" cast iron center moldon rubber wheels with roller bearings #150120.
- Available with "Auto-Rewind" or "Manual" belt tightening systems.
- 28.5" from noseplate to center of belt.
- ■60" and 66" frame 3/4"-14 Ga. steel tube.
- ■72" frame 1"-14 Ga. steel tube.
- Noseplate 24" wide x 5" deep.

OVERALL DIMENSIONS

- w: 24"
- h: 60" or 66" or 72"
- d. 14.5"



Wesco Steel Appliance Trucks

- All joints double welded for maximum durability.
- Rugged tubular steel construction.
- Available with "Auto-Rewind" or "Manual" belt tightening systems.
- Available with 6" x 2" wheels with 5/8" precision ball bearings.
- 26.5" from noseplate to center of belt.
- Noseplate 24" wide x 5" deep.

OVERALL DIMENSIONS

- w: 24"
- h: 59"

	u. 14.5						u. 10		
Part #	230035	230017	230036	230018	230037	230019	230010	230028	
Model #	WRV-60-EC	WRV-60	WRV-66-EC	WRV-66	WRV-72-EC	WRV-72	WRC	WRC-EC	
Capacity	1,200 lbs	1,200 lbs	1,200 lbs	1,200 lbs	1,200 lbs	1,200 lbs	750 lbs	750 lbs	
Ratchet	Manual	Auto rewind	Manual	Auto rewind	Manual	Auto rewind	Auto rewind	Manual	
Belt	1 piece	2 piece clasp	1 piece	2 piece clasp	1 piece	2 piece clasp	2 piece clasp	1 piece	
Wheel	НВ	HB	HB	НВ	HB	HB	A	А	
Height	60"	60"	66"	66"	72"	72"	59"	59"	
Weight	80 lbs	80 lbs	86 lbs	86 lbs	95 lbs	95 lbs	52 lbs	52 lbs	

Super Wheel

Part #270075 Model # SSWK

- \blacksquare 10" pneumatic rear wheels .
- Quick and easy turnbuckle mounting system.
- Converts a 2 wheel truck into a 4 wheel truck. Note: Cannot be used on 72" WRV-72 Models.











- WHEEL LOCK FEATURE STANDARD: Front wheels have wheel locks to allow truck to be placed in upright position without the danger of the truck rolling away from operator. Wheel lock is activated by a conveniently located lever at top of truck.
- In transport position load rests on (2) 10" poly hub moldon rubber wheels and (2) 5" poly hub moldon rubber front wheels.
- Rear main wheel design allows truck to be tilted back to clear doorways. Especially useful with tall vending machines or other tall cargo.
- Available in 72" and 78" heights.
- 2 webbed cargo belts with ratchet tighteners for maximum load security.
- Constructed of heavy duty 1" diameter steel tubing.
- Noseplate 5" D x 24" W x .25" thick.
- Tilts back at 49° angle.

	OVERALL DIMENSIONS	
w: 27" h: " 72" d: 17"		27" 78" 17"



A Wesco Unique Design -Swivel casters may be deployed for easy steering and 4-wheel support

Heavy Duty Auto-Rewind Appliance Truck with Swivel Casters

- Truck can be used in 2-wheel or 4-wheel mode.
- Dynamic lever activated fulcrum system fulcrum point changes as truck is tilted to decrease break-over effort.
- Swivel caster carriage kickout for four wheel support, lever release.
- 10" poly hub main wheels, 6" rear swivel casters.
- Available in 72" and 78" heights.
- 2 webbed cargo belts with ratchet tighteners for maximum load security.
- Constructed of heavy duty 1" diameter steel tubing.
- Noseplate 5" D x 24" W x .25" thick.

		DIMENSIONS	
W:	27"		27"
h: d:	72" 16"		78" 16"
u.	10		l n



230020

Wesco Steel Vending Truck

- Dual handle control.
- 12" pneumatic wheels for rough terrain #108484.
- Welded steel frame.
- One piece belt.
- 47" from noseplate to center of belt.
- 55" height.
- Noseplate 4.94" D x 25" W x .25" thick.

OVERALL DIMENSIONS

w: 28.5" h: 55" d: 20"

Part #	230074	230075	230076	230077	230020	
Model#	HDSV-72	HDSV-78	WRV-MAX-72	WRV-MAX-78	L4	
Capacity	1,800 lbs	1,800 lbs	1,800 lbs	1,800 lbs	700 lbs	
Ratchet	Auto Rewind	Auto Rewind	Auto rewind	Auto rewind	N/A	
Belt	2 piece w/clasp	2 piece w/clasp	2 piece w/clasp	2 piece w/clasp	1 piece clasp	
Wheel	10" x 2.5" Poly	10" x 2.5" Poly	10" x 2.5" Poly	10" x 2.5" Poly	P-12	
Noseplate	24"W x5"D	24"W x5"D	24"W x5"D	24"W x5"D	25"W x 5.2"D	
Weight	126 lbs	129 lbs	120 lbs	130 lbs	62 lbs	



WESCO DELUXE PALLET TRUCKS

ADJUSTABLE FORK WIDTHS Two sizes of width, 16" - 20" and 21" - 27". Just loosen and reset front and rear adjusting bolts. A Wesco exclusive. One truck to do the work of two!



Deluxe Adjustable Fork Model

- 5 year pump warranty.
- US Patent No. 6,808,357.
- Available in 16" or 21" widths.
- 7" non-marking moldon polyurethane steering wheel.
- 3" non-marking moldon polyurethane load wheels.
- 7.75" raised height; 3" lowered height.
- 6" wide gauge forks.
- 200° steering radius.

Deluxe Models feature 5 year pump warranty and 5,500 lb. capacity plus:

- Pump overload bypass.
- Rubber coated handle.
- Adjustable fork tie rods.
- Exit rollers
- 200° steering.
- Tapered fork tips.
- 8 gauge 6" wide reinforced forks.
- Non-marking.



Deluxe Quick Lift Model

- ■5 year pump warranty. US Patent No. 9,102, 346.
- Fastest/quickest lift on the market.
- Just step on the pedal. No Pumping. Lifts to 4.5".
- 7" non-marking moldon polyurethane steering wheel.
- 3" non-marking moldon polyurethane load wheels.
- All the same features and dimensions as Standard Deluxe models.
- Normal pump operation when load exceeds 300 lbs.
- 200° steering radius.



Deluxe Foot Pump Model

- 5 year pump warranty.
- lacksquare 7" non-marking moldon polyurethane steering wheel.
- 3" non-marking moldon polyurethane load wheels.
- All the same features and dimensions as Standard Deluxe Model 272748.
- 6" wide gauge forks.
- 200° steering radius.

Part #	272744	272747	272746	272861	272766	
Capacity	5,500 lbs	5,500 lbs	5,500 lbs.	5,500 lbs /300 lb Q.L	5,500 lbs	
W-1 x L-1	21" -27" x 48"	16" - 20" x <mark>36"</mark>	16" - 20" x 48"	27" x 48"	27" x 48"	
W-2	6"	6"	6"	6"	6"	
L-2	61"	51"	61"	63"	63"	
WHL-1 / WHL-2	7" / 3"	7" / 3"	7" / 3"	7" / 3"	8" / 3"	
H-1 / H-2 / H-3	47" / 3" / 7.75"	47" / 3" / 7.75"	47" / 3" / 7.75"	48" / 3" / 8"	48" / 3" / 8"	
Weight	180 lbs	147.5 lbs	157 lbs	166 lbs	170 lbs	

Deluxe Lowboy Models

- 5 year pump warranty.
- 2.125" lowered height.
- 6" non-marking moldon polyurethane steering wheel.
- 2" steel load wheels.
- 6.25" raised height.
- 6" wide gauge forks.
- 200° steering radius.

Lowered height - 2.125" 272765


Standard Deluxe Models

- 5 year pump warranty.
- 8" non-marking moldon polyurethane steering wheel.
- 3" non-marking moldon polyurethane load wheels.
- 8" raised height.
- 3" lowered height.
- 6" wide forks.
- 200° steering radius.



Part #	272760	272761	272762	272765	272136	272142	272148	272736	272742	272748
Capacity	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lb
W-1 x L-1	21" x 36"	21" x 42"	21" x 48"	27" x 48"	21" x 36"	21" x 42"	21" x 48"	27" x 36"	27" x 42"	27" x 48"
W-2	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"
L-2	51"	57"	63"	63"	51"	57"	63"	51"	57"	63"
WHL-1 / WHL-2	6" / 2"	6" / 2"	6" / 2"	6" / 2"	8" / 3"	8" / 3"	8" / 3"	8" / 3"	8" / 3"	8" / 3"
H-1/H-2/H-3	46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	48"/3"/8"	48"/3"/8"	48"/3"/8"	48"/3"/8"	48"/3"/8"	48"/3"/8"
Weight	134 lhe	1/13 lhe	1/18 lhe	157 lbe	1/13 lbe	152 lbe	157 lhe	151 lhe	161 lhe	166 lbc


WESCO CPI AND CP3 PALLET TRUCKS



Pallet Truck Chock: High Visibility Yellow



FOR MORE PALLET TRUCK OPTIONS (Chocks and Guards) see page 54.

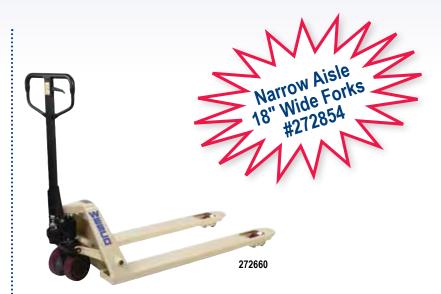

CPI Pallet Truck

- 2 year pump warranty.
- 4 mm thick forks.
- Adjustable fork connecting rods.
- Overload bypass.
- Rubber coated handle.

- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- Entry and Exit Rollers.
- 6.25" wide forks.
- 210° steering radius.
- NEW 18" wide fork model #272854.



CP3 Pallet Truck

- 2 year pump warranty.
- 3 mm thick forks.
- Adjustable fork connecting rods.
- Overload bypass.
- Rubber coated handle.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- Entry and Exit Rollers.
- 210° steering radius.

	•									
Part #	272854	272655	272656	272657	272658	272659	272660	273453	273454	273448
Capacity	5,500 lbs	5,500 lbs								
W-1 x L-1	18" x 48"	21" x 36"	21" x 42"	21" x 48"	27" x 36"	27" x 42"	27" x 48"	21" x 36"	21" x 48"	27" x 48"
W-2	6.25"	6.25"	6.25"	6.25"	6.25"	6.25"	6.25"	6.25"	6.25"	6.25"
L-2	63"	51"	57"	63"	51"	57"	63"	51"	63"	63"
WHL-1 / WHL-2	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"
H-1/H-2/H-3	48.25"/2.9"/7.25"	48.25"/2.9"/7.25"	48.25"/2.9"/7.25"	48.25"/2.9"/7.25"	48.25"/2.9"/7.25"	48.25"/2.9"/7.25"	48.25"/2.9"/7.25"	48.25"/2.9"/7.25"	48.25" /2.9" / 7.25"	48.25"/2.9"/7.25"
Weight	171 lbs	153 lbs	161.5 lbs	169.5 lbs	162 lbs	171 lbs	180 lbs	139 lbs	152.5 lbs	164.5 lbs

H-1 W-2 W-1 Lowered Height H-3 Raised Height Diameter L-1 L-2 WHL-1 Steering Wheel Diameter



272778

CPII Pallet Truck

- 3 year pump warranty.
- \blacksquare 2 Models polyurethane or nylon wheels.
- \blacksquare Adjustable fork connecting rods.
- Entry/exit rollers.
- Overload bypass.
- Reinforced forks 11 Gauge.
- Rubber coated handle.
- Raised height: 8". Lowered height: 3".
- 7" wide forks.
- 8" moldon polyurethane or 8" nylon steering wheels.
- 3" moldon polyurethane or nylon load wheels.
- 180° steering radius.

CPIIHD Pallet Truck

272670

- 3 year pump warranty.
- High capacity rating.
- Adjustable fork connecting rods.
- Entry/exit rollers.
- Overload bypass.
- Reinforced forks 4mm thick.
- Rubber coated handle.
- 7" wide forks.
- 8" moldon polyurethane steering wheels.
- 3" moldon poly-urethane load wheels.
- 180° steering radius.

2.125" 14.5" 278748

Lowered height - 2.125"

CPII Lowboy Pallet Truck

- 3 year pump warranty.
- Many features are the same as CPII.
- Lowered height of 2.125".
- 7" wide 4mm thick forks.
- 7" moldon polyurethane steering wheels.
- 2" steel load wheels.
- 180° steering radius.

	Polyuretha	ne Wheels	Nylon Wheels		
Part #	272777	272778	272775	272776	
Capacity	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	
W-1 x L-1	21" x 48"	27" x 48"	21" x 48"	27" x 48"	
W-2	7"	7"	7"	7"	
L-2	63"	63"	63"	63"	
WHL-1 / WHL-2	8" / 3"	8" / 3"	8" / 3"	8" / 3"	
H-1/H-2/H-3	48" / 3" / 8"	48" / 3" / 8"	48" / 3" / 8"	48" / 3" / 8"	
Weight	170 lbs	176 lbs	159.5 lbs	169 lbs	

	. /
	272670
	6,600 lbs
	27" x 48"
	272670 6,600 lbs 27" x 48" 7" 63" 8" / 3" 48" / 3" / 8"
	63"
	8" / 3"
"	48" / 3" / 8"
	220 lbs

•				
278136	278142	278148	278748	
4,400 lbs	4,400 lbs	4,400 lbs	4,400 lbs	
21" x 36"	21" x 42"	21" x 48"	27" x 48"	
7"	7"	7"	7"	
51"	57"	63"	63"	
7" / 2"	7" / 2"	7" / 2"	7" / 2"	
46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	46.5"/2.125"/6.25"	
226 lbs	235 lbs	240 lbs	249 lbs	



Scale Truck

- NOT FOR LEGAL TRADE.
- 2 year pump warranty.
- Weighing accuracy ±4.4 lbs., or 2.0 Kg.
- LED display scale.
- Mettler-Toledo Hawk scale/sensor.
- UL approved scale operates on rechargeable battery. May be plugged into AC and used while recharging.
- Replacement Battery Pack **#272849**.
- Self-contained battery charger.
- Three position hand control.
- 205° steering radius.
- 7" wide forks.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.

Pallet Truck Chock: High Visibility Yellow



П

FOR MORE PALLET TRUCK OPTIONS (Chocks and Guards) see page 54.




Powered Scale Truck

- NOT FOR LEGAL TRADE.
- 1 year warranty: DC motor drive, hydraulic pump, controllers and switches.
- 90-day parts warranty.
- Built-in battery charger.
- Two 12V-91Ah batteries.
- Requires higher fork clearance. Minimum 3.75" from floor to underside of skid.
- Pallets with bottom board require 4" clearance between top and bottom boards.
- Part #170015 Powered Scale Truck without battery.
- Weighing accuracy
 - +/- .22 lbs, or 3.5 oz.
- \blacksquare 6 digit LED display.
- Display uses four "C" sized batteries.

	Part #	272936	272938	273384
	Model#	SPT27	SPT22	PST
	Capacity	5,000 lbs	5,000 lbs	2,900 lbs
	W-1 x L-1	27.5" x 47.5"	22.5" x 47.5"	26.5" x 47"
	W-2	7"	7"	6.8"
	L-2	62.5"	62.5"	64"
	WHL-1 / WHL-2	7" / 3"	7" / 3"	8" / 3"
	H-1/H-2/H-3	48.25" / 2.9" / 8"	48.25" / 2.9" / 8"	57.5" / 3.5" / 8.25"
	Weight	336 lbs	314 lbs	728 lbs w/battery 613 lbs w/out battery

WESCO 4-WAY/HAND BRAKE/ECONOMIZER PALLET TRUCKS

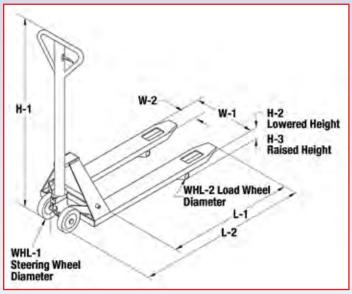





Economizer Pallet Truck

- 1 year pump warranty.
- Fingertip control: raise neutral - lower.
- Polyurethane load and steering wheels.
- 190° steering radius.
- 6" wide 3mm thick forks.




272667

Pallet Truck With Hand Brake

- 2 year pump warranty.
- All the same features as the CPI model.
- 6" wide forks.
- 7" moldon rubber steering wheels.
- 3" moldon polyurethane load wheels.
- Disc brake.
- Tandem load wheels.
- Nylon entry rollers.
- 210° steering radius.






4-Way Pallet Truck


- 3 year pump warranty.
- Overload bypass.
- Reinforced forks 4mm thick.
- Rubber coated handle.
- 180° steering radius.
- Can enter pallet from all 4 sides.
- Adjustable fork connecting rods.
- Steel 1.70" load wheels.
- 6" polyurethane steering wheels.

Part #	272149	272667	273400
Capacity	4,400 lbs	5,500 lbs	4,000 lbs
W-1 x L-1	27" x 48"	27" x 48"	33" x 48"
W-2	6"	6"	7"
L-2	63"	63"	63.5"
WHL-1 / WHL-2	6.25" / 3"	7" / 3"	6" / 1.70"
H-1/H-2/H-3	48.25" /2.9" / 7.5"	48.25" /2.9" / 7.25"	47" / 1.75" / 6"
Weight	136 lbs	206 lbs	241 lbs

WESCO° SPECIALTY PALLET TRUCKS

UNIQUE DESIGN TRANS-ROLLER TRUCKS MOVE FORWARD **OR SIDEWAYS**



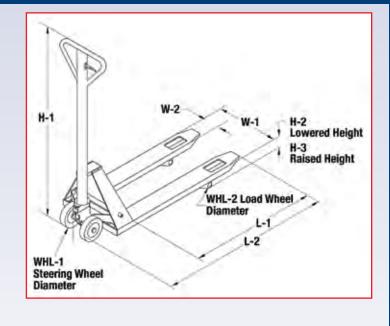

TransRoller Pallet Truck

- 3 year pump warranty.
- Lowered height 3.4". Raised height 8.5".
- Fork height in standard mode 3.4" lowered, 7" raised.
- Fork height for lateral movement 7.25" lowered, 8.5" raised.
- Adjustable fork connecting rods.
- Overload bypass.
- Ergonomic rubber coated handle.
- Nylon entry rollers.
- 7" wide forks.
- 8" moldon polyurethane steering
- 3" moldon polyurethane load wheels.
- 210° steering radius.



272701

Long Fork Pallet Truck

- 2 year pump warranty.
- Pump, load wheels and steering wheels same as CPI model.
- Overload bypass.
- Rubber coated handle.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- 78" and 98" forks handle 2 standard size pallets.
- Nylon entry rollers.
- 210° steering radius.



Galvanized Truck

- 1 year pump warranty.
- 7" nylon steering wheels.
- 3" nylon load wheels.
- Galvanized frame and handle.
- Nylon entry rollers.
- 210° steering radius.
- Comfort-grip coated handle.



Stainless Steel Pallet Truck

- 1 year pump warranty.
- For use in food industry and areas where corrosive solutions are needed.
- 6 1/4" wide forks.
- 7" nylon steering wheels.
- 3" nylon load wheels.
- Nylon entry rollers.
- 210° steering radius.
- Comfort-grip coated handle.

	Part #	272740	273585	272701	273519	273586	272855	272152
	Model#		PT59	PT70	PT78	PT98	GPT	SSPT
	Capacity	Standard - 5,000 lbs/ Lateral 2,200 lbs	4,400 lbs	4,400 lbs	4,400 lbs	3,300 lbs	5,500 lbs	5,500 lbs
	W-1 x L-1	27" x 48"	27" x <mark>59"</mark>	27" x <mark>70"</mark>	27" x <mark>78</mark> "	27" x <mark>98"</mark>	27" x 48"	27" x 48"
	W-2	7"	6"	6"	6"	6"	6.25"	6.25"
	L-2	63"	75"	86"	93"	114"	62.5"	62.5"
	WHL-1 / WHL-2	8" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"
	H-1/H-2/H-3	Std. mode - 48" / 3.4" / 7" Lateral mode - 48" / 3.4" / 8.5"	48" / 3" / 7"	49" / 3" / 8"	49" / 3" / 8"	48"/3"/7"	47.5" / 3" / 7.25"	47.5" / 3" / 7.25"
	Weight	210 lbs	220 lbs	244 lbs	256 lbs	347 lbs	155 lbs	164 lbs

WESC□° SPECIALTY PALLET TRUCKS





272950

Ergonomic Pallet Tilter

- 1 year pump warranty.
- 5" polyurethane swivel casters and 3" polyurethane load wheels.
- Handle height: 44 1/4".
- Load center: min 7 1/2", max. 15 1/2".
- Lifting range with forks in horizontal position: 3 1/4" to 11".
- Forks tilt up to 90° for accurate load positioning.
- Lifting range with back rest in horizontal position: 29" to 37".
- 6 1/2" wide forks.



Drum

Pallet Truck

- 1 year pump warranty.
- For 55-gallon steel drums.
- Lifts drum 4" off ground.
- 8" x 2" nylon steering wheels.
- 3" x 1" nylon load wheels.
- Drum ring raised height - 14.5" Drum ring lowered height - 10.25"



H-1

WHL-1 Steering Wheel Diameter

272153

Pallet Lifter

- 1 year pump warranty.
- Heavy duty steel construction.
- Pallets with bottom boards must be placed on top of forks.
- 6 1/2" wide forks.
- 6" polyurethane swivel casters.
- 2" polyurethane load wheels.



REFERENCE SCHEMATIC FOR PAGES 50 & 51



- 1 year pump warranty.
- Manual lift, power drive.
- Lowered/raised fork height: 3" / 7.5".
- 10" polyurethane drive wheel.
- 3" polyurethane load wheels.
- Speed: 1.6 2.4 mph with load.
- 2 batteries 24V 38Ah.
- 24 volt 8 amp built-in charger.
- 61" steering radius.
- Two fork widths 20.5" and 27".



Lowered Height H-3 Raised Height

WHL-2 Load Wheel Diameter

Heavy Duty Semi-Electric Pallet Truck

- 1 year pump warranty.
- Manual lift.
- Lowered/raised fork height: 3" / 7".
- 7.25" x 2" polyurethane drive wheel.
- 3" polyurethane load wheels.
- Speed: 2.80 mph with load.
- 2 batteries 24V 38Ah.
- 24 volt 8 amp charger.
- 62" steering radius.

		10.5.1				Ü	
Part #	272950	273250	272153	273288	273286	273289	
Model#	ERPT	PTDL	PLFTR	SEPT2.2-20.5	SEPT2.2-27	SEPT3.3	
Capacity	2,200 lbs	660 lbs	1,100 lbs	2,200 lbs	2,200 lbs	3,300 lbs	
W-1 x L-1	21.5" x 31"	28.5" x 26"	27" x 44"	20.5" x 48"	27" x 48"	27" x 48"	
W-2	6.5"	2.5"	6.5"	6.25"	6.25"	6.25"	
L-2	51.67"	41"	61.5"	65.75"	65.75"	69"	
WHL-1 / WHL-2	5" / 3"	8" / 3"	6" / 2"	10" / 3"	10" / 3"	7.25" / 3"	
H-1/H-2/H-3	44.25" / 3.25" / 11"	47.75" / 3" / 8"	40" / 3.5" / 35"	48.5" / 3" / 7.5"	48.5" / 3" / 7.5"	54" / 3" / 7"	
Weight	392 lbs	115 lbs	258 lbs	397 lbs	402 lbs	518 lbs	



MANUAL/ELECTRIC/STEEL/STAINLESS HIGH LIFTS

Manual High Lifts

- 1 year pump warranty.
- Two models: Telescoping and Non-Telescoping.
- Moldon polyurethane wheels.
- Loop handles with inside hand control.
- Closed pallets must be placed on top of forks.
- 180° steering radius.
- Comfort coated handles.
- Two stage pump with Quick Lift.

272463 Non-Telescoping

Stainless Steel Manual High Lift #272859

- 1 year pump warranty.
- 3" nylon load (WHL-2) and 8" nylon steering (WHL-1) wheels.
- 180° steering radius.

304 Stainless Steel

■ 304 stainless steel construction, except for 316 stainless forks.





Quick Lift setting allows the forks with fewer strokes. (See chart below.)

Stainless Model **Available**

S	272859 tainless Steel High Lift	
	_	

Part #	272859	272755	272754	272462	272463	272975	272976	
Model #	SSTHL27M	TSHL21	TSHL27	NTSHL21	NTSHL27	TSHL20-33	TSHL27-33	
Capacity	2,200 lbs	2,200 lbs	2,200 lbs	2,200 lbs	2,200 lbs	3,300 lbs	3,300 lbs	
W-1 x L-1	27" x 46"	21" x 44.5"	27" x 44.5"	21" x 44.5"	27" x 44.5"	20" x 43"	27" x 43"	
W-2	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"	
L-2	61"	63"	63"	56"	56"	63"	63"	
WHL-1 / WHL-2	8" / 3"	6" / 3"	6" / 3"	6" / 3"	6" / 3"	6" / 3"	6" / 3"	
H-1/H-2/H-3	48"/3.3"/31.5"	48.5"/3.6"/31.5"	48.5"/3.3"/31.5"	48.5"/3.3"/31.5"	48.5"/3.6"/31.5"	48.5"/3.6"/31.5"	48.5"/3.6"/31.5"	
Telescoping	Yes	Yes	Yes	No	No	Yes	Yes	
Weight	278 lbs	219 lbs	228 lbs	275 lbs	300 lbs	260 lbs	276 lbs	
		# OF P	UMP STROKES	TO REACH FUL	L HEIGHT			
Quick Lift	28	28	28	28	28	21	21	
Standard	69	67	67	35	35	63	63	

Electric High Lifts

- 1 year pump warranty.
- Two models: Telescoping and Non-Telescoping.
- 12 volt battery charger included.
- 10-12 second lift time unloaded.
- Overload bypass.
- Polyurethane wheels.
- 180° steering radius.
- Comfort coated handles.
- 6 1/2" wide forks.
- 6" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.

272937 Telescoping Models charger separate.



272860 Stainless Steel Electric High Lift



Stainless Steel Electric High Lift #272860


■ 1 year pump warranty.


304 Stainless Steel


- 3" nylon load (WHL-2) and 8" nylon steering (WHL-1) wheels.
- 180° steering radius.
- 304 stainless steel construction, except for 316 stainless forks.

Part #		272860	272939	272937	272460	272461	
	Model #	SSTHL27E	TEHL21	TEHL27	NTEHL21	NTEHL27	
	Capacity	2,200 lbs	3,000 lbs	3,000 lbs	2,200 lbs	2,200 lbs	
	W-1 x L-1	27" x 46"	21" x 45"	27" x 45"	21" x 45"	27" x 45"	
	W-2	6.5"	6.5"	6.5"	6.5"	6.5"	
	L-2	61"	60"	60"	60"	63"	
	WHL-1 / WHL-2	8" / 3"	6" / 3"	6" / 3"	6" / 3"	6" / 3"	
	H-1/H-2/H-3	48" / 3.3" / 31.5"	48.5" / 3.3" / 31"	48.5" / 3.3" / 31"	48.5" / 3.3" / 31"	48.5" / 3.3" / 31"	
	Telescoping	Yes	Yes	Yes	No	No	
	Weight	329 lbs	344 lbs	347 lbs	367 lbs	372 lbs	

WESC□ POWERED PALLET TRUCKS & STACKER





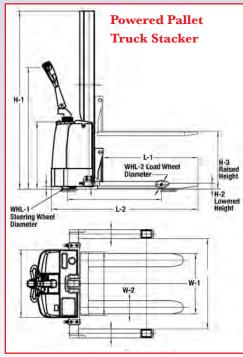



Heavy Duty Powered Walkie Pallet Truck

- 1 year warranty: DC motor drive, hydraulic pump, controllers and switches.
- 90 day parts warranty.
- Three 8V/195 Ah batteries and charger.
- Turn radius of 65.5".
- Lift speed under load: 1.36"/second.
- Lowering speed under load: 1.36"/second.
- Ergonomic handle with:
- throttle with forward and reverse speeds
- lift/lower controls
- belly reverse safety button
- horn
- electromagnetic disk brake with automatic dead-man feature when handle is released.
- Key operated.
- 10" polyurethane steering and 3" polyurethane load wheels.

- Adjustable forks.
- Adjustable outriggers 38" 52".
- Optional guard available. Bolt on configuration. #273136. 273129

2,200 lbs

32" x 45"

4"

Guard Option.



Part #-truck + battery + charger Part # - truck - no battery Capacity W-1 x L-1 W-2

> WHL-1 / WHL-2 H-1/H-2/H-3

Truck Weight with Battery Truck Weight without Battery



69.5" 10" / 3" 77.6" / 1.6" / 60" 1,490 lbs N/A





Part #	273445	273446		
Capacity	3,300 lbs	4,400 lbs		
W-1 x L-1	25.5" x 48"	27" x 48"		
W-2	6.25"	6.25"		
L-2	65"	72"		
WHL-1 / WHL-2	10" x 3.5" / 3" x 3.75"	9" x 3" / 3" x 3.75"		
H-1/H-2/H-3	50" / 3" / 7.67"	50" / 3" / 7.67"		
Battery	(2) 12V 80Ah	24V 210 Ah		
Steering Angle	205°	180°		
Weight	631 lbs	1,147 lbs		

`WESCO° PALLET TRUCK OPTIONS

EASY AS 1-2-3-GO!







Two Models to Secure Your Pallet Jack

- Both models function well on any surface and will resist slipping.
- To secure pallet jack, simply roll steering wheels up the pallet jack stop or chock incline and into holding area.

Pallet Jack Stop

■ Material: black hard rubber.

Part # 272949

Weight 3.5 lbs

OVERALL DIMENSIONS

w: 11.75" h: 2"

d: 14"

Pallet Truck Chock -High Visibility Yellow

■ Material: yellow hard rubber.

Part # 272175


Weight 3.4 lbs

OVERALL DIMENSIONS

w: 11.75"

h: 2"

d: 14"



3 in 1 Guard Adapter

- Fits only specific Wesco 27" W pallet trucks: long fork, with brake, CPI and CP3 models.
- Easily attaches to Wesco CPI pallet truck.
- Factory or field installed.
- #272660 CPI Pallet Truck with Mounted Guard -

Part #272654 - 245 lbs.

■ Guard only kit, field install. **Part #272004** - 54 lbs.



Milk Crate Guard



Box Guard



Skid Adapter


3 in 1 Guard featured as an option is three products in one compact design. You no longer need to purchase separate milk crate guards, box guards or skid adapters. Wesco's 3 in 1 guard does it all.


Cargo Backrest


- Fits only specific Wesco 27" W pallet trucks: long fork, with brake, CPI and CP3 models.
- Easy attachment, no drilling, can be field retrofitted.
- Field or factory installed.
- Backrest Only Kit -

Part #271999 - 42 lbs.

■ Part #272296 - 213 lbs. Assembled CPI Pallet Truck #272660 with Mounted Backrest #271999.









Steel Frame Pedalift Features:

- 750 lb lift capacity.
- Wheel locks are standard on all models.
- Frame and lift heights vary among models.



Two Wheeled Winch Models

- 1-year warranty.
- Manual winch with auto-brake.
- Low maintenance design.
- Front of platform touches the ground on two wheeled model.
- Wheel lock standard.
- All 54" lifts are 60.5" O.A.H. All 40" lifts are 48.5" O.A.H.
- 8" x 2" wheels with .75" precision ball bearings.
- Adjustable forks.

			/ERALL ENSIONS		
h:	22.5"	22.5"	30"	22.5"	22.5"
	48.5"	60.5"	60.5"	48.5"	60.5"
	32"	32"	32"	32"	32"



Four Wheeled Winch Models

- 1-year warranty.
- Manual winch with auto-brake.
- Low maintenance design.
- Platform on four wheeled model sits 5.75" above the floor.
- Wheel lock standard.
- All 54" lifts are 60.5" O.A.H. All 40" lifts are 48.5" O.A.H.
- 8"x2" wheels with .75" precision ball bearings.
- 3.5" diameter polyurethane ball bearing front swivel casters.
- Adjustable forks.

			OVERALL DIMENSIONS		
h:	22.5"	22.5"	30"	22.5"	22.5"
	48.5"	60.5"	60.5"	48.5"	60.5"
	32"	32"	32"	32"	32"

						•				
Part #	260015	260016	260017	260018	260019	260020	260021	260022	260023	260024
Model#	WPL-40-1620	WPL-54-2222	WPL-54-2230	WPL-40-F	WPL-54-F	WDPL-40-1620	WDPL-54-2222	WDPL-54-2230	WDPL-40-F	WDPL-54-F
Capacity	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs
Platform or Fork W x L	Platform 20" X 16"	Platform 22" x 22"	Platform 30" x 22"	Fork 3" x 18"	Fork 3" x 18"	Platform 20" x 16"	Platform 22" x 22"	Platform 30" x 22"	Fork 3" x 18"	Fork 3" x 18"
Lift Height	40"	54"	54"	40"	54"	40"	54"	54"	40"	54"
Load Center	10"	10"	10"	10"	10"	10"	10"	10"	10"	10"
Weiaht	106 lbs	147 lbs	157 lbs	125 lbs	157 lbs	113 lbs	153 lbs	163 lbs	132 lbs	163 lbs

WESCO STEEL & STAINLESS STEEL FRAME HYDRAULIC PEDALIFTS



Two Wheeled Hydraulic Models

- 1-year warranty.
- WESCO manufactured hydraulic Pedalift Jack, over 40 years of proven quality.
- Front tip of nose plate touches floor.
- Foot operated hydraulic pump raises platform, foot release lowers platform.
- Wheel lock standard.
- All 54" lifts are 60.5" O.A.H. All 40" lifts are 48.5" O.A.H.
- 8" x 2" wheels with .75" precision ball bearings.
- Adjustable forks.

	OVERALL DIMENSIONS							
h:	22.5"	22.5"	30"	22.5"	22.5"			
	48.5"	60.5"	60.5"	48.5"	60.5"			
	32"	32"	32"	32"	32"			



Four Wheeled Hydraulic Models

- 1-year warranty.
- WESCO manufactured hydraulic Pedalift Jack, over 40 years of proven quality.
- Available 304 stainless steel construction:
- Stainless model has 8" \times 2" polyurethane tread on polypropylene hub, non-marking wheels with 440 stainless sealed 3/4" precision ball bearing
- 304 stainless hydraulic jack.
- 304 stainless swivel casters with plain bore 3.5" hard rubber wheels.
- Foot operated hydraulic pump raises platform, foot release lowers platform.
- Platform sits 5.75" above the floor.
- Wheel lock standard.
- All 54" lifts are 60.5" O.A.H. All 40" lifts are 48.5" O.A.H.
- 8" x 2" wheels with .75" precision ball bearings on steel models.
- 3.5" diameter polyurethane ball bearing front swivel caster on steel models.
- Adjustable forks.

OVERALL DIMENSIONS								
w:	22.5"	22.5"	30"	22.5"	22.5"	22.5"	22.5"	
h:	48.5"	60.5"	60.5"	48.5"	60.5"	60.5"	60.5"	
d:	32"	32"	32"	32"	32"	32"	32"	

304 Stainless Steel

Part #	260001	260002	260003	260006	260007	260008	260009	260010	260011	260012	260186	260197	
Model#	PL-40-1620	PL-54-2222	PL-54-2230	PL-40-F	PL-54-F	DPL-40-1620	DPL-54-2222	DPL-54-2230	DPL-40-F	DPL-54-F	SSDPL-54-2222	SSDPL-54-F	
Capacity	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	
Platform or Fork W x L	Platform 20" x 16"	Platform 22" x 22"	Platform 30" x 22"	Fork 3" x 18"	Fork 3" x 18"	Platform 20" X 16"	Platform 22" x 22"	Platform 30" x 22"	Fork 3" x 18"	Fork 3" x 18"	Platform 22" x 22"	Fork 3" x 18"	
Lift Height	40"	54"	54"	40"	54"	40"	54"	54"	40"	54"	54"	54"	
Load Center	10"	10"	10"	10"	10"	10"	10"	10"	10"	10"	10"	10"	
Weight	112 lbs	156 lbs	166 lbs	131 lbs	166 lbs	119 lbs	166 lbs	172 lbs	138 lbs	172 lbs	175 lbs	181 lbs	

WESCO SPECIAL APPLICATION HYDRAULIC & WINCH LIFTS

Cylinder Truck?

See page 28.



- 1-year warranty.
- WESCO manufactured hydraulic Pedalift Jack, over 40 years of proven quality.
- Easily lifts and transports gas cylinders.
- Swivel casters make maneuvering in tight places easier.
- Two models:
- Foot operated hydraulic pump.
- Manual winch with auto-brake.
- Maximum cylinder diameter 9.5".
- Casters with wheel locks..

OVERALL

DIMETOR	110
w: 20"	20"
h: 54"	58"
d: 29.25"	29.25"







Universal Lift

- 1-year warranty.
- Two straps with buckles to help secure load, 9' wrap around and 5' front to back.
- Manual winch with auto brake.
- Two 8" wheels and two 3 1/2" polyure-thane casters.
- Lowered platform sits 6" above ground.
- Ideal for placing rental equipment on to pickup truck or into van.

OVERALL DIMENSIONS

w: 29.25"

h: 61" d: 46.4"





Hydraulic Lite-Lift

- 1-year warranty.
- WESCO manufactured hydraulic Pedalift Jack, over 40 years of proven quality.
- Foot operated hydraulic pump.
- Release foot pedal for controlled lowering.
- Casters with wheel locks.
- Adjustable forks.

OVERALL DIMENSIONS

w:	20"	20"
h:	70.5"	70.5"
d:	30"	30"



Platform Option

- Provides the utility of two units.
- Easy installation no tools required. Part # - 260157 Model # - POK



Winch Lite-Lift

- 1-year warranty.
- Manual winch with auto-brake.
- No catches to release.
- Low maintenance.
- Casters with wheel locks.

	(0	١	V	E	1	2	Δ	١L	L
D	I	N	Λ	E	3	N	S	i	0	N

W:	20"	20"
h:	70.5"	70.5"
d:	30"	30"

Part #		260161	260163	260130	260150	260151	260152	260153	
	Model #	LLHPB	LLWPB	ULP2630	LLHP	LLHF	LLWP	LLWF	
	Capacity	300 lbs	300 lbs	750 lbs	500 lbs	500 lbs	500 lbs	500 lbs	
	Platform or Fork W x L	Platform 12" x 20"	Platform 12" x 20"	Platform 26" x 30"	Platform 20" x 20"	Fork 3" x 19" x .75"	Platform 20" x 20"	Fork 3" x 19" x .75"	
	Lift Height	40" / Hydraulic	40" / Winch	54"	54"	54"	54"	54"	
	Lowered Height	1/4"	1/4"	6"	5.75"	4.25"	5.75"	4.25"	
	Caster / Wheel Size	5"	5"	3.5" / 8"	5"	5"	5"	5"	
	Front Leg Span	N/A	N/A	N/A 19.75" OD	15.25" ID x 20" OD	15.25" ID 20" OD	15.25" ID 20" OD	15.25" ID 20" OD	
	Load Center	10"	10"	6"	10"	10"	10"	10"	
	Weight	165 lbs	152 lbs	224 lbs	139 lbs	157 lbs	103 lbs	124 lb	

<u> WESCO°TRI</u>PLE TRUCK∕ALUMINUM PEDALIFTS







261160 Frame w/ 261162 Adjustable Forks



261160 Frame w/ 261163 Platorm

Aluminum Frame Pedalifts features:

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.

- Aluminum construction for lightweight ruggedness.
- 20" deep x 22" wide platform size.
- Wheel locks are standard on all models.
- Front of platform touches the floor.
- Frame and lift heights vary among models.



Triple Truck

- 1-YEAR WARRANTY,
 PATENT NO. US9,139,214B2.
- Handles most standard rim 30, 55 and 85 gal. steel, poly and fiber drums.
- Manual winch with auto brake.
- 3 Models of Lifting Attachments
 No tools required:
 - #261161 Gator Grip® Drum Lifter Attachment
 - #261162 Adjustable Width Forks -6" to 19½" O.D.
 - #261163 Platform 21¼" Wx 28½" D. (Optional slip-on over forks.) Requires adjustable fork option.
- Carriage lock, lock carriage in place at any position.
- Easy load rollers assist loading onto a truck bed.
- HOW TO ORDER:
 - Frame and attachments ordered separately.
 - 1. Purchase basic frame Part #261160.
- 2. Select lifting attachment.
 - a. Gator Grip® Drum Lifter Part #261161.
 - b. Adjustable Forks Part #261162.
 - c. Slip-on Platform* Part #261163.
 - (Requires adjustable fork option.)
- Low-profile 3" debris deflecting neoprene swivel casters.
- Floor to top of leg height 3.75".
- 10" x 2.75" poly hub solid rubber wheels **Part # 150698**.
- Wheel lock pedal activated.
- \blacksquare Lever operated outrigger adjustment 3 positions.
- Outrigger angle can be changed even under full load.

OVERALL

DIMENSIONS										
	w:	30"		16"						
	h:	70.75"		33"						
	d٠	52 25"		12"						



WMPL-54-2022 Winch/Platform

Two Wheeled Winch Models

- 1-year warranty.
- Manual winch with auto-brake.
- Light weight minimizes the effort required for moving and lifting.
- Wheel lock standard.
- 8"x2" wheels with .75" ball bearings.

OVEDALL	DIMENSIONS

w:	22.5"	w:	22.5"				
h:	48.5"	h:	60.5"				
d:	32"	d:	32"				



MPL-54-2022 Hydraulic/Platform

Two Wheeled Hydraulic Models

- 1-year warranty.
- Foot operated hydraulic pump raises platform, foot release lowers platform.
- WESCO manufactured hydraulic Pedalift Jack, over 40 years of proven quality.
- Wheel lock standard.
- 8"x2" wheels with .75" ball bearings.

OVERAL	1	DII	/IEN	SI	ΩN	ς

w:	22.5"	w:	22.5"
h:	48.5"	h:	60.5"
d:	32"	q.	32"

Part #	261160	261161	261162	261163	260025	260026	260004	260005	
Model #	TTF	TTF-GG	TTF-AF	TTF-P	WMPL-40-2022	WMPL-54-2022	MPL-40-2022	MPL-54-2022	
Capacity	750 lbs	750 lbs	750 lbs	750 lbs	400 lbs	400 lbs	400 lbs	400 lbs	
Platform or Fork W x L	FRAME ONLY	gator Grip	ADJ. FORKS 3" x 26.75"	PLATFORM* 21.25" x 28.125"	Platform 22" x 20"	Platform 22" x 20"	Platform 22" x 20"	Platform 22" x 20"	
Front Leg Span	SEE CHART ABOVE				N/A	N/A	N/A	N/A	
Lowered Height	N/A	28.75"	4"	5"	N/A	N/A	N/A	N/A	
Lift Height	N/A	69"	62"	62.125"	40"	54"	40"	54"	
Caster / Wheel Size	3" / 10"	N/A	N/A	N/A	8" x 2"	8" x 2"	8" x 2"	8" x 2"	
Load Center	N/A	16"	16"	16"	10"	10"	10"	10"	
Weight	224 lbs	32 lbs	30 lbs	6 lbs	61 lbs	68 lbs	71 lbs	77 lbs	





WESCO°HAND WINCH LIFTS



Hand Winch Lifters

- Capacities: 350, 400 and 500 lbs.
- Aluminum and steel construction.
- 8" rear wheels and 2" front swivel casters are non-marking.
- Forks can be inverted for two different lift heights. Fork size: 4"W x 22.5"L x 1.75"H.
- Winch crank handle locks to secure carriage.
- Three models:

Fixed Base used in narrow work spaces. Base legs: 13" inside width x 21.5" overall width.

Adjustable Straddle with adjustable legs 21.5" to 36" inside width and 29" to 44" outside width.

Counter-balance Straddle. Short legs get you close to load when there is no room for stndard legs. 5" polyurethane rear swivel casters with brakes and 4" front wheels.

■ Top of frame rollers facilitates laying truck horizontal for transport.

OVERALL DIMENSIONS										
	w: 24"	24"	29"	29"	29"	29"	29"	29"		
	h: 68"	68"	79"	68"	68"	68"	68"	68"		
	d: 35"	35"	43"	43"	43"	47"	47"	47"		


Part #	273510	273511	273512	273513	273514	273515	273516	273517
Model #	HWLFX-4	HWLFX-5	HWLSD-3.5	HWLSD-4	HWLSD-5	HWLCB-3.5	HWLCB-4	HWLCB-5
Capacity	400 lbs	500 lbs	350 lbs	400 lbs	500 lbs	350 lbs	400 lbs	500 lbs
Base	Fixed	Fixed	Adjustable Straddle	Adjustable Straddle	Adjustable Straddle	Counter-balance Straddle	Counter-balance Straddle	Counter-balance Straddle
Max. Lift Range*	98" / 120"	47" / 70"	120" / 142"	98" / 120"	47" / 70"	120" / 142"	98" / 120"	47" / 70"
Lowered Height Range*	3.5" / 25"	3.5" / 27.5"	1.25" / 21.5"	1.25" / 21.5"	1.25" / 21.5"	1.25" / 21.5"	2" / 25"	2" / 25"
Load Center	11.25"	11.25"	11.25"	11.25"	11.25"	11.25"	11.25"	11.25"
Weight	154 lbs	143 lbs	176 lbs	165 lbs	154 lbs	405 lbs	394 lbs	383 lbs

^{*} Forks down / forks up dimensions.

Optional Removable Steel Platform

273516 Counter-balance Straddle (Forks Down)

- Fits over forks.
- Size: 20.5"W x 24.25"L.
- Weight: 26 lbs.
- Part #273518



273513

Adjustable Straddle

(Forks Down)



1,000 LB. HYDRAULIC & WINCH PLATFORM STACKERS

Hydraulic Stackers features:

- Floor locks, safety screen and foot guard are standard on all models.
- Forks touch the floor on all fork models.
- Front phenolic wheels are 5" diameter.
- Rear phenolic swivel casters are 4" diameter.
- Hydraulic jack manufactured by WESCO.
- "S"tandard line features one piece platform guide rail. "E"conomy line offers an economical price value.

■ 1-year warranty.

■ 15" load center.

w: 25.5"

h: 75"

d: 40"

Standard

Wesco Platform Models

over 40 years of proven quality.

■ Base leg span - 15" inside, 21" outside.

25.5"

72"

40"

Fconomy

■ WESCO manufactured hydraulic Stacker Jack,

■ NEW Low Profile Outrigger Option available.

■ 24" x 24" heavy gauge platform with 5.75" lowered height.

25.5'

83"

38"

Standard

OVERALL DIMENSIONS

25.5"

80"

40"

Franchy

■ Foot pedal - pump and release.

Wesco Large Platform Models

A 5 Year Guarantee Against Weld Failure.

A Wesco Quality Exclusive.

- 1-year warranty.
- WESCO manufactured hydraulic Stacker Jack, over 40 years of proven quality.
- 30" deep x 32" wide heavy gauge platform with 5.25" lowered height.

■ 18" load center.

SPL-80-3032

OVERALL DIMENSIONS

■ Base leg span - 25.5" inside, 32" outside.

■ NEW Low Profile Outrigger Option available. See below.

ESDI -60-3032

25.5" 25.5" 94" 92" 40" 40"		w: 32" h: 75" d: 44.5"	32" 72" 44.5"	32" 83" 44.5"	32" 80" 44.5"	32" 94" 44.5"	32" 92" 44.5"	
tandard	Economy	Standard	Economy	Standard	Economy	Standard	Economy	
60034	260046	260038	260050	260039	260051	260040	260052	
L-80-2424	ESPL-80-2424	SPL-60-3032	ESPL-60-3032	SPL-68-3032	ESPL-68-3032	SPL-80-3032	ESPL-80-3032	
000 lbe	1 000 lbe	1.000 lbc	1 000 lbc	1 000 lbc	1.000 lbc	1 000 lbc	1 000 lbc	


	Otanaara	Loonomy	Otanaara	Loonomy	Otalidala	Loonomy	Otanaara	Loonomy	Otaniaara	Loonomy	Otaniaara	Loonomy	
Part#	260032	260044	260033	260045	260034	260046	260038	260050	260039	260051	260040	260052	
Model#	SPL-60-2424	ESPL-60-2424	SPL-68-2424	ESPL-68-2424	SPL-80-2424	ESPL-80-2424	SPL-60-3032	ESPL-60-3032	SPL-68-3032	ESPL-68-3032	SPL-80-3032	ESPL-80-3032	
Capacity	1,000 lbs	1,000 lbs											
Platform/Fork W x L	24" x 24"	24" x 24"	24" x 24"	24" x 24"	24" x 24"	24" x 24"	32" x 30"	32" x 30"	32" x 30"	32" x 30"	32" x 30"	32" x 30"	
Lift Height	60"	60"	68"	68"	80"	80"	60"	60"	68"	68"	80"	80"	
Load Center	15"	15"	15"	15"	15"	15"	18"	18"	18"	18"	18"	18"	
Weight	233 lbs	226 lbs	248 lbs	234 lbs	274 lbs	263 lbs	272 lbs	265 lbs	295 lbs	273 lbs	317 lbs	298 lbs	
Low Profile Option	Yes	Yes											

ESPL-60-2424

SPL-60-2424

1,000 lb Capacity Winch Stacker ■ 1-year warranty. ■ Heavy duty 1,000 lb capacity. Heavy duty winch with auto brake. ■ Floor lock and safety screen are standard. ■ Swivel casters - 4" x 2" phenolic. Load wheels - 5" x 2" phenolic. ■ Lowered height - 5.25". ■ NEW Low Profile Outrigger Option available. **OVERALL DIMENSIONS** SWPL-68-2424 w: 24" h: 83.25"

	d: 41"
Part #	270214
Model#	SWPL-68-2424
Capacity	1,000 lbs
Platform/Fork W x L	24" x 24"
Lift Height	70"
Load Center	15"
Weight	238 lbs
Low Profile Option	Yes

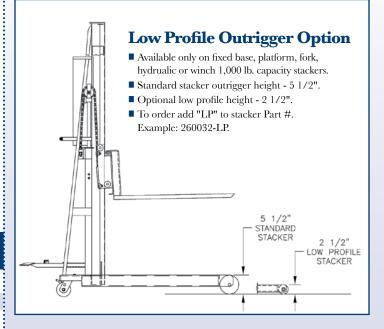





Part #

Model #

Capacity

Lift Height

Load Center Weight

Low Profile Option

Platform/Fork W x L

1,000 LB. FORK STACKERS

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.

Wesco Fork Model

- 1-year warranty.
- 1" thick x 3" wide x 25" long forks.
- Adjustable fork range: minimum - 6.125" O.D. maximum - 25" O.D.
- 15" load center.
- 25.5" overall width; 40" depth.
- Base leg span 15" inside, 21" outside.
- Forks lower to ground.
- WESCO manufactured hydraulic Stacker Jack, over 40 years of proven quality.
- NEW Low Profile Outrigger Option available. (See page 60.)

Yes

i0.)	OVERALL
	DIMENSIONS





Yes

- 1-year warranty.
- 1" thick x 3" wide x 30" long forks.
- Adjustable fork range: minimum - 6.125" O.D. maximum - 25" O.D.
- 18" load center.
- 32" overall width; 44" depth.
- Base leg span 25.5" inside, 32" outside.
- Forks lower to ground.
- WESCO manufactured hydraulic Stacker Jack, over 40 years of proven quality.
- NEW Low Profile Outrigger Option available. (See page 60.)

Wide Straddle Fork Model

■ 1-year warranty.

Yes

SFL-56-25

- 1" thick x 3" wide x 30" long forks.
- Base leg span 42" inside, 48.75" outside.
- Adjustable fork range: minimum - 6.125" O.D. maximum - 25" O.D.
- Overall width 48.75", depth 48.25".
- Forks lower to the ground.
- NOT AVAILABLE Low profile option.
- WESCO manufactured hydraulic Stacker Jack, over 40 years of proven quality.

	U	٧Ŀ	KΑ	۱LL		
D	IM	ΕN	SI	10	IS	

	w: 32.5" h: 75" d: 48"	32.5" 72" 48"	32.5" 83" 48"	32.5" 80" 48"	32.5" 94" 48"	32.5" 92" 48"	48.5" 72.5" 49"
	Standard	Economy	Standard	Economy	Standard	Economy	Wide
Part #	260041	260053	260042	260054	260043	260055	260075
Model#	SFL-56-30S	ESFL-56-30S	SFL-64-30S	ESFL-64-30S	SFL-76-30S	ESFL-76-30S	ESFL-56-30-42S
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs
Fork WxL	3" x 30"	3" x 30"	3" x 30"	3" x 30"	3" x 30"	3" x 30"	3" x 30"
Lift Height	56"	56"	64"	64"	76"	76"	56"
Load Center	18"	18"	18"	18"	18"	18"	18"
Weight	288 lbs	281 lbs	298 lbs	289 lbs	333 lbs	322 lbs	352 lbs
Low Profile Ontion	Yes	Yes	Yes	Yes	Yes	Yes	No



SFL-64-30S



SFL-76-25

VALUE/OFFICE LIFTS AND STACKERS





- Adjustable 4" wide x 25.5" long forks.
- Optional, removable chrome plated 22" wide x 26" long platform.
- Foot operated hydraulic pump.
- Two 5" polyurethane swivel casters with brake and two 3" polyurethane rigid wheels.
- Two lift heights: 47" and 59".
- Chrome plated rails and handle.
- Ships KD.
- #272942 Optional Platform fits both Manual and Electric Value Lift Stakcers.

	DIMENSIONS	
w: 22.5"	22.5"	22"
h: 55"	70"	1"
d: 36"	37"	26"
		Optional



Electric Value Lift Stackers

- Adjustable 4" wide x 25.5" long forks.
- Optional, removable 22" wide x 26" long
- Two 5" polyurethane swivel casters with brake and two 3" polyurethane rigid wheels.
- Two lift heights: 47" and 59".
- Chrome plated rails and handles.
- UL approved charger.
- Sealed maintenance-free battery.
- Keyed on/off switch.
- Raise/lower controls.
- #272942 Optional Platform fits both Manual and Electric Value Lift Stackers.

OVERALL DIMENSIONS

w: 22.5"	22.5"
h: 55"	68"
d: 44"	44"



Manual and **Electric Office Lifts**

- Ideal for narrow aisles.
- Great for offices.
- Two models, manual and electric.
- Lightweight, but sturdy.
- Sealed battery and automatic charger built in.
- Remote up and down pendant for electric model.
- 9/16" thick plastic platform.

OVERALL DIMENSIONS

	23.5"	23.5"
h:	71.5"	78"
d:	32"	34"



- 1 Year Warranty on parts only.
- Zinc-plated finish.
- Suitable for clean environments.

With optional support backrest and foldable platform.

- Swivel caster, 3/4" polyurethane dual wheel.
- Easy maneuvering in tight or narrow spaces.
- 2" lifting strap.
- Manual winch with auto brake.
- Optional zinc-plated cargo support backrest. Part #274531.
- Optional 304 stainless steel foldable platform. Part #274530.

OVERALL DIMENSIONS

- w: 23.25" h: 54.125"
- d: 29.25"

	Value Lift	Value Lift	Platform			Manual	Electric		
Part #	272940	272941	272942	273203	273204	272467	272468	274520	
Model#	VL47	VL59	VLRP	VLP-47	VLP-59	MOL	EOL	DWL-43	
Capacity	880 lbs	880 lbs	N/A	880 lbs	880 lbs	220 lbs	220 lbs	265 lbs	
Platform or Fork W x L	Fork 4" x 25.5"	Fork 4" x 25.5"	Platform 22" x 26"	Fork 4" x 25.5"	Fork 4" x 25.5"	Platform 18" x 23"	Platform 18" x 23"	15.125" x 23.25"	
Lift Height	3.5" - 47"	3.5" - 59"	N/A"	3.5" - 47"	3.5" - 59"	58.5"	66"	43"	
Lowered Height	3.5"	3.5"	N/A	3.5"	3.5"	5"	5	3.25""	
Adj. Fork Width	8.5" - 19.5"	8.5" - 19.5"	N/A	8.25" - 21.5"	8.25" - 21.5"	N/A	N/A	N/A	
Swivel Casters	5" Locking Polyurethane	5" Locking Polyurethane	N/A	5" Locking Polyurethane	5" Locking Polyurethane	5" x 1.25" Hard Rubber	5" x 1.25" Hard Rubber	3/4" Dual Wheel Polyurethane	
Load Wheels	3" Rigid Polyurethane	3" Rigid Polyurethane	N/A	3" Rigid Polyurethane	3" Rigid Polyurethane	2.75" x 1.25" Hard Rubber	2.75" x 1.25" Hard Rubber	7.5" x 1.25" Rubber	
Battery	N/A	N/A	N/A	12V 80AH	12V 80AH	N/A	12V	N/A	
Load Center	12.75"	12.75"	N/A	12.75"	12.75"	9.25"	9.25"	15.25"	
Weight	178 lbs	187 lbs	10 lbs	269 lbs	280 lbs	104 lbs	146 lbs	55 lbs	



POWER DRIVE STACKER/1,000 LB. COUNTER-BALANCE STACKER



2,200 lb Capacity **Power Drive Stacker**

- 6 Month Warranty on parts only.
- Can not be used with pallets only skids without bottom slates.
- Lift height of 981/4". Dual chain lift.
- Includes two, 12 volt, 187 AH, sealed batteries and a separate UL approved charger.
- Power propulsion system takes the effort out of moving heavy loads. Also provides easy steering.
- Fingertip control provides variable forward and reverse speeds.
- Automatic safety stop on top of control post. Unit shuts down when safety stop comes into contact with an obstacle.
- Load wheels, steering wheel and drive wheel are all moldon polyurethane.
- Adjustable forks.

OVERALL DIMENSIONS

70" - 117.5" h: 64"

d:

Part #	212945
Model	EKS-10
Capacity	2,200 lbs
Lowered Mast Height	70"
Raised Mast Height	117.5"
Leg ID/OD	19" / 27"
Fork Size W x L	5" x 35.25"
Outside Fork Spread	12" - 29" <i>-</i> Adjustable
Lowered Fork Height	2.6"
Raised Fork Height	98.25"
Load Center	17.5"
Weight	826 lbs

Features of Counter-Balance Powered Line of Stackers

- Meets ANSI B56.10 specifications.
- Maximum lift capacity 1,000 lbs.
- Remote control, floor lock, and safety screen are standard on all models.
- With a minimally charged battery, unit can be used while recharging.
- Easy to read illuminated battery status voltmeter –no extra cost!



Standard features include: remote control

voltmeter

on/off switch.



- 1-year warranty.
- Proven quality: WESCO manufactured Hydraulic Cylinder.
- Battery and charger included.
- Applications include:
- Loading and unloading trucks.
- Positioning dies.
- Feeding material to presses.
- 25" long forks standard.
- 30" long fork models available, 850 lb. max. capacity.
- Order enough weight kits for your planned load. (See chart below.)
- AC models not available.



w: 26.5" 26.5" 26.5" 94" h: 75" 83" 59.5" 59.5" d: 59.5"

Part #	261037	261038	261039
Model #	PCBFL-56-25	PCBFL-64-25	PCBFL-76-25
Capacity	1,000 lbs	1,000 lbs	1,000 lbs
Fork W x L	3" x 25"	3" x 25"	3" x 25"
Outside Fork Spread	6" - 25" - Adjustable	6" - 25" - Adjustable	6" - 25" - Adjustable
Lift Height	56"	64"	76"
Wheel: Front Rear	5" 5"	5" 5"	5" 5"
Load Center	13"	13"	13"
Weight* *Weight of stack	560 lbs ker without counterweights.	574 lbs	611 lbs

Counter-Balance Weights

		9	
Part #	261041		261043
Counterweight	200 lbs	400 lbs	600 lbs
Stacker Load Capacity	334 lbs	668 lbs	1,000 lbs

WESCO' 1,000 LB. POWER LIFT STACKERS



Platform Model

- 1-year warranty.
- **Proven quality: WESCO** manufactured Hydraulic Cylinder.
- Battery and charger included.
- Lowered height 5.75"
- Phenolic wheels on front and phenolic casters
- Power Drive Option available: see page 67 for details. Add "-PD" to end of Part #.
- 110V AC models available (Special Order). Add AC to end of Part #.

	OVERALL DIMENSIONS	
w: 25.5"	25.5"	25.5"
h: 72"	80"	92"
d: 36"	36"	36"
	24" x 24" Platform Models	



- Forks lower to floor on all models.
- 5" phenolic wheels on front, 4" swivel on rear.
- Power Drive Option available: see page 67 for details. Add "-PD" to end of Part #.
- 110V AC models available (Special Order). Add AC to end of Part#
- Adjustable fork range: minimum 6" O.D. maximum - 25" O.D.
- NEW Low Profile Outrigger Option available. NEW Low Profile Outrigger Option available.

	DIMENSIONS	
w: 25.5"	25.5"	25.5"
h: 72"	80"	92"
d: 44.5"	44.5"	44.5"
	Fork Models	
	•	•




- Battery and charger included.
- Forks lower to floor on all models.
- Extra deep (40") straddle legs and forks for lifting pallets.
- Versatile adjustable span straddle legs can be set from 34" to 50" inside dimension to handle most standard pallets.
- Power Drive Option available: see page 67 for details. Add "-PD" to end of Part #.
- 110V AC models available (Special Order). Add AC to end of Part #
- Adjustable fork range: minimum 6" O.D., maximum - 25" O.D.
- NOT AVAILABLE Low profile option.

	DIMENSIONS					
w: 54" Max	54" Max	54" Max				
h: 72"	80"	92"				
d: 58.75"	58.75"	58.75"				
Adjustable Straddle Fork Models						

OVERALL

Part #	261022	261023	261024	261028	261029	261030	261034	261035	261036	
Model#	PESPL-60-2424	PESPL-68-2424	PESPL-80-2424	PESFL-56-25	PESFL-64-25	PESFL-76-25	PASFL-56-40S	PASFL-64-40S	PASFL-76-40S	
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	
Platform or Fork W x L		Platform 24" x 24"	Platform 24" x 24"	Fork 3" x 25"	Fork 3" x 25"	Fork 3" x 25"	Fork 3" x 40"	Fork 3" x 40"	Fork 3" x 40"	
Lift Height	60"	68"	80"	56"	64"	76"	56"	64"	76"	
Leg ID/OD	15"/21"	15"/21"	15"/21"	15"/21"	15"/21"	15"/21"	34" to 50" ID Adj.	34" to 50" ID Adj.	34" to 50" ID Adj.	
Wheel: Front Rear	5" phenolic	5" phenolic 4" phenolic swivel								
Load Center	15"	15"	15"	15"	15"	15"	20"	20"	20"	
Weight	418 lbs	428 lbs	457 lbs	452 lbs	460 lbs	489 lbs	510 lbs	518 lbs	554 lbs	
Low Profile Option	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	
•							:			

	30" x	32" Platform Mod	lels	Straddle Fork Models			
Part #	261025 261026		261027	261031	261032	261033	
Model#	PESPL-60-3032	PESPL-68-3032	PESPL-80-3032	PESFL-56-30S	PESFL-64-30S	PESFL-76-30S	
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	
Platform or Fork W x L	Platform 32" x 30"	Platform 32" x 30"	Platform 32" x 30"	Fork 3" x 30"	Fork 3" x 30"	Fork 3" x 30"	
Lift Height	60"	68"	80"	56"	64"	76"	
Leg ID/OD	25.5" / 32"	25.5" / 32"	25.5" / 32"	25.5"/32"	25.5"/32"	25.5"/32"	
Wheel: Front Rear	5" rigid 4" swivel	5" rigid 4" swivel	5" rigid 4" swivel	5" phenolic 4" swivel	5" phenolic 4" swivel	5" phenolic 4" swivel	
Load Center	18"	18"	18"	18"	18"	18"	
Weight	404 lbs	427 lbs	452 lbs	442 lbs	456 lbs	465 lbs	
Low Profile Option	Yes	Yes	Yes	No	No	No	





WESC□° 1,500-2,000 LB. TELESCOPING POWER LIFT STACKERS

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.

Wesco[®] 1,500 and 2,000 lb Capacity Powered Telescoping Fork Stackers

- 1-year warranty.
- Proven quality: WESCO manufactured Hydraulic Cylinder.
- Meets ANSI B56.10 specifications.
- Adjustable forks.
- Battery and charger included.
- Forks lower to floor on all models.
- Instant carriage stop for accuracy no drifting.
- Heavy duty rigid frame and base.
- Double chain lift for better balance and load support.
- Heavy-duty pump.
- Ergonomic "D" handles.
- High strength mast for increased stability.
- Optional 5th wheel for easier overall mobility and turning in confined areas.
- Power Drive Option NOT available on any telescoping stacker.
- SPECIAL ORDER: 110V AC available on 1,500 lb. capacity models only.
 - To order add AC to the end of the battery powered stacker part #.

Example:

Battery Powered - **#261118** 110V AC Powered - **#261118AC**





	OVERALL DIMENSIONS							
w:	48.5"	48.5"	48.5"	48.5"				
h:	70.5"	87.5"	70.5"	87.5"				
d:	68"	68"	68"	68"				

Telescoping Models - Fixed Width Base - 2,000 Lb Capacity

		OVER.		
w:	57"	57"	57"	57"
h:	70.5"	87.5"	70.5"	87.5"
d:	68"	68"	68"	68"

Telescoping Models - Adjustable Width Base - 1,500 And 2,000 Lb Capacity

Part #	261120	261119	261124	261123	261117	261118	261115	261116
Model#	PTSFL-96-42-42S-2K	PTSFL-130-42-42S-2K	PTSFL-96-42-50S-2K	PTSFL-130-42-50S-2K	PTASFL-96-42-3550S-1.5K	PTASFL-130-42-3550S-1.5K	PTASFL-96-42-3550S-2K	PTASFL-130-42-3550S-2K
Capacity	2,000 lbs	2,000 lbs	2,000 lbs	2,000 lbs	1,,500 lbs	1,500 lbs	2,000 lbs	2,000 lbs
Lift Range	1.5"-96"	1.5"-130"	1.5"-96"	1.5"-130"	1.5"-96"	1.5"-130"	1.5"-96"	1.5"-130"
Leg ID/OD	42"/48"	42"/48"	50"/56"	50"/56"	35"-50" ID Adj.	35"-50" ID Adj.	35"-50" ID Adj.	35"-50" ID Adj.
Fork Size D x W x L		1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"
Outside Fork Spread		7.4" to 30"	7.4" to 30"	7.4" to 30"	7.4" to 30"	7.4" to 30"	7.4" to 30"	7.4" to 30"
Load Center	24"	24"	24"	24"	24"	24"	24"	24"
Weight	995 lbs	1,240 lbs	1,210 lbs	1,240 lbs	1,125 lbs	1,280 lbs	1,125 lbs	1,285 lbs



5th Wheel Steering Option for easier mobility and precision steering in confined areas. Available only on 1,500 and 2,000 lb models. 8" locking polyurethane wheels. Spring loaded handle. Turning radius: 73.5". Can be field installed.

Order as separate option under Part # 261099



5.875" \$

261053

08

1,500-2,000 LB. POWER LIFT FORK STACKERS

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive.

1,500 & 2,000 lb Capacity Powered Stackers - Fork Models



- Proven quality: WESCO manufactured Hydraulic Cylinder.
- Meets ANSI B56.10 specifications.
- Battery and charger included.



- Adjustable forks:
 - Lower to floor on all models.
 - 3" wide x 25", 30" and 42" long.
 - OD adjustment from 6" to 24.5" or 29" maximum width.
- Adjustable base legs available on fork models.
- Reinforced frame and base.
- Double chain, lift support.
- Heavy-duty pump.

Overall Weight

- Ergonomic "D" handles.
- 5th wheel option see page 65.

- Power Drive Option available: see page 67 for details. Add "-PD" to end of Part #.
- SPECIAL ORDER: 110V AC available on 1,500 lb. capacity models only.
- To order add AC to the end of the battery powered stacker part #.

Example:

Battery Powered - #261079 110V AC Powered - #261079AC #261055-PD with Power Drive Option

30 Fixed and 6 Adjustable Base Leg Fork Models

Part #	Model #	Lift Height	Overall Height	Weight lbs	Capacity lbs	Load Center	Fork Width/Length	Base Leg ID/OD	Adj. Fork Min./Max. OD
261079	PSFL-56-25-15S-1.5K	56"	72"	512	1,500	15"	3"/25"	15"/21"	6" / 24.5"
261080	PSFL-64-25-15S-1.5K	64"	83"	532	1,500	15"	3"/25"	15"/21"	6" / 24.5"
261081	PSFL-76-25-15S-1.5K	76"	94"	596	1,500	15"	3"/25"	15"/21"	6" / 24.5"
261082	PSFL-86-25-15S-1.5K	86"	104"	642	1,500	15"	3"/25"	15"/21"	6" / 24.5"
261083	PSFL-56-25-20S-1.5K	56"	72"	523	1,500	15"	3"/25"	20"/26"	6" / 24.5"
261084	PSFL-64-25-20S-1.5K	64"	83"	543	1,500	15"	3"/25"	20"/26"	6" / 24.5"
261085	PSFL-76-25-20S-1.5K	76"	94"	607	1,500	15"	3"/25"	20"/26"	6" / 24.5"
261086	PSFL-86-25-20S-1.5K	86"	104"	654	1,500	15"	3"/25"	20"/26"	6" / 24.5"
261092	PSFL-56-25-20S-2K	56"	72"	523	2,000	15"	3"/25"	20"/26"	6" / 24.5"
261093	PSFL-64-25-20S-2K	64"	83"	558	2,000	15"	3"/25"	20"/26"	6" / 24.5"
261094	PSFL-76-25-20S-2K	76"	94"	611	2,000	15"	3"/25"	20"/26"	6" / 24.5"
261095	PSFL-86-25-20S-2K	86"	104"	659	2,000	15"	3"/25"	20"/26"	6" / 24.5"
261059	PSFL-64-30-30S-1.5K	64"	83"	566	1,500	18"	3"/30"	30"/36"	6" / 29"
261060	PSFL-76-30-30S-1.5K	76"	94"	630	1,500	18"	3"/30"	30"/36"	6" / 29"
261061	PSFL-86-30-30S-1.5K	86"	104"	677	1,500	18"	3"/30"	30"/36"	6" / 29"
261044	PSFL-64-30-30S-2K	64"	83"	571	2,000	18"	3"/30"	30"/36"	6" / 29"
261045	PSFL-76-30-30S-2K	76"	94"	635	2,000	18"	3"/30"	30"/36"	6" / 29"
261046	PSFL-86-30-30S-2K	86"	104"	682	2,000	18"	3"/30"	30"/36"	6" / 29"
261062	PSFL-64-42-42S-1.5K	64"	83"	571	1,500	24"	3"/42"	42"/48"	6" / 29"
261063	PSFL-76-42-42S-1.5K	76"	94"	637	1,500	24"	3"/42"	42"/48"	6" / 29"
261064	PSFL-86-42-42S-1.5K	86"	104"	688	1,500	24"	3"/42"	42"/48"	6" / 29"
261047	PSFL-64-42-42S-2K	64"	83"	577	2,000	24"	3"/42"	42"/48"	6" / 29"
261048	PSFL-76-42-42S-2K	76"	94"	642	2,000	24"	3"/42"	42"/48"	6" / 29"
261049	PSFL-86-42-42S-2K	86"	104"	693	2,000	24"	3"/42"	42"/48"	6" / 29"
261065	PSFL-64-42-50S-1.5K	64"	83"	577	1,500	24"	3"/42"	50"/56"	6" / 29"
261066	PSFL-76-42-50S-1.5K	76"	94"	642	1,500	24"	3"/42"	50"/56"	6" / 29"
261067	PSFL-86-42-50S-1.5K	86"	104"	693	1,500	24"	3"/42"	50"/56"	6" / 29"
261050	PSFL-64-42-50S-2K	64"	83"	582	2,000	24"	3"/42"	50"/56"	6" / 29"
261051	PSFL-76-42-50S-2K	76"	94"	647	2,000	24"	3"/42"	50"/56"	6" / 29"
261052	PSFL-86-42-50S-2K	86"	104"	698	2,000	24"	3"/42"	50"/56"	6" / 29"
261068	PASFL-64-42-3550S-1.5K	64"	83"	587	1,500	24"	3"/42"	35"-50" ID AD	J. 6" / 29"
261069	PASFL-76-42-3550S-1.5K	76"	94"	652	1,500	24"		35"-50" ID AD	
261070	PASFL-86-42-3550S-1.5K		104"	703	1,500	24"		35"-50" ID AD	
261053	PASFL-64-42-3550S-2K	64"	83"	592	2,000	24"		35"-50" ID AD	
261054	PASFL-76-42-3550S-2K	76"	94"	657	2,000	24"	 	35"-50" ID AD	
261055	PASFL-86-42-3550S-2K	86"	104"	708	2,000	24"	3"/42"	35"-50" ID AD	J. 6" / 29"









POWERED STACKERS - SINGLE & DUAL PLATFORMS

1,500 & 2,000 lb Capacity Powered Stackers - Platform Models

5.875"

- 1-year warranty.
- Proven quality: WESCO manufactured Hydraulic Cylinder.
- Meets ANSI B56.10 specifications.
- Battery and charger included.
- Platform models lowered height 6".
- Adjustable base legs available on fork models only.
- Fixed platforms 24" x 24", 24" x 27", 30" x 32".
- Reinforced frame and base.
- Double chain, lift support.
- Dual platform stacker #262056, call for details.
- Heavy-duty pump.
- Ergonomic "D" handles.
- 5th wheel option see page 65.
- Power Drive Option available: see below for details. Add "-PD" to end of Part #.
- To order add AC to the end of the battery powered stacker part #.

Example:

Battery Powered #261074 #261074AC #261087-PD with Power Drive Option

■ SPECIAL ORDER: 110V AC available on 1,500 lb. capacity models only.





Fixed Base Leg Platform Models

Part #	Model #	Lift Height	Overall Height	Weight lbs	Capacity lbs	Load Center	Platform Width/Length	Base Leg ID/OD
261074	PSPL-60-2424-15S-1.5K	60"	72"	468	1,500	15"	24" x 24"	15"/21"
261075	PSPL-68-2424-15S-1.5K	68"	83"	482	1,500	15"	24" x 24"	15"/21"
261076	PSPL-80-2424-15S-1.5K	80"	94"	523	1,500	15"	24" x 24"	15"/21"
261077	PSPL-90-2424-15S-1.5K	90"	104"	563	1,500	15"	24" x 24"	15"/21"
261088	PSPL-60-2427-20S-2K	60"	72"	476	2,000	15"	27" x 24"	20"/26"
261089	PSPL-68-2427-20S-2K	68"	83"	487	2,000	15"	27" x 24"	20"/26"
261090	PSPL-80-2427-20S-2K	80"	94"	530	2,000	15"	27" x 24"	20"/26"
261091	PSPL-90-2427-20S-2K	90"	104"	569	2,000	15"	27" x 24"	20"/26"
261071	PSPL-60-3032-30S-1.5K	60"	72"	479	1,500	18"	32" x 30"	30"/36"
261072	PSPL-68-3032-30S-1.5K	68"	83"	492	1,500	18"	32" x 30"	30"/36"
261073	PSPL-80-3032-30S-1.5K	80"	94"	534	1,500	18"	32" x 30"	30"/36"
261078	PSPL-90-3032-30S-1.5K	90"	104"	573	1,500	18"	32" x 30"	30"/36"
261056	PSPL-60-3032-30S-2K	60"	72"	484	2,000	18"	32" x 30"	30"/36"
261057	PSPL-68-3032-30S-2K	68"	83"	497	2,000	18"	32" x 30"	30"/36"
261058	PSPL-80-3032-30S-2K	80"	94"	539	2,000	18"	32" x 30"	30"/36"
261087	PSPL-90-3032-30S-2K	90"	104"	578	2,000	18"	32" x 30"	30"/36"
262056	PDPL-61-3033-30S-2K	61.375"	74.75"	674	2,000	18.25"	33" x 30"	30"/36"



Battery Powered System provides both propulsion and lift!

Eliminates the stress and strain of lifting and transporting heavy loads. All Wesco power lift stackers can be ordered as power drive models (except for telescoping models). All other operating specifications are the same as equivalent power lift-only models. To order, simply add "-PD" to the end of the Model #.



Easy fingertip controls.



High torque motor drive.

Optional Power Drive System for Fork and Platform Stackers

- Variable speed, steerable power drive system allows a single user to easily control forward and reverse movement of stacker.
- Simple to use finger-tip controls are built into steering handle.
- 180° hinged design allows precision steering in confined spaces.
- Spring-loaded mechanism automatically compensates for uneven floors ensuring drive wheels maintain constant contact with floor.
- Two maintenance-free sealed batteries provide plenty of power for propulsion and lift.
- 1,000 2,000 lb. capacities.
- Automatic emergency safety switch instantly reverses direction if control post comes in contact with obstacle.





Model # PCBFL-64-25-PD 1,000 lb. capacity counter-balance model

LIFT TABLES / OPTIONS

LT-10-1836

Wesco Standard Duty Tables (200 - 1,000 lb Capacities)

- 1-year warranty.
- LT-02-1616 has four 3" hard rubber swivel casters.
- LT-02-1616 ships via UPS knocked down.
- LT-05 and LT-10 models feature 2 rigid and 2 swivel 4" phenolic resin roller bearing
- 7 Gauge steel top and base.
- 3/8" lift per stroke.

DIMEN	DIMENSIONS						
16"	18"						
00 511	00 511						

w:	16"	16"	18"	18"
h:	28.5"	28.5"	30.5"	30.5"
d:	16"	16"	21.25"	39.25"

Features:

- Capacity ranges from 200 to 6,000 lbs.
- Solid steel top and base construction.
- Casters provide easy mobility.
- Floor locks are standard on all 500 lb.+ capacity tables.



Wesco Medium & Heavy Duty Tables (2,000-6,000 lb Capacities)

- 1-year warranty.
- LT models feature 2 rigid and 2 swivel 6" phenolic resin roller bearing wheel casters.
- Four support posts and push handle.
- Foot operated floor lock.
- LTL models feature 2 rigid and 2 swivel 4" phenolic resin roller bearing wheel casters.
- Wesco made hydraulic pump with 3/8" lift per stroke.

	0	1	Æ.	Ξ	R	Δ	L	L	
n	I۱	///	F	N	S	ı	n	N	S

w: 24"	32"	24"	32"	24"	32"	24"	32"
h: 30.5"	30.5"	37"	37"	37"	37"	37"	37"
d: 39.25"	51.25"	39.25"	51.25"	39.25"	51.25"	39.25"	51.25"

Part #	260059	260060	260061	260062	260063	260064	260065	260066	260067	260068	260069	
Model#	LT-02-1616	LT-05-1818	LT-10-1836	LTL-20-2436	LTL-20-3248	LT-20-2436	LT-20-3248	LT-40-2436	LT-40-3248	LT-60-2436	LT-60-3248	
Capacity	200 lbs	500 lbs	1,000 lbs	2,000 lbs	2,000 lbs	2,000 lbs	2,000 lbs	4,000 lbs	4,000 lbs	6,000 lbs	6,000 lbs	
Table Size W x L	16" x 16"	18" x 18"	18" x 36"	24" x 36"	32" x 48"	24" x 36"	32" x 48"	24" x 36"	32" x 48"	24" x 36"	32" x 48"	
Lowered Height	28.5"	30.5"	30.5"	30.5"	30.5"	37"	37"	37"	37"	37"	37"	
Raised Height	46"	47.5"	47.5"	47.5"	47.5"	59"	59"	59"	59"	59"	59"	
Caster Size	3"	4"	4"	4"	4"	6"	6"	6"	6"	6"	6"	
Support Posts	None	2	2	4	4	4	4	4	4	4	4	
Weight	54 lbs	122 lbs	168 lbs	308 lbs	350 lbs	339 lbs	465 lbs	349 lbs	475 lbs	359 lbs	485 lbs	



272470 272469

		DIMENSIONS	
N:	16"		18"
ղ։	29"		30"

Value Lift Tables

Foot operated pump and release.

36 pumps to fully raised height.

OVERALL

18"

Polyurethane casters.

■ Ships KD.

Part #	272469	272470
Model #	VLT200	VLT500
Capacity	200 lbs	500 lbs
Table Size	16" x 16"	18" x 18"
Lowered Height	29"	30"
Raised Height	46"	48"
Support Posts	None	Two
Floor Lock (FL)	N/A	Yes
Caster Size	(4) swivel 3"	(2) rigid (2) swivel 4"
Weight	76 lbs	153 lbs


d: 16"

5 Table-Top Options

- Factory installed only.
- Call for price.
- Not available on 16" or 18" wide tables.
- For both manual and powered Wescomade tables only.
- Table capacity determines option capacity.
- Roller: diameter 1.9" with 7/16"
- 1 3/8" diameter ball transfer.
- Push-Pull and Roller Top options have two directions of travel: length or width.
- select table Part No. (manual or powered).
- select Option and add as suffix to table Part
- Example: 260062-PPL

24" x 36", 2,000 lb. capacity, manual table with a Push-Pull option that travels the length of the table.





Travel: Length of table Suffix Code: PPL Table top to top of roller: 3"



WESCO POWERED LIFT TABLES/OPTIONS

Remote control for raising/lowering. Magnets on back of remote allow for storage anywhere on table.



Powered Lift Tables

- 1-year warranty.
- Up to 6,000 lbs capacity.
- High volume output pump raises 1.5"per second without load.
- Standard floor lock holds table steady for loading and unloading.
- Easy to read illuminated battery status voltmeter.
- With a minimally charged battery, unit can be used while recharging.

Push-pull, roller and ball tops available on Wesco 24" x 36" and 32" x 48" manual and power tables.

OVERALL DIMENSIONS





Available with Power Drive

- Combines power lift and power drive capabilities.
- Power drive option weighs 160 lbs.
- To order Power Drive, add -PD to the end of Model #.

Example:

Lift Table Power Drive #PLT-10-1836-PD #PLT-10-1836





Shown With Power Drive Option -261105-PD

	w: 18"	24"	32"	24"	32"	24"	32"	24"	32"
	h: 30.5"	30.5"	30.5"	37"	37"	37"	37"	37"	37"
	d: 39.25"	39.25"	51.25"	39.25"	51.25"	39.25"	51.25"	39.25"	51.25"
	:								
Part #	261108	261100	261101	261102	261103	261104	261105	261106	261107

Part #	261108	261100	261101	261102	261103	261104	261105	261106	261107	
Model #	PLT-10-1836	PLTL-20-2436	PLTL-20-3248	PLT-20-2436	PLT-20-3248	PLT-40-2436	PLT-40-3248	PLT-60-2436	PLT-60-3248	
Capacity	1,000 lbs	2,000 lbs	2,000 lbs	2,000 lbs	2,000 lbs	4,000 lbs	4,000 lbs	6,000 lbs	6,000 lbs	
Table Top W x L	18" x 36"	24" x 36"	32" x 48"	24" x 36"	32" x 48"	24" x 36"	32" x 48"	24" x 36"	32" x 48"	
Raised Ht	47.5"	47.5"	47.5"	59"	59"	59"	59"	59"	59"	
Lowered Ht	30.5"	30.5"	30.5"	37"	37"	37"	37"	37"	37"	
Caster Size	4"	4"	4"	6"	6"	6"	6"	6"	6"	
Weight	415 lbs	472 lbs	597 lbs	567 lbs	607 lbs	597 lbs	607 lbs	597 lbs	607 lbs	











(Push-Pull)



Travel: Width of table Suffix Code: PPW Table top to top of roller: 3"




(Roller-Top)



Travel: Length of table Suffix Code: RTL Table top to top of roller: 3"




RTW (Roller-Top)



Travel: Width of table Suffix Code: RTW Table top to top of roller: 3"

(Ball Transfer)



balls determined by table top size and capacity.

1" diameter balls Suffix Code: BT Table top to top of ball: 1 3/8"

LEXCO HYDRAULIC PRECISION LIFT TABLES





200 lb. Capacity Foot Operated Hydraulic Lift Table

- 1-year warranty.
- Top and base 1/4" steel.
- Top rotates 360°.
- 4 swivel 2" diameter rubber casters.

300 lb. Capacity Foot Operated Hydraulic Lift Table

- 1-year warranty.
- Top and base 3/8" steel.
- 2 rigid and 2 swivel 3 1/2" diameter rubber casters.
- Optional phenolic resin and polyurethane caster wheels.
- Floor lock.
- Two posts.

Part #	492220	492221	492222	492223	492224	492225	492226	492227	492228	
Model#	HT-200-FR	HT-203-FR	HT-201-FR	HT-209-FR	HT-300-FR	HT-318-FR	HT-316-FR	HT-314-FR	HT-312-FR	
Capacity	200 lbs	200 lbs	200 lbs	200 lbs	300 lb					
Table Size	16" x 16"	16" x 16"	16" x 16"	16" x 16"	18" x 18"					
Lowered Height	26"	24"	22"	20"	30"	28"	26"	24"	22"	
Raised Height	44"	40"	36"	32"	48"	46"	42"	38"	34"	
Caster Size	2"	2"	2"	2"	3.5"	3.5"	3.5"	3.5"	3.5"	
Lift	18"	16"	14"	12"	18"	18"	16"	14"	12"	
Weight	53 lbs	52 lbs	51 lbs	50 lbs	135 lbs	131 lbs	128 lbs	124 lbs	121 lbs	



400 lb. & 500 lb. Capacity Foot Operated Hydraulic Lift Table

- 1-year warranty.
- Top and base 12 gauge steel.
- 2 rigid and 2 swivel 5" diameter rubber casters.
- Floor lock.
- Optional phenolic resin, polyurethane and steel caster wheels.
- Precision telescoping guide tubes.



HT-500-FR



HT-2388-05-FR with Drop-Base

Part #	492229	492230	492231	492232	496037	492234	492235	492236	492237	492238	
Model#	HT-400-FR	HT-416-FR	HT-414-FR	HT-412-FR	HT-500-FR	HT-2388-05-FR	HT-2368-05-FR	HT-2346-05-FR	HT-2324-05-FR	HT-2302-05-FR	
Capacity	400 lbs	400 lbs	400 lbs	400 lbs	500 lbs	500 lbs	500 lbs	500 lbs	500 lbs	500 lbs	
Table Size W x L	18" x 24"	18" x 24"	18" x 24"	18" x 24"	20" x 30"	20" x 30"	20" x 30"	20" x 30"	20" x 30"	20" x 30"	
Lowered Height	30"	28"	26"	24"	30"	28"	26"	24"	22"	20"	
Raised Height	48"	44"	40"	36"	48"	46"	44"	40"	36"	32"	
Caster Size	5"	5"	5"	5"	5"	5"	5"	5"	5"	5"	
Lift	18"	16"	14"	12"	18"	18"	18"	16"	14"	12"	
Weight	119 lbs	115 lbs	112 lbs	108 lbs	142 lbs	173 lbs	180 lbs	176 lbs	170 lbs	164 lbs	
Base	Flat	Flat	Flat	Flat	Flat	Drop	Drop	Drop	Drop	Drop	

2,000 LB. LIFT TABLES & OPTIONAL CONVEYOR TOP







499811 (20" x 30" #492205 Table with #499206 Optional Push-Pull attached.)

2,000 lb. Capacity Foot Operated Hydraulic Lift Table

- 1-year warranty.
- Precision telescoping guide tubes.
- 1/4" reinforced steel top and base.
- 5" diameter steel caster wheels.
- 2 rigid/2 swivel/1 floor lock on 20" x 30" and 30" x 30" models.
- 4 swivel casters/2 floor locks on 30" x 48" models.
- AC & DC power custom tables available. **Call for details.**
- Compatible with optional Push Pull Conveyor Top.
- Push Pull Die Conveyor Top may be ordered separately without table or attached to table top at factory.

Part #	492204	492205	492206	492207	492208	492209
Model#	HT-2338-2F	HT-2388-2F	HT-2368-2F	HT-2346-2F	HT-2324-2F	HT-2302-2F
Capacity	2,000 lbs					
Table Size	20" x 30"					
Lowered Height	30"	28"	26"	24"	22"	20"
Raised Height	48"	46"	44"	40"	36"	32"
5" Steel Caster	2 rigid/ 2 swivel					
Lift	18"	18"	18"	16"	14"	12"
Weight	215 lbs	216 lbs	224 lbs	220 lbs	213 lbs	208 lbs
— +	TABLE WI	TH PUSH-P	ULL ATTAC	HED AT FAC	TORY 🔱	
Part #	Aggann :	499811	499820	/199821	499822	100823

+											
Part #	499800	499811	499820	499821	499822	499823					
Model#	HTP-2338-2F	HTP-2388-2F	HTP-2368-2F	HTP-2346-2F	HTP-2324-2F	HTP-2302-2F					
Lowered Height	33"	31"	29"	27"	25"	23"					
Raised Height	51"	49"	47"	43"	39"	35"					

Part #	492193	492199	492200	492201	492202	492203	492210	492211	492212	492213	492214	492215
Model#	HT-3338-2F	HT-3388-2F	HT3368-2F	HT-3346-2F	HT-3324-2F	HT-3302-2F	HT-3438-2F	HT-3488-2F	HT-3468-2F	HT-3446-2F	HT-3424-2F	HT-3402-2F
Capacity	2,000 lbs											
Table Size	30" x 30"	30" x 48"										
Lowered Height	30"	28"	26"	24"	22"	20"	30"	28"	26"	24"	22"	20"
Raised Height	48"	46"	44"	40"	36"	32"	48"	46"	44"	40"	36"	32"
5" Steel Caster	2 rigid/ 2 swivel											
Lift	18"	18"	18"	16"	14"	12"	18"	18"	18"	16"	14"	12"
Weight	276 lbs	274 lbs	284 lbs	280 lbs	274 lbs	268 lbs	460 lbs	472 lbs	482 lbs	478 lbs	472 lbs	466 lbs
			+	TABLE WIT	H PUSH-PL	JLL ATTACH	IED AT FAC	TORY 🔱	•			
Part #	499824	499825	499826	499827	499828	499829	499830	499831	499832	499833	499834	499835
Model#	HTP-3338-2F	HTP-3388-2F	HTP-3368-2F	HTP-3346-2F	HTP-3324-2F	HTP-3302-2F	HTP-3438-2F	HTP-3488-2F	HTP-3468-2F	HTP-3446-2F	HTP-3424-2F	HTP-3402-2F
Lowered Height	33"	31"	29"	27'	25"	23"	33"	31"	29"	27"	25"	23"
Raised Height	51"	49"	47"	43"	39"	35"	51"	49"	47"	43"	39"	35"

Optional Manual Push-Pull Conveyor Tops (Top only/without table.)

- Optional top only, mounted on 1/4" steel plate. Table not included.
- 1-year warranty.
- Easier method for pushing and pulling loads to and from the unit.

Part #	499206	499235	499237
Model #	1098	1106	SP-5746
Capacity	2,000 lbs	2,000 lbs	2,000 lbs
Fits Table Top W x L	20" x 30"	30" x 30"	30" x 48"
Max. Die Size W x L	20" x 23"	30" x 23"	30" x 41"
Direction of Travel	30"	30"	48"
Weight	123 lbs	143 lbs	225 lb

- 5-lb. effort required to crank the handle.
- Sold as stand alone unit or assembled onto table.
- Fits only 2,000 lb Lexco Model HT Lift Tables.
- Fits 3 sizes of table tops: 20" x 30", 30" x 30" and 30" x 48" only.
- Drilling and layout required if purchased without table.





Photo illustrates Optional #499206 Push-Pull top. TABLE NOT INCLUDED.

HYDRAULIC PRECISION LIFT TABLES

3,000 - 6,000 lb. Foot Operated or Powered Portable Hydraulic Lift Tables

- 1-year warranty.
- AC and DC power options available.
- 1/4" steel top and base.
- 2 rigid and 2 swivel steel wheel casters.
- Standard designs available in 2 sizes: 30" x 30" and 48" x 30".
- Available in 4 capacities: 3,000 4,000 5,000 and 6,000.
- Precision telescoping guide tubes.
- Stabilizers included on 4,000, 5,000 and 6,000 models.





30" x 30" Tables

Part #	496043	496044	496045	496046	496047	496048	496049	496050	496051	496038
Model #	HT-3033-23	HT-3033-22	HT-3033-20	HT-3033-18	HT-3033-16	HT-3034-23	HT-3034-22	HT-3034-20	HT-3034-18	HT-3034-16
Capacity	3,000 lbs	4,000 lbs								
Table Size	30" x 30"									
Raised Height	54"	52"	48"	44"	40"	54"	52"	48"	44"	40"
Lowered Height	31"	30"	28"	26"	24"	31"	30"	28"	26"	24"
Casters	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"
Weight - Foot Pedal	437 lbs	433 lbs	423 lbs	413 lbs	402 lbs	448 lbs	444 lbs	433 lbs	423 lbs	407 lbs
Weight - Electric	488 lbs	484 lbs	474 lbs	464 lbs	498 lbs	499 lbs	495 lbs	484 lbs	474 lbs	458 lbs
Part #	496052	496053	496054	496055	496056	496057	496058	496059	496060	496061
Model #	HT-3035-23	HT-3035-22	HT-3035-20	HT-3035-18	HT-3035-16	HT-3036-23	HT-3036-22	HT-3036-20	HT-3036-18	HT-3036-16
Capacity	5,000 lbs	6,000 lbs								
Table Size	30" x 30"									
Raised Height	54"	52"	48"	44"	40"	54"	52"	48"	44"	40"
Lowered Height	31"	30"	28"	26"	24"	31"	30"	28"	26"	24"
Casters	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"
Weight - Foot Pedal	476 lbs	472 lbs	461 lbs	451 lbs	435 lbs	480 lbs	476 lbs	465 lbs	454 lbs	437 lbs
Weight - Electric	527 lbs	523 lbs	512 lbs	502 lbs	486 lbs	531 lbs	527 lbs	516 lbs	505 lbs	488 lbs

48" x 30" Tables

	40 X JU	Tables									
Part #	496062	496063	496064	496065	496066	496067	496068	496069	496070	496071	
Model #	HT-3043-23	HT-3043-22	HT-3043-20	HT-3043-18	HT-3043-16	HT-3044-23	HT-3044-22	HT-3044-20	HT-3044-18	HT-3044-16	
Capacity	3,000 lbs	4,000 lbs									
Table Size	48" x 30"										
Raised Height	54"	52"	48"	44"	40"	54"	52"	48"	44"	40"	
Lowered Height	31"	30"	28"	26"	24"	31"	30"	28"	26"	24"	
Casters	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	
Weight - Foot Pedal	555 lbs	551 lbs	540 lbs	530 lbs	520 lbs	568 lbs	563 lbs	553 lbs	543 lbs	526 lbs	
Weight - Electric	606 lbs	602 lbs	591 lbs	581 lbs	571 lbs	619 lbs	614 lbs	604 lbs	594 lbs	577 lbs	
		•								1	
Part #	496072	496073	496074	496075	496076	496077	496078	496079	496080	496081	
Model#	HT-3045-23	HT-3045-22	HT-3045-20	HT-3045-18	HT-3045-16	HT-3046-23	HT-3046-22	HT-3046-20	HT-3046-18	HT-3046-16	
Capacity	5,000 lbs	6,000 lbs									
Table Size	48" x 30"										
Raised Height	54"	52"	48"	44"	40"	54"	52"	48"	44"	40"	
Lowered Height	31"	30"	28"	26"	24"	31"	30"	28"	26"	24"	
Casters	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	
Weight - Foot Pedal	600 lbs	596 lbs	585 lbs	575 lbs	559 lbs	604 lbs	600 lbs	589 lbs	578 lbs	562 lbs	
Weight - Electric	651 lbs	647 lbs	636 lbs	626 lbs	610 lbs	655 lbs	651 lbs	640 lbs	629 lbs	613 lbs	

Other sizes also available. Call for details.

■ 30" wide x 60", 72", 96" and 120" long. ■ 36" wide x 60", 72", 96" and 120" long. ■ 48" wide x 60", 72", 96" and 120" long.

■ These sizes with 2 rigid and 2 swivel 8" diameter steel wheel casters and two floor locks.



2,000 lb. Capacity Long-Deck Hydraulic **Foot-Operated Lift Tables**

- 1-year warranty.
- AC and DC power options available.
- Standard lift height 30" 48".
- Optional lift ranges available, call factory.
- 10 gauge steel top.





- Foot operated.
- Precision telescoping guide tubes.
- 4 swivel 5" diameter steel wheels or optional polyurethane wheels.
- 2 floor locks.

Call for information on powered models.

	I								
Part #	492239	492240	492241	492242	492128	492129	492130	492131	
Model#	STN-2005-2F	STN-2006-2F	STN-2008-2F	STN-2010-2F	STN-3005-2F	STN-3006-2F	STN-3008-2F	STN-3010-2F	
Capacity	2,000 lbs								
Table Size	5' x 20"	6' x 20"	8' x 20"	10' x 20"	5' x 30"	6' x 30"	8' x 30"	10' x 30"	
Raised Height	48"	48"	48"	48"	48"	48"	48"	48"	
Lowered Height	30"	30"	30"	30"	30"	30"	30"	30"	
Casters	5"	5"	5"	5"	5"	5"	5"	5"	
Weight	384 lbs	400 lbs	459 lbs	505 lbs	423 lbs	457 lbs	512 lbs	568 lbs	

Call for information on powered models.

3,000 & 5,000 lb. Capacity **Long-Deck Hydraulic Foot-Operated Lift Tables**

- 1-year warranty.
- AC and DC power options available.
- Load stabilizer assembly on 5,000 lb models.
- 2 floor locks.
- Precision telescoping guide tubes.
- Table top 3,000 lb. models: .25" thick steel.
- Table top 5,000 lb. models: .25" thick steel.





Part #	492250	492251	492252	492253	492254	492255	492256	492257
Model#	STN-3605-3F	STN-3606-3F	STN-3608-3F	STN-3610-3F	STN-3605-5F	STN-3606-5F	STN-3608-5F	STN-3610-5F
Capacity	3,000 lbs	3,000 lbs	3,000 lbs	3,000 lbs	5,000 lbs	5,000 lbs	5,000 lbs	5,000 lbs
Table Size	5' x 36"	6' x 36"	8' x 36"	10' x 36"	5' x 36"	6' x 36"	8' x 36"	10' x 36"
Raised Height	56.375"	56.375"	56.375"	56.375"	53.125"	53.125"	53.125"	53.125"
Lowered Height	36.375"	36.375"	36.375"	36.375"	33.125"	33.125"	33.125""	33.125"
Casters	8" steel wheels 4 / swivel	8" steel wheels 4 / swivel	8" steel wheels 4 / swivel	•	•	8" steel wheels 2 swivel & brake 2 rigid	8" steel wheels 2 swivel & brake 2 rigid	8" steel wheels 2 swivel & brake 2 rigid
Weight	811 lbs	846 lbs	954 lbs	1,026 lbs	1,010 lbs	1,074 lbs	1,397 lbs	1,486 lbs





Call for information on powered models.

The DH series hydraulic die handler is a cost effective mobile die cart that allows you to transport, separate, and present your dies for service and maintenance.

2,000, 3,000 & 4,000 lb. **Capacity Die Handlers**

- 1-year warranty.
- Heavy-duty steel adjustable clamps for gripping the upper die set for separation.
- \blacksquare Floor lock.
- Precision telescoping guide tubes.
- Rigid die hangers with 360° indexing plate.
- Optional gantry heights available upon request.

Part #	499243	499244	499245	499246	
Model #	DH-3339-22	DH-3438-24	DH-3043-22	DH-3005-43	
Capacity	2,000lbs	2,000lbs	3,000 lbs	4,000 lbs	
Table Top W x L	30" x 30"	30" x 48"	30" x 48"	30" x 60"	
Raised Height	48"	48"	52"	55"	
Lowered Height	30"	30"	30"	32"	
Minimum Clearance under Bar to Table Top	19.885"	19.885"	20.5"	20.5"	
Caster Size/ Type	5" 2 swivel / 2 rigid	5" 4 swivel	6" 4 swivel	8" 2 swivel / 2 rigid	
Max. Die Size	30" x 24"	42" x 30"	42" x 30"	54" x 30"	
Weight	388 lbs	590 lbs	747 lbs	1,069 lbs	





Folding Handle Scissors Lift Table

- Folding handle lays flat on table top.
- Chrome plated handle and foot pedal.
- Lever release handle.
- Moldon polyurethane wheels and locking swivel casters.
- Foot operated pump.

	OVE	RALL ISIONS	
w: 17.75" h: 37"	20" 39"	19.5" 39"	20" 39"
d: 36"	37"	42"	37"







Fixed Handle **Scissors Tables**

- Fixed handle.
- Foot operated pump.
- Easy to use spring loaded release lever.
- 5" x 1.5" moldon polyurethane wheels and locking casters.

OVERALL	
DIMENSIONS	

JNO
19.5"
37"
42"



LT-770DSL



Double Scissors High Lift Tables

- Fixed handle.
- Chrome plated handle and foot pedal.
- Lever release handle.
- 5" x 1.5" moldon polyurethane wheels and locking swivel casters.
- Foot operated pump.

OVERAL	L
DIMENSIO	NS

	DIMENSIONS					
w:	19.5"	24"				
h:	37"	37"				
d:	45.5"	58"				



LT-2200SL



LT-1650SL

Heavy Duty Scissors Lift Tables

- Fixed handle.
- Chrome plated handle and foot pedal.
- 5" x 2" moldon polyurethane wheels and locking swivel casters.
- Foot operated pump.

w:	20"	20"
h:	39.5"	39.5"
d:	49"	50"

								:			
P	art#	260201	260207	272974	260208	260199	260200	260204	272862	272970	272973
Mod	del#	LT-330SL	SLT-660-11	LT-660FHSL	SLT-1100-11	LT-700SL	LT-1000SL	LT-770DSL	LT-1540DSL	LT-1650SL	LT-2200SL
Сар	acity	330 lbs	660 lbs	660 lbs	1,100 lbs	700 lbs	1,000 lbs	770 lbs	1,540 lbs	1,650 lbs	2,200 lbs
Table	Size	17.75" x 27.5"	20" x 32"	19.5" x 32"	20" x 32"	19.5" x 32"	19.5" x 32"	19.5 x" 35.5	24" x 48"	20" x 39"	20" x 40"
Raised H	eight	28.5"	35"	35"	35"	35"	35"	51"	59"	35.5"	39"
Lowered He	eight	8.5"	11"	14"	11"	14"	14"	14"	17.75"	16.5"	15"
Caster	Size	4" x 1"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 2"	5" x 2"
Locking Caster	(LC)	LC	LC	LC	LC	LC	LC	LC	LC	LC	LC
W	eight	98 lbs	165 lbs	170 lbs	187 lbs	170 lbs	185 lbs	227 lbs	430 lbs	276 lbs	269 lbs

TABLE TOP SIZES

32" WIDE X 63" LONG 30" WIDE X 80" LONG





Manually operated safety bars lock table in raised position.

Long Deck Scissors Table

- Oversized 63" long x 32" wide and **80" long** x 30" wide table tops accommodate large cargo.
- Two wheels and two locking swivel casters.
- Handle height 38" (32" x 63" table) 39" (30" x 80" table).
- Hydraulic foot pump.
- Safety bars.
- Table top thickness: .125" (3mm).

DIMENSIONS	
	34.5"

w:	32"	34.5"
h:	38"	53.5"
d:	74.25"	80.125





Scissors Table with Roller Top

- Roller top permits easy movement of cargo for loading and unloading.
- Two locking swivel casters -5" x 1½" moldon polyurethane.
- Two 5" x 11/2" moldon polyurethane casters.
- Handle height 381/4".
- Two dual-position end stops help keep cargo in place.
- Eight 2" diameter rollers 18½" long.
- Hydraulic foot pump.
- Variable lowering speed valve.

OVERALL DIMENSIONS

- w: 20.25"
- d: 43"





273265

Hydraulic Die Lift Table

- Table top size 24" x 36".
- Handle height 36.75".
- Two swivel locking casters 5" x 1½" moldon polyurethane.
- Hydraulic foot pump.
- Removable handle may also be reversed for use in confined areas.
- Variable lowering speed.

n:	30.73
d:	49.5'

Part #	273261	273230	273269	273265	
Model #	LDT-3263	LDT-3080	DRT-2033	DT-2436	
Capacity	1,100 lbs	2,200 lbs	660 lbs	2,000 lbs	
Table Size	32" x 63"	30" x 80"	19.5" x 32.5"	24" x 36"	
Raised Height	36"	53.5"	38.25"	36"	
Lowered Height	11.25"	14.2"	12.5"	24.25"	
Caster Size/ Type	5" x 1.5" Moldon Polyurethane	Nylon 3" x 1.5" swivel 7" x 2" wheel	5" x 1.5"	5" x 1.5"	
Weight	340 lbs	440 lbs	210 lbs	265 lbs	





- 12 volt rechargeable, deep cycle batteries with onboard charger and battery gauge.
- Moldon polyurethane wheels and locking swivel casters.
- Chrome plated handle.
- Keyed on/off switch.

w: 19.75" h: 36" d: 45.25"

- Raised-height limit switch.
- Push-button pendent can be removed for hand held operation.
- Overload bypass valve.
- Emergency stop button.

OVERAL DIMENSIO		
20.5"	24.5"	19.625"
38"	36.25"	36"
52"	53.75"	47.75"



270662



Mini Electric Lift Table

- Heavy duty to handle tough loads.
- Small and light enough to move.
- Full perimeter safety bar stops table from lowering if it contacts an obstruction.
- 110V 60 Hz.
- Push button station.

w:	24"
h:	30"

11.	00
٩٠	35

Part #	273710	273711	273712	273713	270662
Model #	PSLT-660	PSLT-1100	PSLT-1650	PSLT-770-DS	MELT
Capacity	660 lbs	1,100 lbs	1,650 lbs	770 lbs (Double Scissors)	2,200 lbs
Table Size W x L	19.75" x 33.5" x 2"	20.5" x 39.75" x 2.25"	20" x 39.5" x 2.25"	19.625" x 35.875" x 2.25"	24" x 35"
Raised Height	34.25"	40.5"	39.5"	51.5"	30"
Lowered Height	11.25"	17.25"	17"	14.5"	7"
Caster Size	5" x 1.25"	6" x 1.5"	6" x 2"	5" x 1.25"	N/A
Qty. of batteries	. 4	2	4	4	N/A
Weight	256 lbs	346 lbs	353 lbs	300 lbs	283 lbs

WESCO PALLET LEVELERS









Protective Skirt - Part # 275001

- Option must be ordered as a separate item.
- Only available as factory installed.
- Fits both spring and pneumatic pallet levelers.

Pallet Leveler

- The pallet leveler progressively lowers as pallet is loaded and raises as pallet is unloaded.
- 3 Heavy duty calibrated springs used in combination according to desired load range.
- Bearing supported carousel for easy turning.
- Built in fork pockets for ease of transport.
- Helps reduce fatigue and injury from bending and lifting.

OVERALL DIMENSIONS

- w: 36"
- h: 9.25" Compressed / 29" Raised
- d: 45.5"



272696

Pneumatic Pallet Leveler

- The pneumatic pallet leveler progressively lowers as pallet is loaded and raises as pallet is unloaded.
- Pneumatic bellows actuates raising and lowering of loads.
- 80 PSI of initial air pressure required.
- Air tank and controls are selfcontained and do not require constant air pressure.
- Removable tank and controls for remote operation; 48" of hose included.

- v: 36"
- h: 12.55" Compressed / 28.5" Raised
- d: 45.5"

Part #	272986	272696
Model #	PL	PPL
Capacity	400-4,500 lbs	4,500 lb maximum
Raised Height	29"	28.5" (without load)
Lowered Height	9.25"	12.5"
Carousel Diameter	40.75"	40.75"
Rotating Ring Diameter	43.5"	43.5"
Fork Pocket L x W	39" x 5.75"	39" x 5.75"
Load Size	72" x 50" x 50"	72" x 50" x 50"
Weight	352 lbs	322 lbs

A 5 Year Guarantee Against Weld Failure. A Wesco Quality Exclusive. **Features:**

- Heavy duty capacities up to 5 tons the most economical way to lift and move large bulky loads.
- Swivel casters allow movement in any direction.
- Hand operated hydraulic jack for easy lifting and controlled lowering of loads.
- All models supplied with hooks for recommended optional LB-1 or LB-2 load binders.





Rais-N-RolTM 2,000 lb Capacity Per Pair

- 23" wide x 12.5" deep x 48.375" high (lowered height).
- I.D. fork span range 7.25" to 17.5".

OVERALL DIMENSIONS

w: 23" h: 48.375'

d: 15.5"

MADE IN THE USA



Rais-N-RolTM 4,000 lb Capacity Per Pair

- 23" wide x 16.5" deep x 43.625" high (lowered height).
- I.D. fork span range 5" to 19.5".

OVERALL DIMENSIONS

w: 23"

h: 43.625" d: 19.75"



Rais-N-Rol[™] 6,000 lb **Capacity Per Pair**

- 23" wide x 16.5" deep.
- RNR-6(P): 41.375" H; RNR-64(P): 43.625" H.
- I.D. fork span range 6" to 19.5".

DIMENSIONS	_
OVERALL	

w: 23' h: 41.375" d: 18.75"

OVERALL DIMENSIONS

w: 23" h: 43.625'

d: 18.75"





RNR-8



Rais-N-RolTM 8,000 lb Capacity Per Pair

- 23" wide x 16.5" deep x 43.375" high (lowered height).
- I.D. fork span range 6" to 19.5".

OVERALL DIMENSIONS

w: 23" h: 41.375"

d: 20.75"

2600





RNR-10



Rais-N-RolTM 10,000 lb Capacity Per Pair

- 23" wide x 16.5" deep x 47.625" high (lowered height).
- I.D. fork span range 6" to 19.5".

OVERALL DIMENSIONS

w: 24" h: 47.625" d: 21.75"

8" x 2.5"

Steel

94	260090	260095
8P	RNR-10	RNR-10P
lbs	10,000 lbs	10,000 lbs
	6"	6"

8" x 3"

Polyurethane

Part # 260086 260092 260088 260138 260139 260091 260087 260093 260089 Model # RNR-2 RNR-2P RNR-4 RNR-4P RNR-6 RNR-6P RNR-64 RNR-64P RNR-8 RNR-2,000 lbs 2,000 lbs 4,000 lbs 4,000 lbs 6,000 lbs 6,000 lbs 6,000 lbs 6,000 lbs 8,000 lbs 8,000 Capacity 5" 5" 12" 12" 12" 12" 12" Lift 12" Casters 5" x 2" 5" x 2" 6" x 2" 6" x 2" 6" x 2.5" 6" x 2.5" 6" x 2.5" 6" x 2.5" 8" x 2.5" 8" x 2.5" Polyurethane Steel Polyurethane Phenolic Polyurethane Steel Polyurethane Steel Steel Polyurethane Weight 170 lbs/PR 176 lbs/PR 315 lbs/PR 313 lbs/PR : 325 lbs/PR : 306 lbs/PR : 359 lbs/PR : 359 lbs/PR : 390lbs/PR : 402 lbs/PR : 480 lbs/PR

Option: Load Binder Accessory


LB-2

- LB-1
- Two 12' long nylon belts with heavy duty ratchet tighteners.
- Highly recommended for stabilizing large loads.

Part Model # 260096 LB-1

260147

Delta rings secure belt to Rais-N-Rol





WE5□ FURNITURE AND MACHINE MOVERS

Furniture Mover

- Sold in pairs only.
- Two models: Manual Lift / Hydraulic Lift
- Economically priced.
- Great for moving furniture or odd shaped loads.
- Straps to secure load standard.
- Hydraulic unit with ratcheting strap tightener.
- 6" swivel casters.





272952




w:	23"	26.5"
h:	32"	42"
d:	15"	16"

	•	
Part #	272951	272952
Model#	MFM	HFM
Capacity	1,320 lbs per pair	3,950 lbs per pair
late L x D	8.5" x 4.5"	23" X 2.25"
₋ift Height	12"	10""
Casters	6" Moldon Polyurethane	6" Moldon Polyurethane
Weight	72 lbs	195 lbs









Lift Pla




- Dolly
- .25" thick steel plate.
- 2" x .5" aircraft quality, heat treated steel wheels.

DIMENSIONS	OVERALL	
	DIMENSIONS	

W:	8.5"
h:	2.5"
d:	11.75"

- **Machine Rollers**
- Swivel-top for maximum maneuverability, full 360° rotation.
- Spring-loaded
- locking mechanism at 45° intervals.
- Only periodic cleaning and light re-oiling of roller chain needed.

	DIMENSIONS				
w:	3.125"	5.5"	5.75"	6.5"	
h:	3.1875"	4.4375"	4.875"	4.875"	
d:	8"	10"	10.5"	12.75"	





HeviMoverTM Kit #480019

■ Includes 4 HMS-2 HeviMovers and 2 29" knocked down steering handles in a rugged steel tool box.

OVERALL DIMENSIONS

w: 16" h: 7" d: 7"

Part #	480020	480001	480002	480003	480004	480019
Model#		HMS-2	HMS-8	HMS-15	HMS-30	HMS-2K
Capacity	10,000 lbs	2,000 lbs	8,000 lbs	15,000 lbs	30,000 lbs	4 HMS - 2's @ 2,000 lbs ea.
Wheel Size	2" x .5"	N/A	N/A	N/A	N/A	N/A
Roller Width	NA	1.875"	3.25"	3.25"	4"	1.875"
Roller Diameter	NA	.6875"	.9375"	1.1875"	1.1875"	.6875"
Weight	11.5 lbs	10 lbs	31 lbs	39 lbs	52 lbs	55 lbs

HeviMover[™] **Options**

- Steering handles.
- Turning bar.

Part #	480005	480006
Model #	HMH-36-1	HMH-48-1
Description	36" steering handle for HMS-2	48" steering handle for HMS-2
Weight	6 lbs	7 lbs

Part # Model #	480007 HMH-36-2	480008 HMH-48-2
Description	36" steering handle for HMS-8, 15, 30	48" steering handle for HMS-8, 15, 30
Weight	6 lbs	7 lbs

Part #	480009	
Model #	HMH-TB-2	
Description	36" turning bar for HMS-8, 15, 30	
Weight	14.5 lbs	



WES⊏□°ALUMINUM PLATFORM TRUCKS

Aluminum Platform Truck Features:

- Aluminum is corrosion resistant and maintains clean appearance.
- Strong enough to handle up to 3,000 lbs (depending upon caster selection).
- Lightweight aluminum allows for easy maneuverability.
- Handle included.
- Corner sockets at both ends allow handles to be used on either or both ends of truck.
- For truck platform height, add 2.5" to caster height (see caster option chart).
- Bolt on casters. (Casters Sold Separately)-choose from caster option chart.



ATP Series - Aluminum Treadplate Mode

- Structural capacity of any size platform **NOT** to exceed 3,000 lbs.
- Slip-resistant diamond pattern surface.
- Solid one piece platform surface construction.

	OVERALL DIMENSIONS										
w:	24"	24"	30"	30"	36"	36"					
h:	2.5"	2.5"	2.5"	2.5"	2.5"	2.5"					
d:	36"	48"	48"	60"	60"	72"					



ASD Series - Aluminum Smooth Deck

■ Structural capacity of any size platform **NOT** to exceed 3,000 lbs.

OVERALL **DIMENSIONS**

36"

36"

30"

■ Smooth surface that is easy to keep clean.

■ Solid one piece platform surface construction.

	h: 2.5" d: 36"	2.5" 48"	2.5" 48"	2.5" 60"	2.5" 60"	2.5" 72"	h: 2.5" d: 36"	2.5" 48"	2.5" 48"	2.5" 60"	2.5" 60"	2.5" 72"
Part#	350036	350037	350039	350040	350042	350043	350027	350028	350030	350031	350033	350034
Model#	ATP-2436	ATP-2448	ATP-3048	ATP-3060	ATP-3660	ATP-3672	ASD-2436	ASD-2448	ASD-3048	ASD-3060	ASD-3660	ASD-3672
Structural Capacity		1	NOT TO EXC	EED 3,000 LB	S		NOT TO EXCEED 3,000 LBS					
Platform	24" x 36"	24" x 48"	30" x 48"	30" x 60"	36" x 60"	36" x 72"	24" x 36"	24" x 48"	30" x 48"	30" x 60"	36" x 60"	36" x 72"
Weight	32 lbs	40 lbs	45 lbs	54 lbs	61 lbs	71 lbs	27 lbs	33 lbs	37 lbs	44 lbs	49 lbs	59 lbs

Actual capacity of assembled platform is dependent upon caster capacity but should never exceed the platform's structural capacity, regardless of

24"

W:

Caster Options for ATP and ASD Series Platform Trucks

(Two rigid, two swivel per set)

Part #	250046	250047	250049	250050	250051	250052	250053	250055	250056	250250
Model #	SR-5A	SR-5	SR-6	MR-6	MP-6	PR-6	MR-8	MP-8	PR-8	PN-8
Capacity	750 lbs	2,000 lbs	2,000 lbs	2,000 lbs	3,000 lbs	3,000 lbs	2,400 lbs	3,000 lbs	3,000 lbs	1,200 lbs
Wheel Size	5" x 1.5"	5" x 2"	6" x 2"	6" x 2"	6" x 2"	6" x 2"	8" x 2"	8" x 2"	8" x 2"	8" x 2.5"
Wheel Type	Polyolefin	Polyolefin	Polyolefin	Moldon Rubber	Moldon Polyurethane	Phenolic	Moldon Rubber	Moldon Polyurethane	Phenolic	Pneumatic
"H" Dimension Floor to Platform Top	9"	9.25"	10"	10"	10"	10"	12"	12"	12"	12.5"
Caster Height	6.50"	6.75"	7.5"	7.5"	7.5"	7.5"	9.5"	9.5"	9.5"	10"
Weight	14 lbs per set	20 lbs per set	26 lbs per set	26 lbs per set	24 lbs per set	26 lbs per set	28 lbs per set	27 lbs per set	30 lbs per set	29 lbs per set

Actual capacity of assembled platform is dependent upon caster capacity but should never exceed the platform's structural capacity, regardless of caster type.

Corner Bumper Option

Part #250022 Model #CB

Includes 4 bumpers.

To order, add -CB to the end of Truck Model #.

Example:

ASD-2436-CB

Perimeter Bumper Option

Part #250023 Model #PB

To order, add -PB to the end of Truck Model #.

Example: ASD-2436-PB

Extra Push Handle Option

■ Truck Width - 24" Part #052574 30" #052575

36" #052576

To order, add -PH2 to the end of Truck Model #.

Example:

ASD-2436-PH2

WES⊏□°ALUMINUM & STEEL GRID PLATFORM TRUCKS





■ Structural capacity of any size platform **not** to

Casters determine capacity - 1,200 lbs or less. Non-marking gray corner bumpers.

273616 (includes 4 bumpers + hardware).

Platforms and casters sold separately.

Platform top to top of handle - 27.625".

■ 24" Extra Push Handle - Part # 273614.

Close-up of grid deck

273297 **Steel Grid Deck** Platform Truck

- Sturdy open grate design provides high strength and prevents accumulation of water and
- Durable powder coat paint finish.
- end casters.
- Tilt design allows truck to pivot own radius.
- of handle 35.5".

OVERALL

DIMENSIONS

35.5" h:

30" W:

63" d:

Thrifty Plate Aluminum Tread Platform Trucks -

- small debris.
- (2) 8" x 2" rigid casters and (4) 6" x 1.5"
- Platform height 10.75", height to top

Thrifty Plate Aluminum Tread Platform Trucks -Commercial Quality (Import)

- Structural capacity of any size platform **not** to exceed 2,400 lbs.
- Platforms and casters sold separately.
- Casters determine capacity 2,400 lbs or less.
- Non-marking gray corner bumpers.
- Platform top to top of handle 32".
- Replacement Corner Bumper Option Part Replacement Corner Bumper Option Part #273611 (includes 4 bumpers + hardware).
- **24**" Extra Push Handle Part # 273609.
- 30" Extra Push Handle Part # 273610. 30" Extra Push Handle Part # 273615.

OVERALL

DIMENSIONS

2.625"

49"

25"

2.625"

w: 25"

d: 37"

h: 2.625"

		OVEI DIMEN	RALL ISIONS	
31" 2.625" 61"	w: 25" h: 1.625"	25" 1.625" 49"	31" 1.625" 49"	31" 1.625 61"

Light Duty (Import)

exceed 1,200 lbs.

					•				•
Part #	273601	273602	273603	273604	273605	273606	273607	273608	273297
Model#	CQ2436	CQ2448	CQ3048	CQ3060	LD2436	LD2448	LD3048	LD3060	
Structural Capacity	N	IOT TO EXCE	EED 2,400 LB	S		1,750 lb			
Platform	24" x 36"	24" x 48"	30" x 48"	30" x 60"	24" x 36"	24" x 48"	30" x 48"	30" x 60"	30" x 50
Weight	28 lbs	36 lbs	43 lbs	53 lbs	19 lbs	23 lbs	28 lbs	34 lbs	170 lbs

50"

Actual capacity of assembled platform is dependent upon caster capacity but should never exceed the platform's structural capacity, regardless of

Caster Options for Thrifty Plate Platform Trucks

■ Each Caster Set includes 2 rigid, 2 swivel casters.

Part #	273612	273613	172244	172245	
Capacity	2,000 lbs	2,400 lbs	1,200 lbs	1,500 lbs	
Wheel Size	6" x 2"	8" x 2"	8" x 2.5"	10" x 3.5"	
Wheel Type	Moldon Rubber Aluminum Hub	Moldon Rubber Aluminum Hub	Full Pneumatic Zinc Steel Hub	Full Pneumatic Zinc Steel Hub	
H-CQ Dimension - Floor to Platform Top	10.375"	12.125"	12.625"	14.625"	
H-LD Dimension - Floor to Platform Top	9.375"	11.125"	11.625"	13.625"	
Caster Height	7.75"	9.5"	10"	12"	
Weight	26 lbs per set	28 lbs per set	26 lbs per set	34 lbs per set	

Actual capacity of assembled platform is dependent upon caster capacity but should never exceed the platform's structural capacity, regardless of caster type.



Steel Platform Truck Features:

- Heavy duty 12 gauge steel reinforced welded construction.
- Constructed for both standard corner or diamond caster mounting pattern.
- Removable two cross-brace handle can be inserted in either end.
- Choose your caster. Platforms and casters sold separately, except #272265.
- All platforms include one handle. Additional handles available as an option. (except #272265)
- All listed capacities are based on evenly distributed loads.





Steel Platform Trucks (Casters sold separately)

■ 32" high handles from platform top.

						DIMENSIO				
w:	24"	24"		27"		30"		30"	36"	36"
h:	2" 39.5"	2" 48"		2" 57.5"		2" 51.5"		2" 63.5"	2" 63.5"	2" 75.5"
u.	•		•		•		•	03.5	•	75.5
27	2266 :	272267		272268		272260		272270	272274 :	27227



Economy Steel Platform Truck

- Ships complete. Platform, one handle, four 5" x 1.25" casters.
- Deck height 5.75", handle height 41".
- Maximum capacity 750 lbs.

OVERALL DIMENSIONS

w: 24" h: 41" d: 42"

Part #	272266	272267	272268	272269	272270	272271	272272	272265
Structural Capacity			NOT T	O EXCEED 4	,000 LBS			750 lbs
Platform W x L	24" x 36"	24" x 48"	27" x 54"	30" x 48"	30" x 60"	36" x 60"	36" x 72"	24" x 42"
Caster	chart selection	5" x 1.25" rubber						
Weight	86 lbs	65 lbs	82 lbs	115 lbs	135 lbs	126 lbs	172 lbs	62 lbs

Actual capacity of assembled platform is dependent upon caster capacity but should never exceed the platform's structural capacity, regardless of caster type.

Caster Sets

Part #

Each caster set contains 2 swivel and 2 rigid casters.

272193

Extra Handles for Trucks with

27" Wide

Platform

30" Wide

Platform

Platform

24" Wide

Platform

	•				
03	272197	272198	272199	272200	
lbs	N/A	N/A	N/A	N/A	
2" lon er on n hub	N/A	N/A	N/A	N/A	
5"	N/A	N/A	N/A	N/A	
5"	N/A	N/A	N/A	N/A	

1,600 lbs 2,500 lbs 4,000 lbs 1,600 lbs 1,600 lbs 1,600 lbs 1,800 lbs 2200 Set Capacity Description 6" x 1.375" 8" x 2" 8" x 2" 8" x 2.5" 10" x 3.5' 5" x 2" 6" x 2" 8" x Polyolefin Polyolefin Moldon Full Full Moldon Moldon Mold Pneumatic Polyurethane Pneumatic Rubber on Rubber on Rubbei on cast iron hub cast iron hub cast iron hub cast iron "H" Dimension 11.5" 11.5" 12.25" 14.00' 8.5" 9.5" 12.5 Floor to Platform Top Caster Height 9.5" 9.5" 10.25" 12" 6.5" 7.5" 10.25 40 lbs Weight 9 lbs 31 lbs 42 lbs 31 lbs 32 lbs 29 lbs 39 lbs 15 lbs 16 lbs 17 lbs

> Actual capacity of assembled platform is dependent upon caster capacity but should never exceed the platform's sructural capacity, regardless of caster type.

WESCO POWER DRIVE PLATFORM TRUCKS AND WOOD DOLLIES

272416

Power Drive Platform Truck

- 47¹/₄" turning radius.
- Deck height from floor: 12.375".
- Finger tip variable speed controller with forward and reverse modes. Illuminated battery status indicator.
- Key lock and emergency stop.
- Motor: 370 watts.
- Maximum climbing incline: 8°.
- (2) 12v 40 A.H. batteries and charger included.
- Charge time: 7-8hr. / Continuous run time: 6 hr.
- Motor controller: Curtis 110 amp.
- Front wheels: 10" pneumatic.
- Rear swivel polyurethane casters: 5" x 2".
- Reverse direction safety beeper and reduced speed in reverse for added safety.
- Full perimeter bumper helps prevent wall damage.
- Rear panel grid helps keep cargo in place.
- Durable white powder coat finish with black rubber deck mat.
- 43" handle height.
- Steel thickness 2.5 mm.

OVERALL	
DIMENSIONS	

w: 24"	24"	30"	30"
h: 43"	43"	43"	43"
d: 38.5"	50.5"	50.5"	62.5"

Part #	272413	272414	272415	272416
Capacity	1,100 lbs	1,100 lbs	1,100 lbs	1,100 lbs
Shelf Size	24" x 36"	24" x 48"	30" x 48"	30" x 60"
Wheel Type	10" Pneumatic	10" Pneumatic	10" Pneumatic	10" Pneumatic
Casters	5" x 2"	5" x 2"	5" x 2"	5" x 2"
Weight	243 lhs	254 lhs	276 lbs	300 lbs



Optional Tow Handle and Eye Hook Part #272073

Wood Dollies

- 4 swivel casters/3" hard rubber or 4" hard plastic.
- Seasoned hardwood with flush top bolted construction.
- Optional tow handle and eye hook.
- Ships KD and boxed via ground service.





272060





Open Deck Rubber Ends 272062

Description	Size	Part # 3" Casters (Weight / Capacity)	Part # 4" Casters (Weight / Capacity)	
Solid Platform	24" x 16" 27" x 18" 30" x 18" 36" x 24"	272053 (18 lbs / 900 lbs) 272054 (20.5 lbs / 900 lbs) 272055 (23.5 lbs / 900 lbs) 272056 (32 lbs / 900 lbs)	272063 (20.5 lbs / 1,200 lbs) 272064 (23 lbs / 1,200 lbs) 272065 (26 lbs / 1,200 lbs) 272066 (34.5 lbs / 1,200 lbs)	
Flush Open Deck	24" x 16" 30" x 18" 36" x 24"	272057 (14.5 lbs / 900 lbs) 272058 (16.5 lbs / 900 lbs) 272059 (21.5 lbs / 900 lbs)	272067 (17 lbs / 1,200 lbs) 272068 (19 lbs / 1,200 lbs) 272069 (24 lbs / 1,200 lbs)	
Open Deck Carpet Ends	30" x 18" 36" x 24"	272060 (16.5 lbs / 900 lbs) 272061 (18.5 lbs / 900 lbs)	272070 (19 lbs / 1,200 lbs) 272071 (21 lbs / 1,200 lbs)	
Open Deck Rubber Ends	30" x 18"	272062 (18 lbs / 900 lbs)	272072 (20.5 lbs / 1,200 lbs)	











272227

Wire Caged Steel Platform Trucks

- Great for moving loose materials or small boxes.
- Two models, regular or heavy duty.
- Moldon non-marking TPR rubber wheels.
- Removable cages.
- Ships KD and boxed.
- Casters: two swivel, two rigid.

OVERALL **DIMENSIONS**

h:	23" 36" 35"	30" 40" 48"
۵.	00	10

Commercial **Quality Steel Panel Cart**

- 8" Moldon non-marking TPR rubber wheels.
- Wraparound corner bumpers.
- Great for commercial applications.
- Casters: two swivel, two rigid.
- Removable side rails.

OVERALL **DIMENSIONS**

- w: 30"
- h: 37"
- d: 48"

Standard Greenline Steel Panel Carts

- Removable plastic basket for carrying tools.
- Detachable center bar for moving bulky items like tables and partitions.
- Great for sheet products like dry wall and plywood.
- 4" x 2" Phenolic casters 2 swivel/2 rigid withbrakes.
- Ships KD.

OVERALL DIMENSIONS

- w: 27"
- h: 43"
- d: 32"

Heavy Duty Greenline **Steel Panel** Carts

- Heavy duty steel
 - platform and supports. 5" x 2" Moldon polyurethane casters, 2 swivel/2
 - rigid with brakes. 12 1/8" spacing
 - between removable vertical supports.
 - Ships KD.

OVERALL **DIMENSIONS**

- w: 29"
- h: 34" d: 36"
- w: 30.25"

273298

h:	45.5"
d:	51.5"

Steel

Panel Cart

■ Steel, powder coat

Deck dimensions:

paint finish.

 $48" \times 30.25"$.

■ 2 rigid, 2 swivel

4" x 2".

rubber casters -

OVERALL

DIMENSIONS

Part #	270456	270461	270388	272226	272227	273298
Capacity	660 lbs	1,100 lbs	1,100 lbs	1,540 lbs	4,400 lbs	1,750 lbs
Platform/ Deck Size		30" x 48"	30" x 48"	27" x 32"	29" x 36"	30.25" x 48"
Handle Height	36"	40"	37"	43"	34"	45.5"
Deck Height	8.5"	11.5"	11.5"	10.5"	10.5"	10"
Caster Size	5" x 2"	5" x 2"	8" x 2"	4" x 2"	5" x 2"	4" x 2"
Weiaht	66 lbs	124 lbs	118 lbs	138 lbs	199 lbs	150 lbs

WESCO ALUMINUM & STEEL U-BOATS





*Steel Shelf Option for 273291



273292

273296 Folding Handles





273294

U-boats

- 8 models and a variety of sizes to suit your application.
- Painted steel, galvanized steel, aluminum, wood deck models available.
- Tilting and non-tilting models.
- Removable handles, except on folding handle model.

- 2 rigid center casters and 4 swivel end casters allow trucks to turn on their own radius. Provides easy maneuverability in narrow aisles and confined areas.
- #273565 galvanized steel shelf option for #273291 U-boat only (16"W x 60"L). 350 lb. maximum capacity with evenly distrubuted load.

* #273291 U-boat can handle two shelves.

	w: 16" h: 61" d: 64"	16" 61" 63"	16" 60" 63"	18" 60" 63"	24" 60" 63"	17.5" 61.25" 53"	16.25" 60" 63"	
Part Number	273296	270339	273291	273292	273295	273293	273294	
Capacity	1,750 lbs	1,322 lbs	1,750 lbs	1,750 lbs	1,750 lbs	1,750 lbs	1,750 lbs	
Platform (W x L)	16" x 59.5"	16" x 63"	16" x 60"	18" x 60"	24" x 60"	16" x 48"	16" x 60"	
Material	Aluminum	Aluminum	Galvanized steel	Galvanized steel	Galvanized Steel	Painted Steel	Painted Steel	
Deck Type	Open	Open	Tread plate	Tread plate	Tread plate	Smooth	Wood	
Tilting	Yes	Yes	No	No	Yes	Yes	Yes	
2 Rigid Wheels (center)	6" x 2" Polyurethane	6" x 2" Polyurethane	8" x 2" Polyurethane	8" x 2" Polyurethane	8" x 2" Polyurethane	6" x 2" Moldon Rubber	8" x 2" Moldon Rubber	
4 Swivel Casters (ends)	5" x 1.25" Polyurethane	5" x 1.25" Polyurethane	4" x 1.25" Polyurethane	4" x 1.25" Polyurethane	4" x 1.25" Polyurethane	4" x 1.25" Moldon Rubber	4" x 1.25" Moldon Rubber	
Deck (h) (at center)	9.5"	9.5"	10.75"	10.75"	10.75"	7.5"	11.5"	
Height - Handle top	62"	61"	60"	60"	53.25"	61.25"	60"	
Weight (lbs.)	63.5 lbs	91 lbs	97 lbs	109 lbs	116.5 lbs	82 lbs	115.5 lbs	

OVERALL DIMENSIONS



Steel Folding Handle Trucks

- Fold down handle for easy storage.
- Enameled finish with non-skid heavy vinyl deck surface.
- Protective vinyl perimeter bumpers.
- 4" & 5" caster wheels TPR non-marking rubber.

OVERALL DIMENSIONS - DELUXE SERIES

23"

37.5"

■ Boxed and UPS shippable.

w: 19"

h: 32.5"

	d: 29"	35"	35"	d: 29"	35"	35"	d: 29	34"
Part #	272019	272035	272235	272238	272239	278762	270457	270458
Model #	Deluxe	Deluxe	Deluxe	Economy	Economy	Economy	Deluxe	Deluxe
Capacity	440 lbs	660 lbs	660 lbs	275 lbs	400 lbs	400 lbs	440 lbs	770 lbs
Platform Size	19" x 29"	23" x 35"	23" x 35"	19" x 29"	23" x 35"	23" x 35"	19" x 29"	22.5" x 34"
Caster Size	4"	5"	8" Pneumatic	4"	5"	8" Pneumatic	2 swivel/2 rigid	2 swivel/2 rigid
	2 swivel/2 rigid	4" Stainless Rigs	4" Stainless Rigs					
Handle Height	32.5"	37.5"	43.5"	32.5"	32.5"	38.5"	34.5"	34"
Weight	28 lbs	47 lbs	69.7 lbs	21 lbs	41 lbs	69 lbs	26 lbs	37 lb

w: 19"

h: 32.5"

23"

43.5"

OVERALL DIMENSIONS - ECONOMY SERIES

23"

38.5"

23"

32.5"

ALL STAINLESS STEEL: Handle, Platform and Caster Rigs





Stainless Steel Folding Handle Truck

- Fold down handle for easy storage.
- Caster: sealed bearing with stainless rig.
- TPR rubber non-marking caster wheels.
- Vinyl perimeter bumper.
- Boxed and UPS shippable.

OVERALL DIMENSIONS			
w:	19"	22.5"	
h:	34.5"	34"	

u. 29	34
270457	270458
Deluxe	Deluxe
440 lbs	770 lbs
19" x 29"	22.5" x 34"
2 swivel/2 rigid	2 swivel/2 rigid
4" Stainless Rigs	4" Stainless Rigs
34.5"	34"







Aluminum **Folding** Ergo-Handle Truck

- Ergonomic European style handle.
- **■** Corner bumpers.
- Boxed and UPS shippable.

OVERALL DIMENSIONS

SINCE 1948

w: 24" h: 41" d: 35.5"



272076



Aluminum **Folding** Handle Truck

- TPR rubber non-marking caster wheels.
- Lightweight aluminum deck.
- Wrap around corner bumper.
- Boxed and UPS shippable.

w: 18.5"

h: 34.5"

OVERALL DIMENSIONS

24"

35.5"

d: 29"	35.5"
272076	272112
350 lbs	550 lbs
18.5" x 29"	24" x 35.5"
34.5"	35.5"
4"	5"



270389



Aluminum **Folding Handle Long** Deck Truck

- TPR rubber non-marking caster wheels.
- Lightweight aluminum deck.
- Wrap around corner bumper.
- Six 5" casters, four swivel on ends, two rigid in center.
- Boxed and UPS shippable.

OVERALL DIMENSIONS

w: 18.5" h: 35.5" d: 58.5"





272048

Aluminum **Professional Series Telefolding Truck**

- Deck extends from 21" to 29.5".
- Push button, quick conversion.
- Anti-impact, non-skid polypropylene and aluminum deck.
- Non-marking 4" moldon rubber wheels.
- Sponge rubber coated handle.
- Boxed and UPS shippable.

OVERALL DIMENSIONS

w: 17.5" h: 36.5"

d: 21" - 29.5"



272250



Aluminum Economy Telefolding Truck

- Deck extends from 20" to 28".
- Full size platform truck that folds to briefcase size.
- Strong, lightweight aluminum frame.
- Protective vinyl corner bumpers.
- Boxed and UPS shippable.
- Rubber wheel with plastic hub.
- Swivel casters with brake.

OVERALL DIMENSIONS

w: 16" h: 36.5"

d: 20" - 28"

		•			•	
Part #	270382	272076	272112	270389	272048	272250
Capacity	660 lbs	350 lbs	550 lbs	660 lbs	330 lbs	300 lbs
Platform W x L	24" x 35.5"	18.5" x 29"	24" x 35.5"	18.5" x 58.5"	17.5" x 21" - 29.5"	16" x 20" - 28"
Handle Height	41"	34.5"	35.5"	35.5"	36.5"	37.75"
Caster Size		4" 2 swivel/2 rigid	5" 2 swivel/2 rigid	5" 4 swivel/2 rigid	4" 2 swivel/2 rigid	4" 2 swivel w/brake/2 rigid
Weight	46 lbs	26 lbs	33 lbs	44 lbs	19 lbs	21 lbs

WESCO STAINLESS STEEL UTILITY CARTS











Stainless Steel Carts

- 430 Stainless Steel shelf and frame construction.
- NSF Approved.
- 4 swivel, zinc plated casters with non-marking rubber tread polyurethane hub wheels.
- 3 shelves
 - .040" thick

27.5"

32.125"

w:

h:

- top and center 1" lip, 3 sides
- bottom flat, no lip.
- Sound deadening aluminum pad on underside of top shelf.
- Welded construction.
- Protection bumpers on legs and handle.
- Shelves have reinforced hemmed front.
- Overall capacity based upon evenly distributed loads.*

30.75"

33"

• "		
	OVERALL	
D	IMENSIONS	

31"

32"

27.625"

32"





39.25"

37.25"





Steel Service Carts

- \blacksquare 500 lb. capacity, evenly distributed load.
- 5" x 1.25" hard rubber casters 2 swivel, 2 rigid.
- 20 gauge steel trays and 14 gauge corner posts.
- 3.5" tray depth.

SC-1630 500 lbs

2

Cart

16" x 30"

- Baked enamel paint finish.
- 2 sizes, 16" x 30" and 24" x 36".
- Top tray can be inverted for flat work surface.
- Drawer with roller glides for easy operation.

SCT-1630

N/A

Optional

3rd tray

16" x 30"

11 lbs

Shipped KD and boxed.

OVERALL DIMENSIONS							
w:	16"	16"	24"	24"			
h:	32"	3.5"	32"	3.5"			
d:	33"	30"	39"	39"			
2	70166		270168	270169			

SC-2436

500 lbs

2

Cart

24" x 36"

48 lbs

SCT2-436

N/A

Optional

3rd tray

24" x 36"

17 lbs



Deluxe Plastic Service Cart

- 550 lb. capacity, evenly distributed load.
- Available in two sizes: 16" x 30" and 24" x 36".
- Optional 3rd shelf.
- Heavy duty construction resists chips, dents, and rust.
- Push handle has compartments to accommodate a variety of tools, labels, small parts, etc.
- Shipped KD, boxed, and includes 5" non-marking casters 2 swivel, 2 rigid.
- Caster wheels; 5" TPR (thermoplastic rubber tread) molded onto polypropylene hub.
- Shelf depth 2.625".

DIMENSIONS		U١	/ E	K/	٩L	L	
	D	IM	ΕN	IS	10	N	S

w: 16.5" h: 33.5" d: 37.5"	16.5" 4.125" 31"	25" 35.5" 43.5"	25" 4.125" 37.25"
270433 DPC-1630	270453 DES-1630	270434 DPC-2436	270454 DES-2436
550 lbs	N/A	550 lbs	N/A
2	Optional	2	Optional
Service cart	3rd tray	Service cart	3rd tray
16" x 30"	16" x 30"	24" x 36"	24" x 36"
37 lbs	9 lbs	50 lbs	13 lbs



Part # Model #

Capacity

No. of Trays

Description

Dimensions

WESC□° PLASTIC SERVICE & PLATFORM CARTS







270483

Standard Plastic Service Cart

- 500 lb. maximum capacity, evenly distributed load.
- Available in two sizes: 16" x 30" and 24" x 36".
- Optional 3rd shelf.
- Shipped KD, boxed, and includes 5" non-marking casters 2 swivel, 2 rigid.

9 lbs

- Caster wheels; 5" TPR (thermoplastic rubber tread) molded onto polypropylene hub.
- Very economical.
- Shelf depth 2.625".



270493 **Flat Work Surface**

43 lbs

272946

20" 18"

•	w: 17.375" h: 32.5" d: 34.25"	17.375" 4.125" 34.25"	25.5" 32.5" 40.25"	25.5" 4.125" 40.25"	25.5" 32.5" 40.25"
ŧ :	270482	270484	270483	270485	270493
ŧ	SD-1630	SDES-1630	SD-2436	SDES-2436	SDF-2436
/	500 lbs	N/A	500 lbs	N/A	500 lbs
3	2	Optional	2	Optional	2
1	Cart	3rd tray	Cart	3rd tray	Flat top cart
3	16" x 30"	16" x 30"	24" x 36"	24" x 36"	25.5" x 34"

49 lbs

OVERALL DIMENSIONS

Economy Plastic Service Cart

w: 17.25"

d: 34"

h: 30.635"

270494

EPC-1630

330 lbs

2

Cart

16" x 30"

36 lbs

■ 330 lb. maximum capacity, evenly distributed load. Value Plastic

36 lbs

- Optional 3rd shelf.
- Shipped KD, boxed, and includes 5" non-marking casters - 2 swivel, 2 rigid.

Part # Model # Capacity No. of trays Description Dimensions Weight

- Value priced.
- Caster wheels; 5" TPR (thermoplastic rubber tread) molded onto polypropylene hub.

Part #

Model #

Capacity No. of Trays

Description

Dimensions

Weight

■ Shelf depth 2".



17.25"

3.125"

34"

270496

EES-1630

N/A

Optional

3rd tray

16" x 30"

9 lbs

OVERALL

DIMENSIONS

270494

Platform Trucks

- Economically priced.
- Fixed and folding handle designs.
- Plastic platform with steel handle.
- Steel reinforced platform.
- Platform height 8".





OVERALL DIMENSIONS

22"

	h: 34.5" d: 27.5"	34.5" 33.5"
Part #	272281	272282
Capacity	265 lbs	265 lbs
Folded (H x W x D)	N/A	N/A
Wheel Size	5" x 1" rubber caster	5" x 1" rubbe caster
Platform W x D	119.25" x 22.25"	22" x 30.5"
Handle Type	34.5" fixed	34.5" fixed
Construction	Plastic	Plastic
Weight	20 lbs	26.5 lbs

w: 19.25"

Bi-Mode Poly Folding Handle Truck

13 lbs

■ Push/Pull mode - handle is tilted allowing truck to be pulled or pushed.

■ Dolly mode - handle folds flush with surface of deck allowing truck to be used as a dolly without cargo coming in contact with handle. Cargo stays flat and secure on

Casters—two swivel, t non-marking rubber w

37.5" folding

Polyurethane

24 lbs

OVERALL DIMENSIONS

w: 20" h: 37.5" d: 34"



deck.	A CONTRACTOR OF THE PARTY OF TH
wo rigid 5"	
heels.	

deck. vo rigid 5"	
neels.	
0	0

272946	
400 lbs	
2.5" x 20" x 34"	
5" swivel caster	
20" x 31"	



Wire Office Carts

- Ideal for carrying hanging files (letter and legal) mail, packages and tools.
- Swivel casters.

20"

- Removable baskets.
- 1" diameter, 18 gauge tubular construction.

OVERALL

DIMENSIONS

23.75"

- All metal surfaces plated for long life.
- Shipped KD and boxed via UPS.

	h: 37.5" d: 33"	38.25" 33.5"	38.5" 43"	h: 28.75" d: 28"	h: 55" d: 18"	h: 39.5" d: 23"	39.5" 23"	39.5" 23"
Part #	272228	272230	272231	272233	272079	272155	272156	272157
Capacity	200 lbs	200 lbs	250 lbs	200 lbs	as 2 wheel truck: 200 lbs as 4 wheel truck: 400 lbs as 4 wheel table: 100 lbs	600 lbs	600 lbs	600 lb
Basket/Table Size	25" x 17.25 x 11"	25 x 17.25" x 11"	36 x 17.25" X 11"	28" x 19"	19" x 23.5"	N/A	N/A	N/A
Lower Basket	25" x 17.25" x 7.5"	25 x 17.25" x 7.5"	36 x 17.25" X 7.5"	N/A	N/A	N/A	N/A	N/A
Handle Height	N/A	N/A	N/A	N/A	55"	39.5"	40"	41.25"
Deck Height	N/A	N/A	N/A	28.75"	32"	N/A	N/A	N/A
Collapsed Size	N/A	N/A	N/A	6"	11.5"	N/A	N/A	N/A
Raised Height Lowered Height		N/A N/A	N/A N/A	N/A N/A	N/A N/A	9.75" 4.25"	10.25" 4.75"	11.25" 6"
Caster Size	4" hard rubber	5" hard rubber	5" hard rubber	4"	2.5"	2.5"	3"	4"
Wheel Size	4" hard rubber	10" semi-pneumatic	10" semi-pneumatic	N/A	8" x 1.75"	N/A	N/A	N/A
Weight	41 lbs	49 lbs	62 lbs	32 lbs	42 lbs	44 lbs	45 lbs	46 lbs



Foldaway Table Top Cart

- Folds for easy storage.
- Ideal for transporting instruments and office equipment.
- Laminate surface with vinyl edge.
- Four 4" swivel ball bearing casters.
- Lower basket: 21" x 13".

OVERALL DIMENSIONS

w: 19" h: 28.75

23.75"

■ Multi-purpose service

- Multi-purpose service truck ideal for offices and service vehicles.
- Fits in most car trunks.
- Easily converts for use as a four wheel rolling table or two or four wheel hand truck. 7 possible positions.
- Oak color top with vinyl edge.
- 8" x 1.75" easy roll semi-pneumatic wheels and 2.5" hard rubber swivel casters.

OVERALL DIMENSIONS

w: 19" h: 55"





Desk Mover & Pedestal Adapter

- Move a desk without emptying drawers or clearing the top.
- Easy operation, automatically locks in the raised position.
- Vinyl coated lift rack prevents damage and slipping.
- Adjustable pedestal adapter required to move desks with single pedestal - Part # 272150.
- Capacity 600 lbs.
- Boxed and UPS shippable.
- Swivel casters.

31.75"	31.75"
39.5"	39.5"
23"	23"
	39.5"



WESCO® lightweight folding trucks



220646



Mega Mover, Maxi Mover, Superlite & Mini Mover Folding Trucks


- Space saving folding design. Fits into small storage spaces or car trunks.
- Elastic straps for securing load.
- Aluminum or steel construction.
- Non-marking wheels.

■ Mini Mover fits into overhead airline compartments.

OVERALL DIMENSIONS EXTENDED

	w: 26.5" h: 47" d: 25.5"	19" 42" 19"	19" 42" 19"	15.5" 41" 17.5"	
Part #	220650	220649	220617	220646	
Capacity	550 lbs	275 lbs	175 lbs	110 lbs	
Folded (H x W x D)	34" x 23.5" x 4.75"	29.5" x 19" x 2"	29.5" x 19" x 2"	24" x 15.25" x 2"	
Wheel Size	8" x 2.5" pneumatic wheel	7" x 1.5" rubber tread / poly hub	7" x 1.5" rubber tread / poly hub	5" x 1.25" rubber tread / poly hub	
Noseplate/Platform Dimensions (W x D)	23.5" x 18" Noseplate	19" x 12" Noseplate	19" x 12" Noseplate	15" x 12.5" Noseplate	
Handle Type	34" - 47"	29.5" - 42"	29.5" - 42"	24" - 41"	
Construction	Aluminum	Steel	Aluminum	Aluminum	
Weight	33 lbs	14 lbs	11.5 lbs	9 lbs	

WESCO TILT CARTS







Tilt Carts


- Heavy-duty, molded, FDA compliant material, polyethylene bin.
- Easy to move and dump.
- \blacksquare Wheels: 10" x 2.75" / 12" x 3" black rubber tread tire, molded to polyolefin hub.
- Swivel casters, polyurethane wheels.
- 1/2 and 1 cubic yard bins.

- All models include bin, frame, handle, wheels and casters.
- Optional black polyethylene hinged lids: #272586 1/2 cu. yd. and #272587 1 cu. yd. (304 stainless hinge).
- Four grades: utility, standard, heavy duty and forklift.
- Blue recycle 1/2 cubic yard bin available: #272577.

Part #	272575	272576	272577	272578	272579	272580	272581	272582	272583	272584	272585	
Model #	1/2 U450B	1/2 S850B	1/2 S850BLRC	1/2 S850R	1/2 HD1400B	1/2 FL850B	1U850B	1S1250B	1S1250R	1HD2100B	1FL1250B	
Туре	Utility	Standard	Standard/Recycle	Standard	Heavy Duty	Fork Lift	Utility	Standard	Standard	Heavy Duty	Fork Lift	
Cubic Yard	1/2	1/2	1/2	1/2	1/2	1/2	1	1	1	1	1	
Capacity	450 lbs	850 lbs	850 lbs	850 lbs	1,400 lbs	850 lbs	850 lbs	1,250 lbs	1,250 lbs	2,100 lbs	1,250 lbs	
Color	Black	Black	Blue	Red	Black	Black	Black	Black	Red	Black	Black	
Wheel	10" x 2.75"	10" x 2.75"	10" x 2.75"	10" x 2.75"	12" x 3"	12" x 3"	10" x 2.75"	12" x 3"	12" x 3"	12" x 3"	12" x 3"	
Caster	(2) 4" x 1.5"	(2) 3" x 1.25"	(2) 3" x 1.25"	(2) 3" x 1.25"	(2) 4" x 2"	(1) 4" x 2"	(2) 4" x 1.25"	(2) 4" x 1.25"	(2) 4" x 1.25"	(2) 4" x 2"	(2) 4" x 2"	
DIMENSIONS												
A,B	60.75", 57"	61.5", 57"	61.5", 57"	61.5", 57"	61.5", 57"	61.5", 57"	72.5", 69"	72.75", 69"	72.75", 69"	72.75", 69"	73.75", 69"	
C,D	21.5", 26.5"	21.5", 26.5"	21.5", 26.5"	21.5", 26.5"	21.5", 26.5"	21.5", 27"	24.5", 29.25"	24.5", 29.25"	24.5", 29.25"	24.5", 29.25"	24.5", 29.25"	
E,F	18.75", 16"	18.75", 16"	18.75", 16"	18.75", 16"	18.75", 16"	18.75", 16"	22", 19.25"	22", 19.25"	22", 19.25"	22", 19.25"	22.5", 19.25"	
G,H	29", 31"	29", 31"	29", 31"	29", 31"	29", 31"	29", 31"	37", 37"	37", 37"	37", 37"	37", 37"	37", 37"	
Overall Height	36.5"	36.5"	36.5"	36.5"	37.5"	37.25"	43"	43"	43"	43.25"	43.5"	
Weight	51 lbs	65.5 lbs	65.5 lbs	65.5 lbs	83.5 lbs	88 lbs	74 lbs	94.5lbs	94.5 lbs	107.5 lbs	119 lbs	




1/2 and 1 Cubic Yard Lids



Lid Part#	272586	272587
Size	1/2 Cu. Yd.	1 Cu. Yd.
LA,LB,LC	24",26.5",28.375"	27.125",29",33.125"
LD,LE,LF,LG	6.5",6.25",7.5",61"	6.625",6.625",8.25",71.50
Weight	11 lbs.	16.5 lbs



WESCO PLASTIC BOX TRUCKS

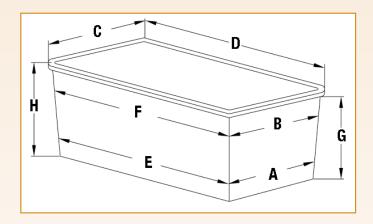

Standard Caster OR Caster Pattern Pattern

To order the diamond caster pattern, add DP to Part #. Example: 272513DP.



5" caster adds 6.75" to

height, except 4 bushel

adds 6"

8" caster adds 10.75" to

height, except 4 bushel

adds 10"






Plastic Box Trucks

- Material: polyethylene.
- Five sizes and color choices.
- Two caster choices: 5" Polyurethane or 8" Pneumatic. Two swivel, two rigid mounted on 5-Ply Plywood base for extra rigidity (except 4 bushel models).
- Can ship KD and nested on quantity orders.
- Caster pattern Standard or Diamond.
- White color, only, produced from FDA compliant polyethylene material.*

Look! 8" Pneumatic Casters

	32 gal.	64 gal.	96 gal.	128 gal.	160 gal.
Volume	4 bushels	8 bushels	12 bushels	16 bushels	20 bushels
Capacity	350 lbs	450 lbs	550 lbs	600 lbs	600 lbs
Dimensions (inches): A-B-C-D E-F-G-H	17 - 17.75 - 20.75 - 32 27.75 - 29 - 13.75 - 15.25	19 - 21 - 24 - 35 30 - 31.75 - 21.5 - 23	22.75 - 25 - 28 - 38 33 - 35 - 27 - 28.25	24.25 - 27 - 30 - 42 36 - 38 - 28.25 - 29.75	28 - 30.75 - 34 - 46 39.75 - 43 - 31.25 - 33
Weight: Tub Only	10 lbs	16.5 lbs	25 lbs	33 lbs	42.5 lbs
Weight: Assembled Tub 5" Caster 8" Caster	20 lbs 24 lbs	43 lbs 47 lbs	50 lbs 54 lbs	54 lbs 58 lbs	65 lbs 69 lbs
GREY Part #: 5" Caster 8" Caster	272503 272530	272508 272531	272513 272532	272518 272533	272523 272534
BLUE Part #: 5" Caster 8" Caster	272504 272535	272509 272536	272514 272537	272519 272538	272524 272539
* WHITE Part #: 5" Caster 8" Caster	272505 272540	272510 272541	272515 272542	272520 272543	272525 272544
RED Part #: 5" Caster 8" Caster	272506 272545	272511 272546	272516 272547	272521 272548	272526 272549
YELLOW Part #: 5" Caster 8" Caster	272507 272550	272512 272551	272517 272552	272522 272553	272527 272554

≣5□°STRAPPING TRUCK & TOOLS/DOCK LIGHTS



UL Approved Dock Lights

- Spring-loaded pushup socket for easy bulb changing.
- 7 gauge wall mount standard.
- 18" two speed fan accessory.
- Use with incandescent lamps or LED only: PAR-38: up to 150W. R40: up to 300W.
- For indoor use.
- Ready for hardwiring or plug attachment.
- 272328 & 272329 arm and fan only (NO LIGHT). Fan has a 62" long cord with a 3 prong plug. Fan plugs directly into outlet. No hard wiring or plug attachment required. On & Off switch on fan.



Part #	272224	272240	272260	272290	272330	272328	272329	272340	272360	
Description	24" Light	40" Light	60" Light	90" Light	Fan only	Fan with 40" arm	Fan with 60" arm	Light & fan w/40" arm	Light & fan w/60" arm	
Weight	15.5 lbs	17.7 lbs	22 lbs	31 lbs	20 lbs	41 lbs	45 lbs	38 lbs	39 lbs	



Universal **Strapping Truck**

- Automatic brake to reduce strap spillage.
- Tray for storing tools and seals.
- Handles steel and non-metallic strapping.
- Accepts 3", 6" and 8" face coils; 8" and 16" core sizes.
- 10" x 1.75" steel semi-pneumatic wheel.

OVERALL				
DIN	MENSIONS			
w:	27"			

h: 39" d: 25"



272009

Poly Strapping System

- Tools for tightening and sealing poly and plastic
- High quality tensioner tightens and cuts .5" to .625" plastic strap.

BOXED OVERALL DIMENSIONS					
4.25" 1.5" 17"					



272024

Steel Strapping System

- Tools for tightening and sealing steel banding.
- Cast sto (.375"

to .75").	es
BOXED OVERALL	

		DIMEN	ISIONS	
w: h:	4" 3.5"	6.25" 1.75"	6.25" 1.75"	6.25" 1.75"
d:	15.5"	13.5"	13.5"	13.5"
		•	•	•



272015

Strap **Cutters**

One hand operation.

	BOXED OVERALL DIMENSIONS		
:	w:	1.75"	
:	h:	1.75"	
•		4.00	



Tensioner/ Crimper

- Push/windless type for steel strapping.
- With cutter and hammer knob for seal closing.
- For use with wing seals.
- Use for on .375" .75" wide and up to .030" thick steel strap.

BOXED	OVERALL
DIME	NSIONS

w:	4"	
h:	2.5"	
٩٠	12 75"	

h:	2.5"
d:	12.75"

Part#	272286	272008	272009	272010	272011	272023	272024	272025	272015	272022	
Description	Truck	Tensioner	Sealer	Sealer	Tensioner	Sealer	Sealer	Sealer	Deluxe	Tensioner/Crimper	
Size	N/A	.375"75"	.5" only	.625" only	.375"75"	.375" only	.5" only	.75" only	up to .75"	.375"75"	
Weight	54 lhs	3 lhe	4 lhs	4 lhs	5 lhs	2 lhs	2 lhe	2 lhe	2 lhs	3 25 lhe	



≣5CO°EASY MOUNT STRIP





Ribbed Strip Surface Inside (wall) **Smooth Strip** Mount Mount

Note: Models and sizes shown are for inside mount. For outside or surface mount select next highest width and height or select size as required.

Easy Mount Strip Doors

- Molded plastic, high-strength, Easy-Mount Bracket. No bolts or screws, just hook it on.
- Energy conserving.
- Reduces noise, dirt, dust and odors. Helps meet OSHA noise rules.
- Two-way visibility.
- No wasted space for swinging door.
- \blacksquare High quality flexible vinyl.



- \blacksquare Functional from -20° to 150° F as an effective thermal barrier. Special compound reduces bruising and lacerations and fading UV rays.
- Two styles: **Smooth** concave/convex overlap for best seal in 12" and 8" widths. Ribbed - reduced scratching and improved sealing.
- Orange end panels on doors with 12" strips.
- 12" strips are .120 thick; 8" strips are .080" thick.
- Can be ordered as complete doors, individual strips, and bulk lengths.
- Custom sizes available.
- Note: The length of the strip is dependent on the type of mount used.
- 12 ft. maximum length.

	HEAVY DUTY – 12" STRI 66% OVERLAP	P WIDTH	WALK	WALK THROUGH DOORS – 8" STRIP WIDTH 50% OVERLAP					
Opening W.x H.	Smooth Part #	Ribbed Part #	Opening W. x H.	Smooth Part #	Ribbed Part #				
6' x 7'	272813	272863	3' x 7'	272801	N/A				
6' x 8'	272814	272864	3' x 8'	272802	N/A				
6' x 9'	272815	272865	4' x 7'	272803	N/A				
6' x 10'	272816	272866	4' x 8'	272804	N/A				
6' x 12'	272817	272867	5' x 7'	272805	N/A				
7' x 7'	272818	272868	5' x 8'	272806	N/A				
7' x 8'	272819	272869	6' x 7'	272807	N/A				
7' x 9'	272820	272870	6' x 8'	272808	N/A				
7' x 10'	272821	272871	7' x 7'	272809	N/A				
7' x 12'	272822	272872	7' x 8'	272810	N/A				
8' x 7'	272823	272873	8' x 7'	272811	N/A				
8' x 8'	272824	272874	8' x 8'	272812	N/A				
8' x 9'	272825	272875		REPLACEMENT STRIPS	– CLEAR				
8' x 10'	272826	272876		Smooth	Ribbed				
8' x 12'	272827	272877	Size	Part #	Part #				
9' x 7'	272828	272878	8" x 7'	171001	N/A				
9' x 8'	272829	272879	8" x 8'	171002	N/A				
9' x 9'	272830	272880	12" x 7'	171003	171012				
9' x 10'	272831	272881	12" x 8'	171004	171013				
9' x 12'	272832	272882	12" x 9'	171005	171014				
10' x 7'	272833	272883	12" x 10'	171006	171015				
10' x 8'	272834	272884	12" x 12'	171007	171016				
10' x 9'	272835	272885	F	REPLACEMENT STRIPS -	ORANGE				
10' x 10'	272836	272886		Smooth	Ribbed				
10' x 12'	272837	272887	Size	Part #	Part #				
12' x 7'	272838	272888	12" x 7'	171022	171032				
12' x 8'	272839	272889	12" x 8'	171023	171033				
12' x 9'	272840	272890	12" x 9'	171024	171034				
12' x 10'	272841	272891	12" x 10'	171025	171035				
12' x 12'	272842	272892	12" x 12'	171026	171036				
14' x 7'	272843	272893	В	ULK STRIP – ORDER BY	THE FOOT				
14' x 8'	272844	272894	Color/	Smooth	Ribbed				
14' x 9'	272845	272895	Width	Part #	Part #				
14' x 10'	272846	272896	Clear 8"	172003	N/A				
14' x 12'	272847	272897	Clear 12"	172004	172006				
			Orange 12"	172005	172007				
				REPLACEMENT HAN	GERS				
			Length	Part #					

24"

172001

WESC□° CHROME-PLATED WIRE SHELVING

Features:

- Open wire design that provides maximum visibility and air circulation while minimizing dust accumulation.
- All units are NSF® Approved for use in the food industry.
- Sets up easily without tools.
- Shelves adjust at 1" increments on numbered posts.
- Adjustable floor levelers compensate for surface irregularities.
- Begin with "starter" units and then "add-on" additional units.
- Not suitable for refrigerated or freezer cold storage environments.
- Capacity of wire shelving sets are reduced to 880 lbs. when using Wesco caster sets. All capacities based upon evenly distributed loads.





Wire Shelving Starter Unit

- Kit consists of 4 posts, 4 shelves and 16 post sleeves that secure shelves to posts.
- Posts are numbered around diameter in 1" increments.
- 24 sizes to choose from: shelves available in 18" and 24" depth and 36", 48", 60", and 72" length; posts are available in 63", 74", and 86" heights.



Add-On Kit

- Kit consists of 2 posts, 4 shelves, 8 "S" hooks and 8 post sleeves that secure shelves to posts.
- "S" hooks attach Add-on Kits to existing shelving units.
- 24 sizes to choose from: shelves available in 18" and 24" depth, and 36", 48", 60", and 72" length; posts are available in 63", 74", and 86" heights.

STARTER LINITS

		STARTE	R UNITS		ADD-ON KITS				
	Part#	Size (D x W x H)	Total Unit Capacity*	Capacity Per Shelf*	Part#	Size (D x W x H)	Total Unit Capacity*	Capacity Per Shelf*	
	272640	18" x 36" x 63"	2,400 lbs	600 lbs	272646	18" x 36" x 63"	2,400 lbs	600 lbs	
	272641	18" x 36" x 74"	2,400 lbs	600 lbs	272647	18" x 36" x 74"	2,400 lbs	600 lbs	
	272642	18" x 36" x 86"	2,400 lbs	600 lbs	272648	18" x 36" x 86"	2,400 lbs	600 lbs	
	272703	18" x 48" x 63"	2,400 lbs	600 lbs	272721	18" x 48" x 63"	2,400 lbs	600 lbs	
	272704	18" x 48" x 74"	2,400 lbs	600 lbs	272722	18" x 48" x 74"	2,400 lbs	600 lbs	
	272705	18" x 48" x 86"	2,400 lbs	600 lbs	272723	18" x 48" x 86"	2,400 lbs	600 lbs	
	272706	18" x 60" x 63"	2,400 lbs	600 lbs	272724	18" x 60" x 63"	2,400 lbs	600 lbs	
	272707	18" x 60" x 74"	2,400 lbs	600 lbs	272725	18" x 60" x 74"	2,400 lbs	600 lbs	
	272708	18" x 60" x 86"	2,400 lbs	600 lbs	272726	18" x 60" x 86"	2,400 lbs	600 lbs	
	272709	18" x 72" x 63"	2,000 lbs	500 lbs	272727	18" x 72" x 63"	2,000 lbs	500 lbs	
	272710	18" x 72" x 74"	2,000 lbs	500 lbs	272728	18" x 72" x 74"	2,000 lbs	500 lbs	
	272711	18" x 72" x 86"	2,000 lbs	500 lbs	272729	18" x 72" x 86"	2,000 lbs	500 lbs	
	272643	24" x 36" x 63"	2,400 lbs	600 lbs	272649	24" x 36" x 63"	2,400 lbs	600 lbs	
	272644	24" x 36" x 74"	2,400 lbs	600 lbs	272650	24" x 36" x 74"	2,400 lbs	600 lbs	
	272645	24" x 36" x 86"	2,400 lbs	600 lbs	272651	24" x 36" x 86"	2,400 lbs	600 lbs	
	272712	24" x 48" x 63"	2,400 lbs	600 lbs	272730	24" x 48" x 63"	2,400 lbs	600 lbs	
	272713	24" x 48" x 74"	2,400 lbs	600 lbs	272731	24" x 48" x 74"	2,400 lbs	600 lbs	
:	272714	24" x 48" x 86"	2,400 lbs	600 lbs	272732	24" x 48" x 86"	2,400 lbs	600 lbs	
	272715	24" x 60" x 63"	2,400 lbs	600 lbs	272733	24" x 60" x 63"	2,400 lbs	600 lbs	
	272716	24" x 60" x 74"	2,400 lbs	600 lbs	272734	24" x 60" x 74"	2,400 lbs	600 lbs	
	272717	24" x 60" x 86"	2,400 lbs	600 lbs	272735	24" x 60" x 86"	2,400 lbs	600 lbs	
	272718	24" x 72" x 63"	2,000 lbs	500 lbs	272737	24" x 72" x 63"	2,000 lbs	500 lbs	
	272719	24" x 72" x 74"	2,000 lbs	500 lbs	272738	24" x 72" x 74"	2,000 lbs	500 lbs	
	272720	24" x 72" x 86"	2,000 lbs	500 lbs	272739	24" x 72" x 86"	2,000 lbs	500 lbs	

*Capacity in pounds based on evenly distributed loads.




Accessories for Wire Shelving

- 5" x 1.25" stem casters. Choice of polyurethane or rubber wheels. Post clamps join units together and "S" hooks are
- Foot plates to bolt racks to the floor.
- Shelf edges to prevent items from falling.
- Extra shelves sold in pairs only.
- Leveling feet protect flooring and level racks on uneven surfaces.



Shelf 2 Shelves		s		ERALL NSIONS			
w: 36"	48"	60"	72"	36"	48"	60"	72"
h: 1.3"	1.3"	1.3"	1.3"	1.3"	1.3"	1.3"	1.3"
d: 18"	18"	18"	18"	24"	24"	24"	24"

- Post clamps join units together and "S" hooks are needed when adding shelves.
- Snap in 8" high shelf dividers keep shelves organized.
- Replacement posts sold in pairs only.



She	lf	Ed	oes.
2116	ш	Lu	ges

w: 18"

h: 3" d: .25" OVERALL DIMENSIONS

24" 36" 48" 60" 72"
3" 3" 3" 3" 3"
.25" .25" .25" .25" .25"

Part #	170278	170264	170265	170266	170279	170267	170268	170269	170247	170248	170273	170249	170251	170252
Description		(2)	(2)	(2)		(2)	(2)	(2)	40"	0.411	0.011	4011	2011	
	18" x 36"	18" x 48"	18" x 60"	18" x /2"	24" x 36"	24" x 48"	24" x 60"	24" x 72"	18"	24"	36"	48"	60"	72"
	shelves	shelves	shelves	shelf	shelf	shelves	shelves	shelves	shelf edge					
Weight	21 lbs	26.2 lbs	32 lbs	43 lbs	29 lbs	37 lbs	48 lbs	56.5 lbs	2 lbs	2.4 lbs	2.5 lbs	2.76 lbs	4 lbs	4 lbs



Shelf Dividers

Shelf
Post Sets
2 Posts/Set



Caster Sets

- 4 swivel casters per set. 2 with brakes; 2 without.
- Wire shelving sets with Wesco casters have a maximum capacity of 880 lbs. with an evenly distributed load.



:	Leveling
	Feet
:	1000



"S" Post Hooks Clamps

						•				
Part #	170253	170254	170261	170262	170263	170258	170270	170256	170255	170260
Description	18" W	24" W 8" H	(2) 63" long	(2) 74" long	(2) 86" long	5" Rubber wheels A. 8.625" B. 6.437"	5" Polyurethane wheels A. 8.562" B. 6.375"	A50"		
Weight	1.75 lbs	2.4 lbs	7 lbs	9 lbs	10 lbs	11.25 lbs	10 lbs	.31 lb	.05 lb	1 lb



Foot Plates



Replacement Sleeves

Part #	: 170257 :	170259
Weight	.15 lb	.11 lbs

WESCO STABILIZING JACKS/CARGO BARS

Trailer Stabilizing Jacks

- High strength steel construction.
- Adjustable height for leveling of trailers parked on uneven ground.
- Broad base prevents trailer dollies from sinking into soft surfaces.
- Prevents up-ending of semi-trailers when not connected to a truck during loading/unloading.
- TSJE Economy, manually turned ACME threaded screw raises and lowers jack. 14" dia. base, 5" x 5" top plate.

 TSJS Standard, ratchet with ACME threaded screw raises and lowers jack. 14" diameter x 1/2" thick base plate, 8" semi-pneumatic wheels. 8" diameter top plate.

 TSJHD Heavy duty, two way reversible hand ratchet, 6" x 24" long beam, 5" triangular base, 8" semi-pneumatic wheels, and 4" semi-steel wheels.

272957

■ Wesco recommends always using at least two jacks per trailer. Meets OSHA requirements.

		OVERALL	
		DIMENSIONS	
w:	13.75"	13.75"	14.5"
h:	44"-51"	39.5" - 51"	39.5" - 51"
d:	13.75"	13.75"	26.5"

Part #	272957	272955	272956
Model #	TSJE	TSJS	TSJHD
Static Capacity	50,000 lbs	100,000 lbs	100,000 lbs
Lifting Capacity	5,000 lbs	40,000 lbs	50,000 lbs
Service Range	44" - 51"	39.5" - 51"	39.5" - 51"
Weight	45 lbs	125 lbs	160 lbs



Cargo Bars, Hoops and Decking Beams

- Helps secure loads to prevent shifting.
- One or two piece construction.
- Materials of construction are lightweight aluminum and heavy duty steel.
- \blacksquare #272962 optional hoops available for models #272958 and #272961 only.
- Cargo bars with quick release feature.



272962 HOOPS

272955

272956

				DIMENSIONS	DIMENSIONS				
W:	1.5" dia.	1.5"	1.75"	1.5"		2.625"	2.625"		
h:		1.5"	1.75"	1.5"	24" W x 36" L	3.1875"	3.1875"		
l:	87" - 103"	87" - 115"	64" - 130"	82.5" - 110"		91" - 102"	91" - 102"		

OVERALL

Part #	272958	272959	272960	272961	272962	273130	273138	
Model#	CBA1000	CBS2000	CBGS3000	CBS4000	СВНООР	E-TRACK DECKING BEAM	E-TRACK DECKING BEAM	
Static Capacity		N/A	N/A	N/A	N/A	2,000 lbs	3,000 lbs	
Length Adjustment		87" - 116"	80" - 139"	86" - 115"	N/A	91" - 102"	91" - 102"	
Articulating Foot Pads	4" x 2.5"	4" x 4"	4" x 4"	4" x 4"	N/A	E-track clips	E-track clips	
Construction	Aluminum Round Tube	Galvanized Sq. Steel Tube	Galvanized Sq. Steel Tube	Galvanized Steel	Galvanized Steel	Aluminum & zinc-plated steel	Aluminum & zinc-plated steel	
Weight	11 lbs	18 lbs	24 lbs	17 lbs	15 lbs	22 lbs	24 lbs	



272159

Wesco Trolleys

- Heavy duty trolleys designed for flexibility of installation.
- Usable on straight or curved track.
- Adjusts for wide variety of beam widths; simply remove end nut and adjust spacers.
- Can be installed or removed from any point in the track.

Part #	272158	272159	272160	272161	272162
Capacity	1,000 lbs	2,000 lbs	4,000 lbs	6,000 lbs	10,000 lbs
Fits I-Beam Flange Width	3.5" to 5.5"	3.5" to 5.875"	4.125" to 7"	4" to 7"	5" to 7"
Α	4"	5"	5.75"	6.75"	7.75"
В	10.25"	12.5"	13.25"	14"	14.625"
С	7.875"	9.5"	11.375"	13.25"	15.375"
Weight	18 lbs	31 lbs	48 lbs	76 lbs	104 lbs



- Heavy duty welded steel construction.
- Steel restraining strap prevents extensions from sliding off fork.
- Sold in pairs.
- Maximum lift truck fork thickness 2".

- 1. OSHA requires contacting the manufacturer of your fork truck for written approval for the use of any fork truck attachment.
- 2. OSHA standards require that the length of fork extensions do not exceed the lift truck fork length by more than 50%. (e.g., Fork extension used on 48" long lift truck forks should not exceed 72".)
- 3. The use of extensions effect lift truck capacity. Contact lift truck manufacturer for load capacity reductions.

OVERALL

:		D	IMENSIONS		
-	w: 6.75" h: 2.375"	6.75" 2.375"	7.75" 2.375"	7.75" 2.375"	8.75" 2.375"
	d: 63.375"	75.375	63.375"	75.375"	75.375"
		272559	272560	272561	272562

Battery Transfer Cart

- For use with a standard pallet truck (sold separately).
- Pallet trucks easily locate in 6.75" W x 3.5" H fork pockets.
- One person can easily remove and replace forklift batteries.
- (12) 2.25" diameter steel rollers.
- Swing tabs help to hold battery in place while on rollers.
- Winch with 2" wide nylon belt and safety latch hook.
- Height to top of rollers 6.5".
- Platform roller base:
- I.D. 26.75" W x 43.25" L.
- O.D. 27.25" W x 43.625" L. ■ Adjustable winch height:

Lowered - 29.625".

OVERALL DIMENSIONS

27.25"

41.50"


55.875"

W:

h:

d:

Raised - 35.50".



Part #	274260
Model #	BAT-TC
Capacity	4,000 lbs
WxL	26.75" W x 43.25" L (usable deck)
Weight	131 lbs



Foldable Maintenance Platform

- (4) swivel casters 4" x 1.5" moldon polyurethane.
- Fork Pockets: 7.75"W x 3.5"H. Centers: 26".
- Replacement caster set #272572, 13.2 lbs.

w:	37.5"
h:	81" w/o casters; 87.25" w/casters
۸.	40 OF"

Part #	272558	272559	272560	272561	272562	272571
Capacity	N/A	N/A	N/A	N/A	N/A	600 lbs
Size	4" x 60"	4" x 72"	5" x 60"	5" x 72"	6" x 72"	Platform Deck - 37" x 37" I.D.
Fits Fork Width	4"	4"	5"	5"	6"	N/A
Weight	95 lbs	114 lbs	108 lbs	121 lbs	139 lbs	220 lbs

WESCO' WHEELS

Cellular Foam Wheel / Microcellular Polyurethane – will not go flat



Part No.	Model	Diameter	Hub Type	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
053446	CF	10"	Steel	3"	2.25"	.625"	5 LBS.	BALL	280
053490	CFB	10"	Steel	3"	2.25"	.75"	5 LBS.	BALL	280

CF

Solid Rubber Wheels



Part No.	Model	Diameter	Hub Type	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
150698	Z2	10"	Poly	2.75"	2.25"	.625"	5 LBS. 12 OZ.	BALL	550
150697	Z8	8"	Poly	2.0"	2.25"	.625"	3.5 LBS.	BALL	300
108479	SR	10"	Poly	2.5"	2.25"	.625"	9 LBS.	BALL	250
109486	Z-12	12"	Poly	3"	3.25"	.625"	8 LBS.	BALL	750

Semi-Pneumatic Wheels



Part No.	Model	Diameter	Hub Type	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
052859	Z8B	8"	Poly	2.5"	2"	.75"	4.25 Lbs.	Ball	250
150589	Z	10"	Zinc/Steel	2.75"	2.25"	.625"	6.25 Lbs.	Ball	350

Pneumatic Wheels



Part No.	Model	Diameter	Hub Type	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
050602	Р	10"	Zinc/Steel	3.50"	2.25"	.625"	4 LBS.	BALL	350
108478	PB	10"	Zinc/Steel	3.50"	2.25"	.75"	4 LBS.	BALL	350
108484	P-12	12"	Zinc/Steel	4"	3.25"	.75"	7 LBS.	BALL	460
151507	PWT	10"	Zinc/Steel	3.625"	2.25"	.625"	4 LBS.	BALL	350
151551	PE	10"	Zinc/Steel	3.50"	2.25"	.625"	3.5 LBS.	BALL	350

Aluminum Center Moldon Rubber Wheels



Typical aluminum center moldon wheel



Part No.	Model	Diameter	Hub Type	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
050567	Α	6"	Solid	2"	2.375"	.625"	2.5 LBS.	BALL	500
053706	AB	6"	Solid	2"	2.1875"	.625"	2.5 LBS.	ROLLER	500
053707	ı	6"	Solid	2"	2.1875"	.75"	2.5 LBS.	ROLLER	500
052870	RB	8"	Solid	1.625"	2"	.75"	3 LBS.	BALL	500
108545	R	8"	Solid	1.625"	2"	.625"	3 LBS.	BALL	500
052868	H-1B	8"	Solid	2"	2.25"	.75"	3.75 LBS.	BALL	550
053708	H-1R	8"	Solid	2"	2.1875"	.625"	3.75 LBS.	ROLLER	600
150131	H-1RB	8"	Solid	2"	2.1875"	.75"	3.75 LBS.	ROLLER	600
108561	R3	8"	Spoke	1.625"	1.625"	.625"	2.5 LBS.	BALL	300

Balloon Cushion TPR Rubber



Part No.	Model	Diameter	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.	Hub Type
*150228	BC-10	10"	2.165"	2.25"	.625"	4 LBS. 12 OZ.	BALL	300	Polyolefin
*150229	BC-8	8"	2.165"	2.25"	.625"	2 LBS. 12 OZ.	BALL	300	Polyolefin
050566	RK-8	8"	2.25"	2.25"	.750"	3 LBS. 10 OZ.	BALL	450	Aluminum

DC 40

Moldon Rubber on Cast Iron Hubs



вт

Part No.	Model	Diameter	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
053722	-	5"	2"	2.1875"	.75"	3.25 LBS.	ROLLER	500
108838	1	6"	1.5"	2"	.75"	3.50 LBS.	BALL	400
108839	_	6"	1.5"	2"	.625"	3.50 LBS.	BALL	400
053723	-	6"	2"	2.1875"	.625"	4.25 LBS.	ROLLER	500
053724	1	6"	2"	2.1875"	.75"	4.25 LBS.	ROLLER	500
050579	Н	8"	2"	2.1875"	.625"	6.25 LBS.	ROLLER	600
150120	HB	8"	2"	2.1875"	.75"	6.25 LBS.	ROLLER	600
150596	BT	10"	2.5"	2.75"	1.00"	13.75 LBS.	ROLLER	800

Moldon Polyurethane on Polypropylene Hub



Part No.	Model	Diameter	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
053730	PP10	10"	2.5"	2.75"	1.00"	6 LBS.	ROLLER	1200
053733	PP8	8"	2"	2.1875"	.75"	2.5 LBS.	BALL	800

Moldon Rubber on Polyolefin Hub



Part No.	Model	Diameter	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
150692	R2	8"	1.625"	2.187"	.625"	1 LB.	PLAIN	375

22

Solid Polyolefin Wheels



BTW

Part No.	Model	Diameter	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
150103	CWP-1	2.5"	1.125"	1.25"	.5"	2.5 OZ.	PLAIN	200
150197	-	3"	1.25"	1.56"	.375"	3 OZ.	PLAIN	300
101355	_	4"	1.25"	1.56"	.5"	5 OZ.	PLAIN	350
108300	CT-3	5"	1.5"	1.62"	.5"	8 OZ.	PLAIN	400
150693	E-2	6"	1.5"	1.625"	.625"	13 OZ.	PLAIN	500
150204	_	8"	2"	2.25"	.75"	2 LBS.	PLAIN	600
150691	BTW	10"	2.25"	2.75"	1.00"	2.5 LBS.	PLAIN	750

Solid Phenolic Resin Wheels



Part No.	Model	Diameter	Tread Width	Hub Length	Bore Id	Approx. Weight	Bearing Type	Capacity Lbs.
053902	ı	5"	2"	2.1875"	.625"	1.75 LBS.	ROLLER	1000
053769	_	5"	2"	2.1875"	.75"	1.75 LBS.	ROLLER	1000
053903	-	6"	2"	2.1875"	.625"	2.5 LBS.	ROLLER	1200
053770	-	6"	2"	2.1875"	.75"	2.5 LBS.	ROLLER	1200

Phenolic resin wheels are non-marking.

^{*}BC-8 is gray non-marking TPR rubber. BC-10 is charcoal-gray non-marking TPR rubber.

NEW! PRODUCTS FROM WESCO®





Stainless Steel Rotary **Drum Pump** #272397, Page 20.



Pneumatic Power Leveler #272696, Page 78.



Double Scissors Lift Table #272862. Page 75.



Page 89.

Stainless Steel Carts 3 Shelf Carts, 5 Models,




Light Duty Winch Lift #274520, Page 62.



Powered Lift Scissors Tables #273710 (660 lb. Capacity) #273711 (1,100 lb. Capacity) #273712 (1,650 lb. Capacity), Page 77.



Powered Lift Double Scissors Table #273713 (770 lb. Capacity), Page 77.



Low Profile Stacker Outrigger Option, Page 60.



80" Long Deck Scissors Table #273230 (2,200 lb. Capacity), Page 76.



Powered Pallet Truck Stacker #273129, Page 52.

PRODUCTS FROM WESCO®



Stainless Steel **Universal Drum Lifter** Part #240063, Page 11.



Stainless Steel **Drum Dolly** Part #240197, Page 7.



Stainless Steel **Hand Truck** Part #210351, Page 22,



Stainless Steel **Drum / Hand Truck** Part #210352 , Pages 6 & 26.



Stainless Steel **Heavy-Duty Faucet** Part# 272038, Page 17.



Stainless Steel Knock-**Down Drum Truck** Part #240019, Page 5.



Drum Handler Part #240240,



Rotary Drum Pump #272397, Page 20.



Stainless Steel **Electric High Lift** Part #272860, Page 51.



Stainless Steel 4-Wheeled Pedalift Part #260197, Page 56.



Stainless Steel 4-Wheeled Pedalift Part #260186, Page 56.





Stainless Steel Carts 3 Shelf Carts. 5 Models. Page 89.



Stainless Steel Pallet Truck Part #272152, Page 49.



Stainless Steel Folding **Handle Truck** Part #270458, Page 87.



Stainless Steel Manual High Lift Part #272859, Page 51.




THINK THE BOX!

WESCO® is pleased to present its new line of tilt carts. The carts have heavy-duty, molded, FDA compliant material polyethylene bins. Easy to move and dump, all models include bin, frame, handle, wheels and casters.

- Wheels: 10" x 2.75" or 12" x 3" black rubber tread tire, molded to polyolefin hub (depending on model).
- Swivel casters, polyurethane wheels.
- 1/2 and 1 cubic yard bins.
- Four grades: utility, standard, heavyduty and forklift.
- Blue recycle 1/2 cubic yard bin available: #272577.
- Bins are easily cleaned with hose or pressure washer.
- Optional black polyethylene hinged lids:
 #272586 1/2 cu. yd. and #272587 1 cu. yd. (304 stainless hinge). Helps contain cargo and reduce odor.



WESCO: WESCO: WESCO:






Part #	272575	272576	272577	272578	272579	272580	272581	272582	272583	272584	272585	
Model #	1/2 U450B	1/2 U850B	1/2 S850BLRC	1/2 U850R	1/2 HD1400B	1/2 FL850B	1U850B	1S1250B	1S1250R	1HD2100B	1FL1250B	
Туре	Utility	Standard	Standard/Recycle	Standard	Heavy Duty	Fork Lift	Utility	Standard	Standard	Heavy Duty	Fork Lift	
Cubic Yard	1/2	1/2	1/2	1/2	1/2	1/2	1	1	1	1	1	
Capacity	450 lbs	850 lbs	850 lbs	850 lbs	1,400 lbs	850 lbs	850 lbs	1,250 lbs	1,250 lbs	2,100 lbs	1,250 lbs	
Color	Black	Black	Blue	Red	Black	Black	Black	Black	Red	Black	Black	
Wheel	10" x 2.75"	10" x 2.75"	10" x 2.75"	10" x 2.75"	12" x 3"	12" x 3"	10" x 2.75"	12" x 3"	12" x 3"	12" x 3"	12" x 3"	
Caster	(2) 4" x 1.5"	(2) 3" x 1.25"	(2) 3" x 1.25"	(2) 3" x 1.25"	(2) 4" x 2"	(1) 4" x 2"	(2) 4" x 1.25"	(2) 4" x 1.25"	(2) 4" x 1.25"	(2) 4" x 2"	(2) 4" x 2"	
DIMENSIONS												
A,B	60.75", 57"	61.5", 57"	61.5", 57"	61.5", 57"	61.5", 57"	61.5", 57"	72.5", 69"	72.75", 69"	72.75", 69"	72.75", 69"	73.75", 69"	
C,D	21.5", 26.5"	21.5", 26.5"	21.5", 26.5"	21.5", 26.5"	21.5", 26.5"	21.5", 27"	24.5", 29.25"	24.5", 29.25"	24.5", 29.25"	24.5", 29.25"	24.5", 29.25"	
E,F	18.75", 16"	18.75", 16"	18.75", 16"	18.75", 16"	18.75", 16"	18.75", 16"	22", 19.25"	22", 19.25"	22", 19.25"	22", 19.25"	22.5", 19.25"	
G,H	29", 31"	29", 31"	29", 31"	29", 31"	29", 31"	29", 31"	37", 37"	37", 37"	37", 37"	37", 37"	37", 37"	
Overall Height	36.5"	36.5"	36.5"	36.5"	37.5"	37.25"	43"	43"	43"	43.25"	43.5"	
Weight	51 lbs	65.5 lbs	65.5 lbs	65.5 lbs	83.5 lbs	88 lbs	74 lbs	94.5lbs	94.5 lbs	107.5 lbs	119 lbs	



1/2 and 1 Cubic Yard Lids

Lid Part #	272586	272587
Size	1/2 Cu. Yd.	1 Cu. Yd.
LA,LB,LC	24",26.5",28.375"	27.125",29",33.125"
LD,LE,LF,LG	6.5",6.25",7.5",61"	6.625",6.625",8.25",71.50
Weight	11 lbs.	16.5 lbs





For more details on this equipment or for information regarding any of the products available from WESCO Industrial Products, Inc., please contact your authorized dealer.

STAINLESS STEEL



WESCO STAINLESS STEEL SHELF CARTS

- 430 stainless steel shelf and frame construction.
- NSF Approved.
- 4 swivel, zinc plated casters with non-marking rubber tread polyurethane hub wheels.
- Three shelves:
 - .040" thick
 - top and center 1" lip, 3 sides
 - bottom, flat, no lip.
- Welded construction.
- Protection bumpers on legs and handle.
- Shelves have reinforced hemmed front.
- Overall capacity based upon evenly distributed loads.*





Part # Model #	260290 SS3C11	260291 SS3C22	260292 SS4C11	260293 SS4C22	260294 SS4C44
*Overall Capacity	300 lbs	300 lbs	500 lbs	500 lbs	500 lbs
Capacity Per Shelf	100 lbs	100 lbs	166 lbs	166 lbs	166 lbs
Shelf Size (L x W)	24" x 15.5"	27.125" x 17.625"	24" x 15.75"	27.375" x 18"	35.125" x 21"
Shelf Lip Height	1"	1"	1"	1"	1"
Distance Between Shelves	12.75"	13.25"	12.5" top/14.625" bottom	13" top/14.5" bottom	14.375" top/14.5" bottom
Caster Wheel	3.5" dia. x .75" W	3.5" dia75" W	4" dia. x .75" W	4" dia. x .75" W	5" dia. x 1.25" W
Weight	30.5 lbs	40 lbs	36 lbs	42 lbs	67 lbs

WESCO STAINLESS STEEL MANUAL HIGH LIFTS

- 1 year pump warranty.
- 304 stainless steel construction. Forks are 316 stainless steel.
- Nylon 3" load (WHL-2) and 8"nylon steering (WHL-1) wheels.
- 180° steering arc.
- Loop handles with inside hand control.
- Closed pallets must be placed on top of forks.
- 6 1/2" wide forks.
- Overload bypass.
- Two stage pump: number of strokes to full height (unloaded): Standard - 69. Quick Lift - 28.




QUICK LIFT setting allows operator to raise the height of the lift with fewer strokes.

WESCO STAINLESS STEEL ELECTRIC HIGH LIFTS

- 1 year pump warranty.
- 304 stainless steel construction. Forks are 316 stainless steel.
- Nylon 3" load (WHL-2) and 8"nylon steering (WHL-1) wheels.
- 12 volt battery charger included.
- 10-12 second lift time unloaded.
- Overload bypass.
- 180° steering radius.
- 6 1/2" wide forks.
- Telescoping pump piston.





Manual High Lift

Part #272859 / Model #SSTHL27M

Electric High Lift Part #272860 / Model #SSTHL27E

H-1



H-2 Lowered Height

H-3 Raised Height

WHL-2 Load Wheel Diameter

L-2

WESCO 304 STAINLESS STEEL PALLET TRUCK

- 1 year pump warranty.
- 304 stainless construction.
- For use in food industry and areas where water or other corrosive solutions are needed.
- 6 1/4" wide forks.
- 7" nylon steering wheels.
- 3" nylon load wheels.
- Nylon entry roller.
- Comfort-grip coated handle.
- 210° steering radius.

Part # Model #	272152 SSPT
Capacity	5,500 lbs
W-1 x L-1	27" x 48"
W-2	6.25"
L-2	62.5"
WHL-1 / WHL-2	7" / 3"
H-1 / H-2 / H-3	47.5" / 3" / 7.25"
Weight	164lbs



WESCO 304 STAINLESS STEEL HYDRAULIC PEDALIFT

■ 1 Year Parts Warranty.

- Wesco Manufactured Hydraulic Jack -Over 40 Years of Proven Quality.
- 4-wheeled model.
- 304 stainless steel construction including hydraulic pump body, lift piston, and wheel lock. Foot operated hydraulic pump raises platform, foot release lowers platform and controls lowering speed.
- Platform sits 5.75" above floor.
- Wheel lock standard.
- 60.5" overall height.
- 8" x 2" polyurethane tread on polypropylene hub, non-marking wheels with 440 stainless sealed 3/4" precision ball bearing.
- 304 stainless swivel casters with plain bore 3.5" hard rubber wheels.



Part #	260186	260197
Model #	SSDPL-54-2222	SSDPL-54-F
Capacity	750 lbs	750 lbs
Platform or Fork W x L	Platform 22" x 22"	Fork 3" x 18"
Lift Height	54"	54"
Load Center	10"	10"
Lowered Height	5.75"	5.75"
Weight	175 lbs	181 lbs



4-Wheeled Pedalift Part #260197 Model #SSDPL-54-F

WESCO 304 STAINLESS STEEL HYDRAULIC DRUM LIFTER

- 1 Year Parts Warranty.
- Wesco Manufactured Hydraulic Jack Over 40 Years of Proven Quality.
- Lifts, transports, and places drums on spill or standard pallets.
- 304 stainless auto grab drum clamp with manual lock down knob.
- 304 stainless steel construction including hydraulic pump body, lift piston, and floor lock. Foot operated hydraulic pump raises drum, foot release lowers drum and controls lowering speed.
- (2) 5" x 2" black phenolic wheels with 304 stainless roller bearing.
- (2) 304 stainless swivel casters with 5" x 2" black phenolic wheels, 304 stainless bearings, NSF certified washdown casters.
- Handles most 30, 55 or 85 gallon drums Steel, Fiber and Poly.
- Works with most drums with locking rings.
- Lift range: 26"-73" at lifting clamp.
- Single position outriggers non-telescoping.



Drum Handler Part #240240 / Model #SSDH

Part # Model #	240240 SSDH
Capacity	800 lbs
Rise/Stroke	1"
Weight	207 lbs

WESCO 304 STAINLESS STEEL DRUM/HAND TRUCK

- 304 stainless steel construction.
- Utility of a hand truck & drum truck.
- Chime hook works with 55 and 30 gallon drums.
- Curved frame holds 5-gallon pails and kegs.
- With noseplate resting flat on floor, 18" to center of lowered chime hook.
- Noseplate 7.812" D x 14" W.
- 8" x 2" polyurethane tread on polypropylene hub, non-marking wheels with 440 stainless sealed 3/4" precision ball bearing.





Part #	210351	210352
Model #	156-PP8-SS	156DH-PP8-SS
Capacity	600 lbs	600 lbs
Wheel Type	8" non-marking	8" non-marking
Weight	33 lbs	33.5 lbs

WESCO 304 STAINLESS STEEL HAND TRUCK

- 304 stainless steel construction.
- Swept back continuous handle with curved back design.
- Versatile frame design allows one or two hand control.
- Four horizontal cross straps and vertical center strap provide support for small packages.
- 8" x 2" polyurethane tread on polypropylene hub, non-marking wheels with 440 stainless sealed 3/4" precision ball bearing.



Hand Truck Part #210351 / Model #156-PP8-SS

WESCO 304 STAINLESS STEEL FOLDING HANDLE TRUCK

- 304 stainless steel construction.
- Fold down handle for easy storage.
- Caster: sealed bearing with stainless rig.
- TPR rubber non-marking caster wheels.
- Vinyl perimeter bumper.
- Boxed and UPS shippable.

Part #	270457	270458
Model #	Deluxe	Deluxe
Capacity	440 lbs	770 lbs
Platform Size	19" x 29"	22.5" x 34"
Caster Size	2 swivel/2 rigid	2 swivel/2 rigid
	4" Stainless Rigs	4" <mark>Stainless</mark> Rigs
Handle Height	34.5"	34"
Weight	26 lbs	37 lbs



WESCO HEAVY DUTY 304 STAINLESS STEEL FAUCET

- 304 stainless steel.
- Adjustable shank designed to easily adjust to proper drain position after installing in drum.
- .75" NPT connection.
- PTFE gasket.
- 1.50 lbs.



Part# 272038 Internal flame arrestor. **FM APPROVED** for use with oils (under 30 SAE) and non flammables, compatible with stainless steel.

WESCO 304 STAINLESS STEEL **ROTARY PUMP**

- Made from corrosion resistant materials
- 304 stainless steel pump body.
- 304 stainless steel dispensing spout.
- 304 stainless steel 3 piece suction tube.
- PTFE vanes.
- UPS shippable.
- Compatible fluids: solvents, oils, mild corrosives.
- Min./ Max. temperature rating: 40° Fahrenheit / 140° Fahrenheit.
- 2" NPT Bung Adapter fits 15, 30 and 55 gallon drums.
- ALWAYS USE A GROUND WIRE.
- Weight: 13 lbs.



WESCO 304 STAINLESS STEEL DRUM DOLLIES

■ Wesco's Stability Advantage.

By design, Wesco casters are mounted past the dolly and drum rim. Our casters are mounted further apart than standard designs with casters completely underneath the drum and closer together. The further the casters are apart the greater the stability.

- Welded 304 stainless steel dolly construction with reinforced outriggers.
- 304 stainless dollies are ideal for clean room, pharmaceutical, food, and wash down applications.
- Models available for 30, 55, and 85 gallon drums.
- Three caster set options:


HRZ: zinc plated swivel rig with 3" hard rubber wheel & zinc plated hardware. *HRSS: 304 stainless steel swivel rig with 3" hard rubber wheel and stainless hardware.

*PPSS: 304 stainless steel swivel rig with 3" white polypropylene wheel and stainless hardware.

*Suitable for wash down applications.



Drum Dolly Part #240197 / Model #SS5-PPSS All stainless rigs with 3" polypropylene wheels



/	Part #	240192	240193	240194
	Model #	SS3-HRZ	SS3-HRSS	SS3-PPSS
	Capacity	900 lbs	900 lbs	1,000 lbs
	I.D.	19"	19"	19"
	Drum Size	30 gal	30 gal	30 gal
	Caster Rig	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel
	3" Caster Wheel	Hard Rubber	Hard Rubber	White Polypropylene
	Dolly Material	304 Stainless	304 Stainless	304 Stainless
	Weight	20 lbs	20 lbs	18 lbs

Part #	240195	240196	240197	240198	240199	240200
Model #	SS5-HRZ	SS5-HRSS	SS5-PPSS	SS8-HRZ	SS8-HRSS	SS8-PPSS
Capacity	900 lbs	900 lbs	1,000 lbs	900 lbs	900 lbs	1,000 lbs
I.D.	24"	24"	24"	27"	27"	27"
Drum Size	55 gal	55 gal	55 gal	85 gal	85 gal	85 gal
Caster Rig	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel
3" Caster Wheel	Hard Rubber	Hard Rubber	White Polypropylene	Hard Rubber	Hard Rubber	White Polypropylene
Dolly Material	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless
Weight	22 lbs	22 lbs	21 lbs	24 lbs	24 lbs	23 lbs

WESCO STAINLESS STEEL KNOCKDOWN (KD)DRUM TRUCKS

- US Patent No. 9,302,688.
- UPS shippable KD and boxed.
- Two models: 304 stainless construction to handle steel and poly drums.
- Handles 30, 55 and 85 gallon drums.
- Requires minimal assembly.
- All parts removable and interchangeable among all models.
- Each of the models includes handle, frame, base, kickstand, axle, toes or feet, wheel, chime hook or belt and hardware.
- Foot operated break-over assist bar provides extra leverage to tilt and balance the load.
- Stainless models okay for wash down.
- Optional 3rd Wheel (#240211):
 - Allows load to stand in tilted position.
 - Ergonomic design, better maneuverability.
 - Better load support.
 - Helps reduce breakover effort.
 - 5" x 2" swivel caster.
 - 14 lbs.
- Milled toes are hard-faced, double-beveled.






Part #240019 Model #KD-SS-STL-PO Shown with optional 3rd wheel







Part # Model #	240019 KD-SS-STL-PO	240020 KD-SS-POLY-PO	
Capacity	1,000 lbs	1,000 lbs	
Wheel	10" Polyolefin	10" Polyolefin	
Drum Type Handled	Steel	Poly	
Toe/Foot (replaceable)	Stainless Milled Toe #051904	Stainless Foot #050362	
Construction	304 Stainless	304 Stainless	
Chime Hook	#050197- stainless	N/A	
Belt	N/A	#240213 - stainless buckle	
Weight	66 lbs	75 lbs	

WESCO 304 STAINLESS STEEL UNIVERSAL DRUM LIFTER

- 304 stainless steel construction.
- Design allows for the loading of drums into overpacks with use of hoist.
- Works on open and closed head drums.
- For use with standard steel or poly drums with at least a 3/16" chime.
- Lifting arms are adjustable to work with most 55 or 30 gallon drums.
- Three-point contact of the lifting arms prevents or minimizes deformation of the drum and provides more secure lifting.
- 1,000 lb. capacity.
- Weight 21 lbs.



Distributed by:



For more details on this equipment or for information regarding any of the products available from WESCO Industrial products, Inc., please contact your authorized dealer. Part #179021



CONDENSED CATALOG







for manual drum handling



15BT DELUXE SERIES DRUM TRUCK

Four wheel design enables user to quickly and easily load and unload drums from pallet.



20BT DELUXE SERIES DRUM TRUCK

Floating axle reduces effort required to break over and balance load.



30BT DELUXE SERIES DRUM TRUCKMulti-function drum truck allows you to move drums on four wheels and to store or dispense as

a drum cradle.

40BT DELUXE SERIES DRUM TRUCK

Handles all poly and fiber drums, except over-packs.



45BT DELUXE SERIES DRUM TRUCK

Recommended primarily for handling of over-packs.



156DH DRUM - HAND TRUCK

Utility of a hand truck and drum truck. Also available in Stainless Steel.



MANUAL ALUMINUM DRUM TRUCK

Dual disc brakes for ramp safety. Two chime hook choices, two wheel choices.



KNOCK DOWN (KD) DRUM TRUCK

1,000 lb. capacity. Ships boxed which saves onfreight costs. Requires minimal assembly. Six models available. (Stainless Steel model shown.)

for vertical drum positioners and lifters

ERGONOMIC DRUM HANDLERS

Wesco's DM-100 Series Drum Lifters offer the patented Gator Grip® Head for secure drum lifting. With a variety of models and options, the DM-1100's are the safest choice for all vertical drum lifting and positioning applications.







HIGH REACH MODEL



SCALE MODEL



POWER LIFT



POWER LIFT AND DRIVE

for drum handling accessories



DRUM DOLLY



DRUM RACK



DELUXE DRUM CRADLE



GATOR GRIP® DRUM GRAB



DRUM GRAB FOR 55
GALLON STEEL DRUMS



OPEN HEAD DRUM LIFTER



POLYJAWS



304 STAINLESS STEEL ROTARY PUMP



HEAVY DUTY BRASS FAUCET

NON-SPARKING DEHEADER

for industrial hand trucks



136 SERIES HAND TRUCK WITH **FOLDING NOSE**

Two handle tapered body design for safe handling larger, bulky loads



SERIES 156 HAND TRUCK Versatile frame that allows one or

two hand control. Also available in steel with six wheel choices.



SERIES 156DH **DRUM - HAND TRUCK**

Utility of a hand truck and drum truck. Also available in Stainless Steel.

> **186 SERIES HEAVY DUTY HAND TRUCK**

Rear caster design for effortless transport of loads.



HEAVY DUTY WAREHOUSE TRUCKS

Dual handle design. Large nose plate, 10" x 16.5" x .25" thick. Available in two or four wheel models.



for high pressure and liquid cylinder transport



PROFESSIONAL SERIES CYLINDER TRUCKS

Quick and safe transport of high pressure cylinders.



HYDRAULIC LARGE LIQUID CYLINDER TRUCK

Lifts and transports liquid cylinders effortlessly.



LARGE LIQUID CYLINDER TRUCK

Safe transport of large 20" liquid gas cylinders.



POWER DRIVE LARGE LIQUID CYLINDER TRUCK

Ultimate in mobility and ease of transport.

for appliance and vending trucks



Rugged tubular steel construction.



LIFTKAR HD Powered Stair Climber. High capacity. (Shown with optional fold-out wheel carriage and snap-on toe plate.)



STAIRKING WITH **KICK-OUT WHEEL**



HEAVY DUTY VENDING TRUCK

1,800 lb. capacity with front wheel locks for safe, stable transport.

LIFTKAR SAL

Powered Stair Climber. 375 lb. capacity, high speed climbing - up to 48 steps per minute. (Shown with folding handle.)

STAIRKING BATTERY POWERED STAIR CLIMBING APPLIANCE TRUCK

Fully welded frame with industrial chain drive.

for aluminum and "2 in 1" hand trucks



POWERED CONVERTIBLE TRUCK -COBRA PRO SR.

Variable speed fingertip control forward and reverse.



CONVERTIBLE TRUCK -SPARTAN ECONOMY JR. AND SR.

Value priced truck with pedal release for easy conversion from two wheel to four wheel.



SERIES 410 COBRA-LITE HAND TRUCK

Quality, lightweight truck at an economical price.



for hydraulic and manual lifts



TWO WHEEL WINCH PEDALIFT

Manual winch with auto-brake. Low maintenance design. Available with platform.



FOUR WHEEL HYDRAULIC PEDALIFT

Foot operated hydraulic pump raises fork or platform, foot release lowers. Five models available, including lightweight aluminum. (Stainless Steel shown.)



FOUR WHEEL 1,000 LB. HYDRAULIC STACKER

Foot pedal, pump and release. Available in fork or platform models. Forks touch the floor on all fork models.



1,500-2,000 LB. POWER LIFT FORK STACKER

Adjustable forks and base legs. Power Drive and 5th Wheel Options available.



DUAL PLATFORM POWER LIFT STACKER 1,500-2,000 LB.

Power Drive and 5th Wheel Options available.



1,500-2,000 LB. POWER LIFT PLATFORM STACKER

Power Drive and 5th Wheel Options available.



POWER LIFT ROLL TOP STACKER 1,500-2,000 LB.

Roller top and push pull options safely transfer loads.

for hydraulic, powered and scissors lift tables



MEDIUM & HEAVY DUTY HYDRAULIC LIFT TABLES

Push handle with foot operated floor lock.



POWERED LIFT TABLE

Up to 6,000 lb. capacity with Push-Pull, Roller Top and Ball Transfer available. Power drive.



DOUBLE SCISSORS HIGH LIFT TABLE

Lever release handle and foot operated pump.



POWERED LIFT SCISSORS TABLE

12 volt rechargeable, deep cycle batteries with on board charger and battery gauge.



SCISSORS TABLE WITH ROLLER TOP

Roller top permits easy movement of cargo for loading and unloading. Hydraulic foot pump.



PALLET LEVELER

Progressively lowers as pallet is loaded and raises as pallet is unloaded. Pneumatic and spring models available.



Lever release handle and foot operated pump.

for dock and warehouse equipment



STAINLESS STEEL PALLET TRUCK

For use in food industry and areas where corrosion resistant wash down is needed.



DELUXE ADJUSTABLE FORK PALLET TRUCK

Adjusts from 21" fork width to 27" fork width.



CPI PALLET TRUCK

Narrow aisle 18" wide forks available.



SEMI-ELECTRIC PALLET TRUCK

Manual lift, power drive. Two fork widths available.



STAINLESS STEEL MANUAL LIFT PALLET TRUCK

Telescoping model. Quick Lift setting allows operator to raise the forks with fewer strokes.



ELECTRIC HIGH LIFT PALLET TRUCK

Telescoping and Non-Telescoping models available. 10-12 second lift time unloaded.



SCALE PALLET TRUCK

LED display, Mettler-Toledo Hawk scale/sensor.







PALLET TRUCK CHOCK

High visibility yellow chock secures pallet truck and will not slip.

for hydraulic, precision lift tables



Lexco Lift Tables are custom designed for the most demanding applications including die handling, helicopter blade transport and missile positioning.











for dock and warehouse accessories





TRAILER STABILIZING JACKS



UNIVERSAL STRAPPING TRUCK









DOCK LIGHT AND FAN



for platform trucks, carts and foldable trucks



ALUMINUM PLATFORM TRUCK



GREENLINE STEEL PANEL CART



ECONOMY STEEL PLATFORM TRUCK





PLASTIC BOX TRUCK



STAINLESS STEEL **FOLDING HANDLE TRUCK**









TILT CART

FOLDING HAND TRUCKS

From left: Mini Mover, SuperLite, Maxi Mover, Mega Mover

more solutions...

from our IWS partner companies





TUFF GUARD SAFETY RAIL



EDGE OF DOCK LEVELERS



STEEL DOCK BOARDS



MEZZANINE STRUCTURES

NORDOCK®



DOCK LEVELERS







SMART-HOOK® VEHICLE RESTRAINT

LOGI-SMART® CONTROL PANEL





WEARTOUGH® SEALS & SHELTERS





INTEGRATED WAREHOUSE SOLUTIONS™ represents the coming together of quality known brands within the material handling industry to serve the needs of our customers and prospects on an international basis. As a solutions provider, our goal is to create, manufacture and market products that exceed your expectation. Our products focus on making the work environment both safer and more efficient. As you evaluate your material handling needs, we will strive to earn your business with quality workmanship and the dedication of our associates.







Who's ready for a 6-PACK?





PALLET TRUCKS

Deluxe Adjustable Fork

- 5 YEAR INDUSTRY LEADING **PUMP WARRANTY.**
- US PATENT NO. 6,808,357.
- 7" moldon polyurethane steering wheel.
- 3" moldon polyurethane load wheels.
- 7.75" raised height.
- 3" lowered height.
- 6" wide 8 gauge reinforced forks.
- 200° steering radius.
- Adjustable fork width can be set from 21" to 27" or anywhere in between. Just loosen and reset front and rear adjusting bolts.

EXCLUSIVE PATENT

Deluxe Model

27" Fork

Vidth Setting


5 YEAR INDUSTRY LEADING **PUMP WARRANTY.**

- 8" moldon polyurethane steering wheel.
- 3" moldon polyurethane load wheels.
- 8" raised height.
- 3" lowered height.
- 6" wide 8 gauge reinforced forks.

- 200° steering radius.
- Pump overload bypass.
- Rubber coated handle.
- Adjustable fork tie rods.
- Exit rollers.
- Tapered fork tips.



REFERENCE SCHEMATIC



Part #	272744	272748
Model	ADJ. FORK	STANDARD
Capacity	5,500 lbs	5,500 lbs
W-1 x L-1	21" - 27" x 48"	27" x 48"
W-2	6"	6."
L-2	61"	63"
WHL-1 / WHL-2	7" / 3"	8" / 3"
H-1/H-2/H-3	47" / 3" / 7.75"	48" / 3" / 8"
Weight	180 lbs	166 lbs



272660

PALLET TRUCKS

CPI Pallet Truck

■ 2 YEAR PUMP WARRANTY.

- 4 mm thick forks.
- Adjustable fork connecting rods.
- Overload bypass.
- Rubber coated handle.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- Entry and Exit Rollers.
- 6.25" wide forks.
- 210° steering radius.


CP3 Pallet Truck

- **2 YEAR PUMP WARRANTY.**
- 3 mm thick forks.
- Adjustable fork connecting rods.
- Overload bypass.
- Rubber coated handle.

- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- Entry and Exit Rollers.
- 210° steering radius.

273448





Part #	272660	273448
Model	CPI	CP3
Capacity	5,500 lbs	5,500 lbs
W-1 x L-1	27" x 48"	27" x 48"
W-2	6.25"	6.25"
L-2	63"	63"
WHL-1 / WHL-2	7" / 3"	7" / 3"
H-1/H-2/H-3	48.25" / 2.9" / 7.25"	48.25" / 2.9" / 7.25"
Weight	180 lbs	164.5 lbs



PALLET TRUCKS

WESCO*


Economizer Pallet Truck

1 YEAR PUMP WARRANTY.

- Fingertip control: raise neutral lower.
- 3" moldon polyurethane load and 6.25" moldon polyurethane steering wheels.
- 190° steering radius.
- 6" wide 3mm thick forks.



REFERENCE SCHEMATIC



Part #	272149
Model	ECONOMIZER
Capacity	4,400 lbs
W-1 x L-1	27" x 48"
W-2	6"
L-2	63"
WHL-1 / WHL-2	6.25" / 3"
H-1/H-2/H-3	48.25" / 2.9" / 7.5"
Weight	136 lbs

Who's ready for a 6-PACK?

- Get the best price on the best Jacks in the business!
- Ships the **NEXT** day.
- Wesco Manufacturing stands behind these quality products.
- Unassembled **6-PACK's** save money and freight.



Distributed by:

For more details on this equipment or for information regarding any of the products available from WESCO Industrial Products, Inc., please contact your authorized dealer.





We've joined forces!







....working together.



INTEGRATED WAREHOUSE SOLUTIONS™ represents the coming together of quality known brands within the material handling industry to serve the needs of our customers and prospects on an international basis. Two of these quality brands are Bluff® Manufacturing and Wesco® Industrial Products. As a solutions provider, our goal is to create, manufacture and market products that exceed your expectation. Our products focus on making the work environment both safer and more efficient. As you evaluate your material handling needs, we will strive to earn your business with quality workmanship and the dedication of our associates.

BLUFF MANUFACTURING is the innovative leader in the fabrication and design of high-quality dock and warehouse equipment. For over 80 years, Bluff Manufacturing has been the top national provider of steel and aluminum dock boards and plates, edge of dock levelers, portable yard ramps, mezzanines, carts and warehouse safety equipment.

WESCO' INDUSTRIAL PRODUCTS is a full line manufacturer and distributor of a wide range of standard and custom products. Material handling professionals have relied on the quality and durability of WESCO's products for over 70 years. WESCO's primary lines include drum handling, hand trucks and carts, lift equipment as well as a variety of associated dock and material handling products.

The following pages represent these two quality companies working together with SMO Catalog Marketing to ensure that you have the best warehouse and material handling equipment at your fingertip.

CLIMBING AND TRUCKS



Power LiftKar HD Stairclimbing Trucks

• 725 lb. high capacity models.

This truck features an innovative edge-of-step braking system that automatically applies brake when wheels are at edge of step helping to prevent loss of load control caused by accidental rolling down steps. 24V quick-change battery pack. Includes battery, charger and a 137" x 2" cargo belt. Noseplate measures 21"W x 7½"D. -- call for additional noseplate sizes. Two climbing speeds: 6 steps/minute or 10 steps/minute. Optional Snap-on toe plate equipped with four dual casters provides additional cargo space and the ability to move loads without tilting truck. FOB Shipping Point.

Uni...Straight frame.

Fold...upper handle angle can be adjusted. Best for copiers, safes, heavy motors or any short and heavy load which would require the user to pull the load back to a very low position for proper balance. Extended Fold...same advantage as Fold but with an extra 7" in height and fold-out wheel carriage.

POWER LIFTKAR HD STAIRCLIMBING TRUCKS								
Product Overall Size Wt.								
No.	Description	WxHxD	(lbs.)					
H274100	Uni	22 x 63 x 19"	96					
H274101	Fold	22 x 47/63 x 19"	97					
H274238	Extended Fold	22 x 53.5/70 x 21.3"	105					

H274103 Optional Snap-on toe plate (24"W. x 14"D.) W. 12 (lbs). Price Ea H274116 Battery Pack fits all LiftKar models. Wt. 9.5 (lbs). Price Ea







Power LiftKar SAL Stairclimbing Trucks

• Climbs up to 48 steps per minute.

Dual speed control on all models to fit your application. Quick change battery and charger included. Pivoting and fixed handle configurations available to handle a wide variety of cargo. All models include charger, battery and 56" cargo strap. 1 year warranty on parts against defects in materials and workmanship, 6 month warranty on battery. FOB Shipping Point.

Product No.	Frame	Cap. (lbs.)	R SAL STAIRCLIMBIN Wheel Type TOE PLATE 16.5"W :	Steps Per Minute	Wt. (lbs.)	
H274241 H274242 H274243 H274244	Fold 300 Ergo 240 Ergo 375 Uni 375	300 240 375 375	Pneumatic Pneumatic Microcellular Microcellular	35 48 29 29	46.8 47.3 47.3 46.4	
	WITH	GS-NG SMO	OTH TOE PLATE 18.7	4"W x 9.4"D		
H274252 H274253 H274254 H274255	Fold 300 Ergo 240 Ergo 375	300 240 375 375	Pneumatic Pneumatic Microcellular	35 48 29	46.3 46.8 46.8	

H274116 Battery Pack fits all LiftKar models. Wt. 9.5 (lbs). Price Ea



Spartan III Hand Truck

- Value priced truck.
- Aluminum construction.

This truck has 3 positions: Vertical - 2 wheel, 45° - 4 wheel and 4 wheel Platform. 500 lb. capacity when used in 2 wheel and 45°- 4 wheel positions and 750 lb. capacity when used as a 4 wheel platform truck. Cast aluminum noseplate 18" x 7½". Recessed folding nose extension 7½"W. x 27"L. Handle height 48". FOB Shipping Point.

SPARTAN III HAND TRUCK							
Product	Frame Bed		Caster	Wt.			
No.	WxL	Wheel	Size	(lbs.)			
H270391	12 x 51"	10 x 3½" Pneumatic	5" x 1.25" Swivel	42			

Steel and aluminum surcharges may apply.

Wesco® 4-Wheel Nose Truck®

• Rear caster allows small diameter turns in tight areas. Combination 2 handle and utility bar handle for maximum handling flexibility. Distribution of load over 4 wheels improves load control. All wheels have ball bearings. Overall size 47.5"H. x 20.5"W. 8"D. nose plate. 800 lb. load capacity. Front wheels are 10" x 2.75"

Semi-Pneumatic. Rear wheels are 4" x 1.25" Poly/swivel casters. FOB Shipping Point.



H186-ZC Wt. 53 (lbs.) Price Ea. Wesco® Heavy-Duty Shovel Nose Trucks

• Built to handle loads up to 900 lbs.

Features 5-year weld guarantee. Made of 1" heavy-duty sch-40 pipe frame. Features easy grip continuous handle frame for safe handling of heavy loads. 12" pneumatic wheels are ideal for outdoor construction sites. Shovel noseplate measures 13"D. x 17.5"W -- .25" thick, tapered. Includes wheel guards. 3/1" axle. FOB Shipping Point.



Product No.	Overall Size W x H	Cap. (lbs.)	DUTY SHOVEL NOSE TRUCK Caster Size	Wt. (lbs.)	
HST2-HB	20.5 x 53"	900	8 x 2" Cast Iron Moldon Rubber	59.5	
HST2-P12	20.5 x 53"	800	12" Pneumatic	61	



HAND TRUCKS







Cobra Aluminum Convertible Hand Trucks

- Use as a hand truck or a platform truck.
- Tough, durable and lightweight aluminum construction.

Smooth and easy transition from the 2 to 4 wheeled position. Features 18"W. noseplate for large load handling. 4 rivets per cross brace for extra strength. Welded release pedal. Platform casters are non-marking 5" x 1.25" swivel. Ships KD. FOB Shipping Point.

Cobra Jr... Features dual hand grips for improved control. Includes 3 frame cross braces to help prevent package fall through.

Cobra Sr... Continuous handle allows multiple ways to control loads. 4 frame cross braces to help prevent package fall through.


Spartan Economy 2 In 1 Truck... Foot pedal release allows easy conversion from 2-wheel to 4-wheel position. 18"W. noseplate for large, bulky loads. Shipped KD in a box. Spartan Jr... Includes 3 frame cross braces to help prevent package fall through. Spartan Sr... Includes 5 frame cross braces to help prevent package fall through.

			1.1 1	0	U	
	Product No. 2	COBRA ALU Wt. Cap. (lbs.) Wheels/4 Wheel	MINUM CONVERTIBLE HAN Wheel Is Description COBRA JR.	D TRUCKS Frame Bed W x H	Wt. (lbs.)	
	HCBR-JR-T18-PWT HCBR-JR-T18-Z HCBR-JR-T18-Z2	600/1200 600/1200 600/1200	10 x 3.5" Pneumatic 10 x 2.75" Semi-Pneumatic 10 x 2.75" Solid Rubber COBRA SR.	12 x 38" 12 x 38" 12 x 38"	39 44 43	
)	HCBR-SR-T18-PWT HCBR-SR-T18-Z HCBR-SR-T18-Z2		10 x 3.5" Pneumatic 10 x 2.75" Semi-Pneumatic 10 x 2.75" Solid Rubber	12 x 50.75" 12 x 50.75" 12 x 50.75"	43 47.0 46.0	
			SPARTAN – IMPORTED			
	HSPTN-JR-T18-PE HSPTN-SR-T18-PE	500/1000 500/1000	10" Full Pneumatic	12 x 38 12 x 50.75	37.5 41	

Cobra-Lite Aluminum Hand Truck

- Quality light weight truck at an economical price.
- All aluminum construction for durable use.
- Ships KD and boxed. FOB Shipping Point.

	COBRA-LITE ALUMINUM HAND TRUCKS							
Ltr.	Product	Cap.	Wheel	Size	Wt.			
No.	No.	(lbs.)	Description	WxH	(lbs.)			
Α	H410-T14-R3	500	8 x 1.625" Moldon Rubber	18 x 49"	19.5			
В	H420-T14-P	500	10 x 3.5" Pneumatic	18 x 52"	21			
C	H450-T14-R3	500	8 x 1.625" Moldon Rubber	18 x 49"	21			
D	H470-T14-P	500	10 x 3.5" Pneumatic	18 x 52"	22.5			
E	H450-T14-P	600	10 x 3.5" Pneumatic	18 x 49"	23			



Superlite Folding Truck

- Great for travel, office, sports and other recreational activities.
- Lightweight aluminum or steel construction.

Features easy push button operation for quick set up. Pull down the nose-plate and the wheels move into position. Space saving folding design — fits into small storage spaces or car trunks. Elastic straps for securing load. Rolls on non-marking shock absorbing rubber tread tires. Mini Mover fits into overhead airline compartments. FOB Shipping Point.



Superlite

Mini Mover

	SUPERLITE FOLDING TRUCKS							
Product No.	Description	Cap. (lbs.)	Extended Size H x W x D	Folded Size H x W x D	Nose Plate W x D	Wheel Size	Wt. (lbs.)	
H220646 H220617 H220649 H220650	Mini Mover - Alum. Superlite - Alum. Maxi Mover - Steel Mega Mover - Alum.	110 175 250 550	41 x 15.5 x 17.5" 42 x 19 x 19" 42 x 19 x 19" 47 x 26.5 x 25.5"	24 x 15.25 x 2" 29.5 x 19 x 2" 29.5 x 19 x 2" 29.5 x 19 x 2" 34 x 23.5 x 4.75"	15 x 12.5" 19 x 12" 19 x 12" 23.5 x 18"	5 x 1.25" 7 x 1.5" 7 x 1.5" 8 x 2.5"	7.25 8.4 12 28.5	

Mega Mover

Maxi Mover



VENDING MACHINE TRUCKS



Heavy Duty Vending Trucks

- 1,800 lb. capacity.
- Wheel lock feature standard.

Constructed of heavy duty 1" diameter steel tubing. Front wheels have wheel locks to allow truck to be placed in upright position without the danger of the truck rolling away from operator. In transport position. Frame has $10^{\circ} \times 2^{\circ}$ poly hub wheels with two 5" poly hub moldon rubber front wheels. Rear main wheel design allows truck to be tilted back to clear doorways. Available in 72" and 78" heights. Two webbed cargo belts with auto-rewind ratchet or eccentric tighteners for maximum load security. Noseplate measures $9 \times 24 \times 1/4$ " thick. FOB Shipping Point.

HEAVY DUTY VENDING TRUCKS							
Product	Cap.	Ratchet	Tightening	Size	Wt.		
No.	(lbs.)	System	Belt	Ht.	(lbs.)		
HHDSV-72	1,800	Auto Rewind	2 pc. w/clasp	72"	126		
HHDSV-78	1,800	Auto Rewind	2 pc. w/clasp	78"	129		





Heavy Duty Auto Rewind Ratchet Appliance Truck with Swivel Casters

- 1,800 lb. capacity.
- Fingertip rear wheel carriage release lever.

Constructed of heavy duty 1" diameter steel tubing. Dynamic fulcrum system – fulcrum point changes as truck is tilted to decrease break-over effort. Conveniently located lever releases rear carriage and activates dynamic fulcrum system. 10° x 2" poly hub, moldon rubber main wheels, 6° rear swivel casters. Folding rear carriage allows truck to be used in 2-wheel or 4-wheel mode. Available in 72" and 78" heights. 2 webbed cargo belts with auto-rewind ratchet tighteners for maximum load security. Noseplate measures $5 \times 24 \times \frac{1}{4}$ " thick. FOB Shipping Point.

HEAVY DUTY AUTO REWIND RATCHET APPLIANCE TRUCK WITH SWIVEL CASTERS						
Product	Cap.	Tightening	Size	Wt.		
No.	(lbs.)	Belt	Ht.	(lbs.)		
HWRV-MAX-72	1,800	2 pc. w/clasp	72"	120		
HWRV-MAX-78	1,800	2 pc. w/clasp	78"	130		



Economical Aluminum Appliance & Vending Trucks

• Trucks reduce the strain of balancing the cargo over long distances.

Lightweight aluminum frame with auto rewind ratchet. **HAAP-612** has double ratchet design for greater cargo security. **HAVT-61** has four wheel kick-out design with 2 x 1" casters to support heavy loads and help reduce the strain of balancing the cargo over long distances. Overall size is 24"W x 12"D x 61"H. FOB Shipping Point.

ECONOMICAL ALUMINUM APPLIANCE & VENDING TRUCKS							
Product No.	Cap. (lbs.)	Wheels	Tightening Belt	Wt. (lbs.)			
HAAP-61 HAAP-612 HAVT-61	550 550 550	6 x 2" 6 x 2" 6 x 2"	2 pc. w/clasp Double 2 pc. w/clasp 2 pc. w/clasp	41 43 50			

Steel Appliance Truck 📹

- Move heavy appliances easily.
- All joints double welded for maximum durability.

Rugged tubular steel construction stands up to hard work. Rolls smoothly on aluminum center moldon rubber wheels. FOB Shipping Point.




Steel Vending Machine Trucks

- Retractable moldon rubber casters help support loads.
- Improved kick-out design allows operator to kick-out wheels while keeping both hands on the truck.

HWRC

Rolls on heavy duty 8" cast iron center moldon rubber wheels with roller bearings. FOB Shipping Point.





LATFORM TRUCKS

Thrifty Plate Aluminum Tread Platform Trucks

· Non-marking gray corner bumpers.

Structural capacity of any size platform not to exceed 2400 lbs. for Commercial Quality and 1200 lbs. for Light Duty. Platforms and casters sold separately. Casters determine capacity. Each caster set includes 2 rigid and 2 swivel

One handle included, extra handles available. FOB Shipping Point.

		MMERCIA		TREAD PLATEC	DRM IT DUTY
Size	Product	Wt.	Price.	Product	Wt.
W x L	No.	(lbs.)	Ea.	No.	(lbs.)
24 x 36"	H273601	28		H273605	19
24 x 48"	H273602	36		H273606	23
30 x 48"	H273603	43		H273607	28
30 x 60"	H273604	53		H273608	34

COM Product	A PUSH HA MERCIAL F Fits Truck Width	PLATFO Wt.	RM Price				
H273609 H273610	30"	5					
EXTRA PUSH HANDLE FOR LIGHT DUTY PLATFORM Product Fits Truck Wt. Price							
	Width		Ea.				
H273614 H273615	24" 30"	5					

casters.					
Product No.	Caster Size	STER SETS 2 SW Caster Description	IVEL, 2 RIGII Cap. (lbs.) Set	Wt. (lbs.) Set	Price
H273612	6 x 2"	Moldon Rubber Aluminum Hub	2000	26	
H273613	8 x 2"	Moldon Rubber Aluminum Hub	2400	28	
H272194	8 x 2.5"	Full Pneumatic Steel Plate Hub	1600	28	
H272195	10 x 3.5"	Full Pneumatic Steel Plate Hub	2500	37	

Actual capacity of assembled platform is dependent exceed the platforms structural capacity

Wesco® Steel Platform Trucks

• Features heavy-duty 12 ga. steel reinforced welded construction.

Rugged steel construction handles loads up to 4,000 lbs., depending on caster selection. Casters sold separately. Accepts both standard corner or diamond mount pattern. Corner sockets at both ends allow handles (One handle included) to be used at either or both ends - extra handles available. FOB Shipping Point.

STEEL PLATFORM TRUCKS								
	(CASTERS SOLD SEPARATELY)							
Product	Size	Cap.	Wt.					
No.	LxW	(lbs.)	(lbs.)					
H272266	36 x 24"	4000	54					
H272267	48 x 24"	4000	65					
H272268	54 x 27"	4000	82					
H272269	48 x 30"	4000	115					
H272270	60 x 30"	4000	132					
H272271	60 x 36"	4000	111					
H272272	72 x 36"	4000	127					





Built for easy handling and value. Ships complete with platform, handle and 4 - 5" x 1.25" casters. Handles loads up to 750 lbs. Deck size 42"L. x 24"D. FOB Shipping Point.



Polypropylene Service Carts

· Heavy-duty construction resists chips, dents, and rust.

This line of high quality, low priced, polypropylene service carts are available in two sizes with an optional third shelf. 550 lb capacity. Push handle has compartments to accommodate a variety of tools, labels, small parts and more. Includes 5" non-marking casters. Ships KD in box. FOB Shipping Point.



Product	POLYPROPYLENE SERVICE CARTS Wt.					
No.	Description	(lbs.)				
H270433	30 x 16" 2-shelf Truck	37				
H270453	30 x 16" Middle Shelf	10				
H270434	36 x 24" 2-shelf Truck	50				
H270454	36 x 24" Middle Shelf	15				

CASTERS SETS -- 2 SWIVEL, 2 RIGID Cap. (lbs.) Wt. (lbs.) **Caster Description** H272191 H272192 H272193 H272194 H272195 H272201 H272202 Polyolefin Polyolefin Polyolefin Moldon Polyurethane on cast iron hub Full Pneumatic Full Pneumatic Full Pneumatic Moldon Polyurethane on cast iron hub 25 31 38 28 37 32 35 Moldon Rubber on cast iron hub Moldon Rubber on cast iron hub H272203 8 x 2" Moldon Rubber on cast iron hub 40

*Actual capacity of assembled truck is dependent upon caster capacity, not platform capacity.

Product No.	EXTRA PUSH F Fits Truck Width	IANDLE Wt. (lbs.)	
H272197	24"	15	
H272198	27"	16	
H272199	30"	17	
H272200	36"	19	

Steel and surcharges may apply.

Steel Folding Handle Trucks

Fold down handle for easy, space saving storage. Protective vinyl perimeter bumpers won't scratch walls or furniture. Non-skid heavy vinyl deck surface. Enameled finish.



	STEE	L FOLDING H	ANDLE TRUCKS		
Product	Deck Size	Cap.	Caster	Wt.	
No.	W x L	(lbs.)	Size	(lbs.)	
H272019	19 x 29"	400	4" Rubber	28	
H272238	19 x 29"	275	4" Rubber	24	
H272035	23 x 35"	600	5" Rubber	47	
H272239	23 x 35"	400	5" Rubber	41	
H272235	23 x 35"	600	8" Pneumatic	69	

Casters are 2 swivel, 2 rigid.

Telescoping/Folding Aluminum Truck

Anti-impact, non skid polypropylene and aluminum deck. Deck extends from 21" to 29½" with push button, for quick conversion. Non-marking 4" mold-on rubber casters, 2 swivel and 2 rigid. Sponge rubber coated handle FOR Shipping Point

mandic. 1	OD omppn	16 1 01111.			
		OLDING ALU			
Product No.	Retracted Size	Extended Size	Cap. (lbs.)	Wt. (lbs.)	Price Ea.
H272048	17½ x 21"	17½ x 29½"		19	
Royad and	LIDS chinnah	ام			





STAINLESS STEEL & ALUMINUM DRUM ANDLING EQUIPMENT





Aluminum Drum Truck with Hand Brake

 Great for loading and moving steel, poly and fiber drums.

Chime hooks adjust for 30 and 55 gallon drums. Drum is held securely in place with standard spring loaded chime hooks that automatically engages closed head steel, fiber or poly drums. Rolls smoothly on 12" pneumatic front wheels and 6" mold-on rear wheels. Includes a disc wheel brake that is activated by a hand lever. 1,000 lb. weight capacity. Measures 25¾"W x 60"H x 18½"D. FOB Shipping Point. H240120 Wt. 60 (lbs.) Price Ea.



Steel and

Stainless Steel **Combination Drum and Hand Truck**

• Popular frame that allows one or two hand controls.


Features a swept back continuous handle with a curved back design. Includes four horizontal cross straps and a vertical center strap that provides support for small packages. Rolls smoothly on non-marking 8 x 2" polyurethane tread on a polypropylene hub, non-marking wheels with stainless sealed %" precision ball bearing hubs. 600 lbs. weight capacity. Measures 20½"W. x 48"H. x 18½"D. FOB Shipping Point. H210352 Wt. 34 (lbs.) Price Ea.



Stainless Steel Knockdown Drum Truck - US. Pat. No. 9,302,688

- UPSable KD and boxed.
- Durable 304 Stainless Construction.
- Handles 30, 55 and 85 gallon drums.

Two models to choose from. H240019 handles steel drums and includes replaceable stainless milled toes. H240020 handles poly drums and includes replaceable stainless feet. Each model includes handle, frame, base, kickstand, axle, wheel and chime hook. H240020 also includes a stainless belt buckle. All parts are removable and interchangeable among all models. Rolls smoothly on 10" Polyolefin wheels. Foot operated break-over assist bar provides extra leverage to tilt and balance the load. Optional Third Wheel swivel caster allows your load to stand in a tilted position with a ergonomic design allowing for better load support. FOB Shipping Point.



**	neer Opnon				
	STAINLE	SS STEEL KNOC	KDOWN DRUM TR	UCK	
Product	For Use	Cap. (lbs.)		Wt.	
No.	With	(lbs.)	Belt	(lbs.)	
H240019	Steel Drums	1000	None	66	
H240020	Poly Drums	1000	Stainless Buckle	75	
H240211 T	hird Wheel Option	Wt. 14 (lbs.) Pr	ice Ea.		

Stainless Steel Drum Transporter/Lifter

• One year parts warranty.

Lifts, transports and places drums. Features durable 304 stainless steel hydraulic pump body, lift piston and floor lock. Spring-loaded jaws hold any 36" or higher drum rim. Operator does not need to touch drums to operate. Manual lock can be activated, if desired. Foot operated hydraulic pump raises drum and controls lowering speed. Comes standard with two rear 5 x 2" black phenolic wheels with 304 stainless roller bearings and two front swivel casters that feature 304 stainless bearings. This non-telescoping, single position outrigger handles most 30, 55 or 85 gallon steel, fiber and poly drums. Lift range: 26-73" at lifting clamp. FOB Shipping Point.

	STAINLES	S STEEL DRUM TRANSPO	ORTER/LIFTER	
Product	Cap.		Wt.	
No.	(lbs.)	Rise/Stroke	(lbs.)	
H240240	800	1"	207	

Stainless Steel **Universal Drum Lifter**

Unique design of this Stainless Steel Universal Drum Lifter allows for the loading or removal of drums into overpacks with the use of a hoist. Works on open and closed head standard steel or poly drums with a least a 3/4" chime. Lifting arms are adjustable to work with most 30 or 55 gallon drums. A three-point contact of the lifting arms prevent or minimizes deformation of the drum and provides more secure lifting. 1,000 lbs, capacity. FOB Shipping Point. H240063 Wt. 21 (lbs.) Price Ea.



Stainless Steel Drum Dollies

• Welded 304 Stainless steel construction

By Wesco's stability advantage design, casters are mounted past the dolly and drum rim. Casters are mounted further apart than standard designs with casters completely underneath the drum and closer together. The further the casters are apart the greater the stability. Dollies are ideal for clean rooms, pharmaceutical, food, and wash down applications. Fits 30 gallon drums. Inside dimension measures 19". FOB Shipping Point.



STAINLESS STEEL DRUM DOLLIES Caster
Rig
4 Swivel, Zinc Plate
4 Swivel, Stainless
4 Swivel, Stainless Product No. Description H240192 H240193 H240194 Hard Rubber Hard Rubber White Polypropylene

Heavy Duty Stainless Steel Faucet

• .75" NPT connection.

• PTFE gasket.

Adjustable shank designed to easily adjust to proper drain position after installing in drum. Made in Taiwan.

FOB Shipping Point. **H272038** Heavy Duty Stainless Faucet. Wt. 1.5 (lbs.) Price Ea.

H272038

Interal flame arrestor FM APPROVED for use with oils (under 30 SAE) and non flammables, compatible with stainless steel.

Stainless Steel **Rotary Pump**

• 304 Stainless steel pump body.

Made from corrosion resistant materials 304 Stainless steel pump body, dispensing spout and three piece suction tube. PTFE vanes are compatible with solvents, oils and mild corrosive fluids. 2" NPT bung adapter fits 15, 30 and 55 gallon drums. Always use a ground wire. 40°F Minium temperature rating and 140°F maximum. UPS shippable. Made in Taiwan. FOB Shipping Point. H272397 Stainless Steel Rotary Pump Wt. 13 (lbs.) Price Ea.



H240020 with 3rd

Drum Handling

Steel Drum Trucks

- Made of industrial strength, heavy duty 1" structural pipe frames.
- All joints double welded.

All trucks can be stored in the upright position. Safe, one-man handling of heavy 55 gal. drums. Features vinyl hand grips. FOB Shipping Point.





A) Floating Axle Ergonomic Drum Truck

Easiest drum truck for one person to handle. Floating axle reduces effort required to break over and balance the load. Chime hook can be stored at the top of frame. Self-standing. Replaceable hard double-beveled nose prongs.

A) H20BT

		A) FLOATING AXLE ERGON	OMIC DRUM TRUC	CK	
Product No.	Cap. (lbs.)	Wheel Description	Overall Size W x H	Wt. (lbs.)	
H20BT H20BTW	1000 1000	10 x 2.5" moldon rubber 10 x 2.25" polyolefin	23.75 x 61" 23.75 x 61"	74 59	

B) Economy Series Drum Truck (not shown)

Affordable and durable. Angular steel base design. Kickstand. 24"W. at handle. 16.25"W. at nose.

		B) ECONOMY			
Product No.	Cap. (lbs.)	Wheel Description	Overall Size W x H	Wt. (lbs.)	
H5BT H5RTW	1000	10 x 2.5" moldon rubber	24.5 x 62"	68 53	

C) Standard Series (not shown)

Machined steel load wheels behind nose prong help ease the lifting of drum. Classic single bar frame design. Kickstand. 24"W. at handle. 16.25"W. at nose.

Product No.	Cap. (lbs.)	Wheel Description	Overall Size W x H	Wt. (lbs.)	
H10BT	1000	10 x 2.5" moldon rubber	24.5 x 62"	64	
H10BTW	1000	10 x 2.25" polyolefin	24.5 x 62"	50	



D) Deluxe Series

Four wheel design enable user to quickly and easily load and unload drums from pallet. Rear 6" wheels stabilize the load for effortless transport. Replaceable hard double-beveled nose prongs. Self-storing chime hook. Kickstand. 16.25"W. at nose

		_	D) DELUXE	SERIES		
Product No.	Cap. (lbs.)		Wheel Description	Overall Size W x H	Wt. (lbs.)	
H15BT H15BTW	1000 1000		2.5" moldon rubber x 2.25" polyolefin	24 x 60" 24 x 60"	79 61	

E) Ergonomic Drum Truck (not shown-similar to (D) but with rear swivel casters)

Ergonomic swivel caster design reduces operator muscle strain and fatigue. Swivel casters allow for smooth and tight turns in congested areas and provide 4 wheel support. Not recommended for use with pallets. Replaceable hard double-beveled nose prongs. Kickstand. 16.25"W. at nose. Capacity 1000 lbs. Wheels are 10 x 2.5" moldon rubber. Overall size 24"W x 60"H.

H15BTC, Wt. 79 (lbs.), Price

F) Drum Truck w/Drain Stand Multi-functional drum truck allows four wheel drum handling and acts as a drum cradle for storage or dispensing. Frame clearance for dispensing into 5 gal. pails. Real axle allows for loading and unloading of drums from pallets. Kickstand. 16.5" drain height.

		F) DRUM TRUCK W/I	DRAIN STAND		
Product No.	Cap. (lbs.)	Wheel Description	Overall Size W x H	Wt. (lbs.)	
H30BT	1000	10 x 2.5" moldon rubber	24 x 56.5"	82	

Poly Drum Trucks

A) Standard Poly Drum Truck

Handles all poly and fiber drums except overpacks. Features replaceable "feet" and belt. Wide "feet" and belt eliminate the risk of drums being punctured by nose prongs and chime hooks. Floating axle reduces effort required to break over and balance the load. 23.5"D. Patented design. FOB Shipping Point. Handles all polydrums except overpacks. 6" x 1.5" rear wheel. Patented design. FOB Shipping Point.

FF		••			
Product No.	Cap. (lbs.)	A) STANDARD PO Wheel Description	LY TRUCK Overall Size W x H	Wt. (lbs.)	
H40BT H40BTW	1000 1000	10 x 2.5" Moldon Rubber 10 x 2.25" Polyolefin	23.5 x 59.5" 23.5 x 59.5"	82 67	

B) Overpack Poly Drum Truck (not shown-similar in appearance to (A))

Recommended primarily for handling of 85 gallon overpacks. Long belt allows truck to handle all poly drums. Replaceable "feet" and belt. Wide "feet" and belt eliminate the risk of drums being punctured by nose prongs and chime hooks. Floating axle reduces effort required to break over and balance the load. 23.5"D. Patented design. FOB Shipping Point.

Product No.	Cap. (lbs.)	B) OVERPACK POL Wheel Description	Y TRUCK Overall Size W x H	Wt. (lbs.)	
H45BT H45RTW	1000	10 x 2.5" Moldon Rubber	23.5 x 59.5"	82 67	



C) Poly Truck w/Drain Stand

Use as a poly drum truck and as a convenient drain stand. Wide "feet" and belt eliminate the risk of drums being punctured by nose prongs and chime hooks. Handles all polydrums except overpacks. 6" x 1.5" rear wheel. Patented design. FOB Shipping Point.

Product No.	Cap. (lbs.)	C) POLY TRUCK W/DF Wheel Description	RAIN STAND Overall Size W x H	Wt. (lbs.)
H50BT H50BTW	1000	10 x 2.5" Moldon Rubber	23.75 x 58" 23.75 x 58"	86 65



Drum Handling EQUIPMENT



PolyJaws Drum Grip

- $^{\rm o}$ Works on poly drums that have at least a 3/16" top lip.
- Fork truck driver does not have to leave cab to engage or disengage drum.

Handles most 55 and 30 gal. poly drums. 1000 lb. capacity. Ships KD and boxed via UPS. Fork pocket size 5.375"x 1.5". Orange in color. FOB Shipping Point.

HPJ Wt. 37.5 (lbs.) Price Ea.



Combination Drum & Hand Truck

- Dual purpose truck can be used as a hand truck or drum truck.
- Chime hook works with 55 & 30 gal. drums. Curved frame accommodates 5 gal. pails and kegs.

Handles loads up to 800 lbs. Measures 19.75"W. x 48"H. x 15"D. FOB Shipping Point.
H156DH-1 01" x 2.75" Semi-Pneumotic Tires.

700 lb. cap. Wt. 39 (lbs.) H156DH+HB 8" \times 2" Moldon Rubber Tires. 800 lb. cap. Wt. 42.5 (lbs.)

Steel or aluminum surcharges may apply.

d truck or ms. Curved s. 448"H. x

Drum Grabs

- •Features all welded steel construction for durability.
- •The safe and cost effective way to move steel drums.

Non-Adjustable Drum Grabs...designed for use with 55 gal. steel drums. FOB Shipping Point.

Adjustable Drum Grabs...handles 55 or 30 gal. steel drums. Features replaceable cast pieces. FOB Shipping Point.



DRUM GRABS NON-ADJUSTABLE DRUM GRABS Product Cap. Fork Pocket Wt. No. Handles (lbs.) ID (lbs.)						
HDJ-55 HDJ-255	1-55 gal. drum 2-55 gal. drums	1500 1500	5.5 x 2" 7 x 2.25"	145 230		
	ADJUSTABL	E GRABS				
HADJ-53	1-55 gal.,or 1-30 gal. drum	1500	5.5 x 2"	135		

Gator Grip Drum Grab

- Exclusive patent Auto Grip Lock automatically locks the grip jaws closed. Won't drop drum, even over rough terrain.
- Can be used with steel, fiber and poly drums without having to make any adjustments.

Superior gripping action holds drums tight even over rough terrain. Handles drums up to 1,000 lbs per grip. Can be used with open or closed head drums. Allows lifting and placing drums in tight spots. Lifts drums from the top of center to minimize the risk of damage. Mounts easily on forks -- just hand tighten lock screws and no tools required. FOB Shipping Point.

HEGG-1 One Drum Capacity Wt. 126 (lbs.) **HEGG-2** Two Drum Capacity. Wt. 208 (lbs.)





Open Head Drum Lifter

• Works on open and closed head drums.

For use with standard steel or poly drums with at least %" chime. Lifting arms are adjustable to work with most 55 or 30 gallon drums. Three-point contact of the lifting arms prevents or minimizes deformation of the drum and provides more secure lifting. FOB Shipping Point.



OPEN HEAD DRUM LIFTER						
Product Overall Cap. Wt. No. Size (lbs.) (lbs.)						
H240038	29½ x 5½ x 29½"	1000	18			

Standard Drum Cradle

- Economical and convenient way to tip, drain and store 55 gal. drums.
- Simple and easy for one person to use.

Units available with 2.5" polyolefin wheels, self-storing load tipping lever and swivel casters. Shipped KD and boxed via UPS. Quick and easy to assemble. FOB Shipping Point.



Value Grabs

- •Durable construction features.
- •Economically priced.

HCW-10

Lifts and moves steel drums up to 1000 lbs. FOB Shipping Point.

		VALUE (SINGLE DR				
Product No.	Handles	Jaws	Cap. (lbs.)	Fork Pocket ID	Wt. (lbs.)	
HSVG-55 HSAVG-53	1-55 gal. drum 1-55 gal. or 1-30 gal. drum	Non-adjustable Adjustable	1000 1000	5.5 x 2" 5.5 x 2"	121 115	
		DOUBLE DR	UM GRAB			
HDVG-255 HDAVG-253	2-55 gal. drums 2-55 gal., or 2-30 gal. drums	Non-adjustable Adjustable	1000 1000	7 x 2.25" 7 x 2.5"	198 194	



ERGONOMIC DRUM HANDLERS







Ergonomic Drum Handlers

- Exclusive patent-pending Auto Grip Lock automatically locks the grip jaws closed.
- The Auto Grip Lock won't open, even over rough terrain.

The ergonomic solution for lifting, transporting and placing drums on spill pallets. No need for the operator to touch the drum to raise, transport and lower. Features 1100 lb. capacity hydraulic jack for easy lifting of steel, poly and fiber drums -- lifts 1" per stroke. Spring loaded grip holds any rimmed drum. Handles most 30, 55 and 85 gal. drums. Ergonomic design allows drums to be easily raised 20" above the floor. Swivel 5" x 2" phenolic casters for easy movement. Choose from five models - Standard, High Reach, Scale, Power Lift and Power Lift & Drive. FOB Shipping Point.










Product No.	ERGOMOMIC Description	DRUM H Min Lift Height	IANDLER Max Lift Height	Cap. (lbs.)	Wt. (lbs.)
H240150	Standard Handler	26"	54"	1100	356
H240154	High-Reach Handler	26"	73"	1100	376
H240155	Handler with Scale	26"	54"	1100	356
H240156	Handler with Power Lift	25"	73"	1100	531
H240157	Handler with Power Lift and Drive	25"	73"	1100	691







PALLET TRUCKS



Adjustable Width Pallet Truck

- Adjustable fork widths.
- Just loosen and reset front and rear adjusting bolts.

One truck does the work of two. Handles loads up to 5500 lbs. Features 3"W. polyurethane load wheels. Adjustable fork connecting rods. Overload bypass valve. Rubber coated handle. Entry and exit rollers. 7.5" raised height. 3" lowered height. 3" load wheels and 8" steering wheels -- both mold-on polyurethane. FOB Shipping Point.

polyurethane. FOB Shipping Point. **H272744**, 21 - 27" Adjustment, Wt. 200 (lbs.) Price Ea **H272746**, 16 - 20" Adjustment, Wt. 176 (lbs.) Price Ea.

CPI Pallet Truck

- Durable and affordable pallet truck.
- Features polyurethane load and steering wheels.
- 4mm thick forks.

Safely and easily lift and move pallets up to 5500 lbs. Features adjustable fork connecting rods. Overload bypass.
Rubbercoated handle. 7.25" raised height. 2.9" lowered height.

6"W. forks. 2 year pump warranty. FOB Shipping Point.

Product No.	Cap. (lbs.)	CPI PALLET TRUCK Fork Size W x L	Wt. (lbs.)
H272655	5500	21 x 36"	168
H272656	5500	21 x 42"	180
H272657	5500	21 x 48"	189
H272658	5500	27 x 36"	178
H272659	5500	27 x 42"	186
H272660	5500	27 x 48"	196

The Scale Truck

- 7" Wide Forks.
- 2 year pump warranty.

UL approved scale operates on a rechargeable battery. May be plugged into AC and used while recharging. Weighing accuracy of +/-4.4 lbs. Features a LED display scale and Mettler-Toledo Hawk

scale/sensor. Three position hand control and 205° sterring radius.

7" moldon polyurethane steering wheels and 3" moldon polyurethane load wheels. FOB Shipping Point.

		SCALE TRUCK		
Product No.	Cap. (lbs.)	Fork Size W x L	Wt. (lbs.)	
H272936	5000	27.5 x 47.5"	336	
H272938	5000	27.5 x 47.5 22.5 x 47.5"	314	



CP3 Economy Pallet Truck

• 3mm thick forks

Lifts loads up to 5,500 lbs. Features overload bypass, rubber coated handle, adjustable fork connecting rods, entry and exit rollers 7" mold-on polyurethane steering wheels, 210° steering. 6"W. forks. 7.25" raised height. 2.9" lowered height. FOB Shipping Point.

		ONOMY PALLET TRU		
Product	Overall Size	Fork Size	Wt.	
No.	WxLxH	WxL	(lbs.)	
H273453	21 x 51 x 48¼"	21 x 36"	166	
H273454	21 x 63 x 48¼"	21 x 48"	187	
H273448	27 x 63 x 48¼"	27 x 48"	194	

Manual High Lift Pallet Truck

- Lift 2200 lb. pallet loads up to 31.5" with ease.
- Features loop handle with inside hand control.

Rolls smoothly on mold-on polyurethane wheels. 180° steering arc. Closed pallets must be placed on top of forks. 3.6" lowered fork height. FOB Shipping Point.

H272462 Fork size: 21" x 44.5". Wt. 275 (lbs.) Price Ea. H272463 Fork size: 27" x 44.5". Wt. 300 (lbs.) Price Ea.

Electric High Lift Pallet Truck • Lift 3000 lb. loads up to 31" in 10-12 seconds.

Ideal for work positioning stations. Smooth operating battery lifter makes short work of heavy loads. Easy one man operation saves time and effort.

Rolls smoothly on polyurethane Wheels. 180° steering radius. 3.3" lowered height. Comfort coated handles. FOB Shipping Point. H272939 Fork size: 21" x 45". Wt. 315 (lbs.)

• Includes 12V battery charger.

H272937 Fork size: 27" x 45". Wt. 322 (lbs.) Price Ea.





Manual & Powered PALLET LEVELER

4-Way Pallet Truck

- Enter pallet from all four sides.
- 3-year pump warranty.

Safely and easily lift and move pallets. Overload bypass, reinforced forks, rubber-coated handle measures 47" in height. 101° steering and can enter pallet from all four sides. Adjustable fork connecting rods, steel 1.7" load wheels and 6" polyurethane steering wheels. Lowered/raised fork height measures 13/4"/6". FOB Shipping Point.

		4-WAY PALLE	T TRUCK		
Product No.	Cap. (lbs.)	Fork Area W x L	OA Truck Length	Wt. (lbs.)	Price Ea.
H273400	4.000	33 x 44"	59"	241	





Pallet Leveler

 Reduce injury from bending and lifting.

The pallet leveler progressively lowers as pallet is loaded and raises as pallet is unloaded.

Three heavy duty calibrated springs used in combination according to desired load range. Bearing supported carousel for easy turning. Built-in 5³/₄ x 39" fork pockets for ease of transport.

FOB Shipping Point.



		PAI	LLET LEVEL	ER		
Product No.	Cap. (lbs.)	Min./Max. Height	Rotating Ring Dia.	Load Size	Wt. (lbs.)	Price Ea.
H272986	400-4.500	91/4"/29"	43 1/2"	72 x 50 x 50"	354	

Pallet Truck with Hand Brake

• 2-year pump warranty.

Pallet truck has an automotive style drum brake, 6" wide forks, 7" moldon polyurethane steering wheels and 3" moldon polyurethane load wheels. Lowered/raised fork height measures 27/s"/71/4". FOB Shipping Point.

		PALLE	T TRUCK WIT	'H HAND BRA	AKE	
	Product No.	Cap. (lbs.)	Fork Area W x L	OA Truck Length	Wt. (lbs.)	Price Ea.
H2	272667	5,500	27 x 48"	63"	215	



Heavy Duty Deluxe Powered Pallet Truck

• 4,400 lb. capacity.

• 180 degree steering angle.

Same features as the Light Duty Pallet Truck. Features a two year warranty on the DC motor drive, hydraulic pump, controllers and switches. Ergonomic control handle with throttle forward and reverse speeds, lift and lower controls, horn and belly reverse safety button. Electromagnetic disc brake includes a dead-man feature when handle is released. Sold complete with a 24V 210 Ah battery and charger. Curtis Electronic Controls. FOB Shipping Point.

	HEAV'	Y DUTY DELUXI					
Product	Cap.	Fork Area	Overall	Overall	Wt.	Price	
No.	(lbs.)	WxL	Height	Length	(lbs.)	Ea.	
H273446	4,400	27 x 48"	50"	72"	1147		

Long Fork Pallet Truck

• 2-year pump warranty.

Overload bypass, rubber-coated handle, 7" moldon polyurethane steering wheels and 3" moldon polyurethane load wheels. 70" long forks. Lowered/raised fork height measures 3'/4"/8". FOB Shipping Point.

		NG FORK PA			
Product No.	Cap. (lbs.)	Fork Area W x L	Overall Height	Wt. (lbs.)	Price Ea.
H272701 H273519	4,400	27 x 70"	49" 49"	308 320	



H273286

Semi-Electric Pallet Truck

• 1-year pump warranty.

Manual lift with power drive. Lowered/raised fork height measures 3''/7'/2''. 10'' polyurethane drive wheel, 3'' polyurethane load wheels. Truck speed with load ranges from 1.6 - 2.4 mph. 24 volt 8 amp charger. FOB Shipping Point.

SEMI-ELECTRIC PALLET TRUCK									
Product No.	Cap.	Fork Area W x L	Overall Height	Wt. (lbs.)	Price Ea.				
H273288 H273286	2,200	20 ¹ / ₂ x 48" 27 x 48"	48 ¹ / ₂ " 48 ¹ / ₂ "	330 330					



Heavy	Duty	Semi-Electric
Pallet	Truck	

1-year pump warranty.

Manual lift. Lowered/raised fork height measures 3"/7". 7¹/4 x 2" polyurethane drive wheel and 3" polyurethane load wheels. 62" turning radius. Truck speed with load is 2.8 mph. 2 batteries - 24 volt 38Ah. 24 volt 8 amp charger. FOB Shipping Point.



H273446

HEAVY DUTY SEMI-ELECTRIC PALLET TRUCK								
Product	Cap. (lbs.)	Fork Area	Overall	Wt.	Price			
No.	(IDS.)	WxL	Height	(lbs.)	Ea.			
H273289	3,300	27 x 48	54"	452				



HAND TRUCKS

Hydraulic Lift Hand Trucks

• Dependable hydraulic lift system helps prevent muscle and back strain.

Two & four wheel models. 2-wheel model features a noseplate that touches floor for easy loading. 4-wheel model provides full support and easy transport. Lift height of 54" gives plenty of clearance. 750 lbs. capacity. Wheel locks standard. FOB Shipping Point.

HYDRAULIC LIFT HAND TRUCKS						
	Product	Platform Size	Wt. (lbs.)			
	No.	W x D 2-WHEEL	(IDS.)			
	HPL-54-2222	22 x 22"	156			
	HPL-54-2230	30 x 22"	166			
		4-WHEEL				
	HDPL-54-2222	22 x 22"	162			
	HDPI -54-2230	30 x 22"	172			

Lightweight Office Lifts

 Ideal for lifting and transporting heavy boxes of paper, materials and more.

Available in manual or battery powered models. Small footprint allows for easy storage and mobility. Electric model includes remote control and battery charger. 220 lbs. lift capacity. FOB Shipping Point.



LIGHTWEIGHT OFFICE LIFTS						
Product	Platform	Lift	Wt.			
No.	Size	Height	(lbs.)			
HMOL	18 x 23"	58.5"	104			
HEOL	18 x 23"	66"	146			



Furniture and Cargo Movers

• Sold in pairs - ideal for moving crates, furniture and more.

Available in manual or hydraulic models. Small footprint allows for easy storage and mobility. Included straps secure loads tightly. Sold in pairs. FOB Shipping Point.



FURNITURE AND CARGO MOVERS						
Product	Load	Wt. Per Pair				
No.	Capacity	(lbs.)				
HMFM	1320	55				
HHFM	3950	190				



Super Heavy-Duty Cargo Lifts

 Capacities up to 10,000 lbs. provide the most economical way to lift and move large, bulky loads.

Super Heavy-Duty Cargo
Lifts are sold in pairs to
facilitate lifting bulky loads
from each end utilizing a
heavy-duty hand operated
hydraulic jack. Swivel
casters allow movement
in any direction. All
models supplied with
hooks for attaching
recommended optional
HLB-1 or HLB-2 load
binders. Sold in pairs.
FOB Shipping Point.



SUPER HEAVY-DUTY CARGO LIFTS								
Product No.	Lift Capacity (lbs.)	Lift Height	Caster	Wt. Per Pair (lbs.)				
HRNR-2 HRNR-2P HRNR-4 HRNR-6 HRNR-6P HRNR-64 HRNR-64P HRNR-8 HRNR-8P HRNR-10P	2000 2000 4000 4000 6000 6000 6000 6000	5" 5" 12" 12" 6" 12" 12" 6" 6"	Steel Poly	160 167 315 313 325 306 359 359 390 402 480 475				



HRNR-2 Shown Used With Optional Load Binder

Steel or aluminum surcharges may apply.

Optional Load Binder

Two 12' long high strength nylon belts with heavy-duty ratchet tighteners. Highly recommended for stabilizing large, bulky loads. FOB Shipping Point.

HLB-1 Delta Ring Load Binder Wt. 6 (lbs.) Price Ea. HLB-2 "E" Track Hook Load Binder Wt. 7 (lbs.) Price Ea.





STACKERS AND





HESPL-60-2424 Hydraulic **Foot Pump Stackers**

- · Lift and transport 1000 lb. loads safely and efficiently.
- · Floor locks, safety screen and foot guard standard

Built and engineered for durable and superior performance. Forks touch the floor on all fork units. Front phenolic wheels are 5" dia. Rear phenolic swivel casters are 4" dia. Dependable hydraulic jack. FOB Shipping Point. 25" Long Fork Stacker

Forks measure 1" thick x 3"W. x 25"L. 25.5" overall width, 40"D. 24" x 24" Platform Stacker

Platforms have 5.75" lowered height. 25.5" overall width, 40"D.

30"L. Fork Stacker

Forks measure 1" thick x 3"W. x 30"L. 32" overall width 44"D. 30 x 32" Platform Stacker

Platforms have 5.75" lowered height. 32" overall width, HESFL-56-305

Product No.	Cap. (lbs.)	10 50710 1	Overall Height ENTER 2	P STACKERS Base Leg Span Inside/Outside 5°L. FORKS	Wt. (lbs.)
HESFL-56-25 HESFL-64-25 HESFL-76-25	1000 1000 1000	56" 64" 76"	72" 80" 92"	15*/21* 15*/21* 15*/21*	258 266 295
	15	" LOAD CENT	ER 24" X	24" PLATFORM	
HESPL-60-2424 HESPL-68-2424 HESPL-80-2424	1000 1000 1000	60° 68°	72* 80* 92*	15*/21* 15*/21* 15*/21*	226 234 263
		18" LOAD C	ENTER 3	O"L. FORKS	
HESFL-56-30S HESFL-64-30S HESFL-76-30S	1000 1000 1000	56* 64* 76*	72* 80* 92*	25.5"/32" 25.5"/32" 25.5"/32"	281 289 322
	18	B" LOAD CENT	TER - 32 X	30" PLATFORM	
HESPL-60-3032 HESPL-68-3032 HESPL-80-3032	1000 1000 1000	60* 68* 80*	72* 80* 92*	25.5"/32" 25.5"/32" 25.5"/32"	265 273 298

Steel surcharges may apply.



Battery Powered Counterbalance Lifts

- Lift and transfer heavy loads with this battery powered lift.
- Ideal for loading and unloading trucks, positioning dies or feeding material to presses.

Remote control, floor lock and safety screen standard. With a minimally charged battery, unit can be used even while recharging. Three light LED charge status indicator included. Easy to read illuminated battery status voltmeter. Order enough weight kits for your planned load. FOB Shipping Point.


	BATTERY POWERED COUNTERBALANCE LIFTS							
Product No.	Cap. (lbs.)	Lift Height	Overall Height	Load Center	Fork Length	Wt. (lbs.)		
HPCBFL-56-25 HPCBFL-64-25 HPCBFL-76-25	1000 1000 1000	56" 64" 76"	72* 82½* 92*	13* 13* 13*	25" 25" 25"	560 574 611		
		0	OUNTERBALANCE	WEIGHT KITS				
Product No.		Counterweight (lbs.)		Stacker Cap. (lbs.)			
H261041 H261042		200 400		33 66				
H261043		600		100	0			



Battery Powered 1000 lb. to 2000 lb. Pallet Straddle & Platform Stackers

- · Ideal for loading and unloading trucks, positioning dies, or feeding material to presses.
- Remote control, three light LED charge status indicator, and easy to read illuminated battery status voltmeter included.

Equipped with safety screen and floor lock. FOB Shipping Point, With a minimally charged battery, unit can be used even while plugged in and recharging.



1500 and 2000 lb. Straddle Fork Units

For minimum rolling resistance, features glass filled nylon 5" wheels on front, and 6" swivel casters on rear. Extra long 42" forks for lifting pallets. Versatile adjustable span straddle legs can be set from 34" to 50" inside dimension to handle most standard pallets. Features reinforced frame and base. Double chain, lift support. Heavy-duty pump. Ergonomic "D" handles. Features remote control, floor lock and safety



For easier mobility and precision steering in confined areas. Features 8* locking polyurethane wheels. Spring loaded handle. Can be field installed.



BATTERY POWI	ERED PA	LLET STRA	ADDLE & PLATFO	RM STA	CKERS
Product	Cap.	Lift	Base Led	Lood	Wt.
No.	(lbs.)	Height	Inside/Outside	Center	(lbs.)
			TFORM UNITS		
HPESPL-60-2424	1000	60*	15*/21*	15*	418
HPE5PL-68-2424	1000	68*	15"/21"	15*	428
HPE5PL-80-2424	1000	80*	15"/21"	15*	457
			TFORM UNITS		
HPESPL-60-3032	1000	60*	25.5"/32"	18*	404
HPESPL-68-3032	1000	68*	25.5"/32"	18*	427
HPESPL-80-3032	1000	80*	25.5*/32*	18*	452
			FORK UNITS		
HPESFL-56-25	1000	60*	15"/21"	15*	452
HPESFL-64-25	1000	68"	15"/21"	15*	460
HPESFL-76-25	1000	80*	15"/21"	15*	489
			FORK UNITS		
HPESFL-56-30S	1000	60*	25.5*/32*	18*	442
HPESFL-64-30S	1000	68*	25.5"/32"	18"	456
HPESFL-76-30S	1000	80*	25.5*/32*	18*	465
42" FORKS, A					
HPASFL-64-42-35505-1.5K	1500	64"	35"-50" ID Adi		587
HPASFL-76-42-35505-1.5K	1500	76*	35"-50" ID Adi		652
HPASFL-86-42-35505-1.5K	1500	86*	35"-50" ID Adi	24"	703
HPASFL-64-42-35505-2K	2000	64"	35"-50" ID Adi	24"	592
HPASFL-76-42-35505-2K	2000	76*	35"-50" ID Adi		657
HPASFL-86-42-35505-2K	2000	86"	35"-50" ID Adi	. 24"	708



POWERED STACKERS





Wesco® Fully Powered Stackers

- Battery Powered System provides both propulsion and lift.
- Eliminates the stress and strain of lifting and transporting heavy loads.
- Simple to use finger-tip controls are built into steering handle.
- 180 degree hinged design allows precision steering in confined spaces.


- Spring loaded mechanism automatically compensates for uneven floors ensuring drive wheels maintain constant contact with floor.
- Automatic emergency safety switch instantly reverses direction if control post comes in contact with an obstacle.
- Heavy-duty maintenance-free sealed battery provides more than ample power for propulsion and lift.



FULLY POWERED STACKERS COUNTER BALANCE - 25" FORKS							
Product No.	Cap. (lbs.)	Lift Height	Base Leg In/Out	Load Center	Wt. (lbs.)		
HPCBFL-56-25-PD HPCBFL-64-25-PD HPCBFL-76-25-PD	1000 1000 1000	56" 64" 76"	15"/21" 15"/21" 15"/21"	15" 15" 15"	717 734 771		
COU	NTER BALANCI	WEIGHT KITS	(For use with coun	ter-balance mode	els only)		
H261041-200 LB KIT H261042-400 LB KIT H261043-600 LB KIT	334 668 1000	N/A N/A N/A	N/A N/A N/A	N/A N/A N/A	200 400 600		
		2	25" FORKS				
HPESFL-56-25-PD HPESFL-64-25-PD HPESFL-76-25-PD	1000 1000 1000	56" 64" 76"	15"/21" 15"/21" 15"/21"	15" 15" 15"	612 620 649		
		30" FORK	S, WIDE STRADDLE				
HPESFL-56-30S-PD HPESFL-64-30S-PD HPESFL-76-30S-PD	1000 1000 1000	56" 64" 76"	25½"/32" 25½"/32" 25½"/32"	18" 18" 18"	602 616 625		
		24" x	24" PLATFORM				
HPESPL-60-2424-PD HPESPL-68-2424-PD HPESPL-80-2424-PD	1000 1000 1000	60" 68" 80"	15"/21" 15"/21" 15"/21"	15" 15" 15"	578 588 617		
		30" x	32" PLATFORM				
HPESPL-60-3032-PD HPESPL-68-3032-PD HPESPL-80-3032-PD	1000 1000 1000	60" 68" 80"	25½"/32" 25½"/32" 25½"/32"	18" 18" 18"	564 587 612		
30" x 32" PLATFORM							
HPSPL-60-3032-30S-2K-PD HPSPL-68-3032-30S-2K-PD HPSPL-80-3032-30S-2K-PD HPSPL-90-3032-30S-2K-PD	2000 2000 2000 2000	60" 68" 80" 90"	30"/36" 30"/36" 30"/36" 30"/36"	18" 18" 18" 18"	644 657 699 738		
			ADJUSTABLE STRAD				
Product	Cap.	Lift	Inside Straddle	Load	Wt.		



Power Drive





Finger-tip Controls





HEKS-10 Economy Stacker



STEEL LOADING AMPS & PLATFORMS



Yard Ramps

Bluff Yard Ramps are ideal for efficient loading and unloading of shipments at a warehouse dock, or from trucks and railcars. Choose from portable or stationary depending on the situation. Add-on options include handrails, pneumatic air-filled tires, caster wheels, adjustable legs, hinged lip, dock leveler, dock extension or a steel platform. Manufacturing time 7 working days. FOB Shipping Point.

Standard Yard Ramp Features

- Manufactured in 7 working days.
- All steel welded construction.
- Serrated steel grating for exceptional traction.
- Standard capacities from 16,000 to 30,000 lbs.
- Higher capacity ramps available up to 100,000 lbs.
- · Safety chains included.
- · Option of ramp clamp or tow bar with portable ramp.
- Solid rubber tires and double-action hydraulic pump on portable ramp.
- Wall-mounted chain brackets on the stationary ramp.
- · Ship up to 4 ramps on one flatbed.



		YARD I	RAMPS				
Product	Cap.			Wt.			
No.	(lbs.)	Width	Length	(lbs.)			
		STATIO	ONARY	, ,			
H16SYS7030NU	16000	70"	30' All-Incline	3730			
H16SYS8430NU	16000	84"	30' All-Incline	4464			
H16SYS9630NU	16000	96"	30' All-Incline	4988			
H20SYS7030NU	20000	70"	30' All-Incline	3934			
H20SYS8430NU	20000	84"	30' All-Incline	4670			
H20SYS9630NU	20000	96"	30' All-Incline	5502			
H30SYS7030NU	30000	70"	30' All-Incline	4601			
H30SYS8430NU	30000	84"	30' All-Incline	5186			
H30SYS9630NU	30000	96"	30' All-Incline	5950			
		PORT					
H16SYS7036L	16000	<i>7</i> 0"	36' With Level-Off	5171			
H16SYS8436L	16000	84"	36' With Level-Off	5828			
H20SYS7036L	20000	<i>7</i> 0"	36' With Level-Off	5816			
H20SYS8436L	20000	84"	36' With Level-Off	6084			
H30SYS7036L	30000	70"	36' With Level-Off	6020			
H30SYS8436L	30000	84"	36' With Level-Off	6750			

Steel Platforms

• Fixed or adjustable legs.

Bluff Steel Platforms are an efficient way to create a loading dock when there's not one available on site for shipment deliveries at a warehouse or railway facility. These can be used as a free-standing setup, or can be used in conjunction with a yard ramp to increase loading capabilities. Available options include handrails, hinged lip, dock leveler, ladders or stairs. Standard capacities range from 16,000-30,000 lbs. with higher capacity options available upon request. Steel Platforms come in either a fixed height or with adjustable legs, depending on your requirements. Worksheet required to ensure proper design. Manufacturing time 10 working days. FOB Shipping Point.



STEEL PLATFORMS						
Product No.	Cap. (lbs.) FIXI	Width	Length PLEASE SPECIFY	Wt. (lbs.)		
H16SP88-FL	16000	8'	8'	2150		
H16SP810-FL	16000	8'	10'	2576		
H16SP812-FL	16000	8'	12'	2986		
H20SP88-FL	20000	8'	8'	2359		
H20SP810-FL	20000	8'	10'	3054		
H20SP812-FL	20000	8'	12'	3654		
H30SP88-FL	30000	8'	8'	2710		
H30SP810-FL	30000	8'	10'	3357		
H30SP812-FL	30000	8'	12'	4249		
ADJUSTABLE HEIGHT - 39" - 63"						
H16SP88-AL	16000	8'	8'	221 <i>4</i>		
H16SP810-AL	16000	8'	10'	2640		
H16SP812-AL	16000	8'	12'	3050		
H20SP88-AL	20000	8'	8'	2423		
H20SP810-AL	20000	8'	10'	3118		
H20SP812-AL	20000	8'	12'	3718		
H30SP88-AL	30000	8'	8'	2774		
H30SP810-AL	30000	8'	10'	3421		
H30SP812-AL	30000	8'	12'	4313		

Container Ramps

• Safely transport loads.

The Bluff Container Ramp is used to load and unload cargo from shipping containers, while allowing for a safe transition from the ground to the bed of the shipping container. Container Ramps feature a full width stiffener that bumps up against the container to provide strength, and locking chains to easily lock the ramp into place. Standard capacities range from 15,000-30,000 lbs. with custom size options available. Manufacturing time 7 working days. FOB Shipping Point.



		COIVIA	ALLAND KANAN			
			Ht. Up	Ht. Up		
Product	Cap.	Size	Electric	Propane	Wt.	
No.	(lbs.)	W x L	Forklift	Forklift	(lbs.)	
H15CR6048	15000	60 x 48"	5"	7"	489	
H15CR6060	15000	60 x 60"	7"	9"	573	
H15CR6072	15000	60 x 72"	8½"	11"	658	
H15CR7248	15000	72 x 48"	5"	7"	565	
H15CR7260	15000	72 x 60"	7"	9"	663	
H15CR7272	15000	72 x 72"	8½"	11"	761	
H15CR8448	15000	84 x 48"	5"	7"	641	
H15CR8460	15000	84 x 60"	7"	9"	753	
H15CR8472	15000	84 x 72"	8½"	11"	865	
H20CR6048	20000	60 x 48"	5"	7"	552	
H20CR6060	20000	60 x 60"	7"	9"	649	
H20CR6072	20000	60 x 72"	8½"	11"	747	
H20CR7248	20000	72 x 48"	5"	7"	639	
H20CR7260	20000	72 x 60"	7"	9"	681	
H20CR7272	20000	72 x 72"	8½"	11"	833	
H20CR8448	20000	84 x 48"	5"	7"	727	
H20CR8460	20000	84 x 60"	7"	9"	857	
H20CR8472	20000	84 x 72"	8½"	11"	951	

CONTAINED DAMES



BOARDS & PLATES



Aluminum Dock Plates

• Bolt-on steel legs.

Bluff Aluminum Dock Plates offer a low-cost solution to bridging the gap between a dock and trailer, and are intended for low to medium volume loading applications using pallet jacks, hand trucks or dollies. Not intended for forklift use or for below dock loading. Bolt-on steel legs secure the dock plate while in use. Dock Plates come standard with hand holes for lifting, but EZ-Roll Handles can also be added on for additional cost. Manufactured and tested in compliance with ANSI Standard MH30.2. OSHA 1910.3 Compliant. Manufacturing time 1 working day (or 2 days with EZ Rolls). FOB Shipping Point.


ALUMINUM DOCK PLATES						
Product	Cap.	Size	Height	Wt.		
No.	(lbs.)	WxL	Up	(lbs.)		
HA3624 HA3630	4000 3200	36 x 24" 36 x 30"	1" 2"	47 56		
HA3636	2650	36 x 36"	3"	64		
HA3648	2000	36 x 48"	5"	80		
HA4824	5300	48 x 24" 48 x 30"	1"	58		
HA4830	4250	48 x 30"	2"	69		
HA4836 HA4848	3550 2650	48 x 36" 48 x 48"	3" 5"	80 105		
HA4860	2100	48 x 60"	7"	130		
HA6024	6650	60 x 24"	1"	69		
HA6030	5300	60 x 30"	2"	83		
HA6036	4400	60 x 36"	3"	97		
HA6048 HA6060	3300 2650	60 x 48" 60 x 60"	5" 7"	127 157		
HA7230	6400	72 x 30"	2"	97		
HA7236	5300	72 x 36"	3"	113		
HA7248	4000	72 x 48"	5"	149		
HB3624 HB3630	7100	36 x 24" 36 x 30"	1" 2"	58 68		
HB3636	5650 4700	36 x 36"	3"	79		
HB3648	3550	36 x 48"	5"	106		
HB4824	9450	48 x 24"	1"	72		
HB4830	7550	48 x 30"	2"	86		
HB4836 HB4848	6300 4700	48 x 36" 48 x 48"	3" 5"	101 133		
HB4860	3750	48 x 60"	7"	164		
HB6024	11850	60 x 24"	1"	86		
HB6030	9450	60 x 30"	2"	104		
HB6036	7900	60 x 36"	3"	122		
HB6048 HB6060	5900 4700	60 x 48" 60 x 60"	5" 7"	163 200		
HB7230	11350	72 x 30"	2"	122		
HB7236	9450	72 x 36"	3"	144		
HB7248	7100	72 x 48"	5"	190		

EZ ROLL ATTACHMENTS FOR ALUMINUM DOCK PLATES					
Product		Wt.			
No.	Description	(lbs.)			
HEZ35-L & EZ35-R	For 36"L. Dock Boards/Plates	42 per pair			
HEZ40-L & EZ40-R	For 42" or 48"L. Dock Boards/Plates	46 per pair			
HEZ47-L & EZ47-R	For 54" or 60"L. Dock Boards/Plates	50 per pair			
HEZ52-L & EZ52-R	For 66", 72" or 78"L. Dock Boards/Plates	58 per pair			

Spring Loaded Dock Plates

Bluff's Spring Loaded Dock Plate (SL Plates) is an ideal solution for loading applications involving hand trucks and dollies, and is typically used by customers in bakery, beverage and snack distribution industries. The SL Plate is vertically stored and easily actuated by hand or foot. Available options include kick plate covers and traction tape. Not for use with powered equipment. Each SL Plate is site-specific and requires a completed worksheet to design - - call for pricing. Manufacturing time 6 working days. Patent # US D633,684 S. FOB Shipping Point.







Aluminum Dock Boards

• Lightweight.

Bluff Aluminum Dock Boards are ideal for low to medium volume dock loading applications, and are designed for use with forklifts or pallet jacks. A lightweight alternative to steel dock boards, the aluminum boards are available in capacities from 10,000-15,000 lbs. Add-on options include EZ Roll arms, lifting chains or speedy board cutouts. Manufactured and tested in compliance with ANSI Standard MH30.2. Manufacturing time 1 working day (or 2 with EZ Rolls). FOB Shipping Point.





ALUMINUM DUCK BUARDS						
			Ht. Up	Ht. Up		
Product	Cap.	Size	Electric	Propane	Wt.	
No.	(lbs.)	WxL	Forklift	Forklift	(lbs.)	
HAC6036	10000	60 x 36"	3"	5"	127	
HAC6048	10000	60 x 48"	5"	7"	163	
HAC6060	10000	60 x 60"	7"	9"	202	
HAC6072	10000	60 x 72"	8½"	11"	253	
HAC7236	10000	72 x 36"	3"	5"	136	
HAC7248	10000	72 x 48"	5"	7"	1 <i>7</i> 9	
HAC7260	10000	72 x 60"	<i>7</i> "	9"	225	
HBC6036	15000	60 x 36"	3"	5"	145	
HBC6048	15000	60 x 48"	5"	7"	201	
HBC6060	15000	60 x 60"	7"	9"	247	
HBC6072	15000	60 x 72"	8½"	11"	304	
HBC7236	15000	72 x 36"	3"	5"	167	
HBC7248	15000	72 x 48"	5"	7"	220	
HBC7260	15000	72 x 60"	7	9"	277	

ADD-ON OPTIONS FOR ALUMINUM DOCK BOARDS					
Product		Wt.			
No.	Description	(lbs.)			
HEZ35-L & HEZ35-R		42 per pair			
HEZ40-L & HEZ40-R		46 per pair			
HEZ47-L & HEZ47-R		50 per pair			
HEZ52-L & HEZ52-R	For 66", 72" or 78"L. Dock Boards/Plates Lifting Chains w/Fasteners	58 per pair			
HACLC	Lifting Chains w/Fasteners				



STEEL DOCK BOARDS & LEVELERS



Steel Dock Boards

• Fully welded design.

Rated for forklift use, Bluff Steel Dock Boards provide an easy transition from dock to truck. The fully-welded design aids in safely loading and unloading freight and are available in standard capacities from 15,000 to 40,000 lbs. All steel dock boards are manufactured and tested in compliance with ANSI Standard MH30.2 and are OSHA 1910.3 compliant. Manufacturing time 5-7 working days. FOB Shipping Point.



		STEEL D	OCK BOAR	DS	
Product	C==	Size	Ht. Up Electric	Ht. Up Propane	Wt.
No.	Cap. (lbs.)	W x L	Forklift	Forklift	(lbs.)
H10SC6036 H10SC6048	10000 10000	60 x 36" 60 x 48"	3" 5"	5" 7"	207 276
H10SC6060	10000	60 x 60"	7"	9"	345
H10SC6072	10000	60 x 72"	8½"	11"	510
H10SC7236	10000	72 x 36"	3"	5"	298
H10SC7248 H10SC7260	10000 10000	72 x 48" 72 x 60"	5" 7"	7" 9"	392 486
H15T6048	15000	60 x 48"	5"	7"	439
H15T6060 H15T6072	15000 15000	60 x 60" 60 x 72"	7" 8½"	9" 11"	523 607
H15T7248	15000	72 x 48"	5"	7"	506
H15T7260 H15T7272	15000 15000	72 x 60" 72 x 72"	7" 8½"	9" 11"	605 703
H20T6048	20000	60 x 48"	5"	7"	490
H20T6060	20000	60 x 60"	7"	9"	605
H20T6072	20000	60 x 72"	8½"	11"	684
H20T7248	20000	72 x 48"	5"	7"	568
H20T7260	20000	72 x 60"	7" 814"	9" 11"	682 795

Rail Boards

Bluff Rail Boards are a way to bridge the gap between a dock and railcar for safe loading and unloading of shipments. They are custom designed to meet the unique specifications of each dock site, and can work successfully with any type of railcar. Lifting loops and locking rings make the Rail Board easy to place and secure before driving across it with a forklift. Available capacities range from 15,000-90,000 lbs. All-welded steel construction. Worksheet required to design - - call for pricing. Manufacturing time 10-12 working days. FOB Shipping Point.





Edge of Dock Levelers

Bluff's Edge of Dock Leveler provides an easy way to correct the height difference between a dock and trailer bed. With a working range of 5" above and 5" below dock, it accommodates most loading applications. The leveler is positioned by lifting and pulling the handle to the dock floor, and then the latch assembly activates the lip, projecting it forward onto the bed of the trailer as the handle is lifted. When released, the handle automatically returns to its stored position. Conforms to ANSI MH30.1 Standards.

Manufacturing lead time 7 working days. FOB Shipping Point.

Edge of Dock Leveler Features

- Capacities from 20,000 to 30,000 lbs.
- Available widths of 66", 72", and 78".
- Self-Storing handle.
- Bumper and bumper blocks included.
- Optional add-ons include: anchor kit, approach plate, longer lip for refrigerated trucks, steel faced bumpers and hydraulic package.







Product No.	Cap. (lbs.)	EDGE OF DOCK Usable Width	Overall Width	Wt. (lbs.)	
H20EP66	20000	66"	88"	448	
H20EP72	20000	72"	94"	476	
H20EP78	20000	78"	100"	504	
H25EP66	25000	66"	88"	509	
H25EP72	25000	72"	94"	542	
H25EP78	25000	78"	100"	576	
H30EP66	30000	66"	88"	509	
H30EP72	30000	72"	94"	542	
H30EP78	30000	78"	100"	576	

	OPTIONS FOR EDGE OF DOCK LEVELERS		
Product		Wt.	
No.	Description	(lbs.)	
HEPAP12	Approach Plate 120"W x 12"L Approach Plate 120"W x 24"L Anchor Kit for Approach Plate Only Anchor Kit for EOD Only Anchor Kit for EOD + Approach Plate Hydraulic Package for EOD	164	
HEPAP24	Approach Plate 120"W x 24"L	328	
HEPAP1	Anchor Kit for Approach Plate Only	3	
HEPAP2	Anchor Kit for EOD Only	6	
HEPAP3	Anchor Kit for EOD + Approach Plate	7_	
HEPHYDRAULIC	Hydraulic Package for EOD	55	

Surcharge may apply.



GUARDS &



Tuff Guard Safety Railing

Bluff Tuff Guard safety railing greatly improves plant safety and efficiency by reducing costs associated with employee injury, machinery down time and building repairs due to accidental collisions. Tuff Guard is an efficient way of protecting machinery, in-plant offices, personnel, aisle ways, electrical panels, tool cribs, conveyors, shelving, receiving docks, cooling equipment and parking areas. Manufacturing time 5-15 working days, depending on quantity. FOB Shipping Point.

Tuff Guard Safety Rail Specifications

POSTS

- 4" x 4" x 3/16" structural steel square tubing posts.
- Standard post heights: 18", 30", and 42"
- Anchors provided.
- Safety Yellow powder coat finish is standard, with other colors available upon request: orange, blue, black and gray.
- Call for quanity discounts or help with special projects.

RAIIS

- Formed 10 gauge steel rails in lengths from 1' to 12'.
- With proper installation, railing can withstand impacts of up to a 10,000 pound load at 6 mph.
- Fasteners provided.
- · Optional lift-out attachment available.
- Safety Yellow powder coat finish is standard: orange, blue, black and gray available no uncharge.
- available no upcharge.

 Call for quanity discounts or help with special projects.
- Custom lengths available.



TUFF GUARD SAFETY RAILING									
Product		Wt.							
No.	Description	(lbs.)							
HTGR2	2' Rail w/Fasteners	20							
HTGR3	3' Rail w/Fasteners	27							
HTGR4	4' Rail w/Fasteners	35							
HTGR5	5' Rail w/Fasteners	42							
HTGR6	6' Rail w/Fasteners	49							
HTGR7	7' Rail w/Fasteners	57							
HTGR8	8' Rail w/Fasteners	64							
HTGR9	9' Rail w/Fasteners	72							
HTGR10	10' Rail w/Fasteners	79							
HTGR11	11' Rail w/Fasteners	87							
HTGR12	12' Rail w/Fasteners	94							
HTGP18	18" Tall Inline/End Post	24 24							
HTGP18-C	18" Tall Corner Post	24							
HTGP42	42" Tall Inline/End Post	44							
HTGP42-C	42" Tall Corner Post	44							
HTGL	Rail Lift-Out Attachment (Pair)	18							
HTGAA	Rail 45 Deg. Angle Attachment	10							

Modular Protective Barriers

Bluff's Modular Protective Barrier safety railing offers an inexpensive and simple solution for protecting personnel by creating in-plant walkways that act as a barrier between man and machine. Not rated for forklift impact. Lift-out rail design allows for quick and safe temporary access to areas when necessary. Manufacturing time 5-15 working days, depending on quantity. FOB Shipping Point.

Specifications

- 20" or 42" high posts (single or double high railing).
- 2" x 2" x 11 gauge steel tubing rails.
- 3" x 3" x 11 gauge steel tubing columns.
- Installation hardware not included.
- Floor rail option available.
- Safety Yellow powder coat finish is standard: orange, blue, black and gray available - no upcharge.
- · Call for quanity discounts or help with special projects.
- · Custom lengths available.





MODULAR PROTECTIVE BARRIERS									
Product		Wt.							
No.	Description	(lbs.)							
HMPBR2	2' Rail	9							
HMPBR3	3' Rail	13							
HMPBR4	4' Rail	18							
HMPBR5	5' Rail	23							
HMPBR6	6' Rail	27							
HMPBR7	7' Rail	32							
HMPBR8	8' Rail	37							
HMPBR9	9' Rail	42							
HMPBR10	10' Rail	46							
HMPBP20	20" Tall Inline Post	15							
HMPBP20E	20" Tall End Post	14							
HMPBP20C	20" Tall Corner Post	15							
HMPBP42D	42" Tall Inline Post	25							
HMPBP42DE	42" Tall End Post	24							
HMPBP42DC	42" Tall Corner Post	25							

Pipe Guards

• Custom designs available.

Surcharge may apply.

Bluff's Pipe Guards are designed to protect exposed pipes, conduits, ducts and downspouts from vehicle and forklift damage. Standard models are 36" tall wall-mounted guards built using %" thick steel, and designed for pipe diameters ranging from 2" to 12". If the pipe is located off the wall, or there are multiple pipes in question, a complete worksheet is required for proper design. Powder coated safety yellow, but also available in blue, gray, black and orange - no upcharge. Hardware not included. Manufacturing time 5-15 days, depending on quantity. FOB Shipping Point.





Product No.	Height	PIPE GUARDS Fits Pipe Size	Wt. (lbs.)	
HPGWM436	36"	4"	42	
HPGWM636	36"	6"	56	
HPGWM836	36"	8"	66	
HPGWM1036	36"	10"	77	
HPGWM1236	36"	12"	87	
HPGWM446	46"	4"	53	
HPGWM646	46"	6"	71	
HPGWM846	46"	8"	85	
HPGWM1046	46"	10"	98	
HPGWM1246	46"	12"	112	








Proudly Manufacturing in the USA







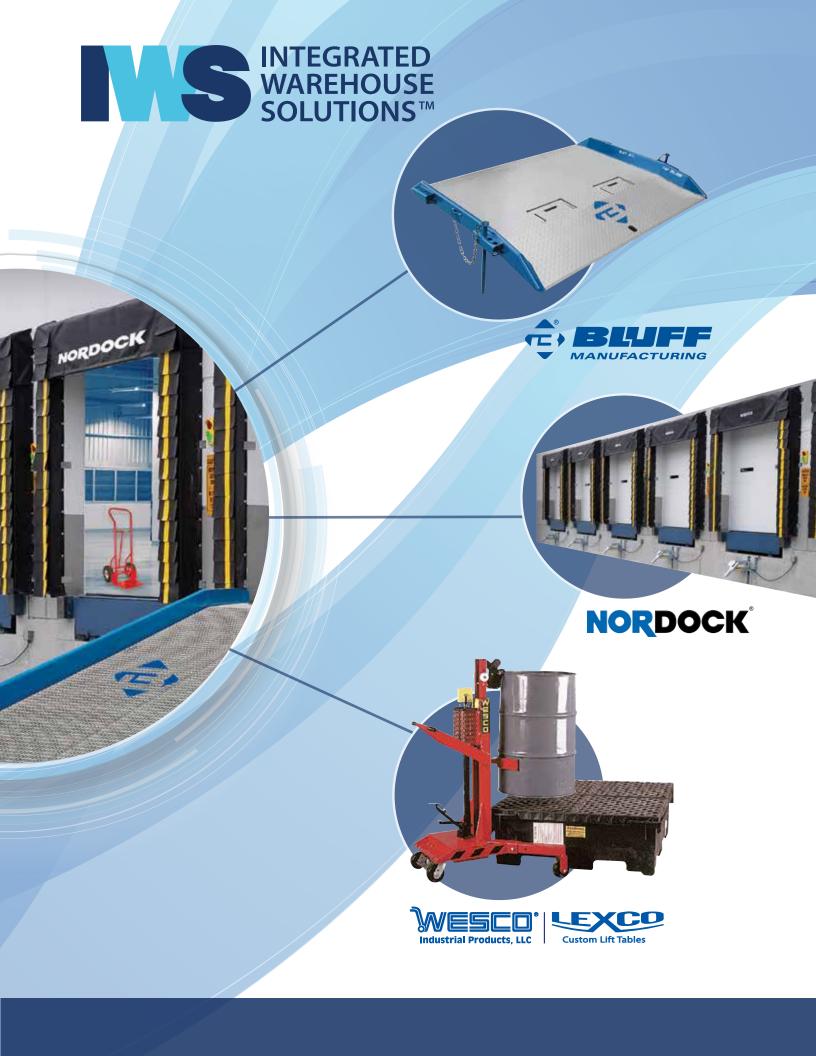

BLUFF YARD RAMPS

BLUFF steel yard ramps work for loading from ground to dock or ground to truck, and can be portable or stationary.



BLUFF STEEL TRUCK DOCK BOARDS

Provide an easy transition between a dock and truck. Standard capacities from 15,000 to 40,000 lbs.

MODEL T STEEL DOCK BOARD



SPEEDY BOARD® STEEL DOCK BOARD



MODEL R STEEL RAIL DOCK BOARD

Bridge the gap between a dock and railcar for safe loading and unloading of rail shipments. Capacities available from 15,000 to 90,000 lbs. Worksheet required.




BLUFF PORTABLE DOCK/STEEL PLATFORM

Can be used in conjunction with a yard ramp, or as a free standing feature to increase loading capabilities.



BLUFF EDGE OF DOCK LEVELERS

Correct the height difference between dock and trailer bed with a BLUFF EOD, while providing an easy transition. Capacities from 20,000 to 30,000 lbs.



BLUFF ALUMINUM DOCK BOARDS

AND DOCK PLATES

ALUMINUM DOCK BOARDS

Ideal for low to medium dock loading applications, designed for use with forklifts or pallet jacks. Capacities from 10,000 to 15,000 lbs.



Lightweight plate used to transition between a truck and dock, for use with hand trucks, pallet jacks or dollies. Not forklift rated.



BLUFF CONVEYOR CROSSOVERS

Create a safe method for personnel to cross over busy conveyors. Worksheet required.



BLUFF MEZZANINE STRUCTURES

Value engineered mezzanine solutions create vertical space that can be used to create in-plant offices, observation or equipment platforms, work stations, storage areas or conveyor supports. Many add-on options available. Worksheet required.



BLUFF CANTILEVER RACK

Maximize space both vertically and horizontally with a Bluff cantilever rack. Worksheet required. (Shown in photo with Guide Rail protection.)



BLUFF WHEEL RISERS


Eliminate unsafe below dock loading conditions with the use of wheel risers. Available in aluminum or steel. Worksheet required.

> TUFF GUARD SAFETY RAIL



BLUFF SAFETY EQUIPMENT

Protect valuable warehouse equipment and structures using Bluff's diverse offering of safety products. Powder coated safety yellow, with other standard color options available.

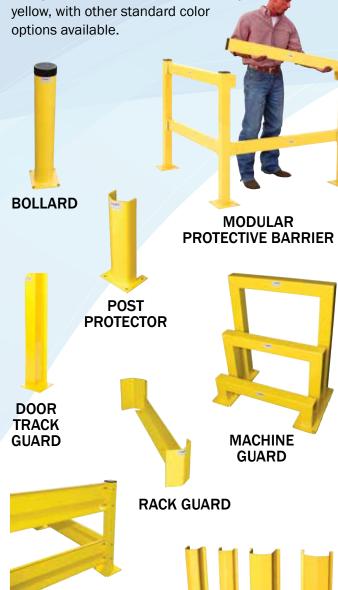

PIPE GUARD

NORDOCK® DOCK LEVELERS

NORDOCK® offers a complete line of dock levelers that provide unequalled strength, reliability and ease-of-use with industry leading innovations. Pit levelers are available in Mechanical, Hydraulic, and Air-Powered activations. The exclusive smooth transfer FLEX-LIP® and the versatile TELESCOPING-LIP™ models provide unique solutions to complex loading problems. Additional products include manual and hydraulic Edge Mount, XTRA-WIDE™ and BOXCAR™ levelers. All dock levelers come in a wide range of standard sizes and capacities and can be customized for replacement or to meet customer requirements.





SUPER-DUTY™ SERIES




HEAVY-DUTY™ SERIES



INDUSTRIAL™ SERIES



XTRA-WIDE™ SERIES



AIRDOCK® SERIES

FLEX-LIP®





BOXCAR™ SERIES

NORDOCK® COLDSTORAGE™ LEVELERS

Vertical storing dock levelers with hinged or telescoping lip and Model TLH horizontal storing dock levelers with telescoping lip are the solution for climate controlled facilities. COLDSTORAGE™ Series dock levelers with telescoping lip combined with proprietary 360 degree sealing capability lead the industry in energy saving, safety and efficiency.



MODEL TLH






MODEL NV

NORDOCK® safety products include rear impact guard and wheel based vehicle restraints, run-off barrier lips, barrier gates, signal lights and LOGI-SMART® integrated control panels to control and interlock all products at the loading dock. PIT-HOOK™, TRUCK-LOCK®, POSI-CHOCK™, COMBI-LOK®, DOK-CHOCK™ and FALL-STOP™ products are all designed to increase safety by preventing premature departure and run off accidents at the loading dock. Vehicle restraints are available in manual or push button designs including the industry standard SMART-HOOK® with the least amount of moving parts that keeps working when power is lost.







LOGI-SMART®



TRUCK-LOCK®



SMART-HOOK®

PIT-HOOK™



DOK-COM™

GREEN ONLY

GREEN

ONLY



NORDOCK® SEALS & SHELTERS

The WEARTOUGH® line of seals and shelters are designed to improve safety, conserve energy, and protect products from outside contaminants, while reducing costs and improving security at the loading dock. Constructed with the highest quality tear and abrasion resistant fabrics and ultra-resilient high-density foam materials, NORDOCK® seals and shelters are built to last. Comprehensive traditional compression style foam pad, foam side and rigid frame shelter, L-pad and inflatable curtain.



MULTI-SEAL™



FC SERIES



ULTIMATM

NORDOCK® LIFT & SPECIALTY

NORDOCK® lift products are built to last with uncompromising standard features including high dynamic camfollowers, spherical bearings, chrome pins, heavyduty cylinders combined with more steel and a better design that simply results in a longer lasting and better performing product. Whether unloading a truck with our DOCK-LIFT™ or MAST-GUIDE™ models or lifting, turning, tilting or transferring product of any conceivable size or capacity we always strive to surpass expectations.



WESCO HAND TRUCKS

100 SERIES INDUSTRIAL HAND TRUCKS

WESCO's versatile line of 100 Series hand trucks have been the favorite tool for professionals requiring a rock solid hand truck that can withstand the rigors of daily use and abuse! The structural tube frame is backed by an industry leading 5 Year Weld Guarantee.



SPARTAN ECONOMY ALUMINUM 2 IN 1 TRUCKS

This value-priced, versatile truck is made of sturdy, lightweight aluminum with the noseplate cast from a special aluminum alloy. Platform Deck and Folding Nose options available.



SPECIALTY TRUCKS

WESCO produces a wide range of specialty hand trucks including the Heavy Duty Steel Appliance and Vending Truck and the Hydraulic Large Liquid Gas Cylinder Cart.



WESCO DRUM EQUIPMENT

ERGONOMIC DRUM HANDLERS

With the Patented "Gator Grip®" head, WESCO's Ergonomic Drum Handlers provide industry leading safety and stability, making them the obvious choice for transporting a wide variety of drums in the industrial workplace. Choose from Standard Lift, High Reach, Power Lift, Power Drive or Scale models.



20BT & 30BT DRUM TRUCKS

WESCO's drum trucks are available in a wide variety of configurations to safely handle all types of products.

With a 5 Year Guarantee, our rugged Drum Trucks provide ergonomic features that drum handling professionals have relied on for over 50 years.



KNOCK DOWN DRUM TRUCKS

WESCO's KD Drum Trucks are designed with the same heavy duty load carrying capacity of our fully welded models but in an innovative knock down construction. Shipped in a single carton these trucks allow economical shipping costs via UPS and other parcel services.



WESCO LIFT EQUIPMENT

PALLET TRUCKS

WESCO offers a full line of pallet trucks that have been an industry staple on the loading dock. WESCO has one of the widest variety of available models that are backed by one of the industry's best warranties against pump failure.



LEXCO HYDRAULIC LIFT TABLES

LEXCO Lift Tables are custom designed for the most demanding applications including die handling, helicopter blade transport and missile positioning. Contact Lexco today with all your lifting and positioning requirements!





WESCO PLATFORM TRUCKS & CARTS

PLATFORM TRUCKS

WESCO supplies Aluminum, Steel, and Power Drive carts as well as platform trucks in a complete range of sizes, handle options and wheel/caster choices.



SCISSORS LIFT TABLES

WESCO has a variety of Scissors Tables - Long Deck, Die Lift, Powered and Mini Electric Tables.



LIGHTWEIGHT FOLDING TRUCKS

Fits into small storage spaces or car trunks. MegaMover, MaxiMover, SuperLite, MiniMover.



HYDRAULIC AND MANUAL LIFTS

WESCO Stackers and Pedalifts are available in a wide variety of configurations to handle any lifting or positioning project. Available with custom platforms, power lift and power drives these workhorses provide the ultimate solution for safe and ergonomic material handling.





INTEGRATED WAREHOUSE SOLUTIONS™ represents the coming together of quality known brands within the material handling industry to serve the needs of our customers and prospects on an international basis. As a solutions provider, our goal is to create, manufacture and market products that exceed your expectation. Our products focus on making the work environment both safer and more efficient. As you evaluate your material handling needs, we will strive to earn your business with quality workmanship and the dedication of our associates.

BLUFF® MANUFACTURING is the innovative leader in the fabrication and design of high-quality dock and warehouse equipment. For over 80 years, Bluff Manufacturing has been the top national provider of steel and aluminum dock boards and plates, edge of dock levelers, portable yard ramps, mezzanines, carts and warehouse safety equipment.

NORDOCK® manufactures and distributes a full line of loading dock equipment, including pit-style, vertical storing and telescoping lip dock levelers, vehicle restraints, dock lifts and in-plant lifts, truck levelers, dock seals and shelters, and a comprehensive line of accessories. In addition, NORDOCK® has the unique capability to design and manufacture specialty engineered products for loading dock, safety, and lift applications.

WESCO® INDUSTRIAL PRODUCTS is a full line manufacturer and distributor of a wide range of standard and custom products. Material handling professionals have relied on the quality and durability of WESCO's products for over 70 years. WESCO's primary lines include drum handling, hand trucks and carts, lift equipment as well as a variety of associated dock and material handling products.

Our local representatives are ready to take your call.









Supplying Material Handling Equipment Since 1948





PALLET TRUCKS



PROVEN QUALITY LEADER!
Over 70,000 sold trouble free.

Page 3

DELUXE PALLET TRUCKS

Deluxe Adjustable Fork Model

- 5 year pump warranty.
- US Patent No. 6,808,357.
- 7" moldon polyurethane steering wheel.
- 3" moldon polyurethane load wheels.
- 7.75" raised height.
- 3" lowered height.




Adjustable Width - 16" - 20" 272746



Deluxe Foot Pump Model

- ■5 year pump warranty.
- All the same features and dimensions as Standard Deluxe Model 272748.
- 6" wide forks.
- Foot pedal gives you the option of using the foot pedal to raise the forks when space constraints make it difficult to use the standard handle to raise the load.

NO EXTRA COST



Deluxe Lowboy Models

- 5 year pump warranty.
- 2.125" lowered height.
- 6" moldon polyurethane steering wheel.
- 2" steel load wheels.
- 6.25" raised height.
- 6" wide forks.



Part #	272747	272746	272744	272766	272760	272761	272762	272765	272136	272142	272148	
Model	ADJ. FORK	ADJ. FORK	ADJ. FORK	FOOT PUMP	LOWBOY	LOWBOY	LOWBOY	LOWBOY	STANDARD	STANDARD	STANDARD	
Capacity	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	
W-1 x L-1	16"- 20" x 36"	16"- 20" x 48"	21" - 27" x 48"	27" x 48"	21" x 36"	21" x 42"	21" x 48"	27" x 48"	21" x 36"	21" x 42"	21" x 48"	
W-2	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	
L-2	61"	61"	61"	63"	51"	57"	63"	63"	51"	57"	63"	
WHL-1 / WHL-2	7" / 3"	7" / 3"	7" / 3"	8" / 3"	6" / 2"	6" / 2"	6" / 2"	6" / 2"	8" / 3"	8" / 3"	8" / 3"	
H-1/H-2/H-3	47" / 3" / 8"	47" / 3" / 8"	47" / 3" / 8"	48" / 3" / 8"	46.5"/2.125"/6.25"	46.5"/2.125"/6.25"	46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	48"/3"/8"	48"/3"/8"	48"/3"/8"	
Weight	156 lbs	156 lbs	180 lbs	170 lbs	134 lbs	143 lbs	148 lbs	157 lbs	143 lbs	152 lbs	157 lbs	



DELUXE MODEL FEATURES

- Pump overload bypass.
- Rubber coated handle.
- Adjustable fork tie rods.
- Exit rollers
- 200° steering.
- Tapered fork tips.
- 8 gauge 6" wide reinforced forks.

Standard Deluxe Models

- 5 year pump warranty.
- 8" moldon polyurethane steering wheel.
- 3" moldon polyurethane load wheels.
- 8" raised height.
- 3" lowered height.
- 6" wide forks.



Deluxe Quick Lift Model

- 5 year pump warranty. Patented design.
- Fastest/quickest lift on the market.
- Just step on the pedal. No Pumping. Lifts to 4.5".
- All the same features and dimensions as Standard Deluxe models.
- Normal pump operation when load exceeds 300 lbs.



CPI PALLET TRUCKS

CPI Pallet Truck

- 2 year pump warranty.
- 4 mm thick forks.
- Adjustable fork connecting rods.
- Overload bypass.
- Rubber coated handle.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- Entry and Exit Rollers.
- 8 Gauge, 6" wide forks.
- 210° steering.





CPI Narrow Pallet Truck

- **2** year pump warranty.
- 4 mm thick forks.
- 18" overall width.
- Adjustable fork connecting rods.
- Overload bypass.
- Rubber coated handle.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- Entry and Exit Rollers.
- 8 Gauge, 6" wide forks.
- 210° steering.

	272736	272742	272748	272861	272655	272656	272657	272658	272659	272660	272854
	STANDARD	STANDARD	STANDARD	QUICK LIFT	CPI	CPI	CPI	CPI	CPI	CPI	CPI NARROW
	5,500 lbs	5,500 lbs	5,500 lb	5,500 lbs /300 lb Q.L	5,500 lbs						
	27" x 36"	27" x 42"	27" x 48"	27" x 48"	21" x 36"	21" x 42"	21" x 48"	27" x 36"	27" x 42"	27" x 48"	18" x 48"
	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"
	51"	57"	63"	63"	51"	57"	63"	51"	57"	63"	63"
	8" / 3"	8" / 3"	8" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"
	48"/3"/8"	48"/3"/8"	48"/3"/8"	48"/3"/8"	48.25" /2.9" / 7.25"	48.25" /2.9" / 7.25"	48.25" /2.9" / 7.25"	48.25" /2.9" / 7.25"	48.25" /2.9" / 7.25"	48.25" /2.9" / 7.25"	48.25" /2.9" / 7.25"
	151 lbs	161 lbs	166 lbs	170 lbs	153 lbs	161.5 lbs	169.5 lbs	162 lbs	171 lbs	180 lbs	171 lbs

CPII PALLET TRUCKS




CPII Pallet Truck


- 3 year pump warranty.
- 2 Models polyurethane or nylon wheels.
- Adjustable fork connecting rods.
- Entry/exit rollers.
- Overload bypass.
- Reinforced forks 11 Gauge.
- Rubber coated handle.
- Raised height: 8". Lowered height: 3".
- 7" wide forks.
- 8" moldon polyurethane or 8" nylon steering wheels.
- 3" moldon polyurethane or nylon load wheels.
- 180° steering.

CPIIHD Pallet Truck

- 3 year pump warranty.
- 6,600 lb capacity.
- Adjustable fork connecting rods.
- Entry/exit rollers.
- Overload bypass.
- Reinforced forks.
- Rubber coated handle.
- 7" wide forks.
- 8" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.







CPII Lowboy Pallet Truck

- 3 year pump warranty.
- Many features are the same as CPII.
- Lowered height of 2.125".
- 7" wide forks.
- 7" moldon polyurethane steering wheels.
- 2" steel load wheels.

	Polyurethane Wheels		Nylon Wheels							
Part #	272777	272778	272775	272776	272670	278136	278142	278148	278748	
Model	CPII	CPII	CPII	CPII	CPIIHD	CPII LOWBOY	CPII LOWBOY	CPII LOWBOY	CPII LOWBOY	
Capacity	5,500 lbs	5,500 lbs	5,500 lbs	5,500 lbs	6,600 lbs	4,400 lbs	4,400 lbs	4,400 lbs	4,400 lbs	
W-1 x L-1	21" x 48"	27" x 48"	21" x 48"	27" x 48"	27" x 48"	21" x 36"	21" x 42"	21" x 48"	27" x 48"	
W-2	7"	7"	7"	7"	7"	7"	7"	7"	7"	
L-2	63"	63"	63"	63"	63"	51"	51"	51"	63"	
WHL-1 / WHL-2	8" / 3"	8" / 3"	8" / 3"	8" / 3"	8" / 3"	7" / 2"	7" / 2"	7" / 2"	7" / 2"	
H-1/H-2/H-3	48" / 3" / 8"	48" / 3" / 8"	48" / 3" / 8"	48" / 3" / 8"	48" / 3" / 8"	46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	46.5" / 2.125" / 6.25"	
Weight	200 lbs	203 lbs	200 lbs	210 lbs	220 lbs	226 lbs	235 lbs	240 lbs	249 lbs	



CP3 & SCALE PALLET TRUCKS



CP3 Pallet Truck

- ■2 year pump warranty.
- 3 mm thick forks.
- Adjustable fork connecting rods.
- Overload bypass.
- Rubber coated handle.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- Entry and Exit Rollers.
- ■210° steering.

Scale Truck

- ■2 year pump warranty.
- Weighing accuracy ± .22 lbs., or 3.5 oz.
- LED display scale.
- Metler-Toledo Hawk scale/sensor.
- UL approved scale operates on rechargeable battery. May be plugged into AC and used while recharging.
- Replacement Battery Pack #272849.
- Self-contained battery charger.
- Three position hand control.
- ■205° turning radius.
- 7" wide forks.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- Not for legal trade.






Powered Scale Truck

- 1 year warranty: DC motor drive, hydraulic pump, controllers and switches.
- 90-day parts warranty.
- Built-in battery charger.
- Two 12V-91Ah batteries.
- Requires higher fork clearance. Minimum 3.75" from floor to underside of skid.
- Pallets with bottom board require 4" clearance between top and bottom boards.
- Part #170015 Powered Scale Truck without battery.
- Weighing accuracy+/- .22 lbs, or 3.5 oz.
- 6 digit LED display.
- Display uses four "C" sized batteries.
- Not for legal trade.

	CP3 Pallet Trucks		Sca	Powered Scale Truck	
273453	273454	273448	272936	272938	273384
CP3	CP3	CP3	SPT27	SPT22	PST
5,500 lbs	5,500 lbs	5,500 lbs	5,000 lbs	5,000 lbs	2,900 lbs
21" x 36"	21" x 48"	27" x 48"	27.5" x 47.5"	22.5" x 47.5"	26.5" x 47"
6"	6"	6"	7"	7"	6.8"
63"	63"	63"	62.5"	62.5"	64"
7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	8" / 3"
48.25" /2.9" / 7.25"	48.25" /2.9" / 7.25"	48.25" /2.9" / 7.25"	48.25" / 2.9" / 8"	48.25" / 2.9" / 8"	57.5" / 3.5" / 8.25"
139 lbs	152.5 lbs	164.5 lbs	336 lbs	314 lbs	728 lbs w/battery 613 lbs w/out battery


4-WAY, HAND BRAKE, ECONOMY





4-Way Pallet Truck

- 3 year pump warranty.
- Overload bypass.
- Reinforced forks.
- Rubber coated handle.
- 180° steering.
- Can enter pallet from all 4 sides.
- Adjustable fork connecting rods.
- Steel 1.70" load wheels.
- 6" polyurethane steering wheels.



Pallet Truck With Hand Brake

- 2 year pump warranty.
- All the same features as the CPI model.
- 6" wide forks.
- 7" moldon polyurethane steeringwheels.
- 3" moldon polyurethane load wheels.
- Disc brake.
- Tandem load wheels.





Economizer Pallet Truck

- 1 year pump warranty.
- Fingertip control: raise neutral lower.
- Polyurethane load and steering wheels.

Part #	273400	272667	272149		
Model	4-WAY	HAND BRAKE	ECONOMIZER		
Capacity	4,000 lbs	5,500 lbs	4,400 lbs		
W-1 x L-1	33" x 48"	27" x 48"	27" x 48"		
W-2	7"	6"	6"		
L-2	63.5"	63"	63"		
WHL-1 / WHL-2	6" / 1.75"	7" / 3"	6.25" / 3"		
H-1/H-2/H-3	47" / 1.75" / 6"	48.25" /2.9" / 7.25"	48.25" /2.9" / 7.5"		
Weight	241 lbs	206 lbs	136 lbs		



& SPECIALTY PALLET TRUCKS

UNIQUE DESIGN TRANS-ROLLER TRUCKS MOVE FORWARD OR SIDEWAYS





Unique side rolling pallet truck



TransRoller Pallet Truck

- 3 year pump warranty.
- Lowered height 3.4". Raised height 8.5".
- Fork height in standard mode 3.4" lowered, 7" raised.
- Fork height for lateral movement 7.25" lowered, 8.5" raised.
- Adjustable fork connecting rods.
- Overload bypass.
- Ergonomic rubber coated handle.
- Entry rollers.
- 7" wide forks.
- 8" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.



Stainless Steel Pallet Truck

- 1 year pump warranty.
- All parts are made of stainless.
- For use in food industry and areas where corrosive solutions are used.
- 6 1/4" wide forks.
- 7" nylon steering wheels.
- 3" nylon load wheels.

Long Fork Pallet Truck

- 2 year pump warranty.
- Pump, load wheels and steering wheels same as CPI model.
- Overload bypass.
- Rubber coated handle.
- 7" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.
- 78" and 98" forks handle 2 standard size pallets.





Galvanized Steel Pallet Truck

- 1 year pump warranty.
- For use in corrosive and wet environments, laboratories, clean rooms.
- 6 1/4" wide forks.
- 7" nylon steering wheels.
- 3" nylon load wheels.

272740	273585	272701	273519	273586	272152	272855
TRANS ROLLER	LONG FORK PT59	LONG FORK PT70	LONG FORK PT78	LONG FORK PT98	STAINLESS STEEL	GALVANIZED STEEL GPT
Standard - 5,000 lbs/ Lateral 2,200 lbs	4,400 lbs	4,400 lbs	4,400 lbs	3,300 lbs	4,400 lbs	4,400 lbs
27" x 48"	27" x <mark>59"</mark>	27" x <mark>70"</mark>	27" x <mark>78"</mark>	27" x <mark>98"</mark>	27" x 48"	27" x 48"
7"	6"	6"	6"	6"	6.25"	6.25"
63"	75"	86"	86"	114"	63"	63"
8" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"	7" / 3"
Std. mode - 48" / 3.4" / 7" Lateral mode - 48" / 3.4" / 8.5"	48" / 3" / 8"	49" / 3" / 8"	49" / 3" / 8"	48" / 3" / 7"	48" / 3" / 8"	48" / 2.9" / 7.4"
210 lbs	220 lbs	308 lbs	320 lbs	347 lbs	172 lbs	166 lbs

SPECIALTY PALLET TRUCKS





Ergonomic Pallet Tilter

- 1 year pump warranty.
- 5" polyurethane swivel casters and 3" polyurethane load wheels.
- Handle height: 44 1/4".
- Load center: min 7 1/2", max. 15 1/2".
- Lifting range with forks in horizontal position: 3 1/4" to 11".
- Forks tilt up to 90° for accurate load positioning.
- Lifting range with back rest in horizontal position: 29" to 37".
- 6 1/2" wide forks.

Drum Pallet Truck

- 1 year pump warranty.
- For 55-gallon steel drums.
- Lifts drum 4" off ground.
- 8" x 2" nylon steering wheels.
- 3" x 1" nylon load wheels.
- Drum ring raised height 14.5" Drum ring lowered height - 10.25"



Pallet Lifter

- 1 year pump warranty.
- Heavy duty steel construction.
- Pallets with bottom boards must be placed on top of forks.
- 6 1/2" wide forks.
- 6" polyurethane swivel casters.
- 2" polyurethane load wheels.

Semi-Electric Pallet Truck

273250

- 1 year pump warranty.
- Manual lift, power drive.
- Lowered/raised fork height: 3" / 7.5".
- 10" polyurethane drive wheel.

273286

- 3" polyurethane load wheels.
- Speed: 1.6 2.4 mph with load.
- 2 batteries 24V 38Ah.
- 24 volt 8 amp built-in charger.
- 61" turning radius.
- Two fork widths 20.5" and 27".

Heavy Duty Semi-Electric Pallet Truck


- 1 year pump warranty.
- Manual lift.
- Lowered/raised fork height: 3" / 7".
- 7.25" x 2" polyurethane drive wheel.
- 3" polyurethane load wheels.
- Speed: 2.80 mph with load.
- 2 batteries 24V 38Ah.
- 24 volt 8 amp charger.
- 62" turning radius.



Part #	272950	273250	272153	273288	273286	273289	
Model	ERGONOMIC ERPT	DRUM PTDL	LIFTER PLFTR	SEPT2.2-20.5	SEPT2.2-27	HEAVY DUTY SEPT3.3	
Capacity	2,200 lbs	660 lbs	1,100 lbs	2,200 lbs	2,200 lbs	3,300 lbs	
W-1 x L-1	21.5" x 31"	28.5" x 26"	27" x 44"	20.5" x 48"	27" x 48"	27" x 48	
W-2	6.5"	2.5"	6.5"	6.25"	6.25"	6"	
L-2	51.67"	41"	61.5"	65.75"	65.75"	69"	
WHL-1 / WHL-2	5" / 3"	8" / 3"	6" / 2"	10" / 3"	10" / 3"	7.25" / 3"	
H-1/H-2/H-3	44.25" / 3.25" / 11"	47.75" / 3" / 8"	40" / 3.5" / 35"	48.5" / 3" x 7.5"	48.5" / 3" / 7.5"	54" / 3" / 7"	
Weight	392 lbs	115 lbs	258 lbs	397 lbs	402 lbs	518 lbs	



MANUAL/ELECTRIC HIGH LIFT

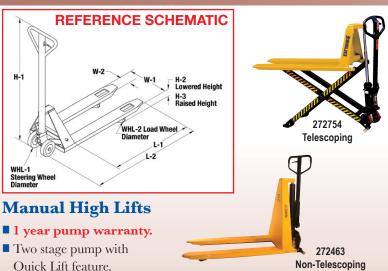

- Quick Lift feature.
- Two models: Telescoping and Non-Telescoping.
- Moldon polyurethane wheels.
- 180° steering arc.
- Loop handles with inside hand control.
- Closed pallets must be placed on top of forks.
- Comfort coated handles.



Quick Lift setting allows operator to raise the height of the lift with fewer strokes. (See chart below.)

Stainless Steel Manual High Lift

- 1 year pump warranty.
- Two stage pump with Quick Lift feature.
- 304 stainless steel construction. Forks are 316 stainless steel.
- Nylon 3" load (WHL-2) and 8" nylon steering (WHL-1) wheels.
- 180° steering arc.

Standard

- Loop handles with inside hand control.
- ad pallate must be placed on top of forke



Electric High Lifts

- 1 year pump warranty.
- Two models: Telescoping and Non-Telescoping.
- 12 volt battery charger included.
- 10-12 second lift time unloaded.
- Overload bypass.
- Polyurethane wheels.
- 180° steering radius.
- Comfort coated handles.
- 6 1/2" wide forks.
- 6" moldon polyurethane steering wheels.
- 3" moldon polyurethane load wheels.





Stainless Steel Electric High Lift


- 1 year pump warranty.
- 304 stainless steel construction. Forks are 316 stainless steel.
- Nylon 3" load (WHL-2) and 8"nylon steering (WHL-1) wheels.
- 12 volt battery charger included.
- 10-12 second lift time unloaded.
- Overload bypass.
- 180° steering radius.
- 6 1/4" wide forks.





■ Closed p	Closed pallets must be placed on top of forks.											
				MANUAL						ELECTRIC		
	Stainless Steel							Stainless Steel				
Part #	272859	272755	272754	272462	272463	272975	272976	272860	272939	272937	272460	272461
Model #	SSTHL27M	TSHL21	TSHL27	NTSHL21	NTSHL27	TSHL20	TSHL27	SSTHL27E	TEHL21	TEHL27	NTEHL21	NTEHL27
Capacity	2,200 lbs	2,200 lbs	2,200 lbs	2,200 lbs	2,200 lbs	3,300 lbs	3,300 lbs	2,200 lbs	3,000 lbs	3,000 lbs	2,200 lbs	2,200 lbs
W-1 x L-1	27"x 46"	21" x 44.5"	27" x 44.5"	21" x 44.5"	27" x 44.5"	20" x 43"	27" x 43"	27"x 46"	21" x 45"	27" x 45"	21" x 45"	27" x 45"
W-2	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"	6.5"
L-2	61"	63"	63"	56"	56"	63"	63"	61"	60"	60"	60"	63"
WHL-1/WHL-2	8" / 3"	6" / 3"	6" / 3"	6" / 3"	6" / 3"	6" / 3"	6" / 3"	8" / 3"	6" / 3"	6" / 3"	6" / 3	6" / 3"
H-1/H-2/H-3	48.5" / 3.3" / 31.5"	48.5" / 3.6" / 31.5"	48.5" / 3.3" / 31.5"	48.5" / 3.3" / 31.5"	48.5" / 3.6" / 31.5"	48.5" / 3.6" / 31.5"	48.5" / 3.6" / 31.5"	48.5" / 3.3" / 31.5"	48.5" / 3.3" / 31"	48.5" / 3.3" / 31"	48.5" / 3.3" / 31"	48.5" / 3.3" / 31"
Telescoping	Yes	Yes	Yes	No	No	Yes	Yes	Yes	Yes	Yes	No	No
Weight	278 lbs	219 lbs	228 lbs	275 lbs	300 lbs	260 lbs	276 lbs	329 lbs	329 lbs	347 lbs	367 lbs	372 lbs
Quick Lift	28	TWO STAGE PUMP STROKES TO FULL HEIGHT (UNLOADED)										

35

STANDARD/DELUXE POWERED









Light Duty Powered Walkie Pallet Truck

- 1 year warranty: DC motor drive, hydraulic pump, controllers and switches.
- 90 day parts warranty.
- Two 12V/79Ah batteries.
- Built-in 12V/15A charger.
- Turn radius of 59".
- Lift speed under load: 1.36"/ second.
- Lowering speed under load: 1.95"/second.

- Ergonomic handle with:
 - throttle with forward and reverse speeds
 - lift/lower controls
 - belly reverse safety button
 - horn
 - electromagnetic disk brake with automatic dead-man feature when handle is released.
- Key operated.
- 10" polyurethane steering and 3" polyurethane load wheels.

Heavy Duty Powered Walkie Pallet Truck

- 1 year warranty: DC motor drive, hydraulic pump, controllers and switches.
- 90 day parts warranty.
- Three 8V/195 Ah batteries.
- Turn radius of 65.5".
- Lift speed under load: 1.36"/second.
- Lowering speed under load: 1.36"/second.
- Ergonomic handle with:
 - throttle with forward and reverse speeds
 - lift/lower controls
 - belly reverse safety button
 - horn
 - electromagnetic disk brake with automatic dead-man feature when handle is released.
- Key operated.
- 10" polyurethane steering and 3" polyurethane load wheels.



	Light	Duty	Heavy	Duty	
Part # - truck + battery + charger	273381	273385	273382	273386	
Part # - truck - no battery	170012	170016	170013 [*]	170017 [*]	
Capacity	3,300 lbs	3,300 lbs	4,400 lbs	4,400 lbs	
W-1 x L-1	26.5" x 45"	21.5" x 45"	26.5" x 45"	21.5" x 45"	
W-2	6.25"	6.25"	6.8"	6.8"	
L-2	65.5"	65.5"	73.75"	73.75"	
WHL-1 / WHL-2	10" / 3"	10" / 3"	10" / 3"	10" / 3"	
H-1/H-2/H-3	57.5" / 3.2" / 7.8"	57.5" / 3.2" / 7.8"	59" / 3.3" / 8"	59" / 3.3" / 8"	
Truck Weight with Battery Truck Weight without Battery	672 lbs 558 lbs	628 lbs 514 lbs	1,370 lbs 860 lbs	1,337 lbs 827 lbs	




273383


Powered Pallet Truck Stacker


- 1 year warranty: DC motor drive, hydraulic pump, controllers and switches.
- 90 day parts warranty.
- Two 12V/79Ah batteries.
- Built-in 12V/15A charger.
- Turn radius of 65.5".
- Lift speed under load: 1.36"/second.
- Lowering speed under load: 1.36"/second.
- Ergonomic handle with:
 - throttle with forward and reverse speeds
- lift/lower controls
- belly reverse safety button
- horn
- electromagnetic disk brake with automatic dead-man feature when handle is released.
- Key operated.
- 10" polyurethane steering and 3" polyurethane load wheels.
- Adjustable forks.
- Adjustable outriggers 38" 52".

Deluxe Power Pallet Trucks

- 2 year warranty: DC motor drive, hydraulic pump, controllers and switches.
- 180-day parts warranty.
- Trucks sold complete with battery and charger.
- Ergonomic control handle with:
 - throttle forward and reverse speeds
 - lift and lower controls
 - horn
 - belly reverse safety button • electromagnetic disc brake with automatic dead-man









DOUBLE THE WARRANTY

OVER STANDARD MODELS

273383	Part #	273445	273446
170014	Model	Light Duty	Heavy Duty
2,200 lbs	Capacity	3,300 lbs	4,400 lbs
26.5" x 42"	W-1 x L-1	25.5" x 48"	27" x 48"
5.8"	W-2	6.25"	6.25"
65"	L-2	65"	72"
10" / 3"	WHL-1 / WHL-2	10" x 3.5" / 3" x 3.75"	9" x 3" / 3" x 3.75"
78.5" / 2.5" / 62.5"	H-1/H-2/H-3	50" / 3" / 7.67"	50" / 3" / 7.67"
1,036 lbs	Battery	(2) 12V 80Ah	24V 210 Ah
922 lbs	Steering Angle	205°	180°
	Weight	631 lbs	1,147 lbs

PALLET TRUCK OPTIONS

Two Models to Secure Your Pallet Jack!

- Both models function well on any surface and will not slip.
- To secure pallet jack, simply roll steering wheels up the pallet jack stop or chock incline and into holding area.





EASY AS 1-2-3-GO!



Pallet Truck Chock -High Visibility Yellow

■ Material: yellow hard rubber.

Part # 272175

Weight 3.4 lbs

OVERALL DIMENSIONS

w: 11.75"

h: 2"

d: 14"



Pallet Jack Stop

■ Material: black hard rubber.

Part # 272949

Weight 3.5 lbs

OVERALL DIMENSIONS

w: 11.75"

h: 2"

d: 14"



3 in 1 Guard Adapter

- Fits only specific Wesco 27" W pallet trucks: long fork, with brake, CPI and CP3 models.
- Easily attaches to Wesco CPI pallet truck.
- Factory or field installed.
- #272660 CPI Pallet Truck with Mounted Guard **Part #272654** 245 lbs.
- Guard only kit, field install. **Part #272004** 54 lbs.





3 in 1 Guard featured as an option is three products in one compact design. You no longer need to purchase separate milk crate guards, box guards or skid adapters. Wesco's 3 in 1 guard does it all.

Cargo Backrest

- Fits only specific Wesco 27" W pallet trucks: long fork, with brake, CPI and CP3 models.
- Easy attachment, no drilling, can be field retrofitted.
- Field or factory installed.

- Backrest Only Kit **Part #271999** 27 lbs.
- Part #272296 Assembled CPI
 Pallet Truck #272660 with
 Mounted Backrest #271999.





3 in 1 Guard and Cargo Backrest designed for use only on specific Wesco Pallet Trucks.

Use on trucks other than Wesco void any and all warranties.



MANUAL PLATFORM

Hydraulic Foot Pump

- Floor locks, safety screen and foot guard are standard on all models.
- Forks touch the floor on all fork models.
- Front phenolic wheels are 5" diameter.
- Rear phenolic swivel casters are 4" diameter.
- WESCO manufactured hydraulic Stacker Jack, over 35 years of proven quality.
- Foot pedal pump and release.
- 1,000 lb. capacity.
- Low Profile Option available on all models except EKS-10.

3" Low Profile Option:

All stackers are available with a low profile design which provides a clearance of as little as 3".




Contact Wesco Customer Service Department for details.

Wesco[®] 1,000 lb Capacity Platform Models

- 1-year warranty.
- WESCO manufactured hydraulic Stacker Jack, over 35 years of proven quality.
- 24" x 24" heavy gauge platform with 5.75" lowered height.
- 15" load center.
- Base leg span 15" inside, 21" outside.







- 1-year warranty.
- WESCO manufactured hydraulic Stacker Jack, over 35 years of proven quality.
- 30" deep x 32" wide heavy gauge platform with 5.25" lowered height.
- 18" load center.
- Base leg span 25.5" inside, 32" outside.

STANDARD FRAME MODEL #SPL-80-3032 PART #260040




		Platform Models						Large Platform Models					
	Standard	Economy	Standard	Economy	Standard	Economy	Standard	Economy	Standard	Economy	Standard	Economy	
Part #	260032	260044	260033	260045	260034	260046	260038	260050	260039	260051	260040	260052	
Model #	SPL-60-2424	ESPL-60-2424	SPL-68-2424	ESPL-68-2424	SPL-80-2424	ESPL-80-2424	SPL-60-3032	ESPL-60-3032	SPL-68-3032	ESPL-68-3032	SPL-80-3032	ESPL-80-3032	
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	
Platform W x L	24" x 24"	24" x 24"	24" x 24"	24" x 24"	24" x 24"	24" x 24"	32" x 30"	32" x 30"	32" x 30"	32" x 30"	32" x 30"	32" x 30"	
Lift Height	60"	60"	68"	68"	80"	80"	60"	60"	68"	68"	80"	80"	
Load Center	15"	15"	15"	15"	15"	15"	18"	18"	18"	18"	18"	18"	
Weight	233 lbs	226 lbs	248 lbs	234 lbs	274 lbs	263 lbs	272 lbs	265 lbs	295 lbs	273 lbs	317 lbs	298 lbs	

AND FORK STACKERS

Wesco[®] 1,000 lb Capacity Hydraulic Drum Stackers

- 1-year warranty.
- WESCO manufactured hydraulic Stacker Jack, over 35 years of proven quality.
- Phenolic 5" diameter front wheels and 4" rear phenolic swivel casters.
- For use with 55 gallon steel closed drums.
- Floor lock and safety screen are standard.
- 5" phenolic front wheels.
- 4" phenolic rear casters.
- Lowers drums to the floor.
- Base leg span 26" inside, 32.75" outside.





Winch Model

Wesco® 1,000 lb Capacity Winch Stacker

- 1-year warranty.
- Heavy duty 1,000 lb capacity.
- Heavy duty winch with auto brake.
- Floor locking.
- Swivel casters 4" x 2" phenolic. Load wheels 5" x 2" phenolic.
- Lowered height 5".







Wesco[®] 1,000 lb Capacity Fork Model

- 1-year warranty.
- WESCO manufactured hydraulic Stacker Jack, over 35 years of proven quality.
- 1" thick x 3" wide x 25" long forks.
- Adjustable span up to 25".
- 15" load center.
- 25.5" overall width; 40" depth.
- Base leg span 15" inside, 21" outside.
- Forks lower to ground.
- 1,000 lb. capacity.

ECONOMY FRAME MODEL #SFL-76-25 PART #260037

	Drum Stackers		Winch Stacker Fork Stackers							
	Economy	Economy	Economy	Standard	Standard	Economy	Standard	Economy	Standard	Economy
Part #	260056	260057	260058	270214	260035	260047	260036	260048	260037	260049
Model #	ESFL-56-DS	ESFL-64-DS	ESFL-76-DS	SWPL-68-2424	SFL-56-25	ESFL-56-25	SFL-64-25	ESFL-64-25	SFL-76-25	ESFL-76-25
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs
Platform/Fork W x L	N/A	N/A	N/A	24" x 24"	3" x 25"	3" x 25"	3" x 25"	3" x 25"	3" x 25"	3" x 25"
Lift Height	56"	64"	76"	70"	56"	56"	64"	64"	76"	76"
Load Center	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"
Weight	295 lbs	314 lbs	327 lbs	238 lbs	265 lbs	258 lbs	273 lbs	266 lbs	306 lbs	295 lbs

MANUAL AND POWERED

Wesco® 1,000 lb Capacity Hydraulic Straddle Fork Models Wide Straddle Fork ■ 1-year warranty. Wesco® 1,000 lb ■ Base leg span - 42" inside, 48.75" outside. STANDARD FRAME Straddle Fork ■ 1" thick by 3" wide MODEL #SFL-64-30S by 30" long forks PART #260042 ■ 1-year warranty. adjustable span. ■ 1" thick x 3" wide x 30" Overall width 48.75", long forks. depth 48.25". ■ Adjustable span up to 25". Forks lower to the ground. ■ 18" load center. ■ 1,000 lb. capacity. ■ 32" overall width; 44" depth. ■ WESCO manufactured ■ Base leg span - 25.5" inside, hydraulic Stacker 32" outside. Jack, over 35 years ■ Forks lower to ground. of proven quality. ■ 1,000 lb. capacity. ■ WESCO manufactured hydraulic Stacker Jack, over 35 years of **ECONOMY FRAME** proven quality.

MODEL #ESFL-56-30S PART #260053

		S		Wide Straddle				
	Standard	Economy	Standard	Economy	Standard	Economy	Wide	
Part #	260041	260053	260042	260054	260043	260055	260075	
Model #	SFL-56-30S	ESFL-56-30S	SFL-64-30S	ESFL-64-30S	SFL-76-30S	ESFL-76-30S	ESFL-56-30-42S	
Capacity	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	1,000 lbs	
Fork WxL	3" x 30"	3" x 30"	3" x 30"	3" x 30"	3" x 30"	3" x 30"	3" x 30"	
Lift Height	56"	56"	64"	64"	76"	76"	56"	
Load Center	18"	18"	18"	18"	18"	18"	18"	
Weight	288 lbs	281 lbs	298 lbs	289 lbs	333 lbs	322 lbs	352 lbs	

Power Lift and Drive Model

2,200 lb Capacity Power Drive Stacker

- 6 Month Warranty on parts only.
- Lift height of 981/4". Dual chain lift.
- Includes two, 12 volt, 187 AH, sealed batteries and a separate UL approved charger.
- Power propulsion system takes the effort out of moving heavy loads. Also provides easy steering.
- Fingertip control provides variable orward and reverse speeds.
- Automatic safety stop on top of control post. Unit shuts down when safety stop comes into contact with an obstacle.
- Load wheels, steering wheel and drive wheel are all moldon polyurethane.
- Adjustable forks.




Part #	272943	
Model	EKS-10	
Capacity	2,200 lbs	
Lowered Mast Height	70"	
Raised Mast Height	117.5"	
Leg ID/OD	19" / 27"	
Fork Size W x L	5" x 35.25"	
Outside Fork Spread	12" - 29" - Adjustable	
Lowered Fork Height	2.6"	
Raised Fork Height	98.25"	
Load Center	17.5"	
Weight	826 lbs	

WIDE STRADDLE MODEL #ESFL-56-30-42S PART #260075



STACKERS

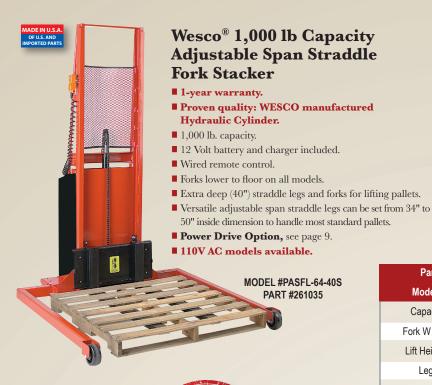

Powered Models

OPTIONS

Power Drive Option: See page 9.

Variable Speed Limiter Control Option:

Useful where precision placement of forks or platform is required, except for EKS.10.

Kit #261182 provides either up-only or down-only speed control. Kit #261180 provides both up and down speed control.

5th Wheel Option: See page 7.

110 AC Models: Contact Wesco.

Part #	261034	261035	261036
Model #	PASFL-56-40S	PASFL-64-40S	PASFL-76-40S
Capacity	1,000 lbs	1,000 lbs	1,000 lbs
Fork W x L	3" x 40"	3" x 40"	3" x 40"
Lift Height	56"	64"	76"
Leg ID	Adj./34" to 50"	Adj./34" to 50"	Adj./34" to 50"
Wheel: Front Rear	5" phenolic 4" phenolic swivel	5" phenolic 4" phenolic swivel	5" phenolic 4" phenolic swivel
Load Center	20"	20"	20"
Weight	510 lbs	518 lbs	554 lbs

Powered Counter-Balance Models

- Meets ANSI B56.10 specifications.
- 1,000 to 2,000 lb. lift capacity.
- Remote control, floor lock, and safety screen are standard on all models.
- With a minimally charged battery, unit can be used while recharging.
- Easy to read illuminated battery status voltmeter no extra cost!
- 12VDC battery or 110VAC units available.

Wesco[®] 1,000 lb Capacity Counter-Balance Powered Stacker

- 1-year warranty.
- Proven quality: WESCO manufactured Hydraulic Cylinder.
- 12 Volt battery and charger included.
- Wired remote control.
- Applications include: Loading and unloading trucks, positioning dies, feeding material to presses.
- 25" long forks standard.
- 30" long fork models available, 850 lb. max. capacity.
- Order enough weight kits for your planned load. (See chart.)
- AC models not available.




Part #	261037	261038	261039
Model #	PCBFL-56-25	PCBFL-64-25	PCBFL-76-25
Capacity	1,000 lbs	1,000 lbs	1,000 lbs
Fork W x L	3" x 25"	3" x 25"	3" x 25"
Lift Height	56"	64"	76"
Wheel: Front Rear	4" 4"	4" 4"	4" 4"
Load Center	13"	13"	13"
Weight*	560 lbs	574 lbs	611 lbs

*Weight of stacker without counterweights.

Counter-Balance Weights

Part #	261041	261042	261043
Counterweight	200 lbs	400 lbs	600 lbs
Stacker Load Capacity	334 lbs	668 lbs	1,000 lbs

Powered Models



- 1-year warranty.
- Proven quality: **WESCO** manufactured Hydraulic Cylinder.
- 1,000 lb. capacity.
- 12 Volt battery and charger included.
- Wired remote control.
- Lowered height 5.75"
- Phenolic wheels on front and phenolic casters on rear.
- Power Drive Option, see page 9.
- 110V AC models available.





Wesco® 1,000 lb **Capacity Fork Model**

- 1-year warranty.
- Proven quality: **WESCO** manufactured Hydraulic Cylinder.
- 1,000 lb. capacity.
- 12 Volt battery and charger included.
- Wired remote control.
- Forks lower to floor on all models.
- 5" phenolic wheels on front, 4" swivel on rear.
- **Power Drive Option,** see page 9.
- 110V AC models available.



	Pla	ttform Model	S	Fork Models				
	2	4" x 24" Platform Models			Fork Models			
Part #	261022	261023	261024	261028	261029	261030		
Model #	PESPL-60-2424	PESPL-68-2424	PESPL-80-2424	PESFL-56-25	PESFL-64-25	PESFL-76-25		
Capacity	1,000 lbs							
Platform or Fork W x L	Platform 24" x 24"	Platform 24" x 24"	Platform 24" x 24"	Fork 3" x 25"	Fork 3" x 25"	Fork 3" x 25"		
Lift Height	60"	68"	80"	56"	64"	76"		
Leg ID/OD	15"/21"	15"/21"	15"/21"	15"/21"	15"/21"	15"/21"		
Wheel: Front Rear	5" phenolic 4" phenolic swivel							
Load Center	15"	15"	15"	15"	15"	15"		
Weight	418 lbs	428 lbs	457 lbs	452 lbs	460 lbs	489 lbs		
	3	30" x 32" Platform Models		Straddle Fork Models				
Part #	261025	261026	261027	261031	261032	261033		
Model #	PESPL-60-3032	PESPL-68-3032	PESPL-80-3032	PESFL-56-30S	PESFL-64-30S	PESFL-76-30S		
Capacity	1,000 lbs							
Platform or Fork W x L	Platform 32" x 30"	Platform 32" x 30"	Platform 32" x 30"	Fork 3" x 30"	Fork 3" x 30"	Fork 3" x 30"		
Lift Height	60"	68"	80"	56"	64"	76"		
Leg ID/OD	25.5" / 32"	25.5" / 32"	25.5" / 32"	25.5"/32"	25.5"/32"	25.5"/32"		
Wheel: Front Rear	5" rigid 4" swivel	5" rigid 4" swivel	5" rigid 4" swivel	5" phenolic 4" swivel	5" phenolic 4" swivel	5" phenoli 4" swivel		
Load Center	18"	18"	18"	18"	18"	18"		
Weight	404 lbs	427 lbs	452 lbs	442 lbs	456 lbs	465 lbs		

TELESCOPING STACKERS

Powered Telescoping Models

Ajustable Forks

Wesco® 1,500 and 2,000 lb Capacity Powered Telescoping Fork Stackers

- 1-year warranty.
- Proven quality: WESCO manufactured Hydraulic Cylinder.
- Meets ANSI B56.10 specifications.
- Adjustable forks.
- 12 Volt battery and charger included.
- Wired remote control.
- Forks lower to floor on all models.
- Instant carriage stop for accuracy—no drifting.
- Heavy duty rigid frame and base.
- Double chain lift for better balance and load support.
- Heavy-duty pump.
- Ergonomic "D" handles.
- High strength mast for increased stability.
- Optional 5th wheel for easier overall mobility and turning in confined areas.


■ Power Drive Option NOT available on any telescoping stacker.

■ SPECIAL ORDER: 110V AC models available.



option under Part # 261099.









Telescoping Models - Fixed Width Base - 2,000 Lb Capacity

Telescoping Models - Adjustable Width Base - 1,500 And 2,000 Lb Capacity

Part #	261120	261119	261124	261123	261117	261118	261115	261116	
Model #	PTSFL-96-42-42S-2K	PTSFL-130-42-42S-2K	PTSFL-96-42-50S-2K	PTSFL-130-42-50S-2K	PTASFL-96-42-3550S-1.5K	PTASFL-130-42-3550S-1.5K	PTASFL-96-42-3550S-2K	PTASFL-130-42-3550S-2K	
Capacity	2,000 lbs	2,000 lbs	2,000 lbs	2,000 lbs	1,,500 lbs	1,500 lbs	2,000 lbs	2,000 lbs	
Lift Range	1.5"-96"	1.5"-130"	1.5"-96"	1.5"-130"	1.5"-96"	1.5"-130"	1.5"-96"	1.5"-130"	
Leg ID/OD	42"/48"	42"/48"	50"/56"	50"/56"	35"-50" ID Adj.	35"-50" ID Adj.	35"-50" ID Adj.	35"-50" ID Adj.	
Fork Size D x W x L	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	1.5" x 3" x 42"	
Outside Fork Spread	7.4" x 30"	7.4" x 30"	7.4" x 30"	7.4" x 30"	7.4" x 30"	7.4" x 30"	7.4" x 30"	7.4" x 30"	
Load Center	24"	24"	24"	24"	24"	24"	24"	24"	
Weight	995 lbs	1,240 lbs	1,210 lbs	1,240 lbs	1,125 lbs	1,280 lbs	1,125 lbs	1,285 lbs	



POWERED STACKERS

Powered Fork Models

Wesco® 1,500 & 2,000 lb Capacity Powered Stackers -Fork Models

- 1-year warranty.
- Proven quality: WESCO manufactured Hydraulic Cylinder.
- Meets ANSI B56.10 specifications.
- 12 Volt battery and charger included.
- Wired remote control.
- Forks lower to floor on all models.
- Adjustable base legs available on fork models.
- Reinforced frame and base.
- Double chain, lift support.
- Heavy-duty pump.
- Ergonomic "D" handles.
- **5th Wheel Option,** see page 7.
- Power Drive Option, see page 9.
- 110V AC models available.



MODEL #PASFL-64-42-3550S-2K PART #261053

Fixed and Adjustable Base Leg Fork Models

Part #	Model #	Lift Height	Overall Height	Weight lbs	Capacity lbs	Load Center	Fork Width/Length	Base Leg ID/OD
261079	PSFL-56-25-15S-1.5K	56"	72"	512	1,500	15"	3"/25"	15"/21"
261079	PSFL-50-25-15S-1.5K	64"	83"	532		15"	3"/25"	15 /21"
261080	PSFL-64-25-15S-1.5K	76"	94"	532 596	1,500 1,500	15"	3"/25"	15 /21
261082	PSFL-76-25-15S-1.5K	86"	104"	642	1,500	15"	3"/25"	15 /21"
261083	PSFL-56-25-135-1.5K	56"	72"	523	1,500	15"	3"/25"	20"/26"
261084	PSFL-50-25-20S-1.5K	64"	83"	543	1,500	15"	3"/25"	20"/26"
261085	PSFL-76-25-20S-1.5K	76"	94"	607	1,500	15"	3"/25"	20"/26"
261086	PSFL-86-25-20S-1.5K	86"	104"	654	1,500	15"	3"/25"	20"/26"
261092	PSFL-56-25-20S-2K	56"	72"	523	2,000	15"	3"/25"	20"/26"
261092	PSFL-64-25-20S-2K	64"	83"	558	2,000	15"	3"/25"	20"/26"
261094	PSFL-76-25-20S-2K	76"	94"	611	2.000	15"	3"/25"	20"/26"
261095	PSFL-86-25-20S-2K	86"	104"	659	2,000	15"	3"/25"	20"/26"
261059	PSFL-64-30-30S-1.5K	64"	83"	566	1,500	18"	3"/30"	30"/36"
261060	PSFL-76-30-30S-1.5K	76"	94"	630	1,500	18"	3"/30"	30"/36"
261061	PSFL-86-30-30S-1.5K	86"	104"	677	1,500	18"	3"/30"	30"/36"
261044	PSFL-64-30-30S-2K	64"	83"	571	2,000	18"	3"/30"	30"/36"
261045	PSFL-76-30-30S-2K	76"	94"	635	2,000	18"	3"/30"	30"/36"
261046	PSFL-86-30-30S-2K	86"	104"	682	2,000	18"	3"/30"	30"/36"
261062	PSFL-64-42-42S-1.5K	64"	83"	571	1,500	24"	3"/42"	42"/48"
261063	PSFL-76-42-42S-1.5K	76"	94"	637	1,500	24"	3"/42"	42"/48"
261064	PSFL-86-42-42S-1.5K	86"	104"	688	1,500	24"	3"/42"	42"/48"
261047	PSFL-64-42-42S-2K	64"	83"	577	2,000	24"	3"/42"	42"/48"
261048	PSFL-76-42-42S-2K	76"	94"	642	2,000	24"	3"/42"	42"/48"
261049	PSFL-86-42-42S-2K	86"	104"	693	2,000	24"	3"/42"	42"/48"
261065	PSFL-64-42-50S-1.5K	64"	83"	577	1,500	24"	3"/42"	50"/56"
261066	PSFL-76-42-50S-1.5K	76"	94"	642	1,500	24"	3"/42"	50"/56"
261067	PSFL-86-42-50S-1.5K	86"	104"	693	1,500	24"	3"/42"	50"/56"
261050	PSFL-64-42-50S-2K	64"	83"	582	2,000	24"	3"/42"	50"/56"
261051	PSFL-76-42-50S-2K	76"	94"	647	2,000	24"	3"/42"	50"/56"
261052	PSFL-86-42-50S-2K	86"	104"	698	2,000	24"	3"/42"	50"/56"
261068	PASFL-64-42-3550S-1.5K	64"	83"	587	1,500	24"	3"/42"	35"-50" ID ADJ.
261069	PASFL-76-42-3550S-1.5K	76"	94"	652	1,500	24"	3"/42"	35"-50" ID ADJ.
261070	PASFL-86-42-3550S-1.5K	86"	104"	703	1,500	24"	3"/42"	35"-50" ID ADJ.
261053	PASFL-64-42-3550S-2K	64"	83"	592	2,000	24"	3"/42"	35"-50" ID ADJ.
261054	PASFL-76-42-3550S-2K	76"	94"	657	2,000	24"	3"/42"	35"-50" ID ADJ.
261055	PASFL-86-42-3550S-2K	86"	104"	708	2,000	24"	3"/42"	35"-50" ID ADJ.



Adjustable legs



Wesco[®] 1,500 & 2,000 lb **Capacity Powered Stackers -Platform Models**


- 1-year warranty.
- Proven quality: WESCO manufactured Hydraulic Cylinder.
- Meets ANSI B56.10 specifications.
- 12 Volt battery and charger included.
- Wired remote control.
- Platform models lowered height 6".
- Adjustable base legs available on fork models only.
- Fixed platforms 24 x 24, 24 x 27, 30 x 32.
- Reinforced frame and base.
- Double chain, lift support.
- Heavy-duty pump.
- Ergonomic "D" handles.
- 5th Wheel Option, see page 7.
- Power Drive Option, see page 9.
- 110V AC models available.

5.875" 1 MODEL #PSPL-60-2424-15S-1.5K PART #261074

Powered Platform Models

Fixed Base Leg Platform Models

Part #	Model #	Lift Height	Overall Height	Weight lbs	Capacity Ibs	Load Center	Platform Width/Length	Base Leg ID/OD
261074	PSPL-60-2424-15S-1.5K	60"	72"	468	1,500	15"	24" x 24"	15"/21"
261075	PSPL-68-2424-15S-1.5K	68"	83"	482	1,500	15"	24" x 24"	15"/21"
261076	PSPL-80-2424-15S-1.5K	80"	94"	523	1,500	15"	24" x 24"	15"/21"
261077	PSPL-90-2424-15S-1.5K	90"	104"	563	1,500	15"	24" x 24"	15"/21"
261088	PSPL-60-2427-20S-2K	60"	72"	476	2,000	15"	24" x 27"	20"/26"
261089	PSPL-68-2427-20S-2K	68"	83"	487	2,000	15"	24" x 27"	20"/26"
261090	PSPL-80-2427-20S-2K	80"	94"	530	2,000	15"	24" x 27"	20"/26"
261091	PSPL-90-2427-20S-2K	90"	104"	569	2,000	15"	24" x 27"	20"/26"
261071	PSPL-60-3032-30S-1.5K	60"	72"	479	1,500	18"	30" x 32"	30"/36"
261072	PSPL-68-3032-30S-1.5K	68"	83"	492	1,500	18"	30" x 32"	30"/36"
261073	PSPL-80-3032-30S-1.5K	80"	94"	534	1,500	18"	30" x 32"	30"/36"
261078	PSPL-90-3032-30S-1.5K	90"	104"	573	1,500	18"	30" x 32"	30"/36"
261056	PSPL-60-3032-30S-2K	60"	72"	484	2,000	18"	30" x 32"	30"/36"
261057	PSPL-68-3032-30S-2K	68"	83"	497	2,000	18"	30" x 32"	30"/36"
261058	PSPL-80-3032-30S-2K	80"	94"	539	2,000	18"	30" x 32"	30"/36"
261087	PSPL-90-3032-30S-2K	90"	104"	578	2,000	18"	30" x 32"	30"/36"
262056	PDPL-61-3033-30S-2K	61.375"	74.75"	674	2,000	18.25"	30" x 33"	30"/36"



Dual Platform Model for Efficient Exchange of **Press Molds and Dies**

Wesco® Optional **Power Drive System for** Fork and Platform Stackers

- Variable speed, steerable power drive system allows a single user to easily control forward and reverse movement of stacker.
- Simple to use finger-tip controls are built into steering handle.
- 180° hinged design allows precision steering in confined spaces.
- Red emergency stop button.
- Spring-loaded mechanism automatically compensates for uneven floors ensuring drive wheels maintain constant contact with floor.
- Two maintenance-free sealed batteries provide plenty of power for propulsion and lift.
- 1,000 2,000 lb. capacities.
- Automatic emergency safety switch instantly reverses direction if control post comes in contact with obstacle.



Optional Power Drive




Easy fingertip controls.



High torque motor drive.

MODEL #PSFL-86-25-20S-2K-PD 2,000 lb. capacity and 86" lift height

TO ORDER: ADD "-PD" TO ANY POWERED MODEL, EXCEPT TELESCOPING.

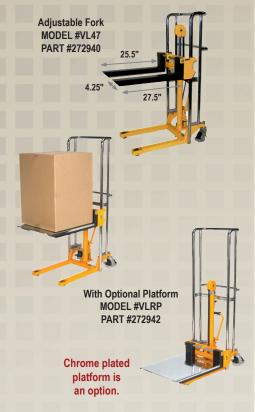

Value Lift

- Adjustable 4.25" wide x 25.5" long forks.
- Optional, removable chrome plated 22" wide x 26" long platform.
- Foot operated hydraulic pump.
- Two 5" polyurethane swivel casters with brake and two 3" polyurethane rigid wheels.
- Two lift heights: 47" and 59".
- Chrome plated rails and handle.
- Ships KD.
- #272942 Optional Platform fits both Manual and Electric Value Lift Stakcers.

Electric Value Lift Stackers

- Adjustable 4.25" wide x 25.5" long forks.
- Optional, removable 22" wide x 26" long platform.
- Two 5" polyurethane swivel casters with brake and two 3" polyurethane rigid wheels.
- Two lift heights: 47" and 59".
- Chrome plated rails and handles.
- UL approved charger.
- 12 Volt sealed, maintenancefree battery.
- Keyed on/off switch.
- Joystick raise/lower control.
- #272942 Optional Platform fits both Manual and Electric Value Lift Stakcers.







MODEL #MOL PART #272467



Manual and **Electric Value** Office Lifts

- Ideal for narrow aisles.
- Great for offices.
- Two models, manual and electric.
- Lightweight, but sturdy.
- 12 Volt sealed battery and automatic charger built in (EOL ONLY).
- Remote up and down pendant for electric model.
- 9/16" plastic platform.

Value Mini Winch Stackers

- Lightweight but strong steel construction.
- Easy to use winch system.
- Comfortable rubber hand grips on MW series.
- Convenient lever actuated wheel lock on MS Series.
- 18.25" wide overall ideal for narrow aisles -MS model only.
- Removable platform (19.5"L x 21"W) included in models MW-176 and MW-330.





MODEL #MW-330 PART #273201 (330 lb. capacity) Shown with removable platform

	Value Lift	Value Lift	Optional Platform			Manual	Electric	Wheel Lock Lever Activated	Wheel Lock On Caster	Wheel Lock On Caster	
Part #	272940	272941	272942	273203	273204	272467	272468	273202	273200	273201	
Model #	VL47	VL59	VLRP	VLP-47	VLP-59	MOL	EOL	MS-265	MW-176	MW-330	
Capacity	880 lbs	880 lbs	N/A	880 lbs	880 lbs	220 lbs	220 lbs	265 lbs	176 lbs	330 lbs	
Platform or Fork W x L	Fork 4.25" x 25.5"	Fork 4.25" x 25.5"	Platform 22" x 26"	Fork 4.25" x 25.5"	Fork 4.25" x 25.5"	Platform 18" x 23"	Platform 18" x 23"	2" x 16"	2" x 19.75"	2" x 19.75"	
Lift Height	3.5" - 47"	3.5" - 59"	N/A"	3.5" - 47"	3.5" - 59"	58.5"	66"	41"	43"	43"	
Lowered Height	3.5"	3.5"	N/A	3.5"	3.5"	5"	5"	3.75"	2.75"	2.75"	
Adj. Fork Width	8.5" - 19.5"	8.5" - 19.5"	N/A	8.25" - 21.5"	8.25" - 21.5"	58.5"	66"	13.5"-18.25"	5"-20"	5"-20"	
Swivel Casters	5" Locking Polyurethane	5" Locking Polyurethane	N/A	5" Locking Polyurethane	5" Locking Polyurethane	5" x 1.25" Hard Rubber	5" x 1.25" Hard Rubber	2"x.75" Nylon	4" x 1.125" Locking Polyurethane	4" x 1.125" Locking Polyurethane	
Load Wheels	3" Rigid Polyurethane	3" Rigid Polyurethane	N/A	3" Rigid Polyurethane	3" Rigid Polyurethane	2.75" x 1.25" Hard Rubber	2.75" x 1.25" Hard Rubber	8"x 2" Moldon Rubber	4"x1" Hard Rubber	4"x1" Hard Rubber	
Battery	N/A	N/A	N/A	12V 80AH	12V 80AH	N/A	12V	N/A	N/A	N/A	
Load Center	12.75"	12.75"	N/A	12.75"	12.75"	9.25"	9.25"	8"	9.75"	9.75"	
Weight	178 lbs	187 lbs	10 lbs	269 lbs	280 lbs	104 lbs	146 lbs	69 lbs	115 lbs	137 lbs	

AND PEDALIFTS

Wesco® 750 lb Capacity Steel Frame Two-Wheeled Winch Pedalifts

- 1-year warranty.
- Auto-brake designed winch raises and lowers by turning handle no catches to lock or release required.
- Low maintenance design.
- Front of platform touches the ground on two wheeled model.
- Wheel lock standard.
- All 54" lifts are 60.5" O.A.H. All 40" lifts are 48.5" O.A.H.
- 8" x 2" wheels with .75" precision ball bearings.
- Adjustable forks.



MODEL #WPL-54-F PART #260019

Winch Pedalift Models

- Wheel locks are standard on all models.
- Frame and lift heights vary among models.
- Fork or platform models.
- Two or four-wheeled models.
- Winch or hydraulic foot pump models.



MODEL #WDPL-54-2222 PART #260021

Wesco[®] 750 lb Capacity Steel Frame Four-Wheeled Winch Pedalifts

- 1-year warranty.
- Auto-brake designed winch raises and lowers by turning handle no catches to lock or release required.
- Winch allows easy horizontal storage and transportation.
- Low maintenance design.
- \blacksquare Platform on four wheeled model sits 5.75" above the floor.
- Wheel lock standard.
- \blacksquare All 54" lifts are 60.5" O.A.H. All 40" lifts are 48.5" O.A.H.
- 8"x2" wheels with .75" precision ball bearings.
- 3.5" diameter polyurethane ball bearing front swivel casters.
- Adjustable forks.

		Two-Wh	reeled M	odels		Four-Wheeled Models					
Part #	260015 WPL-40-1620	260016 WPL-54-2222	260017 WPL-54-2230	260018 WPL-40-F	260019 WPL-54-F	260020 WDPL-40-1620	260021 WDPL-54-2222	260022 WDPL-54-2230	260023 WDPL-40-F	260024 WDPL-54-F	
Capacity	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	
Platform or Fork W x L	Platform 20" X 16"	Platform 22" x 22"	Platform 30" x 22"	Fork 3" x 18"	Fork 3" x 18"	Platform 20" x 16"	Platform 22" x 22"	Platform 22" x 30"	Fork 3" x 18"	Fork 3" x 18"	
Lift Height	40"	54"	54"	40"	54"	40"	54"	54"	40"	54"	
Load Center	10"	10"	10"	10"	10"	10"	10"	10"	10"	10"	
Weight	106 lbs	147 lbs	157 lbs	125 lbs	157 lbs	113 lbs	153 lbs	163 lbs	132 lbs	163 lbs	

PEDALIFTS

Foot Pump Pedalift Models



Wesco® 750 lb Capacity Steel Frame Two-Wheeled Hydraulic Pedalifts

- 1-year warranty.
- WESCO manufactured hydraulic Pedalift Jack, over 35 years of proven quality.
- 750 lb. capacity.
- Front tip of nose plate touches floor.
- Foot operated hydraulic pump raises platform, foot release lowers platform.
- Wheel lock standard.
- All 54" lifts are 60.5" O.A.H. All 40" lifts are 48.5" O.A.H.
- 8"x2" wheels with .75" precision ball bearings.
- Adjustable forks.

Wesco® 750 lb Capacity Steel Frame Four-Wheeled Hydraulic Pedalifts

- 1-year warranty.
- WESCO manufactured hydraulic Pedalift Jack, over 35 years of proven quality.
- 750 lb. capacity.
- Foot operated hydraulic pump raises platform, foot release lowers platform.
- Platform sits 5.75" above the floor.
- Wheel lock standard.
- All 54" lifts are 60.5" O.A.H. All 40" lifts are 48.5" O.A.H.
- 8"x2" wheels with .75" precision ball bearings.
- 3.5" diameter polyurethane ball bearing front swivel casters.
- Adjustable forks



			Two-Wl	neeled M	lodels		Four-Wheeled Models					
	Part #	260001	260002	260003	260006	260007	260008	260009	260010	260011	260012	
	Model #	PL-40-1620	PL-54-2222	PL-54-2230	PL-40-F	PL-54-F	DPL-40-1620	DPL-54-2222	DPL-54-2230	DPL-40-F	DPL-54-F	
	Capacity	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	750 lbs	
	latform or ork W x L	Platform 20" x 16"	Platform 22" x22"	Platform 30" x 22"	Fork 3" x 18"	Fork 3" x 18"	Platform 20" X 16"	Platform 22" x 22"	Platform 30" x 22"	Fork 3" x 18"	Fork 3" x 18"	
L	ift Height	40"	54"	54"	40"	54"	40"	54"	54"	40"	54"	
Loa	ad Center	10"	10"	10"	10"	10"	10"	10"	10"	10"	10"	
	Weight	112 lbs	156 lbs	166 lbs	131 lbs	166 lbs	119 lbs	166 lbs	172 lbs	138 lbs	172 lbs	



ERGONOMIC DRUM HANDLERS Powered, Manual and Scale Models

Wesco® has a complete selection of ergonomic drum handlers with a model for every application. Choose from five models - Standard, High Reach, Scale, Power Lift, Power Lift & Drive. Our patented Standard Model P/N 240150 GatorGrip drum grab handles most 30, 55 or 85 gallon steel, fiber or poly drums with at least a 3/16" lip. The auto-lock feature of the GatorGrip helps hold the drum securely in place until the drum is Scale Model Accuracy ± .5% of load P/N 240155 placed on the ground - even over rough surfaces. The operator does not need to touch drums to operate and High Reach Model our power units have an up/down remote control.

> Power Lift & Drive P/N 240157

SEE VIDEOS OF THESE DRUM HANDLERS IN ACTION!




Power Lift P/N 240156


P/N 240154


		NEW	S NEW	S NEW!	NEW
Part #	240150	240154	240155	240156	240157
Model #	DM-1100	DM-1100-HR ())	DM-1100-S	DM-1100-PL	DM-1100-PLD ()
Description	Standard	High Reach	Scale	Power Lift	Power Lift & Drive
Rise/Stroke	1"	1"	1"	8.5" / sec. without load	8.5" / sec. without load
Legs Retracted Capacity	650 lbs	650 lbs	650 lbs	650 lbs	650 lbs
Legs Extended Capacity	1100 lbs	1100 lbs	1100 lbs	1100 lbs	1100 lbs
Weight	355.5 lbs	376lbs	356 lbs	531 lbs	691 lbs


Now five models, all with U.S. Patented Gator Grip U.S. Patent No. 6,619,905.

#240150 / #240154 SCHEMATIC 41" EXTENDED 36" RETRACTED 36" EXTENDED





















Distributed by:

WESCO POWERED LIFT SCISSORS TABLES



PART#	273710	273711	273712	273713
MODEL#	PSLT-660	PSLT-1100	PSLT-1650	PSLT-770-DS
Capacity	660 lbs	1,100 lbs	1,650 lbs	770 lbs (Double Scissors)
Table Top Dimensions	19.75" x 33.5" x 2"	20.5" x 39.75" x 2.25"	20" x 39.5" x 2.25"	19.625" x 35.875" x 2.25"
Raised Height	34.25"	40.5"	39.5"	51.5"
Lowered Height	11.25"	17.25"	17"	14.5"
Caster/wheel Size	Moldon Polyurethane - 5" x 1.25"	Moldon Polyurethane - 6" x 1.5"	Moldon Polyurethane - 6" x 2"	Moldon Polyurethane - 5" x 1.25"
Qty. of Batteries	4	2	4	4
Weight	256 lbs	346 lbs	353 lbs	300 lbs

OTHER WESCO'S LIFT TABLES



MINI ELECTRIC LIFT TABLE

- Heavy duty to handle tough loads.
- Small and light enough to move.
- Safety skirt around table perimeter.
- 110V 60 Hz.
- Push button station.

SCISSORS TABLE WITH ROLLER TOP

- Roller top permits easy movement of cargo for loading and unloading.
- Moldon polyurethane wheels and locking swivel casters.
- Handle height 381/4".
- Two dual-position end stops helps keep cargo in place.
- Eight 2" diameter rollers 181/2" long.
- Hydraulic foot pump.
- Variable lowering speed valve.



- Oversized **63" long** x 32" wide and accommodates large cargo.
- Two wheels and two locking swivel casters.
- Handle height: 32" x 63"/38"H.
- Hydraulic foot pump.
- Safety bars.



SAFETY BARS LOCK TABLE IN RAISED POSITION.

Part #	270662	273269	273261
Model #	MELT	DRT-2033	LDT-3263
Capacity	2200 lbs	660 lbs	1,100 lbs
Table Size	24" x 35"	19.5" x 32.5"	32" x 63"
Raised Height	30"	38.25"	36"
Lowered Height	7"	12.5"	11.25"
Caster/Wheel Size	N/A	5" x 1.5"	Moldon polyurethane 5" x 1.5"
Weight	283 lbs	210 lbs	340 lbs



FOLDING HANDLE SCISSORS LIFT TABLE

- Folding handle lays flat on table top.
- Chrome plated handle and foot pedal.
- Lever release handle.
- Moldon polyurethane wheels and locking swivel casters.
- Foot operated pump.



FIXED HANDLE SCISSORS TABLES

- Fixed handle.
- Foot operated pump.
- Easy to use spring loaded release lever.
- Moldon polyurethane wheels and locking swivel casters.



DOUBLE SCISSORS HIGH LIFT TABLES

- Fixed handle.
- Chrome plated handle and foot pedal.
- Lever release handle.
- Moldon polyurethane wheels and locking swivel casters.
- Foot operated pump.



HEAVY DUTY SCISSORS LIFT TABLES

- Fixed handle.
- Chrome plated handle and foot pedal.
- Moldon polyurethane wheels and locking swivel casters.
- Foot operated pump.

Part #	260201	260207	272974	260208	260199	260200	260204	272970	272973	
Model #	LT-330SL	SLT-660-11	LT-660FHSL	SLT-1100-11	LT-700SL	LT-1000SL	LT-770DSL	LT-1650SL	LT-2200SL	
Capacity	330 lbs	660 lbs	660 lbs	1,100 lbs	700 lbs	1,000 lbs	770 lbs	1,650 lbs	2,200 lbs	
Table Size	17.75" x 27.5"	20" x 32"	19.5" x 32"	20" x 32"	19.5" x 32"	19.5" x 32"	19.5 x" 35.5	20" x 39"	20" x 40"	
Raised Height	28.5"	35"	35"	35"	35"	35"	51"	35.5"	39"	
Lowered Height	8.5"	11"	14"	11"	14"	14"	14"	16.5"	15"	
Caster/Wheel Size	4" x 1"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 1.5"	5" x 2"	5" x 2"	
Locking Caster (LC)	LC	LC	LC	LC	LC	LC	LC	LC	LC	
Weight	98 lbs	165 lbs	170 lbs	187 lbs	170 lbs	185 lbs	227 lbs	276 lbs	269 lbs	






- UPSable KD and boxed.
- Six models: (4) Steel and (2) **304 Stainless** Construction.
- Handles 30, 55 and 85 gallon drums.
- Models to handle steel and poly drums.
- Requires minimal assembly.
- All parts removable and interchangeable.
- Each of the six models includes handle, frame, base, kickstand, axle, toe or feet, wheel, chime hook or belt and hardware.
- Foot operated break-over assist bar provides extra leverage to tilt and balance load and allows truck to rest in tilt-back position.
- **Stainless** models okay for wash down.
- Optional 3rd Wheel:
 - Ergonomic design, better maneuverability.
 - Better load support.
 - Helps reduce breakover effort.
 - 5" x 2" swivel caster.
 - Two Models: #240210 for steel trucks, 13 lbs. #240211 for **304 stainless** trucks, 14 lbs.



CASTER MOUNTED BEYOND DRUM AND DOLLY RIM FOR



Steel Drum Dollies

- mounted past the dolly and drum rim. Our casters are mounted further apart than standard designs with casters completely underneath the drum and closer together. The further the casters are apart the greater the stability.
- All welded steel frame construction with reinforced outriggers.
- Four bolt on 3" swivel casters.
- I.D. varies among models.

h: d:

■ Models available for 30, 55, and 85 gallon drums.

DIMENSIONS - D3

24"	W:	28.5"
6"	h:	6"
24"	d:	28.5"

		-
W:	31.5"	
h:	6"	
d:	31.5"	

4 swivel casters.






Polypropylene Dolly

- 5 swivel casters, 3" hard rubber wheels.
- Handles 30 or 55 gallon drums.
- Rigid latticed understructure for strength.

U	INLINOIONO
w:	24.25"
h:	7.125"
d:	24.25"

Part #	240028	240029	240030	240031	240088	240089	240201
Model#	D3-SI	D3-HR	D5-SI	D5-HR	D8-SI	D8-HR	P55-30-P
Capacity	1,000 lbs	900 lbs	1,000 lbs	900 lbs	1,000 lbs	900 lbs	900 lbs
I.D.	19"	19"	24"	24"	27"	27"	23.25"
Drum Size	30 gal	30 gal	55 gal	55 gal	85 gal	85 gal	30 or 55 gal
Caster Rig	Zinc plate 4 swivel						
3" Caster Wheel	Sintered Iron	Hard Rubber	Sintered Iron	Hard Rubber	Sintered Iron	Hard Rubber	Polyolefin
Dolly Material	Steel	Steel	Steel	Steel	Steel	Steel	Polypropylene
Weight	18 lhs	18 lhe	21 5 lbc	22 lbe	26 lbc	26 lbc	17 lbs

Stainless Steel Drum Dollies







- 304 stainless dollies are ideal for clean room, pharmaceutical, food and wash down applications.
- Models available for 30, 55, and 85 gallon drums.

SS5-PPSS l stainless rigs with 3" polypropylene



- Three caster set options:
 - HRZ: zinc plated swivel rig with 3" hard rubber wheel & zinc plated hardware
- *HRSS: 304 stainless steel swivel rig with 3" hard rubber wheel & stainless hardware
- *PPSS: 304 stainless steel swivel rig with 3" white polypropylene wheel & stainless hardware.

1	DOLLY RIM
)	
1	

ASSEMBLED OVERALL DIMENSIONS SS3	ASSEMBLED OVERALL DIMENSIONS SS5	ASSEMBLED OVERALL DIMENSIONS SS8			
w: 24" h: 6" d: 24"	w: 28.5" h: 6" d: 28.5"	w: 31.5" h: 6" d: 31.5"			
240192 240193 240194	240195 240196 240197	240198 240199 240200			

i ait m	240132	240133	. 270107	2-10133	270100	: 270131	240130	270100	270200
Model#	SS3-HRZ	SS3-HRSS	SS3-PPSS	SS5-HRZ	SS5-HRSS	SS5-PPSS	SS8-HRZ	SS8-HRSS	SS8-PPSS
Capacity	900 lbs	900 lbs	1,000 lbs	900 lbs	900 lbs	1,000 lbs	900 lbs	900 lbs	1,000 lbs
I.D.	19"	19"	19"	24"	24"	24"	27"	27"	27"
Drum Size	30 gal	30 gal	30 gal	55 gal	55 gal	55 gal	85 gal	85 gal	85 gal
Caster Rig	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel	Zinc plate 4 swivel	Stainless 4 swivel	Stainless 4 swivel
3" Caster Wheel	Hard Rubber	Hard Rubber	White Polypropylene	Hard Rubber	Hard Rubber	White Polypropylene	Hard Rubber	Hard Rubber	White Polypropylene
Dolly Material	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless	304 Stainless
Weight	20 lbs	20 lbs	18 lbs	22 lbs	22 lbs	21 lbs	24 lbs	24 lbs	23 lbs

