
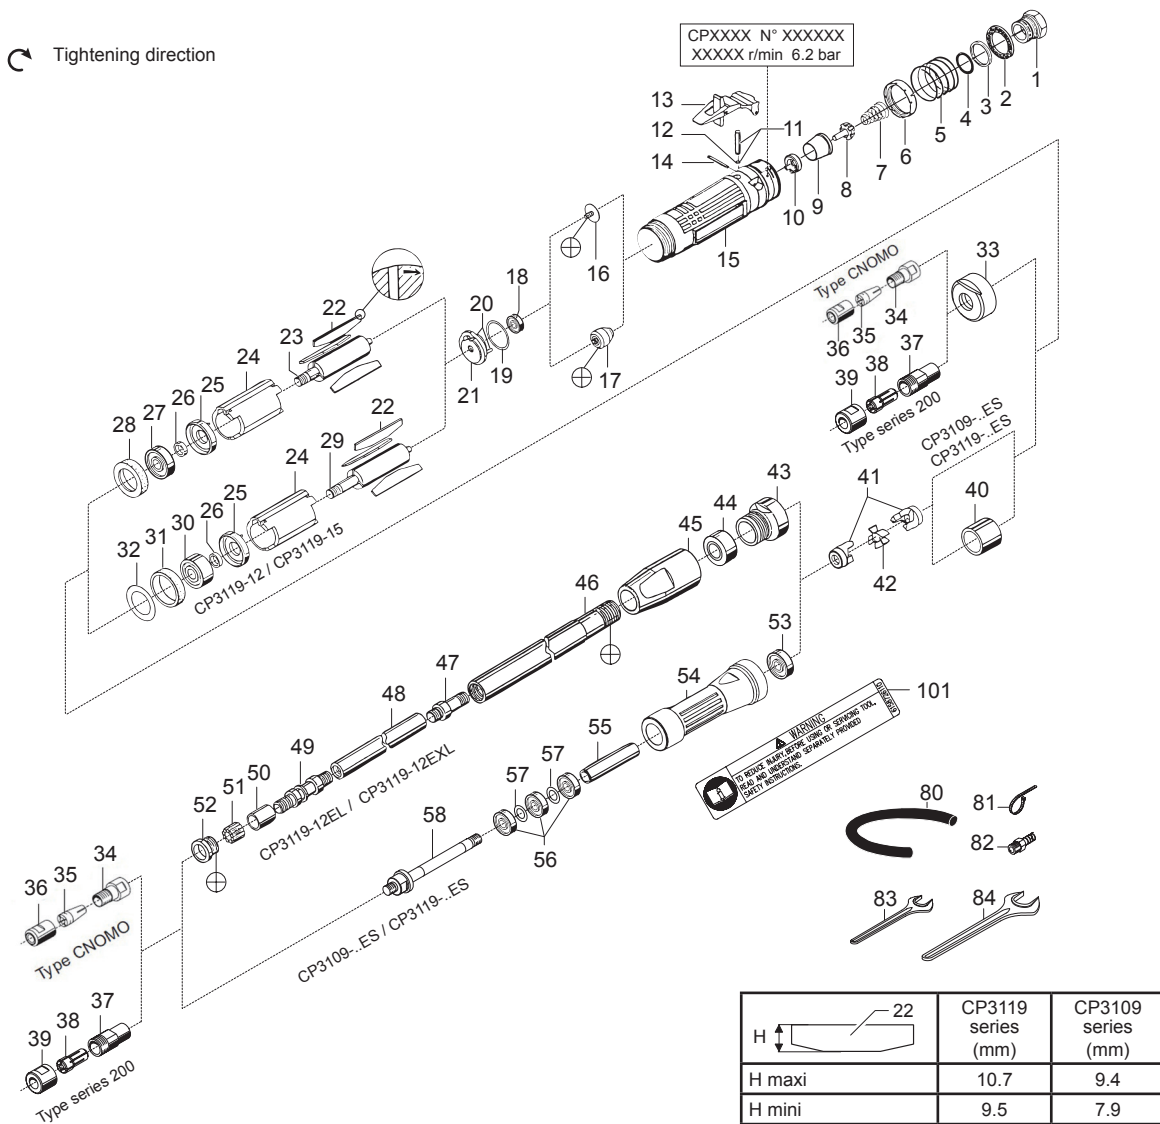


⊕ "Loctite 243"  
 ● "Loctite 222"

41/23-29	*	20Nm
41/58	↻	20Nm
41/47	↻	20Nm
34/23-29	↻	20Nm
34/49-58	↻	20Nm
37/23-29	↻	12Nm
37/49-58	↻	12Nm
⊕ 17/23-29	↻	2Nm
● 54/15	↻	60Nm
● 33/15	↻	50Nm
● 1/15	↻	40Nm
⊕ 16/23	↻	2Nm
● 45/43	↻	40Nm
● 43/15	↻	60Nm
● 52/46	↻	12Nm
⊕ 45/46	↻	40Nm

↻ Tightening direction




H		CP3119 series (mm)	CP3109 series (mm)
H maxi		10.7	9.4
H mini		9.5	7.9

Item	Part No	Description	Qty
<b>A</b>	2050541273	AIR INLET KIT CP3109-.. , CP3119-..	
1	-	Adapter 3/8" BSP	1
2	-	Silencer	1
3	-	Spacer	1
4	658.164	O-Ring	1
5	-	Spring	1
6	-	Valve	1
<b>B</b>	2050541283	THROTTLE KIT CP3109-.. , CP3119-..	
7	-	Spring-throttle	1
8	-	Throttle	1
9	-	Tube inlet	1
10	-	Seat throttle	1
<b>C</b>	2050541293	LEVER KIT CP3109-.. , CP3119-..	
11	-	Pin valve	1
12	-	O-Ring	1
13	-	Safety lever	1
14	-	Roll pin	1
<b>D</b>	2050541553	REAR PLATE KIT CP3109-..	
18	6157581260	Ball bearing	1
19	656.148	Gasket	1
20	-	Roll pin	2
21	-	Rear plate CP3109-..	1
<b>E</b>	2050541563	REAR PLATE KIT CP3119-..	
18	6157581260	Ball bearing	1
19	656.148	Gasket	1
20	-	Roll pin	2
21	-	Rear plate CP3119-..	1
<b>F</b>	2050541573	FRONT PLATE KIT 3109-..	
25	-	Front plate CP3109-..	1
26	-	Spacer	1
27	753.64	Ball bearing	1

Item	Part No	Description	Qty
<b>G</b>	2050541583	FRONT PLATE KIT CP3119-..	
25	-	Front plate CP3119-..	1
26	-	Spacer	1
27	753.64	Ball bearing	1
<b>H</b>	2050541593	FRONT PLATE KIT CP3119-12, CP3119-15	
25	-	Front plate CP3119-..	1
26	-	Spacer	1
30	754.29	Ball bearing	1
<b>I</b>	2050541353	600W MOTOR KIT CP3109-..	
D	2050541553	REAR PLATE KIT 3109-..	1
F	2050541573	FRONT PLATE KIT	1
22	434.53	Blade CP3109-..	3
23	426.84	Rotor CP3109-..	1
24	400.131	Cylinder CP3109-..	1
<b>J</b>	2050541363	900W MOTOR KIT CP3119-..	
E	2050541563	REAR PLATE KIT CP3119-..	1
G	2050541583	FRONT PLATE KIT CP3119	1
22	434.54	Blade CP3119-..	3
23	426.85	Rotor CP3119-..	1
24	400.132	Cylinder CP3119-..	1
<b>K</b>	2050541373	900W MOTOR KIT CP3119-12 CP3119-15	
E	2050541563	REAR PLATE KIT CP3119-..	1
H	2050541593	FRONT PLATE KIT CP3119-12, CP3119-15	1
22	434.54	Blade CP3119-..	3
29	426.86	Rotor CP3119-12 CP3119-15	1
24	400.132	Cylinder CP3119-..	1
<b>L</b>	2050541383	EXTENSION SERVICE KIT CP3119-XXES	
53	-	Ball bearing	1
55	-	Washer	1
56	-	Ball bearing	3
57	-	Washer	2

Item	Part No	Description	Qty
<b>M</b>	2050541393	EXTENSION SERVICE KIT CP3119-12EL & EXL	
44	-	Ball bearing	1
50	-	Cage	1
51	-	Needle	18
52	-	Plug	1
<b>N</b>	2050541603	COUPLING KIT	
41	-	Coupling fork	2
42	-	Coupling	1
<b>O</b>	2050541683	COLLET HOLDER KIT	
37	-	Collet holder	1
39	-	Collet nut	1
45	566.404	Housing	1
43	566.434	Housing	1
58	501.96	Shaft 3/8" UNF	1
47	542.121	Shaft	1
49	542.122	Shaft	1
54	566.432	Housing	1
58	501.96	Shaft 3/8" UNF	1
15	6153962340	Motor housing	1
17	6154570590	Governor 28K (CP3109-18 / CP3109-18ES)	1

Item	Part No	Description	Qty
17	457.19	Governor 24K (CP3109-24/ CP3109-24ES)	1
17	457.20	Governor 19K (CP3109-19/ CP3109-2819)	1
17	457.21	Governor 15K (CP3119-15/ CP3119-15ES)	1
17	457.22	Governor 12K (CP3119-12/ CP3119-12ES)	1
17	457.23	Governor 18K (CP3119-18/ CP3119-18ES)	1
17	457.24	Governor 22K (CP3119-22/ CP3119-22ES)	1
28	645.132	Spacer	1
28	645.136	Spacer (CP3119-12EL/ CP3119-12ExL)	1
31	666.146	Spacer	1
32	645.133	Washer	1
33	672.130	Cap (CP3109-XX/ CP3119-XX)	1
34	523.18	Chuck	1
35	6155260490	CNOMO Collet Ø6mm	1
36	6156071360	Nut Collet	1
38	6155260630	Serie 200 resilient collet 1/4"	1
40	666.145	Washer	1
46	579.50	Tube (CP3119-12EL)	1
46	579.51	Tube (CP3119-12EXL)	1
48	580.17	Shaft (CP3119-12EL)	1
48	580.18	Shaft (CP3119-12EXL)	1
80	6158751130	Exhaust Hose (L= 60" - 1,5m)	1
81	6158734150	Hose clamp	1
82	6157040170	Air hose nipple for 3/8" ID hose	1
83	6158010050	Flat wrench 14mm	1
84	6158010760	Flat wrench 3/4" (19mm)	1
101	6158726110	Warning label	1

	2050541043	Operator's manual
	6159948750	Safety instructions
	2050541103	EC declaration

### CP3119 CNOMO Machined Routing kit

Item	Part no.	Qty	Description
	6153962890	1	Complete kit
201	6155952450	1	Flange
202	6156071450	1	Adjusting Nut
203	6155421322	1	Router nose (not including : circlips & bearing)
-	6156870560	1	Circlip
-	6157581270	1	Bearing
204	6155421310	1	Machined routing guide

