

Makita®

7-1/4" MAGNESIUM CIRCULAR SAWS

MAGNESIUM COMPONENTS CREATE LIGHTWEIGHT SAWS THAT ARE WELL-BALANCED AND JOBSITE TOUGH

Large Cutting and Bevel Capacities with Positive Stops at 22.5° and 45°

Built-in LED Lights and Dust Blower Enhance the Line of Cut for Increased Accuracy*

Reinforced Power Cord Withstands Jobsite Abuse

Blade Wrench is Attached to Saw for Fast and Convenient Blade Changing

Make Quick, One-handed Adjustments Using Large, Rubberized Levers

Ideal for Framers, Roofers and Carpenters for Cutting Dimensional, Engineered and Wet Lumber, Ripping Panels, Plunge Cutting and More



Models

5007MG / 5007MGA (Electric Brake)*

5377MG

MAGNESIUM



POWER



Powerful 15 AMP motor delivers enough power to cut through the densest lumber

EFFICIENCY



Quickly change from 0° to 45° and back using positive stops that are connected to easy-to-grip levers

ACCURACY



Easy-to-read numbers and ruler markings on base and depth guide allow user to measure and follow cuts accurately

CONVENIENCE



Retractable sky hook for hanging tool so it can remain close by, but never in the way (5377MG)

MORE REFINED

7-1/4" MAGNESIUM CIRCULAR SAWS

Models 5007MG / 5007MGA / 5377MG

FEATURES & BENEFITS

- Make quick, one-handed adjustments using large, rubberized levers
- Large cutting and bevel capacities with positive stops at 22.5° and 45°
- Reinforced power cord withstands jobsite abuse and lowers repair costs
- Built-in LED lights illuminate the line of cut for increased accuracy (5007MG/5007MGA)
- Never add oil again because hypoid gears are sealed in an oil bath (5377MG)
- Retractable sky hook for temporarily hanging tool (5377MG)
- Electric brake for maximum productivity (5007MGA)
- Blade wrench is attached to saw for fast and convenient blade changing
- Built-in dust blower enhances the line of sight (5007MG/5007MGA)
- Ergonomic handle is shaped to fit hand comfortably for better control
- Includes premium 7-1/4" C.T. framing blade that cuts 50% faster and lasts 2x longer

STANDARD EQUIPMENT

- Carbide Tipped Blade (A-94530)
- Hex Blade Wrench #6 (783204-6)
- Rip Fence (164095-8), 5007MG/5007MGA
- Plastic Tool Case (824772-1), 5007MG/5007MGA

SPECIFICATIONS

	5007MG	5007MGA	5377MG
Blade Diameter	7-1/4"	7-1/4"	7-1/4"
Arbor	5/8"	5/8"	5/8"
Max. Cutting Capacity at 90°	2-1/2"	2-1/2"	2-3/8"
Max. Cutting Capacity at 45°	1-3/4"	1-3/4"	1-3/4"
No Load Speed	5,800 RPM	5,800 RPM	4,500 RPM
Watts Out	2,300	2,300	2,300
AMPS (120V)	15.0	15.0	15.0
Length	12-1/2"	12-1/2"	17-3/4"
Net Weight	10.1 lbs.	10.1 lbs.	13.0 lbs.
Shipping Weight	18.0 lbs.	18.0 lbs.	21.3 lbs.
UPC Code	088381-07651-7	088381-07695-1	088381-07694-4

OPTIONAL ACCESSORIES

- Hex Blade Wrench #6 (783204-6)
- Rip Fence (164095-8)
- 7-1/4" C.T. Saw Blades





Type	No. of Teeth	Part #
General Purpose	24	D-24826-10 (bulk)
Framing	24	A-94839-10 (bulk)
Framing	24	A-94839A
Pressure Treated	24	A-94530-10 (bulk)


- 7" Diamond Blades



Type	Part #
Turbo General Purpose	A-94574
Turbo Hard Material	A-94611
Turbo Soft Material	A-94649
Segmented General Purpose	A-94714

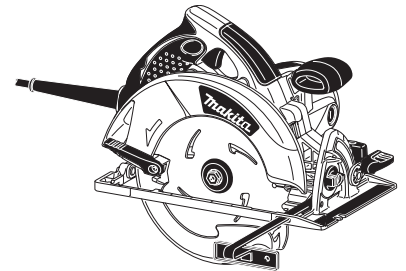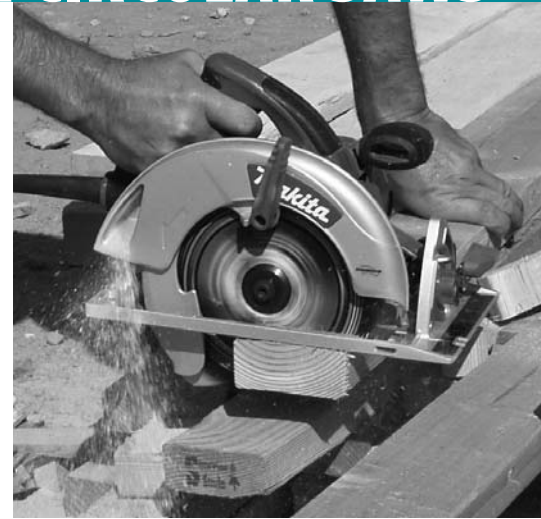

Model 5007MG/5007MGA

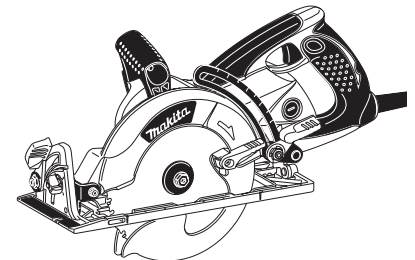

Model 5377MG



Learn more about power tools on our website.