







5.9"

5 oz





Sliding collar hides USB port when not in use



Red **charging indicator light** turns green when fully charged



Use the included li-ion battery for day-to-day use or **included back-up CR123 carrier** when away from a rechargeable battery source (CR123 batteries not included)



Press and hold down single switch to **cycle between high, medium and low modes.** Press twice to activate **strobe** mode

FL1 STANDARD	HIGH	MEDIUM	LOW
31/5	900 LUMENS	350 LUMENS	100 LUMENS
0	2h	4h 25min	16h
M	215m	129m	56m
	11524cd	4133cd	1040cd
2m			

CERTIFIED C

TACTICAL FLASHLIGHT

LITHIUM ION BATTERY (INCLUDED)

ITEM NUMBER/UPC

- USB-558XL, UPC 0 17398 80602 2

MARKET APPLICATIONS

 - Law enforcement, security, sporting goods, fire, rescue, industrial and automotive

CERTIFICATIONS

- CE, NFPA-1971-8.6 (2013)

CASE MATERIAL

- Aircraft grade 6061-T6 aluminum with type II anodized finish

LUMENS/RUNTIME

- HIGH: 900L, 2 hrs. runtime
- MEDIUM: 350L, 4.25 hrs. runtime
- LOW: 100L, 16.75 hrs. runtime

CANDELA

- HIGH: 11,524
- MEDIUM: 4,133
- LOW: 1,040

BEAM DISTANCE

- HIGH: 215 m
- MEDIUM: 129 m
- LOW: 56 m

WATER RATING

- IP-X7 Waterproof

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 5.9 in (150 mm)
- BARREL DIAMETER: 1 in (25 mm)
- BEZEL DIAMETER: 1.2 in (30 mm)
- WEIGHT: 5.7 oz (162 g) (with batteries)

BATTERY


 - Li-ion rechargeable battery, or 2 CR123 (not included) using CR123 battery carrier (included)

WARRANTY

- Limited lifetime warranty

WHAT'S INCLUDED

- Flashlight
- Lithium-ion rechargeable battery
- CR123 battery carrier
- Two foot USB charging cord
- Instruction manual

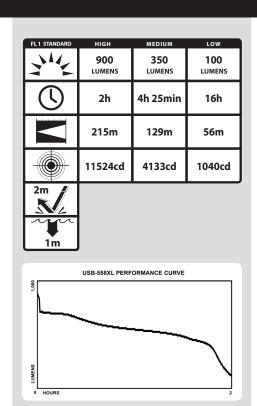

CE

CERTIFIED