

# Cable Ties and Assortment Pack




## 3M™ Cable Ties

3M Cable Ties secure wire bundles and harness components quickly, without slipping. The self-locking head with heavy double teeth on the one-piece lock mechanism assures the 3M reliability you've come to expect.

Molded from 6/6 nylon, 3M cable ties are designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). They are available in a variety of sizes and styles, including weather-resistant black nylon for outdoor use. Our cable ties are UL Recognized (UL File No. E116841).

## 3M Cable Tie Assortment Pack

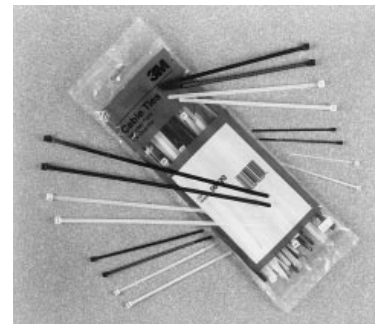

The 3M Cable Tie Assortment Pack 06220 contains 100 of our most commonly used ties. We give you three sizes, four lengths and both colors.

38

### Features — Benefits

#### Cable Ties

Bent tips	Easy insertion saves time
Flame retardant, fungus inert, resistant to solvents, alkalis, and grease	Long life saves money

## Specifications and Ordering Information for 3M Cable Ties

Product Description	Product Number	UPC (054007-)	Approx. Length	Approx. Max. Bundle Dia.	Approx. Width	Approx. Thickness	Loop Tensile	Inner Unit Pack	Certifications and Listings
Natural	06224	06224	4" (102 mm)	0.7" (17,8 mm)	0.1" (2,54 mm)	0.04" (1,02 mm)	18 lbs. (79,9 N)	100/bag	E116841
	06248	06248					1000/bag		
Weather Resistant Black	06200	06200	4" (102 mm)	0.7" (17,8 mm)	0.1" (2,54 mm)	0.04" (1,02 mm)	18 lbs. (79,9 N)	100/bag	E116841
	06270	06270					1000/bag		
Natural	06225	06225	5.88" (149 mm)	1.25" (31,8 mm)	0.14" (3,66 mm)	0.05" (1,14 mm)	30 lbs. (133 N)	100/bag	E116841
	06249	06249					1000/bag		
Weather Resistant Black	06201	06201	5.88" (149 mm)	1.25" (31,8 mm)	0.14" (3,66 mm)	0.05" (1,14 mm)	30 lbs. (133 N)	100/bag	E116841
	06271	06271					1000/bag		

continued on next page

# Specifications and Ordering Information for 3M™ Cable Ties (continued)


Product Description	Product Number	UPC (054007-)	Approx. Length	Approx. Max. Bundle Dia.	Approx. Width	Approx. Thickness	Loop Tensile	Inner Unit Pack	Certifications and Listings
---------------------	----------------	---------------	----------------	--------------------------	---------------	-------------------	--------------	-----------------	-----------------------------

## Standard Cable Ties



Natural	06226	06226	7.94" (202 mm)	1.75" (44,5 mm)	0.18" (4,47 mm)	0.05" (1,37 mm)	50 lbs. (222 N)	100/bag	E116841
	06250	06250					1000/bag		
Natural	06227	06227	12" (305 mm)	3" (76,2 mm)	0.18" (4,47 mm)	0.05" (1,37 mm)	50 lbs. (222 N)	100/bag	E116841
	06251	06251					1000/bag		
Natural	06228	06228	15" (381 mm)	4" (102 mm)	0.19" (4,83 mm)	0.05" (1,37 mm)	50 lbs. (222 N)	50/bag	E116841
	06252	06252					500/bag		
Weather Resistant Black	06202	06202	7.94" (202 mm)	1.75" (44,5 mm)	0.18" (4,47 mm)	0.05" (1,37 mm)	50 lbs. (222 N)	100/bag	E116841
	06272	06272					1000/bag		
Weather Resistant Black	06203	06203	12" (305 mm)	3" (76,2 mm)	0.18" (4,47 mm)	0.05" (1,37 mm)	50 lbs. (222 N)	100/bag	E116841
	06273	06273					1000/bag		
Weather Resistant Black	06204	06204	15" (381 mm)	4" (102 mm)	0.19" (4,83 mm)	0.05" (1,37 mm)	50 lbs. (222 N)	50/bag	E116841
	06274	06274					500/bag		

## Heavy Duty Cable Ties



Natural	06229	06229	8" (202 mm)	2" (50,8 mm)	0.30" (7,62 mm)	0.07" (1,78 mm)	120 lbs. (533 N)	50/bag	E116841
Natural	06240	06240	15" (381 mm)	4" (101 mm)	0.30" (7,62 mm)	0.07" (1,78 mm)	120 lbs. (533 N)	50/bag	E116841
	06264	06264					500/bag		
Natural	06230	06230	32" (813 mm)	9" (229 mm)	0.30" (7,62 mm)	0.07" (1,78 mm)	120 lbs. (533 N)	50/bag	E116841
Weather Resistant Black	06206	06206	8" (202 mm)	2" (50,8 mm)	0.30" (7,62 mm)	0.07" (1,70 mm)	120 lbs. (533 N)	50/bag	E116841
Weather Resistant Black	06207	06207	15" (381 mm)	4" (101 mm)	0.30" (7,62 mm)	0.07" (1,70 mm)	120 lbs. (533 N)	50/bag	E116841
	06277	06277					500/bag		
Weather Resistant Black	06208	06208	32" (813 mm)	9" (229 mm)	0.30" (7,62 mm)	0.07" (1,70 mm)	120 lbs. (533 N)	50/bag	E116841

## Extra Heavy Duty Cable Ties









Natural	06231	06231	34" (864 mm)	10" (254 mm)	0.345" (8,76 mm)	0.09" (2,29 mm)	175 lbs. (777 N)	50/bag	E116841
Weather Resistant Black	06209	06209	34" (864 mm)	10" (254 mm)	0.345" (8,76 mm)	0.09" (2,29 mm)	175 lbs. (777 N)	50/bag	E116841

## Mounting Cable Ties, Standard (#10 Screw)



Natural	06232	06232	8.31" (211 mm)	1.75" (44,5 mm)	0.19" (4,83 mm)	0.06" (1,4 mm)	50 lbs. (222 N)	100/bag	E116841
	06256	06256					1000/bag		
Natural	06234	06234	15.25" (387 mm)	4" (101 mm)	0.19" (4,83 mm)	0.06" (1,4 mm)	50 lbs. (222 N)	50/bag	E116841
	06258	06258					500/bag		
Weather Resistant Black	06205	06205	8.31" (211 mm)	1.75" (44,5 mm)	0.19" (4,83 mm)	0.06" (1,4 mm)	50 lbs. (222 N)	100/bag	E116841
	06275	06275					1000/bag		

## Specifications and Ordering Information for 3M™ Cable Ties (continued)

Product Description	Product Number	UPC (054007-)	Approx. Length	Approx. Max. Bundle Dia.	Approx. Width	Approx. Thickness	Loop Tensile	Inner Unit Pack	Certifications and Listings
									
Natural	06243	06243	15.63" (397 mm)	4" (101 mm)	0.30" (7,62 mm)	0.07" (1,7 mm)	120 lbs. (533 N)	50/bag	 E116841
	06267	06267					500/bag		
									
Natural	06242	06242	15.25" (387 mm)	4" (101 mm)	0.19" (4,83 mm)	0.05" (1,35 mm)	50 lbs. (222 N)	50/bag	 E116841
	06266	06266					500/bag		
									
Natural	06245	06245	15.4" (391 mm)	4" (101 mm)	0.30" (7,62 mm)	0.07" (1,7 mm)	120 lbs. (533 N)	50/bag	 E116841
	06269	06269					500/bag		

## Specifications and Ordering Information for 3M Cable Tie Assortment Pack

Product Number	UPC (054007-)	Product Description	Size	Approx. Length	Number of Ties per Assortment Pack
06220	06220	Assortment Pack			
		Natural	Miniature	4" (102 mm)	15
		Weather Resistant Black	Miniature	4" (102 mm)	10
		Natural	Intermediate	5" (127 mm)	15
		Weather Resistant Black	Intermediate	5" (127 mm)	10
		Natural	Standard	7.5" (190,5 mm)	15
		Weather Resistant Black	Standard	7.5" (190,5 mm)	10
		Natural	Standard	11" (279,4 mm)	15
		Weather Resistant Black	Standard	11" (279,4 mm)	10