

ROGUE



LENS
+ PANORAMIC FIELD OF VISION
+ EASY REPLACEMENT LENS SYSTEM

TEMPLES
+ INTEGRATED LATERAL PROTECTION

FRAME
+ WRAP AROUND

VERSIONS



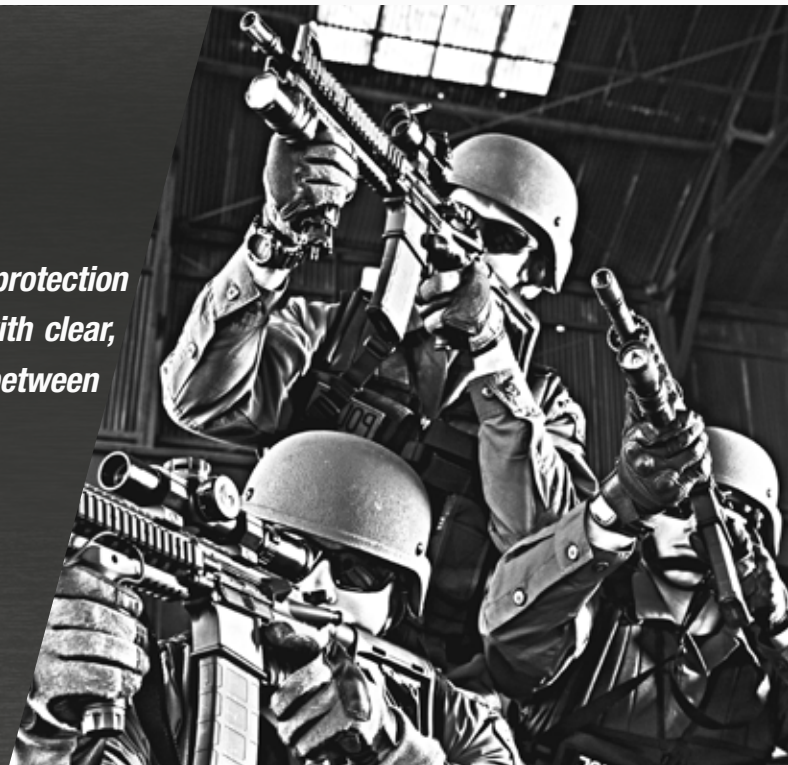
**ROGUE
KIT
#40136**

+ MICROFIBER POUCH, SPARE LENSES AND A RIGID CARRY CASE INCLUDED






DESCRIPTION

Stylish, light-weight, comfortable and ballistic protection make ROGUE unique. Packed in a carry case with clear, yellow and smoke lenses, you can easily switch between the lens versions as necessary.



ROGUE

MODEL	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALLISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
ROGUE	ROGUE kit	40136	-	☞ Z87+	785 km/h - 218 m/s	ANSIZ87.1-2010 MIL-PRF-31013	-
	 Clear lens		☞ +U6	-	785 km/h - 218 m/s	ANSIZ87.1-2010 MIL-PRF-31013	AS/AF
	 Smoke lens		☞ +U6L3	-	785 km/h - 218 m/s	ANSIZ87.1-2010 MIL-PRF-31013	AS/AF
	 Yellow lens		☞ +U6L1.3	-	785 km/h - 218 m/s	ANSIZ87.1-2010 MIL-PRF-31013	AS/AF

Lens markings

Z87+. Impact rated for Plano product - tested and approved to ANSI Z87.1-2010

☞ Manufacturer name

Lens Type:

Clear = none

Welding = W and Shade number from 1,3 to 14

UV filter = U and scale number from 2 to 6

Visible light filter = L and scale number from 1,3 to 10

IR filter = R and scale number from 1,3 to 10

Variable tint = V

Special purpose = S

Frame markings

☞ Manufacturer name

Country of Origin: Taiwan

Z87+. Impact rated for Plano product - tested and approved to ANSI Z87.1-2010

Mechanical strength symbols:

ANSI. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc. Maximum protection for glasses. Use for high speed particles at extreme temperatures.

Bollé Safety product approval certificates to ANSI standards will be sent on request.

	40136
EAN13 Unit pack	054917284190
EAN13 Inner pack (number of unit per inner pack)	
Size // Weight Inner pack	
EAN13 Carton (number of unit per master pack)	054917286477 (90 units)
Size // Weight Master pack	62x56x40 cm 17.8 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

ROGUE	
Lens	PC - 2.2 mm - Curve 8
Frame	Nylon
Temples	Nylon
Spare lens	-
Country of origin	Taiwan