



**Chicago
Pneumatic**

Operator's Manual

CP9105QB / CP9106QB / CP9108QB

CP9110QB / CP9111QB / CP9112QB

Die Grinder



WARNING

To reduce risk of injury, everyone using, installing, repairing, maintaining, changing accessories on, or working near this tool must read and understand these instructions, as well as separately provided safety instructions part number 6159948750, before performing any such task.

Air Diagram:

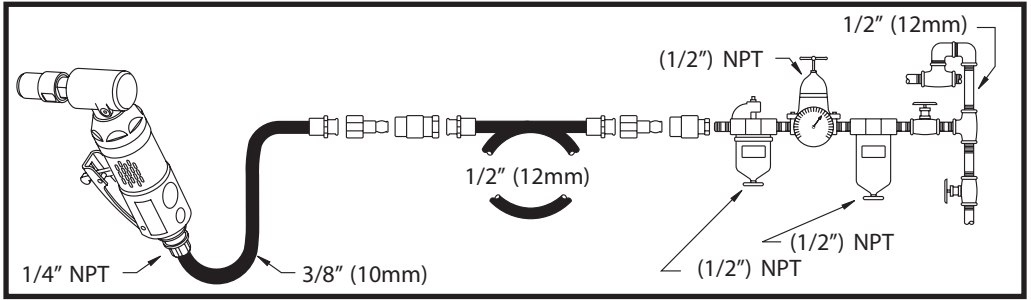


Fig. 1

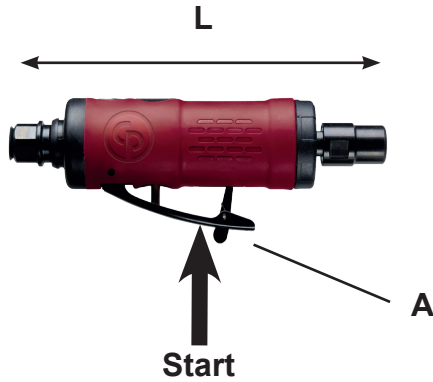












Fig. 2

Model	Speed 	Power 	Collet 	Air consumption		Weight 	Dimension L 	Air Inlet. 	Inner hose diameter 	Sound Pressure 	Sound Power 	Vibrations 									
				Free speed	at load							ahd	k								
				[RPM]	[HP] [W]							[inch] [mm]	[NI/min] [SCFM]	[lb.] [kg]	[in.] [mm]	[in.]	[in.] [mm]	[dB(A)]	[dB(A)]	[m/s ²]	[m/s ²]
				1	2							3	4	5	6	7	8	9	10	11	12
CP9105QB	28,000	0.32 240	1/4" 6.35	558	311	0.8	6.3	1/4"	3/8" 10	80	91	3.6	2								
CP9106QB	23,000	0.32 240	1/4" 6.35	516	311	1.5	6.4	1/4"	3/8" 10	80	91	5.1	2.6								
CP9108QB	23,000	0.32 240	1/4" 6.35	516	311	1.1	7.9	1/4"	3/8" 10	80	91	5.1	1.6								
CP9110QB	27,000	0.32 240	1/4" 6.35	516	311	1.5	10.2	1/4"	3/8" 10	80	91	4.9	2.5								
CP9111QB	22,000	0.47 350	1/4" 6.35	600	311	1.5	6.3	1/4"	3/8" 10	80	91	3.7	1.6								
CP9112QB	22,000	0.47 350	1/4" 6.35	708	311	2.9	13.4	1/4"	3/8" 10	80	91	2.7	1.2								

1. Technical Data

Model	Speed	Power	Collet	Air Consumption		Weight	Dimension L	Air Inlet	Inner Hose Dia.	Sound pressure L_{pA}	Sound power L_{wA}	Vibrations	
				Free speed	at load							a_{hd}	K
	1	2	3	4	5	6	7	8	9	10	11	12	
	[RPM]	[Hp] [W]	[inch] [mm]	[l/min] [SCFM]	[kg] [lb]	[inch] [mm]	[inch]	[mm] [inch]	[dB(A)]	[dB(A)]	[m/s ²]	[m/s ²]	

max. pressure 6.3bar(90psi)

a_v : Vibration level, k Uncertainty ; L_{pA} Sound pressure dB(A), $K_{pA} = K_{wA} = 3$ dB Uncertainty.

Declaration of noise and vibration statement (ISO 15744 and ISO 28927-12)

All values are current as of the date of this publication.

These declared values were obtained by laboratory type testing in accordance with the stated standards and are suitable for comparison with the declared values of other tools tested in accordance with the same standards. These declared values are not adequate for use in risk assessments and values measured in individual work places may be higher. The actual exposure values and risk of harm experienced by an individual user are unique and depend upon the way the user works, the workpiece and the workstation design, as well upon the exposure time and the physical condition of the user. We, CHICAGO PNEUMATIC TOOLS, cannot be held liable for the consequences of using the declared values, instead of values reflecting the actual exposure, in an individual risk assessment in a work place situation over which we have no control. We recommend a programme of health surveillance to detect early symptoms which may relate to noise or vibration exposure, so that management procedures can be modified to help prevent future impairment.

2. Machine type(s)

- This product is designed for removing material using abrasives. No other use permitted. For professional use only.
- Please read the instructions carefully before starting the machine.

3. Operation

- Fix the accessories properly to the tool.
- Connect device as shown in Fig. 01.
- To start the machine, pull the trigger (A). Machine speed is increase by increasing pressure on the trigger. Release the trigger to stop.

4. Lubrication

- Use an air line lubricator with SAE #10 oil, adjusted to two drops per minute. If an air line lubricator cannot be used, add air motor oil to the inlet once a day.

5. Maintenance instruction

• Follow local country environmental regulations for safe handling and disposal of all components.

- Maintenance and repair work must be carried out by qualified personnel using only original spare parts. Contact the manufacturer or your nearest authorised dealer for advice on technical service or if you require spare parts.
- Always ensure that the machine is disconnected from energy source to avoid accidental operation.
- Disassemble and inspect the tool every three 3 months if the tool is used every day. Replace damaged or worn parts.
- High wear parts are underlined in the parts list.
- To keep downtime to a minimum, the following service kits are recommended :

Tune-up kit : see parts list

6. Disposal

- The disposal of this equipment must follow the legislation of the respective country.
- All damaged, badly worn or improperly functioning devices MUST BE TAKEN OUT OF OPERATION.
- Repair only by technical maintenance staff.

7. EC Declaration of conformity

We : CHICAGO PNEUMATIC Tool Co

Machine type(s) : Die grinder

Declare that the product(s) : CP9105QB / CP9106QB / CP9108QB / CP9110QB / CP9111QB / CP9112QB Serial Number: 00001 - 99999

Origin of the product : TAIWAN

is in conformity with the requirements of the council Directives on the approximation of the laws of the Member States relating : to "Machinery" 2006/42/EC (17/05/2006) applicable harmonised standard(s) : EN ISO 11148-9:2012

Name and position of issuer : Pascal Roussy (R&D Manager)

Place & Date : Saint-Herblain, 01/05/2016

Technical file available from EU headquarter. Pascal Roussy R&D manager CP Technocenter 38, rue Bobby Sands - BP10273 44800 Saint Herblain - France

Copyright 2016, Chicago Pneumatic Tool Co. LLC

All rights reserved. Any unauthorized use or copying of the contents or part thereof is prohibited. This applies in particular to trademarks, model denominations, part numbers and drawings. Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty or Product Liability.

Original Instructions