



Chicago
Pneumatic

Operator's Manual

CP7200 random orbital sander

CP7201 polisher

CP7202 rotary sander



WARNING

To reduce risk of injury, everyone using, installing, repairing, maintaining, changing accessories on, or working near this tool must read and understand these instructions, as well as separately provided safety instructions part number 6159948770, before performing any such task.

Air Diagram:

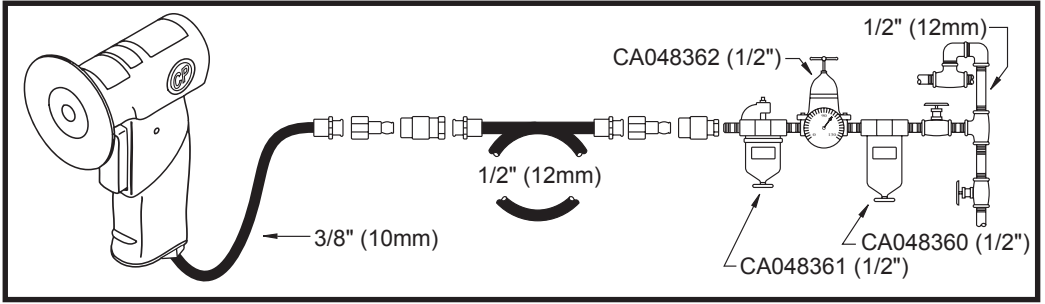


Fig. 1



Fig. 2

Model	Pad Size		Free Speed	Pad Type	Spindle Thread	Overall Length		Weight		Air Consumption @load		Air Inlet	Inner Hose Dia.	Sound Pressure LpA	Sound Power LwA	Vibrations				
																	ahd	K		
	1	2	3	4	5	6	7	*8	*9	10		11	12							
	[mm]	[inch]	[rpm]	[inch]	[mm]	[inch]	[Kg]	[lb]	[NI/s]	[SCFM]	[inch]	[mm]	[inch]	[dB(A)]	[dB(A)]	[m/s ²]	[m/s ²]			
CP7200	50 & 75	2 & 3	15000	H&L	1/4-20	108	4.2	0.7	1.5	7.9	16.6	1/4	10	3/8	78	89	3.9 (2")	2 (2")	10.4 (3")	1.5 (3")
CP7201	75	3	2500	H&L	1/4-20	116	4.6	0.8	1.8	8.6	18.1	1/4	10	3/8	80	91	<2.5			
CP7202	75	3	15000	H&L	1/4-20	97	3.8	0.6	1.3	7.5	15.8	1/4	10	3/8	81	92	3.4			1.8

1. Technical Data (see Fig 2.)

Model	Pad Size	Free Speed	Pad Type	Spindle Thread	Overall Length	Weight	Air Consumption @load	Air Inlet	Inner Hose Dia.	Sound Pressure LpA	Sound Power LwA	Vibrations	
												ahd	K
	1	2	3	4	5	6	7	*8	*9	10	11	12	
	[mm] [inch]	[rpm]		[inch]	[mm] [inch]	[Kg] [lb]	[NI/s] [SCFM]	[inch]	[mm] [inch]	[dB(A)]	[dB(A)]	[m/s ²]	[m/s ²]

max pressure 6.3 bar (90 psi)

a_{ms} : Vibration level, k Uncertainty ; L_{pA} Sound pressure level dB(A), $K_{pA} = K_{wa} = 3$ dB Uncertainty.

Declaration of noise (ISO 15744) and vibration emission (ISO 28927-3)

All values are current as of the date of this publication.

These declared values were obtained by laboratory type testing in accordance with the stated standards and are suitable for comparison with the declared values of other tools tested in accordance with the same standards. These declared values are not adequate for use in risk assessments and values measured in individual work places may be higher. The actual exposure values and risk of harm experienced by an individual user are unique and depend upon the way the user works, the workpiece and the workstation design, as well upon the exposure time and the physical condition of the user.

We, CHICAGO PNEUMATIC TOOLS, cannot be held liable for the consequences of using the declared values, instead of values reflecting the actual exposure, in an individual risk assessment in a work place situation over which we have no control.

This tool may cause hand-arm vibration syndrome if its use is not adequately managed.

We recommend a programme of health surveillance to detect early symptoms which may relate to noise or vibration exposure, so that management procedures can be modified to help prevent future impairment.

2. Machine Type:

Power tool equipped with a flexible disc fitted with abrasive paper for sanding - No other use is permitted.

3. Implementation and Operation

- Connect device as shown in Fig.1.
- Fix the accessories properly to the tool.
- To switch rotation, turn the switch (B) as shown in Fig. 1
- To start the machine, simply pull the trigger (A). Machine speed is increase by increasing pressure on the trigger. Release the trigger to stop.
- To adjust output power, turn the regulator (B) as shown in Fig 1

4. Lubrication

• **Motor Lubrication**

Use an air line lubricator with SAE #10 oil, adjusted to two (2) drops per minute. If an air line lubricator cannot be used, add air motor oil to the inlet once a day.

5. Maintenance

- **Follow local country environmental regulations for safe handling and disposal of all components**
- Disassemble and inspect the tool every three 3 months if the tool is used every day. Replace damaged or worn parts.
- Always ensure that the machine is disconnected from energy source (compressed air) to avoid accidental operation.
- High wear parts are underlined in the parts list.
- To keep downtime to a minimum, the following service kits are recommended:
Tune-Up Kit: see part list

6. Disposal

- The disposal of this equipment must follow the legislation of the respective country.
- All damaged, badly worn or improperly functioning devices **MUST BE TAKEN OUT OF OPERATION.**
- **Repair only by technical maintenance staff.**

7. Declaration of conformity

Declare that the product(s): **Sander/Polisher**

Machine type(s) : **CP7200, CP7201, CP7202**

Serial Number: **From 00001 to 99999**

Origin of the product : **Taiwan**

is in conformity with the requirements of the council Directives on the approximation of the laws of the Member States relating : to "Machinery" **2006/42/EC (17/05/2006)** applicable harmonised standard(s) : **EN ISO 11148-8:2012**

Name and position of issuer : **Nicolas Lebreton (R&D Manager)**

Place & Date : Saint-Herblain, **01/02/2014**

Copyright 2014, Chicago Pneumatic Tool Co. LLC

All rights reserved. Any unauthorized use or copying of the contents or part thereof is prohibited. This applies in particular to trademarks, model denominations, part numbers and drawings. Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty or Product Liability.

WARNING

To reduce risk of injury, everyone using, installing, repairing, maintaining, changing accessories on, or working near this tool must read and understand these instructions before performing any such task.

SAFETY INSTRUCTIONS

• DO NOT DISCARD - GIVE TO USER

- Our goal is to produce tools that help you work safely and efficiently. The most important safety device for this or any tool is YOU. Your care and good judgement are the best protection against injury. All possible hazards cannot be covered here, but we have tried to highlight some of the important ones.
- Only qualified and trained operators should install, adjust or use this power tool.
- This tool and its accessories must not be modified in any way.
- Do not use this tool if it has been damaged.
- If the rated speed, operating pressure or hazard warning signs on the tool cease to be legible or become detached, replace without delay.

▲ Air supply and connection hazards

- Air under pressure can cause severe injury.
- Always shut off air supply, drain hose of air pressure and disconnect tool from air supply when not in use, before changing accessories or when making repairs.
- Never direct air at yourself or anyone else.
- Whipping hoses can cause severe injury. Always check for damaged or loose hoses and fittings.
- Do not use quick disconnect couplings at tool. See instructions for correct set up.
- Whenever universal twist couplings are used, lock pins must be installed.
- Do not exceed maximum air pressure of 6.3 bar / 90 psig, or as stated on tool nameplate.

▲ Entanglement hazards

- Keep away from moving sand pad. Note that the abrasive will continue to run after the start valve has closed; for dual action sanders, this can last several seconds.
- Choking, scalping and / or lacerations can occur if loose clothing, gloves, jewellery, neck ware and hair are not kept away from tool and accessories.

▲ Projectile hazards

- Failure of the accessory or abrasive, or of the workpiece, can generate high-velocity projectiles. Even small projectiles can injure eyes and cause blindness.
- Always wear impact-resistant eye and face protection when involved with or near the operation, repair or maintenance of the tool or changing accessories on the tool.
- Be sure all others in the area are wearing impact-resistant eye and face protection
- Daily measure the speed of a rotary sander or polisher with a tachometer to make sure that it is not greater than the RPM marked on the backing pad, drum or abrasive.
- Ensure that the backing pad / abrasive is securely clamped to the sander using the tools provided.

- Ensure that the workpiece is securely fixed.

▲ Accessory hazards

- Always shut off air supply, relieve hose of air pressure and disconnect tool from air supply when changing accessories.
- Use only recommended sizes and types of accessories and consumables.
- Never use a backing pad, drum or abrasive with a permitted speed lower than the air sander speed.
- Never mount a grinding or cutting-off wheel on a sander. A grinding wheel that bursts can cause very serious injury or death when not properly guarded.
- Use only coated abrasive sanding discs or sheets properly secured to the backing pad provided with the air sander. Ensure that self-fixing sanding discs are mounted concentrically.

▲ Operating hazards

- Operators and maintenance personnel must be physically able to handle the bulk, weight and power of the tool.
- Hold the tool correctly: be ready to counteract normal or sudden movements – have both hands available.
- You can be cut, pinched or burned if you come into contact with the sanding pad, abrasive or the work surface. Avoid contact and wear suitable gloves to protect hands.
- Inspect backing pad before each use. Do not use if cracked or broken, or if it has been dropped.
- Never run the tool unless the abrasive is applied to the workpiece.
- There is a risk of electrostatic discharge if used on plastic and other non-conductive materials.
- When using a tool that is designed to have a guard, the guard should be in place to offer protection from grinding swarf and other debris.

▲ Repetitive motion hazards


- When using a power tool to perform work-related activities, the operator might experience discomfort in the hands, arms, shoulders, neck, or other parts of the body.
- Adopt a comfortable posture whilst maintaining secure footing and avoiding awkward or off-balance postures. Changing posture during extended tasks can help avoid discomfort and fatigue.
- Do not ignore symptoms such as persistent or recurring discomfort, pain, throbbing, aching, tingling, numbness, burning sensation, or stiffness. Stop using the tool, tell your employer and consult a physician.

▲ Noise and vibration hazards

- High sound levels can cause permanent hearing loss and other problems such as tinnitus. Use hearing protection as recommended by your employer or occupational health and safety regulations.
- Exposure to vibration can cause disabling damage to the nerves and blood supply of the hands and arms. Wear warm clothing and keep your hands warm and dry. If numbness, tingling, pain or whitening of the skin occurs, stop using tool, tell your employer and consult a physician.
- Hold the tool in a light but safe grip because the risk from vibration is generally greater when the grip force is higher. Where possible support the weight of the tool with a balancer.
- To prevent unnecessary increases in noise and vibration levels:
 - Operate and maintain the tool, and select, maintain and replace the accessories and consumables, in accordance with this instruction manual;
 - Use damping materials to prevent workpieces from "ringing".

Workplace hazards

- Slip/Trip/Fall is a major cause of serious injury or death. Be aware of excess hose left on the walking or work surface.
- Avoid inhaling dust or fumes or handling debris from the work process which can cause ill health (for example, cancer, birth defects, asthma and/or dermatitis). Use dust extraction and wear respiratory protective equipment when working with materials which produce airborne particles.
- Some dust created by power sanding, sawing, grinding, drilling and other construction activities contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Some examples of these chemicals are:
 - Lead from lead based paints
 - Crystalline silica bricks and cement and other masonry products
 - Arsenic and chromium from chemically-treated rubber
- Your risk from these exposures varies, depending on how often you do this type of work.
- To reduce your exposure to these chemicals: work in a well ventilated area, and work with approved safety equipment, such as dust masks that are specially designed to filter out microscopic particles.
- Proceed with care in unfamiliar surroundings. Hidden hazards may exist, such as electricity or other utility lines.
- Potentially explosive atmospheres can be caused by dust and fumes resulting from sanding or grinding. Always use dust extraction or suppression systems which are suitable for the material being processed.
- This tool is not intended for use in potentially explosive atmospheres and is not insulated from coming into contact with electric power.

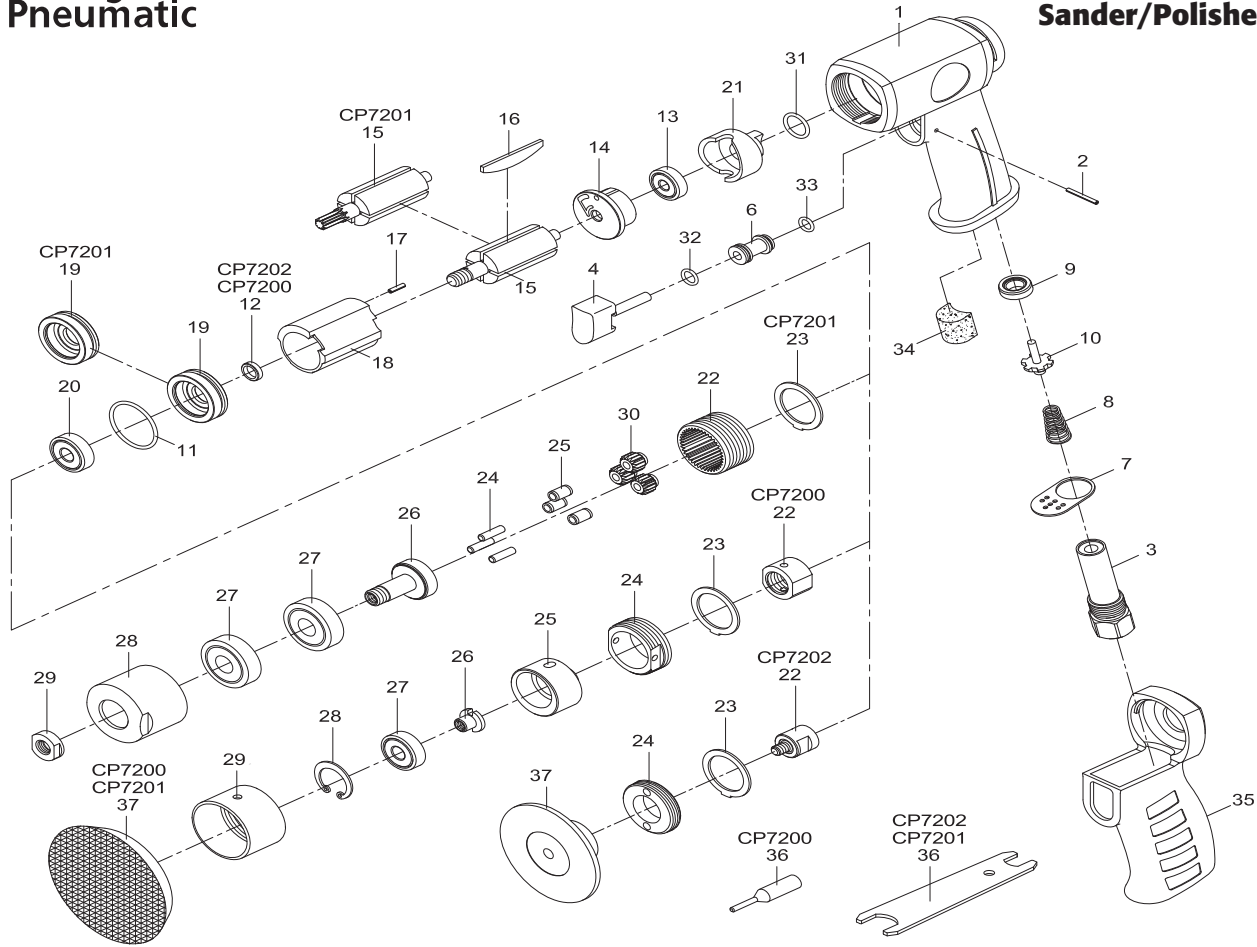

Item	Part No	Description	Qty
A	8940172118	Trigger kit	
2		Pin-Trigger	1
4		Trigger	1
32		O ring	1
33		O ring	1
6		Valve bushing	1
B	8940172119	Throttle kit	
8		Spring-Throttle	1
9		Valve Seal	1
10		Throttle valve	1
C	8940172120	Housing motor kit	
1		Housing-Motor	1
35		Cover-Handle	1
D	8940172121	Rear end plate kit	
13	S039709	Bearing-Ball 626ZZ	1
14		Endplate-Rear	1
17		Pin-Spring	1
E	8940172122	Front End plate KIT CP7200-CP7202	
19		End Plate (CP7200-CP7202)**	1
20	CA144800	Bearing-Ball 608ZZ	1
11		O ring	1
F	8940172123	Front End plate KIT CP7201	
19		End Plate (CP7201)**	1
20	CA144800	Bearing-Ball 608ZZ	1
11		O ring	1
G	8940172124	Regulator KIT	
21		Regulator	1
31		O-Ring-014	1
H	8940172125	Gear box service KIT CP7201	
24		Pin-Idler	3
25		Needle bearing	3
30		Gear-Idler (CP7201)	3
42		Shaft-Spindle	1

Item	Part No	Description	Qty	
I	8940172126	Spindle kit CP7202		
22		Spindle (CP7202)	1	
23		Spacer	1	
24		Nut-Clamp (CP7202)	1	
D	8940172127	Balancer CP7200		
25		Hub-Orbital (CP7200)	1	
26		Nut (CP7200)	1	
27		Bearing-Ball 608RS (CP7200)	1	
28		Ring-Retaining Internal .866 (CP7200)	1	
	22	CA158084	Connector (CP7200)	1
	24	CA158085	Nut-Clamp (CP7200S)	1
	15	CA158065	Rotor (CP7200S-CP7202D)	1
		CA158075	Rotor (CP7201P)	1
	16	CA158066	Blade-Set	1
	18	CA158068	Liner	1
	28	CA158081	Nut-Clamp	1
	29	CA158082	Spacer (CP7201P)	1
	29	CA158088	Guard (CP7200)	1
	27	S025055	Bearing-Ball 6200ZZ	2
	22	CA158077	Gear-Internal (CP7201)	1
		8940172128	Tune-up kit (11,16,31,32,33,34)	
		8940172129	Small part kit	
	7		Deflector-Exhaust	1
	2		Pin-Trigger	1
	17		Pin-Spring	1
	23		Spacer	1
	12		Spacer-Rotor (CP7200S/CP7202D)	1
	28		Ring-Retaining Internal (CP7200S)	1
		CA155648	Warning Label	
		6159948770	Safety instructions	
		8940158311	Operator's Manual	

Recommended Accessories	
<p>Protecto-lub Oil (for cleaning motor parts) CA149661 (1 pt - 0,12l) CA000046 (20,8 oz. - 0,59 l)</p>	<p>Airoileine Oil (for air lubrication) P0895507 (1. gal - 3,8l)</p>
<p>DUS 895500015</p>	<p>Pads</p> <p>CA158108 3" Pad-Polishing Soft CA158109 3" Pad-Polishing Hard CA158110 3" Pad-Buffing (CP7201) 37 8940158330 Pad-Sanding 3" Hook & Loop(CP7200) 8940158334 Pad-Sanding 2" Hook & Loop(CP7200) 37 CA158102 Pad-Sanding 3" Roloc (CP7202) 8940158772 2" Pad-Polishing Soft (Not Shown) 8940158773 2" Pad-Polishing Hard (Not Shown) 8940158774 2" Pad-Buffing (Not Shown)</p>

Recommended Maintenance Tools	
<p>Maintenance Wrench CA158089 Key</p>	<p>8940158771 CP7201 Gear Removal Tool</p>

Spare parts without part number are not sold separately. High wear parts are underlined.

Look through our comprehensive collection of air tools and compressors right away.